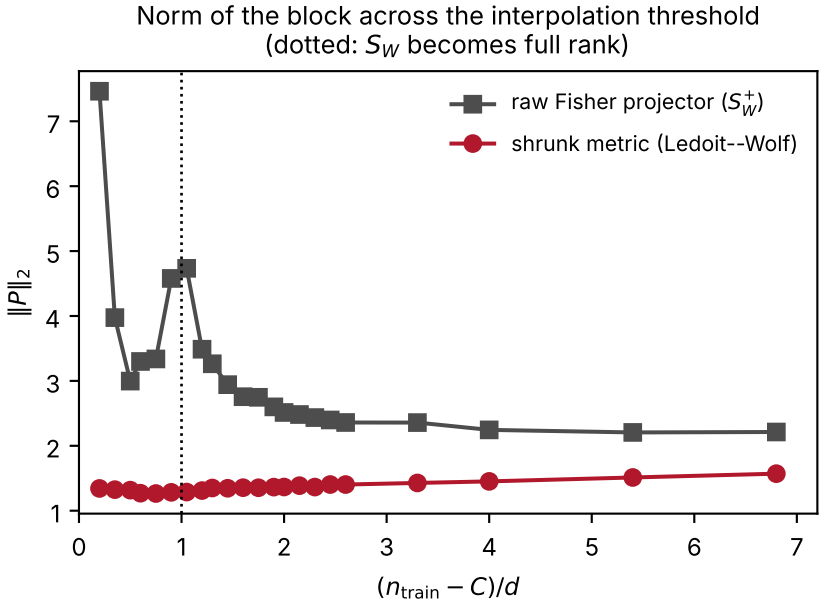
Norm of the block across the interpolation threshold
(dotted: S_W becomes full rank)
raw Fisher projector (S_W^+)
shrunk metric (Ledoit--Wolf)
$\|P\|_2$
$(n_{\text{train}} - C)/d$

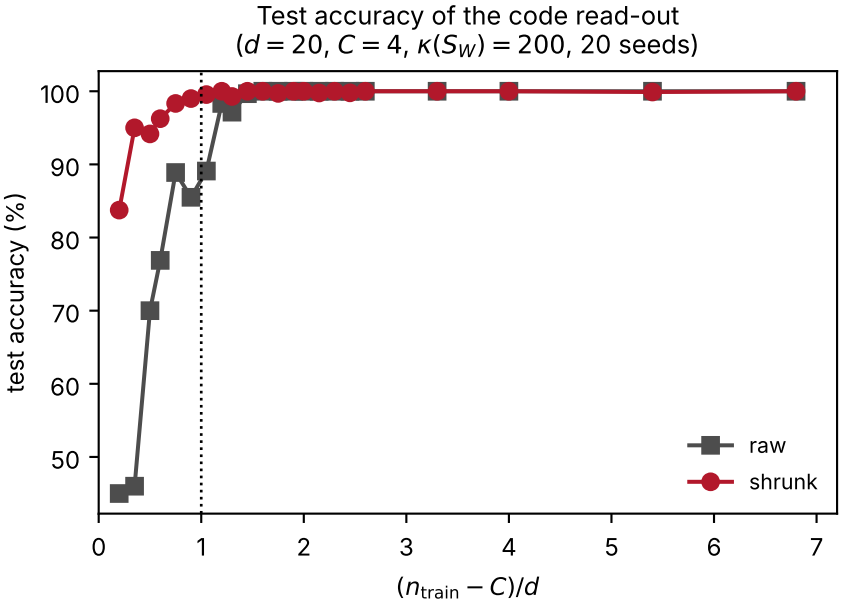
Test accuracy of the code read-out
($d = 20$, $C = 4$, $\kappa(S_W) = 200$, 20 seeds)
test accuracy (%)
raw
shrunk
$(n_{\text{train}} - C)/d$