From Public Videos to Source-Grounded Questions: An Exploratory Study of ET-Channeling Research on YouTube

Living Research Draft — Human Authorship TBD

Channeling Atlas / channels-ET research project
Evidence revision: 23 October 2026
Human validation and institutional determination pending

Abstract

Public videos attributed to extraterrestrial (ET) channeling offer a heterogeneous record of questions, advice, cosmological claims and platform presentation. Comparing this material requires distinguishing a practitioner from a publisher, a paraphrase from a spoken turn, and a generated response from source evidence. We connect a preserved 925-upload index to 949 question/answer-gist candidates from 67 Q&A-bearing digests, all in one Darryl Anka-related practitioner context. We audit coverage, source dependence and possible reuse, compare question and answer vocabulary, and execute a grouped-source CPU retrieval and adaptation pilot. Across 25 matched uploads, title/caption similarity rank association is 0.249 before and 0.129 after measured length conditioning; this is a descriptive sensitivity. The local pilot separately exposes lexical reconstruction, unsupported responses and source-citation failures. New collection attempts, retained derivatives and executed model outputs remain distinct in the database, dashboard and reproducible artifacts. The contribution is an inspectable measurement resource for published discourse and computational source handling. Human construct validation, rights review, authorship and submission decisions remain pending; the study does not verify attributed communication origins or physical claims.

1 Introduction

Online audiences encounter extraordinary claims through a mixture of recordings, interviews, excerpts, summaries and search results. Each layer changes the question that a researcher can answer. A title reveals how an upload is presented; a caption records available recognized speech; a digest compresses that speech; and a language model generates a new response from a prompt and its accessible evidence. These layers can all be computationally compared, but their similarities refer to different objects.

Public ET-channeling videos make this problem concrete. Practitioners publicly attribute messages to named entities or collectives. Their material circulates through official accounts, interview shows, archives and repost publishers. Questions range from everyday relationships and life direction to contact, consciousness, history and physical mechanisms. A single recording may mix a host introduction, an audience question, a purported message and commercial promotion. One performance can reappear as several uploads, while one publisher can host many practitioners. Treating every account as a person or every upload as an independent session changes both denominators and interpretations.

The first Channeling Atlas release addressed the platform layer through source reconciliation, duration summaries, keyword indicators and title/caption representations. A subsequent expansion created an auditable question-answer candidate database. The present continuation integrates these layers and asks a more focused methodological question: how can a researcher move from a heterogeneous public-video index toward source-grounded question answering without losing the evidence type, source dependency or limits of the original material?

This question has two connected parts. The first concerns the corpus: whether question wording, answer wording, publisher structure, duration and source reuse explain apparent similarity. The second concerns computation: whether retrieval and limited adaptation can produce useful, source-addressable responses on held-out material, and what simple automated scores actually measure. Retrieval-augmented generation (RAG) can place evidence in a prompt, while parameter-efficient training can change a model's response behavior. Neither operation independently turns derivative summaries into validated propositions. A careful pilot must therefore preserve the distinction between reproducing a source account and determining whether that account is true.

We ask three research questions:

- **RQ1: Source structure.** What coverage, concentration, source dependence and possible reuse patterns constrain comparisons within the retained video and question-answer index?
- **RQ2: Representation.** How do question and answer vocabulary, upload context and text-layer choices affect retrieval and similarity on matched, source-addressable units?
- **RQ3: Local modeling.** What can a bounded CPU pilot establish about closed-book, retrieval-conditioned and parameter-efficient response generation when source/video dependencies are controlled and outputs are retained for inspection?

Our contribution is a linked measurement resource and executed exploratory investigation. It combines a frozen public-video index, typed derivative Q&A records, transparent keyword extraction, source-family sensitivity, matched numeri-

cal diagnostics and a small local-model evaluation with an auditable result ledger. The manuscript and dashboard draw from the same result artifacts, while earlier releases remain preserved. Established methods—TF–IDF, cosine similarity, retrieval, channel centroids and low-rank adaptation—are used as baselines rather than presented as algorithmic inventions. The substantive scope is public discourse and its computational representation.

2 Background and Related Work

2.1 Channeling content and equivalent questions

Studies of channeling differ in whether they examine elicited participant responses, naturalistic communications or AI-mediated archival answers. These designs are related but not interchangeable. Anastasia et al. (2020) analyze elicited content from thirteen trance channels using qualitative methods. Wahbeh et al. (2023) compare responses to ten scientist-supplied questions, with quantitative correspondence examined in seven US participants and qualitative work spanning fifteen participants across two countries. Such designs foreground equivalent prompts and context. A shared theme need not imply agreement on a proposition.

The related prospective semantic and qualitative studies by Wahbeh and Glick describe a three-channeler research program (Wahbeh and Glick 2026b,a). The retained source register records accessible abstracts and supplement artifacts separately from publisher full text. Their relevance is methodological: comparisons should separate prompts, participants and conditions rather than pool all utterances into a universal similarity score.

A newer archival comparison ingests two text collections, queries each through a common UFODex system using the same questions, and compares generated answers (Wahbeh et al. 2026). Its methods also describe speech-recognition and embedding components. The public supplement directs both corpus queries toward a positive, supportive framing of the subject. A shared generator and prompt stance are therefore plausible contributors to generated resemblance. The computational unit is an AI-mediated archival response, rather than an observed original answer. This is a close comparator for our local-model branch, but its scores cannot be pooled with our title, caption or digest scores. Generated correspondence, original-source agreement and external verification remain separate evaluation targets.

Ethnographic studies of channeling and mediumship emphasize learned practices, voice and audience interaction (Klin-Oron 2014; Tomlinson 2019). Our access to these sources is recorded at abstract depth. Small-community research can provide rich contextual interpretation when it includes participant accounts and reflexive methods (Claisse and Durrant 2023); a small computational corpus does not automatically inherit that grounding. Our model-assisted readings are interpretations of retained summaries, not participant ethnography.

2.2 YouTube sampling and religious communication

YouNiverse documents the construction and coverage of a large English-language channel/video metadata resource (Horta Ribeiro and West 2021). The principle that transfers is procedural: acquisition and inclusion define the observable population. Our curated source union does not inherit YouNiverse's scale, thresholds or sampling weights. Updating every known ID improves within-index coverage without establishing a complete channel history or a census of practitioners.

Tube2Vec represents YouTube channels using sampled video titles and descriptions and evaluates channel representations on human tasks (Boesinger et al. 2024). It is a close computational precedent for account-level text vectors. Its design shows that channel-centroid embeddings are established practice; the present contribution concerns evidence-layer comparability and source dependencies in a much smaller, selected domain corpus. The publication is a peer-reviewed ICWSM poster paper, a status distinguished from an unreviewed software README.

Chen et al. (2026) separate narratives, visual presentation and audience engagement in a religious YouTube study. Their published methods describe keyword-based API collection, explicit filtering, pilot codebook development and human review of model labels. Their annotation and held-out human-coded components provide a useful contrast to the present unvalidated keyword indicators. We borrow the ordering of questions, acquisition and validation; their reported reliability does not transfer to our codebook or model-generated summaries.

Other platform studies analyze comment pathways or trace content sharing across publishing surfaces (Ota, Chujyo, and Toriumi 2025; Starbird et al. 2018). Their operationalizations show why a proxy must be named for what it observes. We do not infer viewer pathways from repeated vocabulary or original authorship from similar uploads, and we do not transfer those studies' political categories to indexed practitioners.

2.3 Text analysis, retrieval and adaptation

Automatic content analysis requires validation for its substantive use (Grimmer and Stewart 2013). Topic evaluation distinguishes interpretable labels, statistical coherence and replication reliability (Chang et al. 2009; Doogan and Buntine 2021; Hoyle et al. 2021; Schroeder and Wood-Doughty 2025). Fluent topic descriptions can still be generic without human involvement (Li et al. 2025). We therefore name the extraction mechanism—dictionary presence, lexical retrieval or a model annotation—rather than calling every output a validated theme.

Sentence-BERT and MiniLM provide efficient representation baselines (Reimers and Gurevych 2019; Wang et al. 2020). Broader multilingual benchmarks demonstrate that performance depends on task and language (Muennighoff et al. 2023; Enevoldsen et al. 2025). A familiar encoder or larger language model does not remove source attribution, duplicated performance or prompt-equivalence problems. In-domain held-out judgments remain necessary for substantive

agreement claims.

Retrieval-augmented generation separates a generator from an external evidence store (Lewis et al. 2020); REALM studies retrieval-augmented language-model pretraining (Guu et al. 2020). These are relevant foundations rather than interchangeable implementations. The present pilot uses a small local model and lexical retrieval over permitted derivative records, not the full architectures, data or training regimes of those papers. The intervention is access to source-addressable context under a controlled split.

Ovadia et al. (2024) compare fine-tuning and retrieval for knowledge injection on their evaluated tasks. Their result motivates measuring both routes under stated conditions, not a universal ranking of RAG over every adaptation method. Gekhman et al. (2024) show why learning new factual associations during fine-tuning warrants separate analysis of unsupported outputs. Low-rank adaptation reduces the trainable parameter subset (Hu et al. 2022); efficiency does not establish that learned responses are correct, faithful to source or robust to paraphrase.

RAG evaluation frameworks separate properties such as contextual relevance and answer faithfulness rather than assigning a single undifferentiated quality score (Es et al. 2024; Saad-Falcon et al. 2024). Their model-based evaluation components and calibration requirements cannot be inherited merely by computing token overlap. We retain raw outputs and retrieved IDs, name each local proxy explicitly, and leave source entailment and human usefulness to future held-out validation.

Evidence location within long contexts can materially affect model performance (Liu et al. 2024). Source duplication can also distort training and evaluation (Lee et al. 2022). These findings motivate bounded context, documented truncation and source/video grouping in our pilot. Our lexical source-family graph is a conservative leakage guard, not proof that all source duplication or pretraining contamination has been removed.

The new source register distinguishes freshly retrieved/read full texts, retained prior reading records, model cards and software documentation. This is a targeted methodological review, not a systematic review or a priority claim. Software repositories establish implementation choices and licenses; empirical papers support the methodological comparisons to their inspected access depth.

3 Data and Source Transformations

3.1 A preserved multi-layer index

The continuation resides in `occult-kranti/channels-ET`, imported from the earlier Atlas project. The original Bashar Index and previous manuscript releases remain separately preserved. Our primary frozen analytical snapshot contains 925 unique upload identifiers, 881 positive durations, 880 exact upload dates and 742 English-likely eligible titles. These counts describe a convenience sample. Publication dates can date reposts, and relative age strings are not converted into invented dates.

Evidence layer	Available	Indexed
Publishing account resolved	886	925
Positive upload duration	881	925
Exact upload date	880	925
English-likely eligible title	742	925
Frozen English caption pilot	30	925

Table 1: Frozen source coverage. The caption row denotes selected pilot inclusion, not estimated caption availability.

The union originally combined 482 atlas IDs and 457 valid unique archive IDs, with fourteen overlaps. Account directories contain aliases, unresolved routes and empty historical leads. The discovery layer includes practitioner, lineage and partial-name candidates, plus adjacent spiritual/contextual material. Inclusion documents public description and source discovery; it does not certify that every upload is a channeling performance.

The identity model distinguishes a practitioner, publishing account, upload, original session, text artifact and attributed entity label. These relations are many-to-many. Only explicit supported alias edges are merged. Unique upload IDs remove URL duplication, not repeated performances. The same practitioner can appear on several interview accounts; treating those publishers as different mediums would create artificial cross-person agreement.

3.2 Captions, digests and Q&A candidates

The retained caption pilot attempted 36 uploads, retrieved 34 tracks and retained 30 English documents for balanced analysis. Most offered tracks were automatic; the platform's manual flag is not an accuracy audit. Hosts and promotion remain unsegmented. Numeric derivatives are retained publicly, while raw captions and model weights remain outside the release. Recalculating numerical comparisons is therefore distinct from source-text inference replay.

The Q&A database indexes 949 question/answer-gist candidates from 67 Q&A-bearing digests among 75 retained digests. All concern a Darryl Anka-related practitioner context. The questions and answers are AI-produced paraphrases and gists, not literal transcript turns. Source hashes and JSON pointers bind each row to a particular digest revision. Timestamps and verified answer-speaker labels remain missing when not supported.

The version-1 candidate schema includes stable row ID, upload ID, source URL/file/hash/pointer, question paraphrase, answer gist, publisher fields, practitioner context, attributed-entity context, source format and verification flags. SQLite, JSON and CSV contain the same record pool. A searchable candidate can be useful without being a verified spoken answer; the database exposes that status rather than guessing it.

3.3 What new collection actually obtained

The acquisition branch implements ordinary public search, account enumeration, metadata refresh, offered-caption collection, resumable state and bounded download controls. Its

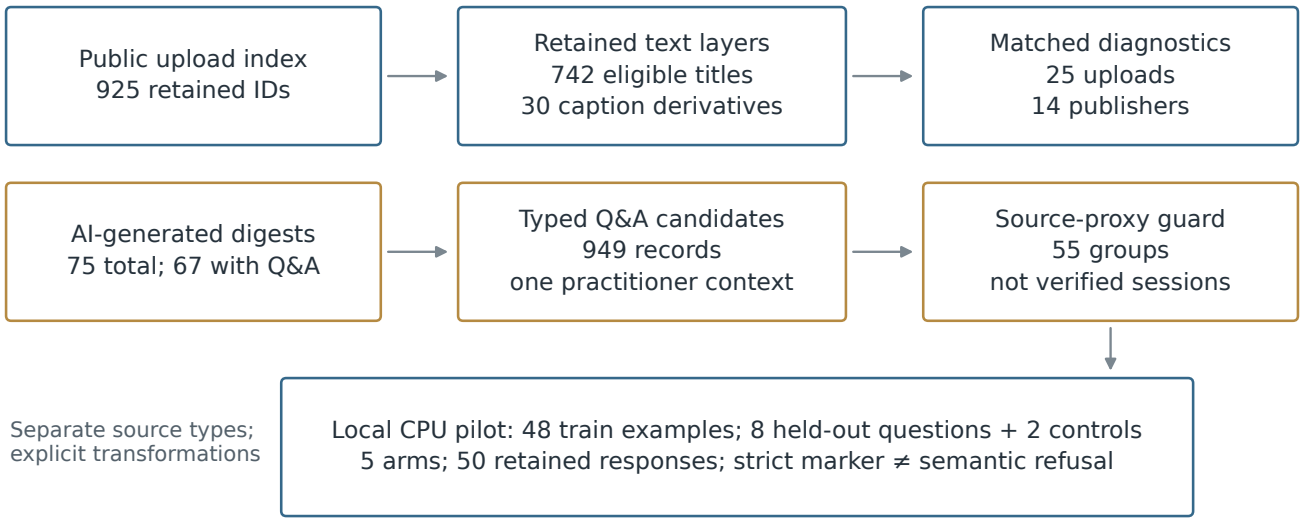


Figure 1: Evidence transformations in the executed resource. Public metadata, retained text derivatives, AI-digest candidates and model responses remain separate types. Source-proxy groups are conservative leakage guards rather than verified original performances. The original five-arm pilot is distinct from later diagnostic controls.

planned frame includes 106 inherited practitioner/lineage candidates, 590 keyword queries, 157 account routes and 215 caption candidates. Query templates combine a quoted name with channeling, questions answers or interview, plus documented name/entity combinations. Planned queries are not retrieved records.

The new continuation receipts document actual access outcomes, including a repeated YouTube watch preflight and an independently attempted author-published Ra-contact transcript. Both returned access denials in the observed environment. Installed `yt-dlp` and `youtube-transcript-api` clients, metadata indexes and local corpus support make the workflow reproducible; their existence does not imply that a successful crawl or caption acquisition occurred. The result ledger distinguishes environment policy, platform response, missing captions and successful artifacts. The exact receipt counts are generated in the appendix.

4 Methods

4.1 Transparent extraction and question retrieval

We report keyword-based extraction explicitly. The retained title/caption codebook uses nine overlapping dictionary families; the Q&A codebook separately maps eight families in question paraphrases and answer gists. A match means that a documented expression occurs, not that a proportion of speech is devoted to that theme. Question presence, answer presence and caption matches per 1,000 tokenizer-defined words have different denominators.

Question and answer-gist TF–IDF matrices are fitted separately with word unigrams/bigrams, English stop words, minimum document frequency one, sublinear term frequency, smooth inverse-document frequency and L2 normalization. For vectors x_i and x_j, lexical resemblance is $s_{ij} = x_i^\top x_j/(\|x_i\|_2\|x_j\|_2)$. The released retrieval set retains distinct-upload question pairs with cosine at least 0.40. Threshold sensitivity recounts the same candidates through 0.90. Neither threshold is a calibrated prompt-equivalence boundary.

Associated answer-gist cosine is computed independently. Comparing question and answer scores asks whether lexical similarity in one field accompanies similarity in another; it does not code proposition agreement. An answer can paraphrase the same idea with few shared terms, qualify a question's premise, or omit a requested detail. Model-assisted single and paired readings inspect such examples with source pointers, while keeping answer agreement undetermined.

4.2 Source dependency and leakage sensitivity

Different upload IDs can derive from one performance. We therefore examine exact normalized question strings, repeated question/answer combinations, concentration of retrieved pairs within upload pairs, and conservative graph-based proxies for shared source families. These are diagnostics of observed text reuse. A graph edge is not proof that two uploads are the same session.

For the new retrieval and local-model experiments, splitting by individual Q&A row would allow near-identical questions or related video material on both sides. The continuation therefore groups source/video relationships using documented exact-question and high-similarity rules before selecting train and test material. The exact grouping thresholds, connected-component counts and resulting split sizes

are emitted from the executed experiment. The guard is intentionally more cautious than a row split, but its sensitivity cannot eliminate unseen paraphrases or pretraining exposure.

The guard also changes which question similarities occur in the compared pools. Because exact and highly similar questions help define groups, within-group and cross-group contrasts are selected on prompt resemblance. An answer-cosine change after quarantine cannot be attributed specifically to source reuse. We inspect common-support question-similarity bins as an additional descriptive sensitivity; neither grouping nor standardization identifies a causal source effect.

4.3 Publisher and text-layer diagnostics

Publisher concentration uses attributed upload counts, with unresolved uploads retained separately. Duration bands name measured minutes rather than assumed genres. Dictionary presence is compared by duration and within accounts to expose changes caused by composition and weighting. These descriptive contrasts do not estimate causal format effects.

The inherited title/caption vectors use a pinned MiniLM encoder. The new matched upload-pair cohort contains 25 uploads from fourteen publishers, including three singletons; it differs from the previous two-document account-centroid cohort of 22 videos and eleven accounts. Pair scores reuse uploads. We report equal-account summaries, deterministic publisher-omission ranges and fixed-vector publisher-label shuffles as diagnostics rather than independent-pair confidence intervals.

New nuisance checks relate similarities to duration and caption length on matched source items. Partial ranks and omission ranges inspect whether a relationship is sensitive to those measured quantities; unobserved speaker composition, performance reuse and selection still matter. The exploratory protocol records its questions before the new calculations but follows inspection of schema and previous summaries. It is not preregistration.

4.4 A bounded local generation pilot

The local pilot compares source access and adaptation under a small fixed resource budget: a four-core-equivalent CPU quota, approximately 32 GiB memory and no GPU. The runtime allocates two PyTorch threads, leaving resources for the surrounding pipeline. A licensed small instruction model is pinned by repository revision and verified artifact hashes. The chosen model is a practical baseline for reproducible CPU execution, not a state-of-the-art claim. Model cards, runtime dependencies, hardware, commands, elapsed time and failures are retained.

The arms separate an extractive lexical baseline, closed-book generation, retrieval-conditioned generation and parameter-efficient adaptation. Source-proxy groups are sorted and shuffled with seed 42; eight groups are held out, with the first candidate by ID selected from each. Training selection takes the first candidate from each of the 47 remaining groups, then one further candidate, yielding 48 examples. This dispersed first-item sample is not a balanced content or difficulty benchmark. Retrieval searches only those 48 records and supplies at most two question/gist items with lexical cosine at least 0.10. Held-out reference gists are not in that store.

The extractive baseline returns a retrieved gist in full. Generative arms use a 40-new-token cap and an instruction requesting fewer than 40 words; words and model tokens are different units. This unequal output budget is retained as a limitation, not ignored in a comparison. Low-rank adaptation changes a limited parameter subset; it does not establish that the model learned verified knowledge. The exact executed training steps, trainable parameter count and evaluated test/control items are reported from their receipts.

We retain prompts, retrieved record IDs, raw model responses and reference gists. Automated token-overlap F1 measures resemblance to the selected reference gist, not factual correctness, entailment, completeness or human usefulness. A valid record-ID citation means the identifier resolves to a permitted item; it does not by itself prove that the cited text supports every generated statement. Abstention controls probe behavior on deliberately unsupported inputs, with the exact controls disclosed. The pilot is too small for population-level model rankings.

5 Results

5.1 Coverage and source structure

The retained index resolves 886 uploads to 180 nonempty publisher groups, with 39 uploads unresolved. The largest ten publishers contribute 38.0% of attributed uploads and the largest twenty 66.9%. This concentration describes index composition rather than audience size or practitioner prevalence.

The Q&A layer contains 949 candidates from 67 of 75 digests. It spans 27 resolved publisher IDs, while 105 candidates remain in 7 unresolved inherited-name groups. All belong to one practitioner context. There are no literal transcript turns or verified answer-speaker labels in this candidate layer.

The conservative benchmark guard links uploads through exact normalized questions, question cosine at least 0.80, or at least three question-pair links at 0.40. It produces 55 groups from 67 Q&A-bearing uploads, with 14 upload links, 8 multi-upload groups and a largest group of 4 uploads. The groups quarantine possible shared source material; they are not verified original-session identities.

5.2 Question similarity weakly predicts answer wording

Across 441,797 distinct-upload candidate combinations, question and answer-gist lexical cosines have Spearman rank correlation 0.075. Aggregating to upload-pair means changes the association to 0.323. The change shows sensitivity to weighting and dependence, not a new independent sample.

The 127 question neighbors at cutoff 0.40 have mean answer-gist cosine 0.171. Restricting them to different quarantine groups leaves 57 pairs with mean 0.044. The 15 pairs with identical normalized question wording still have mean answer-gist cosine 0.311. None of these scores codes whether answers agree. Quarantine groups are themselves defined by

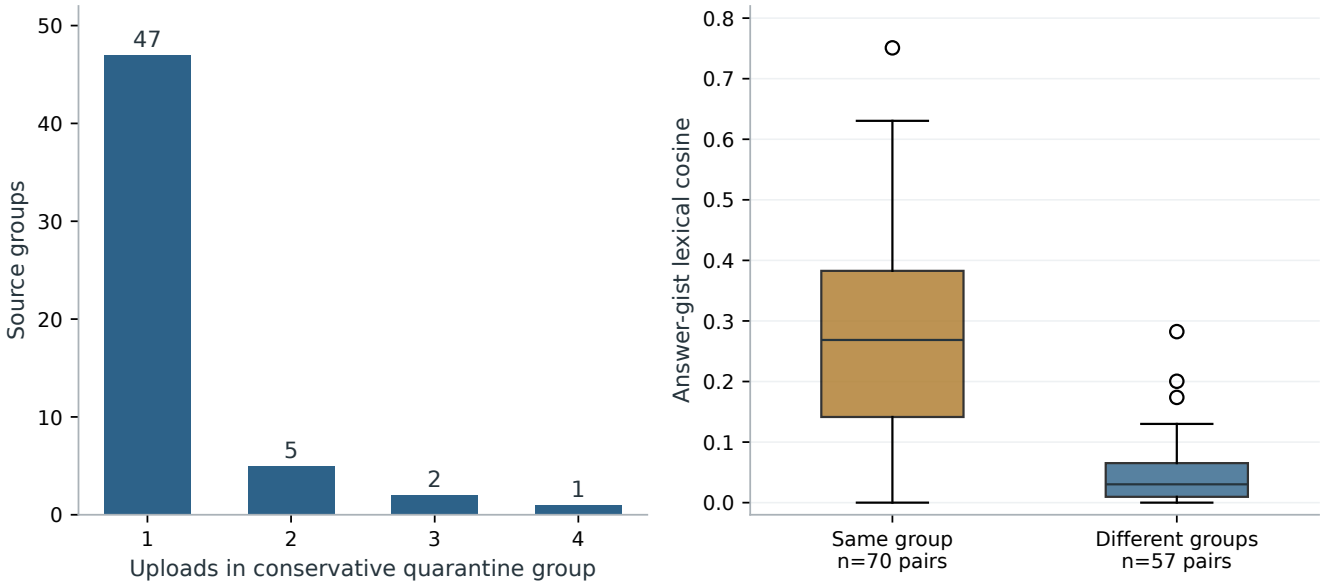


Figure 2: The conservative source guard changes which question neighbors are compared. Upload links are lexical dependency proxies. Same-group and cross-group pair distributions reuse candidates and are not independent samples or agreement scores.

exact/high question similarity or multiple retrieval links; this selected-pool change cannot isolate a source-reuse effect.

A second, explicitly exploratory comparison standardizes the within- and cross-quarantine answer means over question-cosine bins that contain both strata. The common-support pool contains 93 pairs (36 within and 57 cross), excluding 34 within-group pairs in high-similarity bins with no cross-group support. Pooled-bin weights applied identically to both strata give mean answer cosine 0.297 versus 0.044, a difference of 0.253. The directional within-group advantage is not disconfirmed by this sensitivity, but coarse bins leave prompt, length, topic and source-selection differences unresolved.

5.3 Lexical neighborhoods change with their retrieval threshold

At question cutoff 0.40, 178 of 949 candidates participate in nonsingleton lexical components; the largest contains 15 candidates. Raising the cutoff to 0.90 leaves 30 linked candidates and a largest component of 3. These are graph neighborhoods under a word-based rule, not validated topic clusters.

5.4 Text-layer association changes after length conditioning

The matched representation analysis uses 25 uploads from 14 publishers, yielding 300 dependent upload pairs (11 within publisher, 289 between). Raw title/caption cosine rank association is 0.249. After separate rank projections on absolute log duration ratio, mean log duration and absolute log caption-word ratio, the residual association is 0.129. Publisher omission yields -0.026–0.207, an influence range rather than a confidence interval.

Caption within-minus-between separation changes from 0.154 to 0.133 under the documented conditioning, while title separation changes from 0.229 to 0.217. These descriptive residual comparisons do not identify causal mediation or remove speaker and editing differences.

5.5 Local generation and adaptation pilot

The executed pilot uses `Qwen/Qwen2.5-0.5B-Instruct`, revision `7ae557604adf` (full revision in the run receipt), under its Apache-2.0 license. It uses 48 training examples from 47 source-proxy groups and 8 questions from 8 disjoint groups, plus 2 unsupported-input controls. The retrieval store contains only the training examples; held-out answers are deliberately absent. This is a sparse-source transfer stress test, not a conventional factual RAG benchmark with known answer-bearing documents.

LoRA executes 48 microsteps and 12 optimizer updates over one epoch in 65.04 seconds, adapting 270,336 of 494,303,104 parameters. Rank is 4 with alpha 8, learning rate 0.0002, gradient accumulation 4, and targets `q_proj` and `v_proj`. Peak process RSS is 3.21 GiB. This is a short adaptation smoke test on a shared CPU, not an optimized training study or CPU/GPU comparison.

Closed-book reference overlap changes from 0.060 to 0.145 after adaptation, while retrieval-conditioned values are 0.011 and 0.012. The missing held-out answers in the retrieval store confound any algorithm ranking: low overlap may accompany appropriate refusal or evidence gaps. Both language-model retrieval arms emit no valid evidence-label citation on the held-out questions. Citation compliance is therefore an observed failure, separate from source entailment.

Question-cosine band	Within pairs	Cross pairs	Within answer mean	Cross answer mean	Weight
0.40–<0.50	16	38	0.356	0.039	0.581
0.50–<0.60	14	12	0.203	0.026	0.280
0.60–<0.70	6	7	0.243	0.104	0.140
0.70–<0.80	10	0	0.229	unavailable	excluded
0.80–<0.90	6	0	0.310	unavailable	excluded
0.90–1.00	18	0	0.280	unavailable	excluded

Table 2: Question-similarity common support. Standardization uses identical pooled-bin weights only where both quarantine strata occur. Missing cross-stratum means are not zero. These dependent-pair summaries are neither agreement scores nor causal estimates.

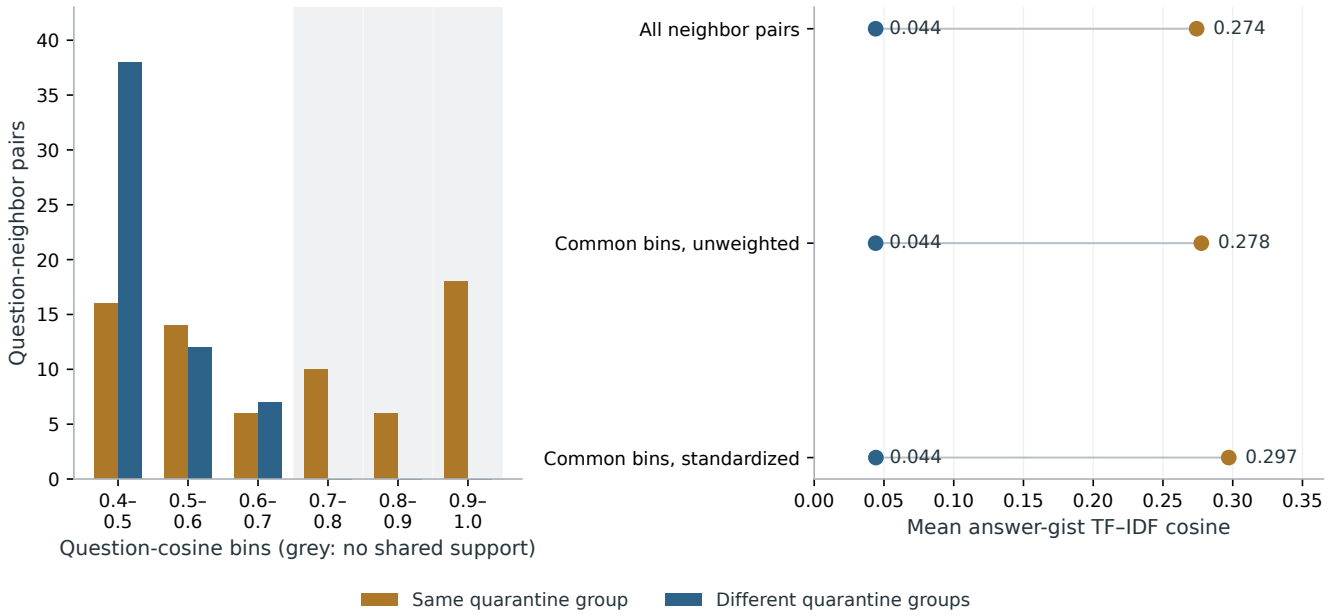


Figure 3: Question-similarity support and standardized answer-gist contrast. Only three bins contain both strata: 93 retained pairs and 34 excluded higher-similarity within-group pairs. Identical pooled-bin weights yield descriptive means, with null unsupported comparisons. Group construction and remaining within-bin differences prevent a causal reuse or agreement interpretation.

Cosine cutoff	Edges	Linked Qs	Largest component
0.40	127	178	15
0.50	73	114	10
0.60	47	78	4
0.70	34	58	3
0.80	24	39	3
0.90	18	30	3

Table 3: Lexical graph sensitivity. Isolated candidates remain part of the 949-row denominator; graph connectivity is not original-session identity.

The strict control score counts a literal marker. A base response saying “Insufficient evidence. is a semantic refusal but does not match that marker; zero strict score must not be described as zero refusal. Conversely, the adapted closed-book output supplies a studio temperature of 23 degrees Celsius although no measurement evidence is provided. This concrete unsupported assertion is a substantive failure that token F1 cannot diagnose. The controls are diagnostic examples, not a representative hallucination rate.

A separately disclosed post-hoc phrase diagnostic was defined after inspecting the responses; it does not replace the original metric. It matches refusal expressions such as “insufficient evidence with spaces/underscores and “not available. It is another lexical rule, not a human semantic-refusal annotation.

Four additional answer-present positive controls supply an exact training-source question and gist, separately for base and adapted retrieval. They are not held-out tests and are excluded from the original five-arm table. Of 4 outputs, 2 exactly reproduce the supplied gist under token-overlap F1, yet 0 emit a valid evidence-label citation. Source availability therefore does not repair citation compliance in this diagnostic. Reproducing an attributed source assertion remains

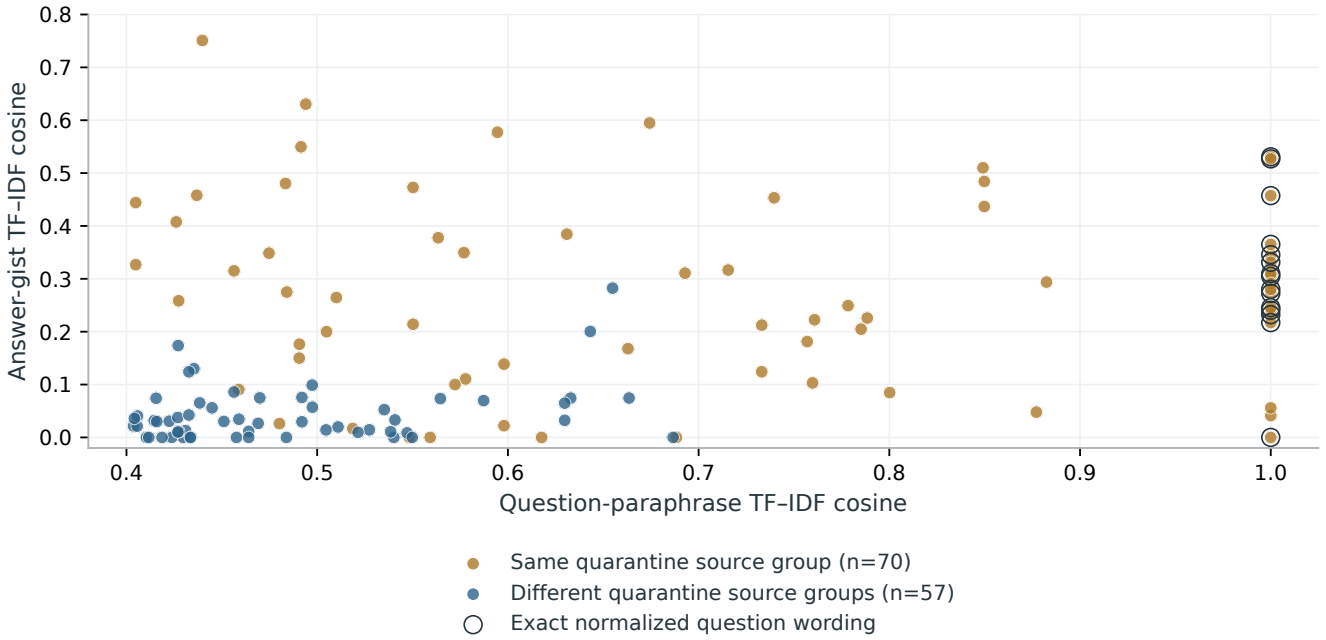


Figure 4: Question and answer-gist lexical resemblance on source-addressable candidate pairs. Question and answer TF–IDF fits are separate. The quarantine contrast is a dependency sensitivity, not a causal source effect or a semantic agreement validation.

Arm	Token F1	Seconds / response	Strict control marker
Lexical retrieval	0.035	0.0004	1/2
Base closed-book	0.060	1.3962	0/2
Base + retrieval	0.011	1.3260	1/2
LoRA closed-book	0.145	3.2899	0/2
LoRA + retrieval	0.012	1.7715	2/2

Table 4: Eight held-out question gists and two controls per arm. F1 is lexical overlap with an AI-produced reference gist. Control column counts exact INSUFFICIENT_EVIDENCE marker emission, not all semantic refusal. The extractive baseline copies a full gist; generators are capped at 40 new tokens. Latency excludes model loading and index fitting. No model-quality ranking is inferred.

Arm	Strict marker	Post-hoc phrase hits
Lexical retrieval	1/2	1/2
Base closed-book	0/2	2/2
Base + retrieval	1/2	2/2
LoRA closed-book	0/2	1/2
LoRA + retrieval	2/2	2/2

Table 5: Control diagnostics on the same two unsupported inputs per arm. The post-hoc phrase rule was selected after viewing outputs and is not an independent validation set.

distinct from externally verifying it.

Generation is greedy, float32, limited to 40 new tokens and a 512-token prompt. No prompt was truncated; 5 adapted closed-book and 1 adapted retrieval responses hit the generation cap. Length-limited outputs can lose qualifications and depress lexical overlap. Their full outputs and source evidence remain inspectable in the prediction archive.

5.6 Structured content labeling exposes another failure mode

An additional base-model task inspects 12 digest excerpts from distinct source-proxy groups, balanced by a dictionary conditionality marker. It requests a primary answer-orientation label, a conditionality label and an exact evidence span of at most eight words. Only 9 outputs parse under the requested schema; 3 remain recorded failures. Conditional labels match the dictionary method in 5/9 parseable cases. This is method concordance on a selected set, not human annotation accuracy.

The most frequent parsed primary label is contact_forecast (9/9 parseable outputs). Conditional wording is labeled yes in 9/9 parseable cases, so the reported dictionary concordance is compatible with a collapsed single-label response. Only 0 of 9 parseable evidence spans satisfy the exact-short-span rule. Forced single labels and overlapping dictionary categories

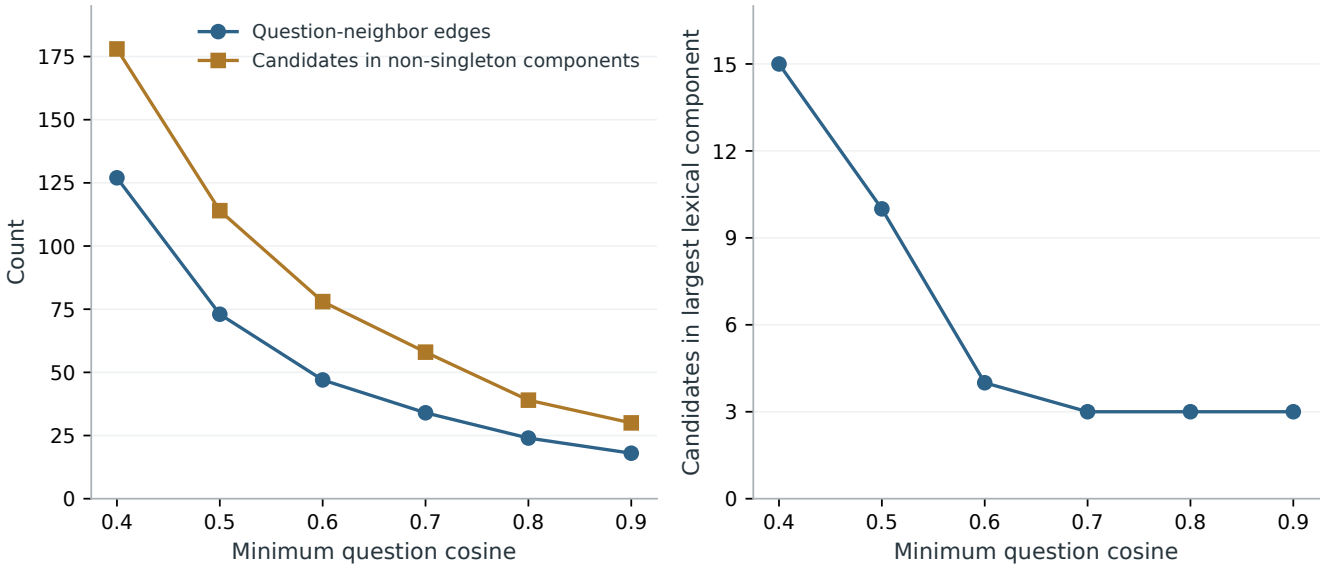


Figure 5: Lexical-neighbor connectivity as the question cosine cutoff changes. Vertices are digest candidates and edges link different uploads. Component size reflects the chosen retrieval rule rather than a calibrated semantic or ontological category.

are not equivalent tasks. These failures argue for retaining raw outputs and explicit unknown/parse states before using generated labels to characterize this material; they do not establish corpus-wide topic prevalence.

A final same-item probe changes only the listed theme-option order, keeping the twelve excerpts, conditional options and generation settings fixed. Original and reversed prompts each yield 9 parseable outputs, with 8 items parseable in both conditions. Of those paired items, 6 change primary theme. The reversed list yields 7 personal-practice and 2 contact/forecast labels, but selects the new first option in 0/9 parseable outputs. This disconfirms a simple first-option-copying explanation while demonstrating local prompt-order sensitivity. No reversed output satisfies the combined exact-short-span rule.

A separate post-hoc dictionary sensitivity narrows the broad dependency-word expression. Conditional flags change from 60 to 58 among 949 source gists (2 changed records). Neither rule is a human reference, and the original selection and benchmark labels remain unchanged. Stability under this single lexical perturbation does not validate the conditionality construct.

The newer pinned Qwen3.5-0.8B model then executes the same twelve excerpts and original annotation schema/options with a 96-token cap, greedy decoding and thinking disabled. It returns 12/12 parseable outputs and 5/12 exact answer substrings of at most eight words, compared with 9/12 and 0/9 in the original small-model run. Its conditional labels are yes in 12/12 cases: 6/12 dictionary concordance is exactly the always-yes result on the balanced six/six sample. Primary labels remain concentrated (11 personal-practice, 1 contact/forecast).

Thus parsing and short-span compliance improve in this same-item check while conditional-label collapse persists. Of the newer model's 12 evidence strings, 10 are exact contiguous answer substrings; 5 of those exceed eight words, leaving 5 combined exact-short successes and 2 nonexact strings. Exact but overlength spans are length-compliance failures, not invented evidence. The modern model uses its own tokenizer/chat template and runtime; architecture, instruction behavior and those implementation changes are not isolated. Mean runtime is 6.90 seconds per excerpt, with 0 cap hits and peak process RSS 5.35 GiB. No human label accuracy, source-truth validation or general model ranking is established.

5.7 Newer-family execution is a separate compatibility probe

A separately pinned `Qwen/Qwen3.5-0.8B` model, revision `2fc06364715b`, also executes on CPU using `Transformers 5.20.2`. The single text-only prompt directly supplies the desired provenance values (AI digest and unverified speaker turns) and requests a JSON object. The response follows that schema. This is instruction-following compatibility, not independently inferred provenance, domain accuracy or a comparison with the earlier labeling task.

The probe generates 23 tokens under a 32-token limit in 3.88 seconds after 1.03 seconds of model loading, with peak process RSS 5.33 GiB. The architecture supports image/text inputs, but no image, video, audio or speech-recognition input is used. Its different prompt and budget make it separate from the five-arm Qwen2.5 experiment; no state-of-the-art, model-quality or CPU/GPU ranking follows.

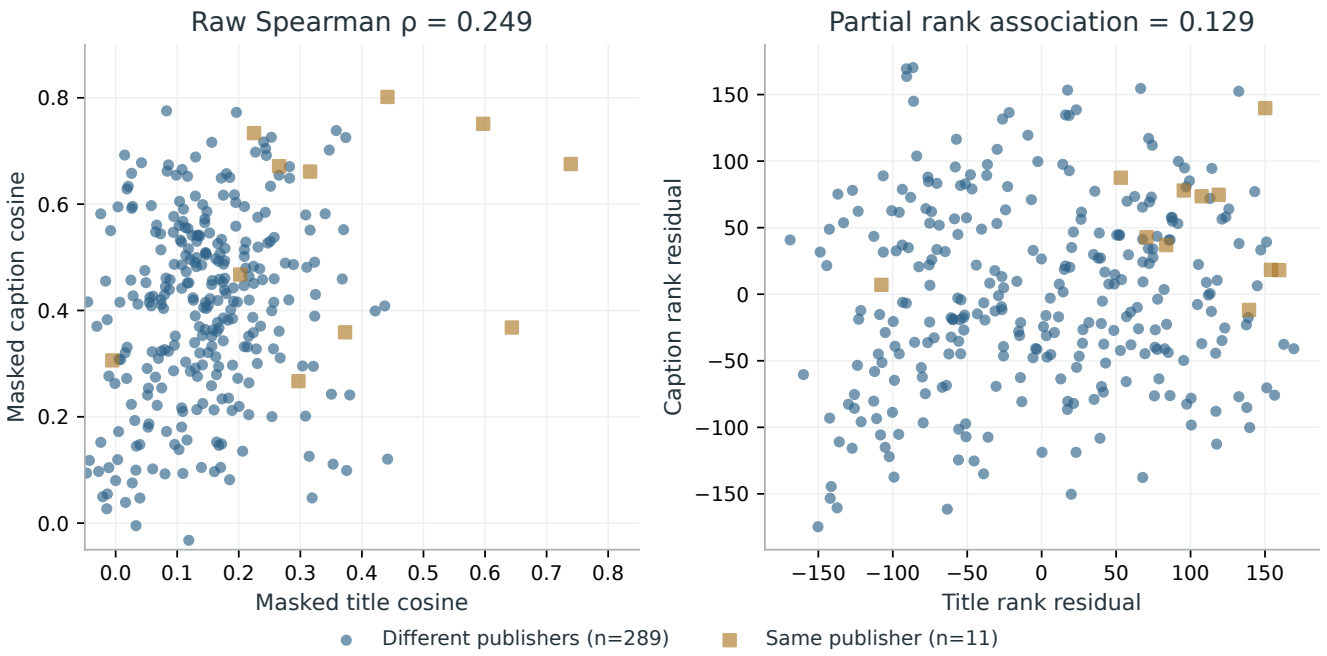


Figure 6: Title/caption association before and after measured length conditioning on identical uploads. Partial rank association is the correlation of separately projected rank residuals. Pair entries share uploads; publisher-omission ranges measure influence.

Annotation condition	Parsed / selected	Exact spans / parsed	Exact + short / parsed	Primary labels
Qwen2.5 original	9/12	0/9	0/9	9 contact/forecast
Qwen2.5 reversed options	9/12	0/9	0/9	7 personal practice; 2 contact/forecast
Qwen3.5 original options	12/12	10/12	5/12	11 personal practice; 1 contact/forecast

Table 6: Same selected excerpts, explicitly different prompt/model conditions. Exact means a nonempty contiguous answer substring; the combined criterion also requires at most eight whitespace words. Source labels are model outputs, not measured corpus prevalence or human annotation accuracy.

6 Discussion

6.1 The answer depends on the evidentiary unit

The linked pipeline makes several useful research actions possible before a multi-practitioner answer study is available: retrieve source-addressable questions, inspect associated gists, identify possible reuse, audit publisher composition and compare model outputs against their accessible evidence. These capabilities address a practical source-understanding problem. They do not justify converting multiple publishers into multiple independent practitioners.

Questions about life direction, beliefs, contact or consciousness can recur within one practitioner context. Repetition may reflect audience concerns, a stable teaching vocabulary, source reuse or summary normalization. The separate question, answer and source fields allow these explanations to compete. A high-dimensional vector alone cannot choose among them. When a retrieved pair disagrees with a model-assisted reading, it becomes an inspection target rather than an error to remove by selecting a preferred encoder.

6.2 Retrieval and adaptation solve different operational problems

A closed-book model responds from its pretrained parameters and prompt. Retrieval supplies identifiable context. Adaptation changes response behavior using the training examples. Differences among these arms can therefore arise from evidence access, response length, formatting or memorization, in addition to any useful improvement in source handling. A model that copies a reference phrase can obtain higher token F1 without preserving its qualifications. A source-linked response can remain unsupported even when its cited identifier exists.

The correct interpretation of a small CPU pilot is consequently operational and bounded. It can establish that a chosen runtime, model artifact, split and training configuration execute, and expose concrete output failure modes. A larger validation study would compare equal evidence budgets, assess groundedness and relevance with held-out human judgments, and retain negative results. It should also

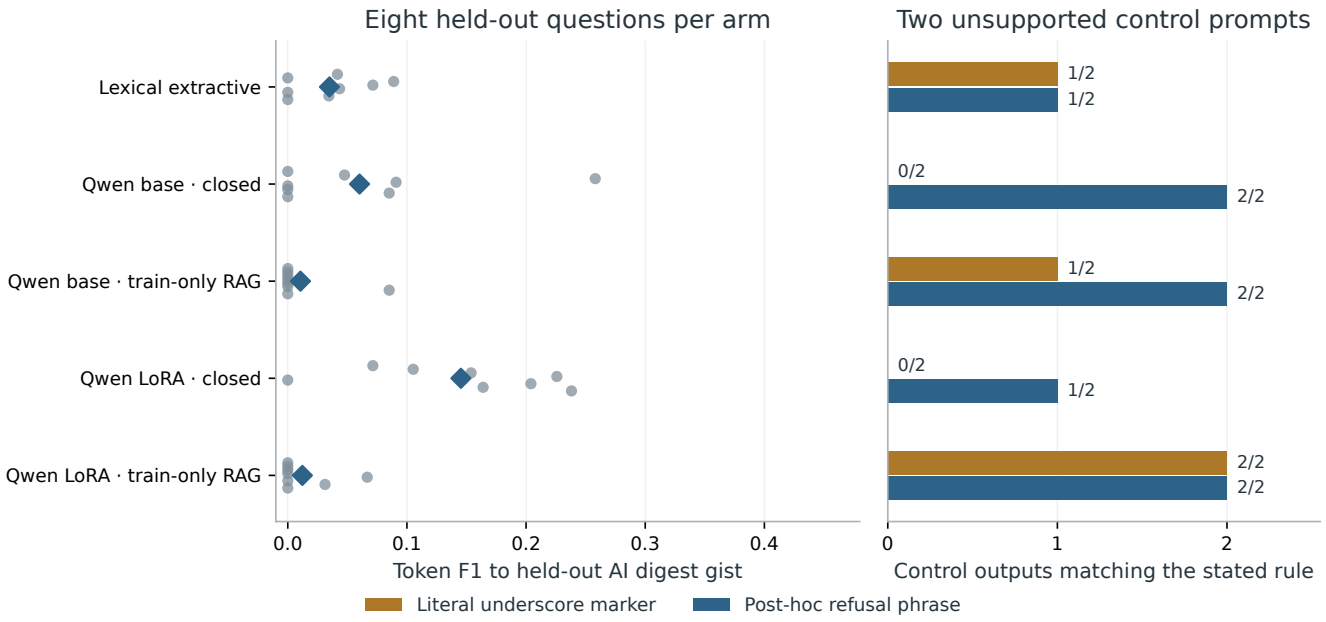


Figure 7: Five executed pilot arms: held-out lexical gist overlap, strict control-marker emission (gold) and the separately defined post-hoc refusal-phrase rule (blue). Eight references are AI digest gists; two controls test unsupported inputs. Neither control rule is human refusal accuracy. Train-only retrieval excludes held-out answers, so these quantities do not rank factual model quality.

test whether improvements survive source-family exclusion and prompt paraphrase.

6.3 Novelty and substantive scope

Channeling content analysis, account embeddings, lexical retrieval, RAG and low-rank adaptation all have prior work. Our proposed contribution is their source-typed integration in a traceable research resource, plus the concrete measurement and failure analyses that integration enables. The work is not a new embedding algorithm, a validated truth detector or a first-in-field claim derived from incomplete search.

The substantive object is how attributed communications are published, summarized and computationally represented. Similarity, repeated answers or generated fluency do not determine extraterrestrial origin, independent information or clinical state. This boundary leaves meaningful social-computing questions: who publishes which formats, how titles differ from speech, which questions recur, how reuse affects comparison, and when systems preserve or erase source uncertainty.

7 Limitations and Responsibility

The index is purposive, English-biased and historically mixed, with unknown inclusion probabilities. Empty or unresolved account routes, unavailable captions and approximate identity joins remain. Known-ID refresh and keyword enumeration cannot establish a worldwide active-medium count. Upload dates do not necessarily date performances or current activity.

The derivative Q&A corpus concerns one practitioner context and may inherit summarizer omissions or normalized wording. It has no new human-verified answer speakers or literal turn timestamps. Captions are largely automatic and unsegmented; model-assisted readings do not establish caption accuracy, human agreement or participant interpretation. Source-family graphs are conservative proxies rather than verified performance identities.

The model pilot is small, CPU-constrained and tied to one baseline and one derivative corpus. Token F1, citation syntax and simple abstention rules are partial measurements. Test rows can still share latent teachings, summarization style or pretraining exposure with training material despite the grouping guard. Small controls and model-agent readings do not replace held-out human evaluation.

Public professional records are analyzed without private communications or audience profiling. Raw captions, full third-party transcript bodies, credentials and model weights are excluded from public research artifacts unless an explicit release basis is established. Model outputs can contain unsupported claims and are displayed as generated research outputs. Appropriate institutional determination, rights review, human authorship, affiliations and contributor acceptance remain **TBD**. The living draft is not submitted or accepted. The official ICWSM/AAAI preprint style is used as a writing reference; venue compliance must be assessed for a concrete submission.

8 Conclusion

Source-grounded computational research begins by preserving what each record actually is. This continuation links a heterogeneous video index to typed Q&A candidates, source-dependency diagnostics and a bounded local modeling workflow. The resulting analyses make publishing structure, lexical reuse and evidence access inspectable, while the paper and dashboard share reproducible inputs. The next substantive step is attributable multi-practitioner answer material with human-reviewed prompts, speakers and claims. More computation can help organize that evidence, but it does not substitute for obtaining and validating it.

AI and Review Disclosure

Model-agent workstreams assisted acquisition, literature inspection, database and model experiments, quantitative analysis, interface implementation and manuscript development. Three new continuation loops, numbered 10–12, review implemented artifacts and record corrections separately from prior rounds. Their receipts name actual files and hashes; they are not independent human peer review. Human responsibility for final authorship and acceptance remains pending.

References

Anastasia, J.; Wahbeh, H.; Delorme, A.; and Okonsky, J. 2020. A qualitative exploratory analysis of channeled content. *EXPLORE*, 16(4): 231–236.

Boesinger, L.; Horta Ribeiro, M.; Veselovsky, V.; and West, R. 2024. Tube2Vec: Social and Semantic Embeddings of YouTube Channels. *Proceedings of the International AAAI Conference on Web and Social Media*, 18(1): 2084–2090.

Chang, J.; Gerrish, S.; Wang, C.; Boyd-Graber, J.; and Blei, D. 2009. Reading Tea Leaves: How Humans Interpret Topic Models. In *Advances in Neural Information Processing Systems*, volume 22. Curran Associates, Inc.

Chen, R.; Xin, Z.; Xiao, Q.; Xiao, R.; Xiao, J.; Zhang, B.; Shen, H.; and Lu, Z. 2026. The Digital Landscape of God: Narrative, Visuals and Viewer Engagement of Religious Videos on YouTube. *Proceedings of the International AAAI Conference on Web and Social Media*, 20(1): 469–486.

Claisse, C.; and Durrant, A. C. 2023. 'Keeping our Faith Alive': Investigating Buddhism Practice during COVID-19 to Inform Design for the Online Community Practice of Faith. In *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems*, 1–19. Association for Computing Machinery.

Doogan, C.; and Buntine, W. 2021. Topic Model or Topic Twaddle? Re-evaluating Semantic Interpretability Measures. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, 3824–3848. Association for Computational Linguistics.

Enevoldsen, K.; Chung, I.; Kerboua, I.; Kardos, M.; Mathur, A.; Stap, D.; Gala, J.; Siblini, W.; Krzemiński, D.; Winata, G.; Sturua, S.; Utpala, S.; Ciancone, M.; Schaeffer, M.; Misra, D.; Dhakal, S.; Rystrøm, J.; Solomatin, R.; Çağatan, O.; Kundu, A.; Bernstorff, M.; Xiao, S.; Sukhlecha, A.; Pahwa, B.; Poświata, R.; GV, K. K.; Ashraf, S.; Auras, D.; Plüster, B.; Harries, J.; Magne, L.; Mohr, I.; Zhu, D.; Gisserot-Boukhlef, H.; Aarsen, T.; Kostkan, J.; Wojtasik, K.; Lee, T.; Suppa, M.; Zhang, C.; Rocca, R.; Hamdy, M.; Michail, A.; Yang, J.; Faysse, M.; Vatolin, A.; Thakur, N.; Dey, M.; Vasani, D.; Chitale, P.; Tedeschi, S.; Tai, N.; Snegirev, A.; Hendriksen, M.; Günther, M.; Xia, M.; Shi, W.; Lu, X. H.; Clive, J.; K, G.; Anna, M.; Wehrli, S.; Tikhonova, M.; Panchal, H.; Abramov, A.; Ostendorff, M.; Liu, Z.; Clematide, S.; Miranda, L. J. V.; Fenogenova, A.; Song, G.; Bin Safi, R.; Li, W.-D.; Borghini, A.; Cassano, F.; Hansen, L.; Hooker, S.; Xiao, C.; Adlakha, V.; Weller, O.; Reddy, S.; and Muennighoff, N. 2025. MMTEB: Massive Multilingual Text Embedding Benchmark. In Yue, Y.; Garg, A.; Peng, N.; Sha, F.; and Yu, R., eds., *International Conference on Learning Representations*, volume 2025, 101715–101771.

Es, S.; James, J.; Espinosa Anke, L.; and Schockaert, S. 2024. RAGAs: Automated Evaluation of Retrieval Augmented Generation. In Aletras, N.; and De Clercq, O., eds., *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics: System Demonstrations*, 150–158. St. Julians, Malta: Association for Computational Linguistics.

Gekhman, Z.; Yona, G.; Aharoni, R.; Eyal, M.; Feder, A.; Reichart, R.; and Herzig, J. 2024. Does Fine-Tuning LLMs on New Knowledge Encourage Hallucinations? In Al-Onaizan, Y.; Bansal, M.; and Chen, Y.-N., eds., *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, 7765–7784. Miami, Florida, USA: Association for Computational Linguistics.

Grimmer, J.; and Stewart, B. M. 2013. Text as Data: The Promise and Pitfalls of Automatic Content Analysis Methods for Political Texts. *Political Analysis*, 21(3): 267–297.

Guu, K.; Lee, K.; Tung, Z.; Pasupat, P.; and Chang, M.-W. 2020. REALM: Retrieval-Augmented Language Model Pre-Training. In *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, 3929–3938.

Horta Ribeiro, M.; and West, R. 2021. YouNiverse: Large-Scale Channel and Video Metadata from English-Speaking YouTube. *Proceedings of the International AAAI Conference on Web and Social Media*, 15: 1016–1024.

Hoyle, A.; Goel, P.; Hian-Cheong, A.; Peskov, D.; Boyd-Graber, J.; and Resnik, P. 2021. Is Automated Topic Model Evaluation Broken? The Incoherence of Coherence. In Ranzato, M.; Beygelzimer, A.; Dauphin, Y.; Liang, P.; and Vaughan, J. W., eds., *Advances in Neural Information Processing Systems*, volume 34, 2018–2033. Curran Associates, Inc.

Hu, E. J.; Shen, Y.; Wallis, P.; Allen-Zhu, Z.; Li, Y.; Wang, S.; Wang, L.; and Chen, W. 2022. LoRA: Low-Rank Adaptation of Large Language Models. In *International Conference on Learning Representations*.

Klin-Oron, A. 2014. How I learned to channel: Epistemology, phenomenology, and practice in a New Age course. *American Ethnologist*, 41(4): 635–647.

Lee, K.; Ippolito, D.; Nystrom, A.; Zhang, C.; Eck, D.; Callison-Burch, C.; and Carlini, N. 2022. Deduplicating Training Data Makes Language Models Better. In Muresan, S.; Nakov, P.; and Villavicencio, A., eds., *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 8424–8445. Dublin, Ireland: Association for Computational Linguistics.

Lewis, P.; Perez, E.; Piktus, A.; Petroni, F.; Karpukhin, V.; Goyal, N.; Küttler, H.; Lewis, M.; Yih, W.-t.; Rocktäschel, T.; Riedel, S.; and Kiela, D. 2020. Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks. In *Advances in Neural Information Processing Systems*, volume 33, 9459–9474.

Li, Z.; Calvo-Bartolomé, L.; Hoyle, A.; Xu, P.; Stephens, D.; Dima, A.; Fung, J. F.; and Boyd-Graber, J. 2025. Large Language Models Struggle to Describe the Haystack without Human Help: A Social Science-Inspired Evaluation of Topic Models. In Che, W.; Nabende, J.; Shutova, E.; and Pilehvar, M. T., eds., *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 7583–7604. Vienna, Austria: Association for Computational Linguistics. ISBN 979-8-89176-251-0.

Liu, N. F.; Lin, K.; Hewitt, J.; Paranjape, A.; Bevilacqua, M.; Petroni, F.; and Liang, P. 2024. Lost in the Middle: How Language Models Use Long Contexts. *Transactions of the Association for Computational Linguistics*, 12: 157–173.

Muennighoff, N.; Tazi, N.; Magne, L.; and Reimers, N. 2023. MTEB: Massive Text Embedding Benchmark. In Vlachos, A.; and Augenstein, I., eds., *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, 2014–2037. Dubrovnik, Croatia: Association for Computational Linguistics.

Ota, K.; Chujyo, M.; and Toriumi, F. 2025. Pathways to Conspiracy Theorizing on YouTube in Japan. *Proceedings of the International AAAI Conference on Web and Social Media*, 19: 2635–2641.

Ovadia, O.; Brief, M.; Mishaeli, M.; and Elisha, O. 2024. Fine-Tuning or Retrieval? Comparing Knowledge Injection in LLMs. In Al-Onaizan, Y.; Bansal, M.; and Chen, Y.-N., eds., *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, 237–250. Miami, Florida, USA: Association for Computational Linguistics.

Reimers, N.; and Gurevych, I. 2019. Sentence-BERT: Sentence Embeddings using Siamese BERT-Networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, 3982–3992. Association for Computational Linguistics.

Saad-Falcon, J.; Khattab, O.; Potts, C.; and Zaharia, M. 2024. ARES: An Automated Evaluation Framework for Retrieval-Augmented Generation Systems. In Duh, K.; Gomez, H.; and Bethard, S., eds., *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, 338–354. Mexico City, Mexico: Association for Computational Linguistics.

Schroeder, K.; and Wood-Doughty, Z. 2025. Reliability of Topic Modeling. In Chiruzzo, L.; Ritter, A.; and Wang, L., eds., *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, 2649–2662. Albuquerque, New Mexico: Association for Computational Linguistics. ISBN 979-8-89176-189-6.

Starbird, K.; Arif, A.; Wilson, T.; Van Koevering, K.; Yefimova, K.; and Scarnecchia, D. 2018. Ecosystem or Echo-System? Exploring Content Sharing across Alternative Media Domains. *Proceedings of the International AAAI Conference on Web and Social Media*, 12(1): 365–374.

Tomlinson, M. 2019. How to speak like a spirit medium: Voice and evidence in Australian Spiritualism. *American Ethnologist*, 46(4): 482–494.

Wahbeh, H.; and Glick, B. 2026a. Qualitative Structure and Meaning in Prospective Trance-Channeled Communications Attributed to Extraterrestrial Intelligences. *World Futures*, 1–21.

Wahbeh, H.; and Glick, B. 2026b. Semantic Structure and Correspondence in Prospective Trance-Channeled Communications Attributed to Extraterrestrial Intelligences. *World Futures*, 1–17.

Wahbeh, H.; Glick, B.; Brinsmead, E.; Taddeo, S.; and Wood, R. S. 2026. Semantic Correspondence Between Trance-Channeled ET Messages and Ufological Records. *Journal of Scientific Exploration*, 40(2): 183–196.

Wahbeh, H.; Speirn, P.; Pederzoli, L.; and Tressoldi, P. 2023. Channelers' Answers to Questions from Scientists: An Exploratory Study. *Journal of Scientific Exploration*, 37(3): 348–369.

Wang, W.; Wei, F.; Dong, L.; Bao, H.; Yang, N.; and Zhou, M. 2020. MiniLM: Deep Self-Attention Distillation for Task-Agnostic Compression of Pre-Trained Transformers. In *Advances in Neural Information Processing Systems*, volume 33, 5776–5788. Curran Associates, Inc.

Min cosine	Links needed	Upload links	Groups
0.70	2	6	62
0.80	2	4	64
0.90	2	4	64

Table 7: Stricter repeated-question-pair source proxy. This rule differs from the more inclusive benchmark guard and must not be described as the same session classification.

A Extended Evidence and Reproduction Ledger

A.1 Acquisition outcome ledger

The continuation attempted 1 new public YouTube watch request and 1 independent author-transcript request. Successful new operations: 0; new caption documents: 0; new media downloads: 0. The corpus index holds 925 inherited upload metadata records and 0 newly indexed transcript artifacts. The author HTTP 403 and YouTube proxy CONNECT 403 are distinct observations; neither means that a source does not exist.

A.2 Retained descriptive checks

Earlier descriptive findings remain available with their original definitions. The caption pilot is shorter in median duration than the nonpilot known-duration pool; title-keyword duration contrasts change with per-account weighting; the former 22-video/eleven-account centroid comparison is distinct from the new 25-video upload-pair diagnostic. They provide context rather than independent replication of the continuation analyses.

A.3 Lexical source-family rule sensitivity

The stricter proxy requires repeated question-pair links at each listed cosine threshold. Its group counts describe that alternative rule, rather than the more inclusive guard used to split the local-model pilot. Neither rule verifies original-session identity.

A.4 Model-assisted reading artifacts

The retained repository files `research/expansion/qa/close-reading.json` and `research/expansion/qa/pair-close-reading.json` contain twenty single-candidate and twelve paired model-assisted readings, respectively. Each links to digest source pointers and hashes. The inspected material is the existing AI-generated question and gist fields; no human annotation, raw transcript, audio or video inspection is claimed by these ledgers. All paired answer-agreement fields remain undetermined.

One paired reading identifies compatible life-purpose paraphrases despite different answer wording; another retains uncertainty about relative versus calendar contact windows because original recording dates are unresolved. These interpretations illustrate why a lexical score alone cannot establish contradiction or chronological drift. They are selected interpretive examples, not a representative validation sample.

B Evidence Types and Interpretation

A watch-page response supports observed metadata at retrieval. A title supports publishing-language analysis. An offered caption supports analysis of its available text and flags, with recognition and speaker limitations. A digest Q&A row supports source-linked paraphrase retrieval. A frozen embedding supports numerical comparisons on its original items. A generated answer supports inspection of that model's behavior under its prompt and accessible evidence. These are distinct observations.

We separate four practical questions: does a statement resemble another text; does it accurately reproduce a source account; does a source support the asserted proposition; and is that proposition externally verified? The current automatic measures mainly address the first, with source-ID checks contributing limited evidence about the second and third. They do not settle external verification.

C Dataset and Model Update Procedure

Preserve raw-source provenance, source access depth and earlier releases. Define the unit and inclusion rules before expanding collection. Execute a small access pilot, retain failures and success hashes, and distinguish new retrieval from reuse of frozen derivatives. When new source text becomes available, record its permission/release basis, caption type, language, timestamps and speaker uncertainty.

Regenerate relevant statistics, keyword features, source families, splits and model runs when inputs change. Repin models by immutable revision and verified artifact hash. Keep source/video grouping and retrieval evidence fixed across comparable arms; separately report any deliberate change in context budget or adaptation data. Review affected prose and figures rather than allowing automatically updated counts to coexist with stale interpretations.

The paper build uses deterministic metadata, current generated values, fixed figure files and the unchanged official style. The standalone source ZIP compiles the manuscript; the repository experiment scripts reconstruct the analytical outputs. Byte-identical same-environment rebuilding and clean-package page-text checks are separate capabilities. Full model recomputation also requires the pinned model artifacts and runtime, which are not silently bundled as manuscript text.

D Future Studies and Falsifiers

Matched answers across practitioners. Obtain equivalent prompts and complete attributable answers from more than one practitioner, group original performances and code agreement, qualification, disagreement and indeterminate separately from topic. The hypothesis that high lexical neighbors are equivalent prompts fails if blinded judgments mostly identify materially different or underspecified questions. A useful plot is a prompt-by-practitioner answer-relation matrix with missing cells and source counts.

Speaker and context windows. Human-check host, question, message and promotion intervals, then compare whole

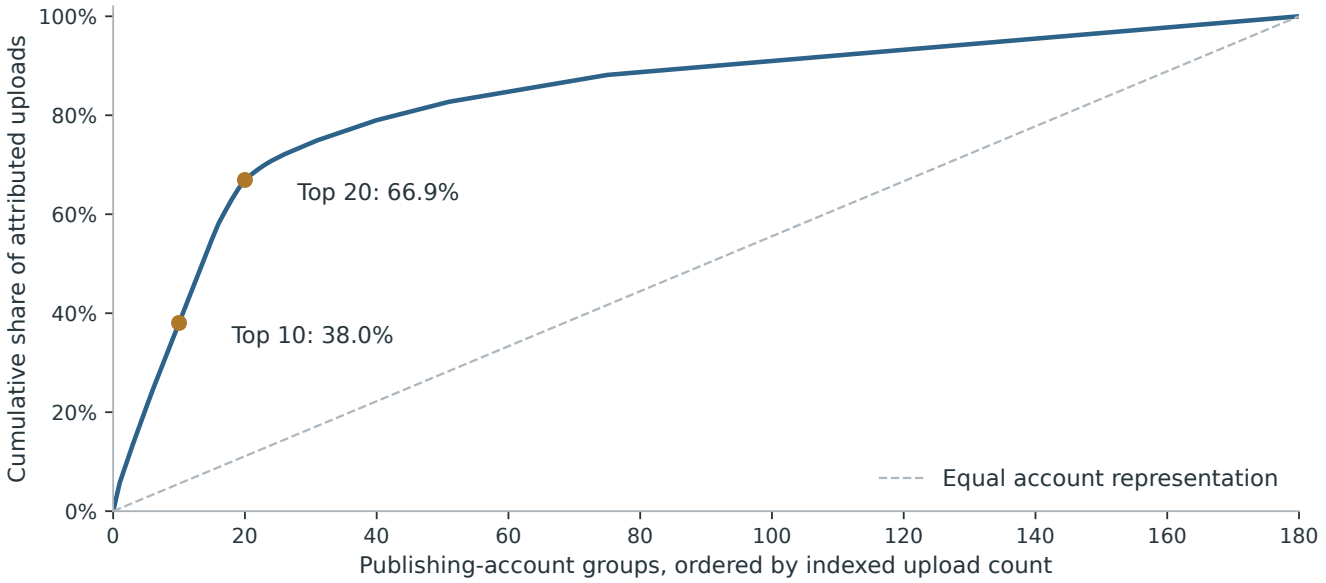


Figure 8: Retained publisher concentration among attributed indexed uploads, not population prevalence.

recordings with the same items' attributed-message windows. Improved substantive retrieval is disconfirmed if held-out relevance does not improve. Plot paired neighbor changes with exclusions; do not describe positional trimming as diarization.

Original-session reuse. Confirm edit/repost families with explicit source links and authorized audiovisual evidence, then collapse to one performance unit. An apparent independent cross-account relation weakens if it disappears on collapse. A bipartite upload/session graph can reveal this dependence without asserting direction from similarity alone.

Chronological change. Obtain original recording dates and sufficiently complete histories, then test within-source changes with format and reuse controlled. A drift hypothesis fails when it vanishes under these controls. Time plots should show denominators, missing intervals and the meaning of uncertainty.

Human validation of retrieval and generation. Use blinded, held-out prompt-equivalence, source-entailment and answer-relation judgments, with a documented codebook and adjudication. Model improvement fails if it does not exceed an equal-evidence lexical baseline on those judgments. Token-overlap gains alone do not satisfy the criterion.

Multilingual and caption accuracy. Compare licensed pinned encoders on identical human-reviewed language strata, and audit speech recognition against corrected reference segments. Record word/claim error, speaker confusion and missed questions. A model or caption threshold fails if held-out errors exceed the predefined standard or change extracted claims.

Uncertainty and conditionality. Annotate propositions, negation, quoted speech, time windows and conditions from original answer spans. Test lexical marker retrieval against held-out labels rather than equating marker counts with certainty, sincerity or deception. Confusion matrices and within-prompt distributions should retain indeterminate cases.

These are unexecuted research directions unless a separate dated result artifact explicitly reports their execution. No future-study row is an empirical finding.

E Pending Human and Submission Decisions

Human authorship and affiliations; contributor review and factual acceptance; institutional ethics determination for the actual study design; release-rights review; human construct and caption validation; a concrete venue; current checklist answers; disclosure placement; and submission approval remain TBD. The ICWSM 2027 initial-paper guidance checked for this phase states eleven pages including references, with checklist and appendices separate. This living manuscript prioritizes inspectability and does not claim automatic compliance with that limit or final checklist.

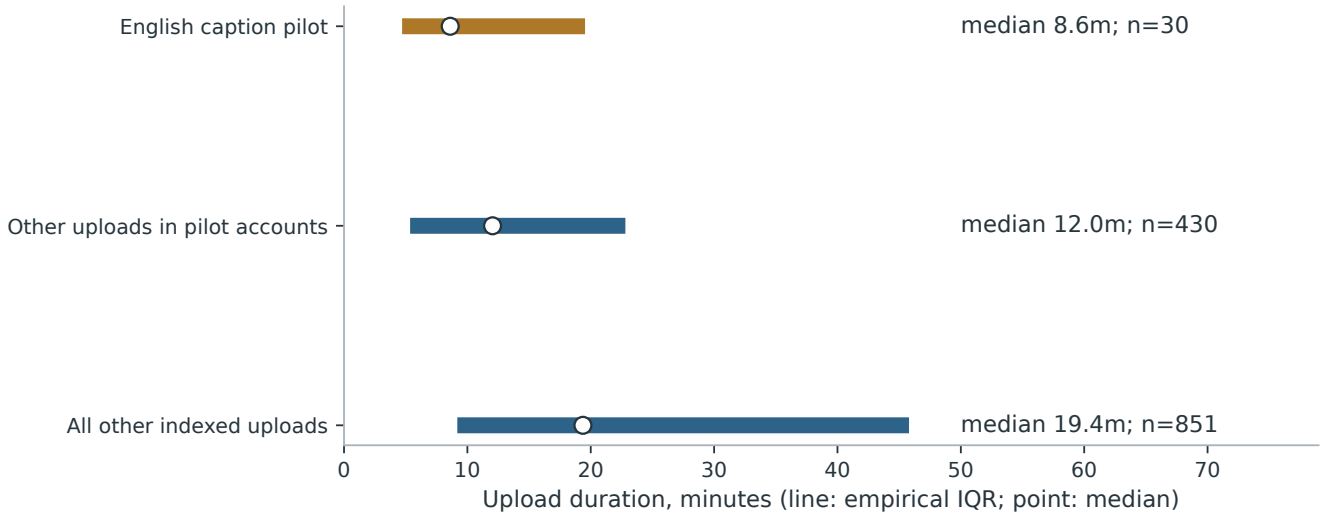


Figure 9: Retained selected-caption duration comparison. Interquartile spans are empirical distributions, not confidence intervals.

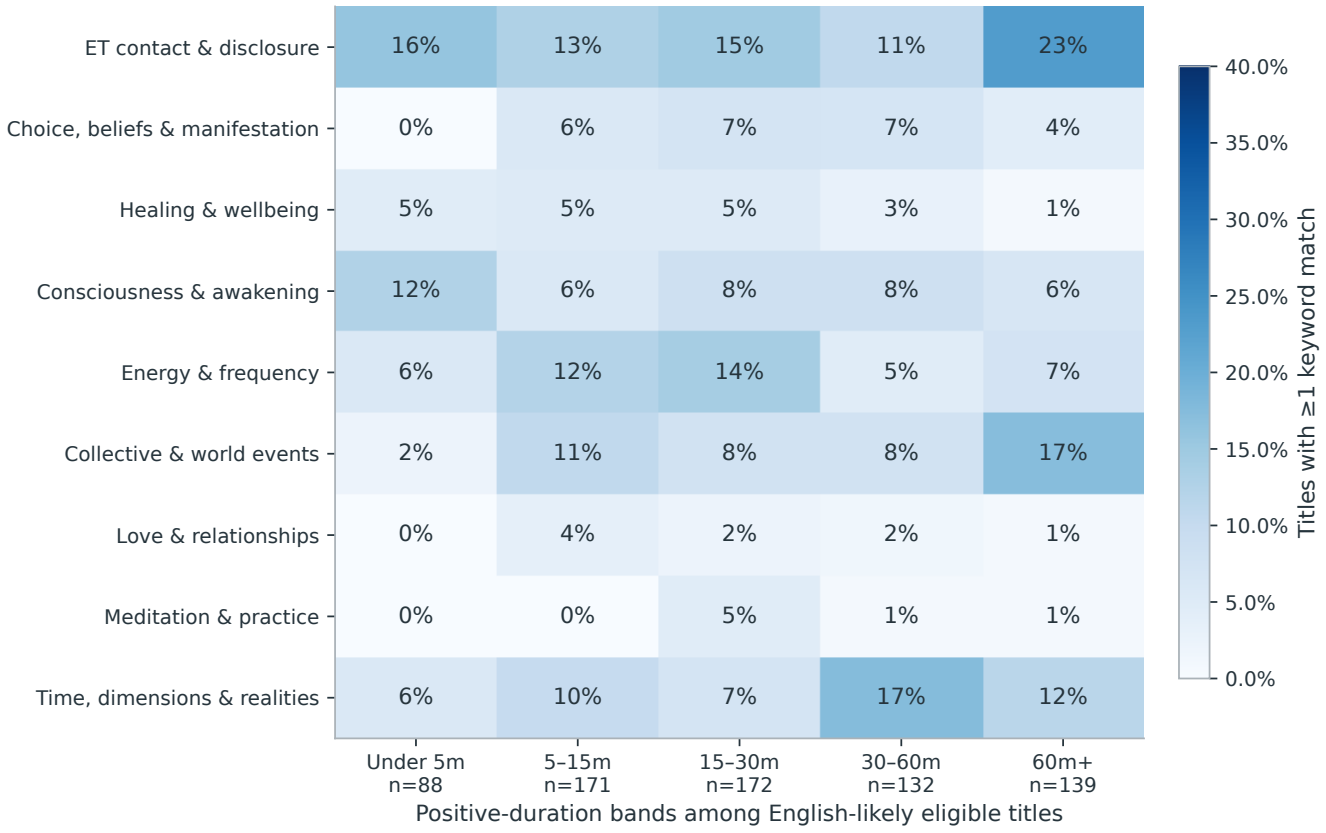


Figure 10: Retained title keyword presence by measured duration. The 702 eligible titled uploads with known duration define the denominator; overlapping dictionary families are unvalidated indicators.