


# Spinor Transfer Model from J3 to J2 Space in Collatz Inverse Trees

Hiroshi Harada — July 6, 2026

## (a) Conceptual Architecture of Spinor Transfer (J3 → J2)

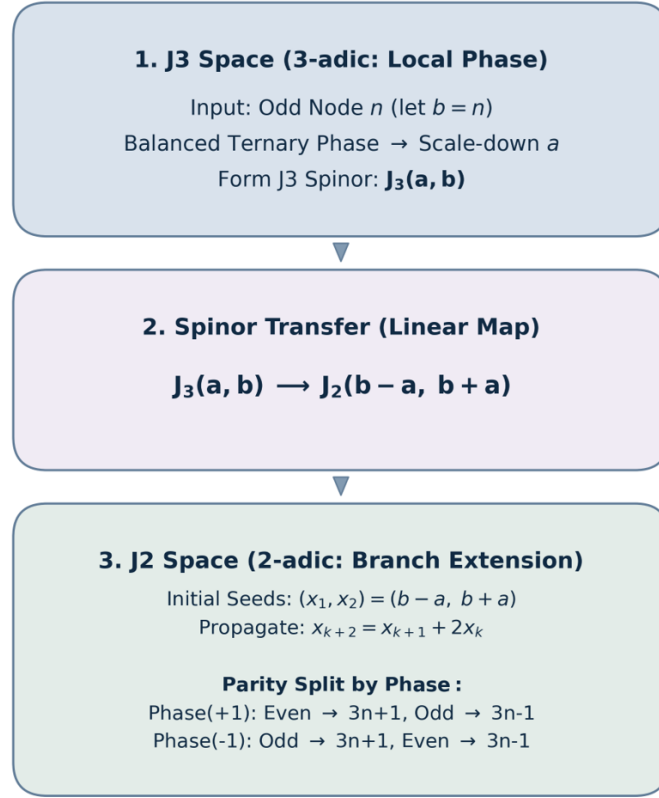

(b)

| Node ( $n = b$ ) | Phase | J3(a,b)  | J2(b-a,b+a) | J2_Sequence           |
|------------------|-------|----------|-------------|-----------------------|
| 7                | 1     | J3(2,7)  | J2(5,9)     | [5, 9, 19, 37, 75]    |
| 11               | -1    | J3(4,11) | J2(7,15)    | [7, 15, 29, 59, 117]  |
| 17               | -1    | J3(6,17) | J2(11,23)   | [11, 23, 45, 91, 181] |
| 13               | 1     | J3(4,13) | J2(9,17)    | [9, 17, 35, 69, 139]  |
| 5                | -1    | J3(2,5)  | J2(3,7)     | [3, 7, 13, 27, 53]    |
| 1                | 1     | J3(0,1)  | J2(1,1)     | [1, 1, 3, 5, 11]      |

**Figure 1. Jacobsthal Spinor Transfer Architecture and Computed Reverse Odd Collatz Orbit.**

(a) Schematic representation of the linear spinor transfer mapping from the 3-adic (J3) local phase to the 2-adic (J2) branch-extension space. (b) Spinor values computed along the reverse odd Collatz orbit for the initial value 7 ( $1 \leftarrow 5 \leftarrow 13 \leftarrow 17 \leftarrow 11 \leftarrow 7$ ), highlighting the parity-based parent selection governed by the Balanced Ternary phase.

### License

Research document: CC BY 4.0

Python source code: MIT License

Copyright (c) 2026 Hiroshi Harada