Figure Compilation — Runaround Smooth

Auto-generated from figure_registry_concise.txt

February 28, 2026

List of Figures

1 2×3 observed vs predicted r_e for six composite-roughness expressions, coloured by sigma. Felkel and Horton-Einstein track the 1:1 line best; Cox is insensitive. 2

2 2×2 predicted vs observed n_e/¡n¿ for four CF methods, coloured by sigma. Leading-term CF captures most variance (R^2≈0.67); Lotter predicts a constant and cannot distinguish cases. 3

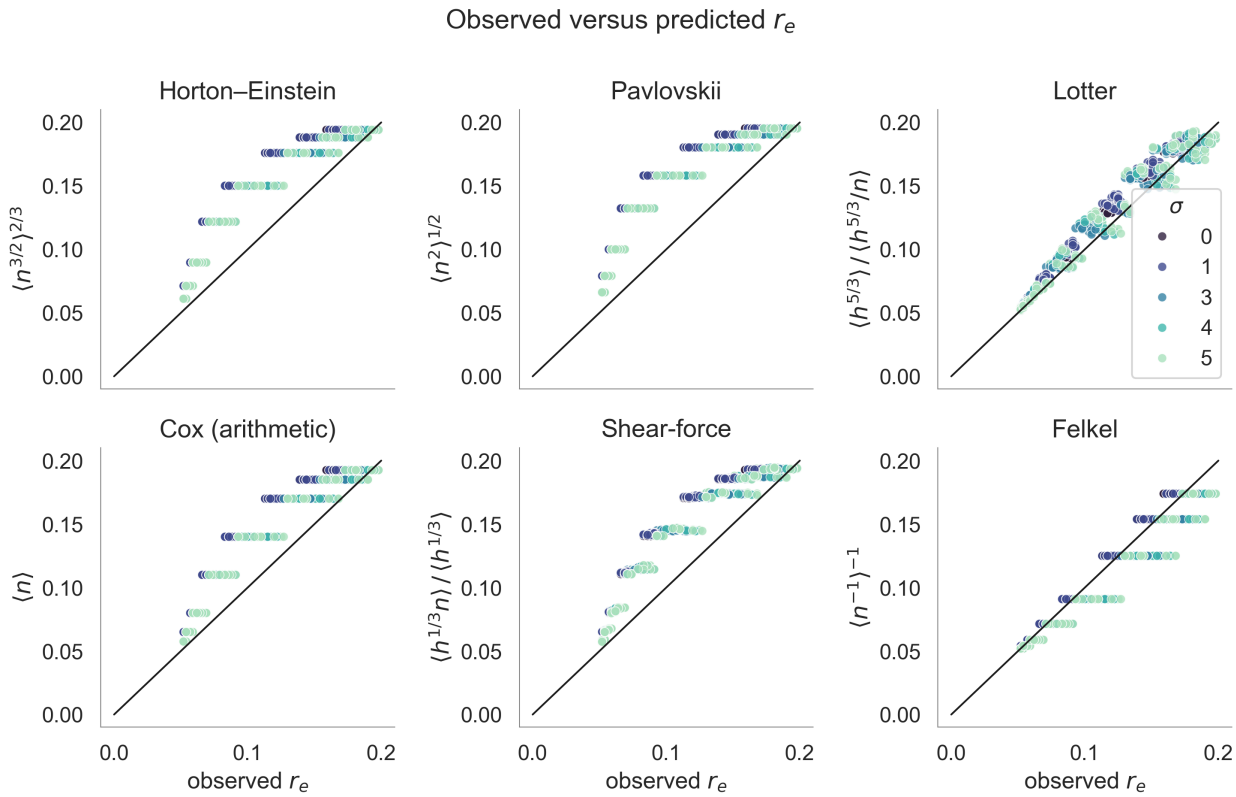

Figure 1: 2×3 observed vs predicted r_e for six composite-roughness expressions, coloured by sigma. Felkel and Horton-Einstein track the 1:1 line best; Cox is insensitive.

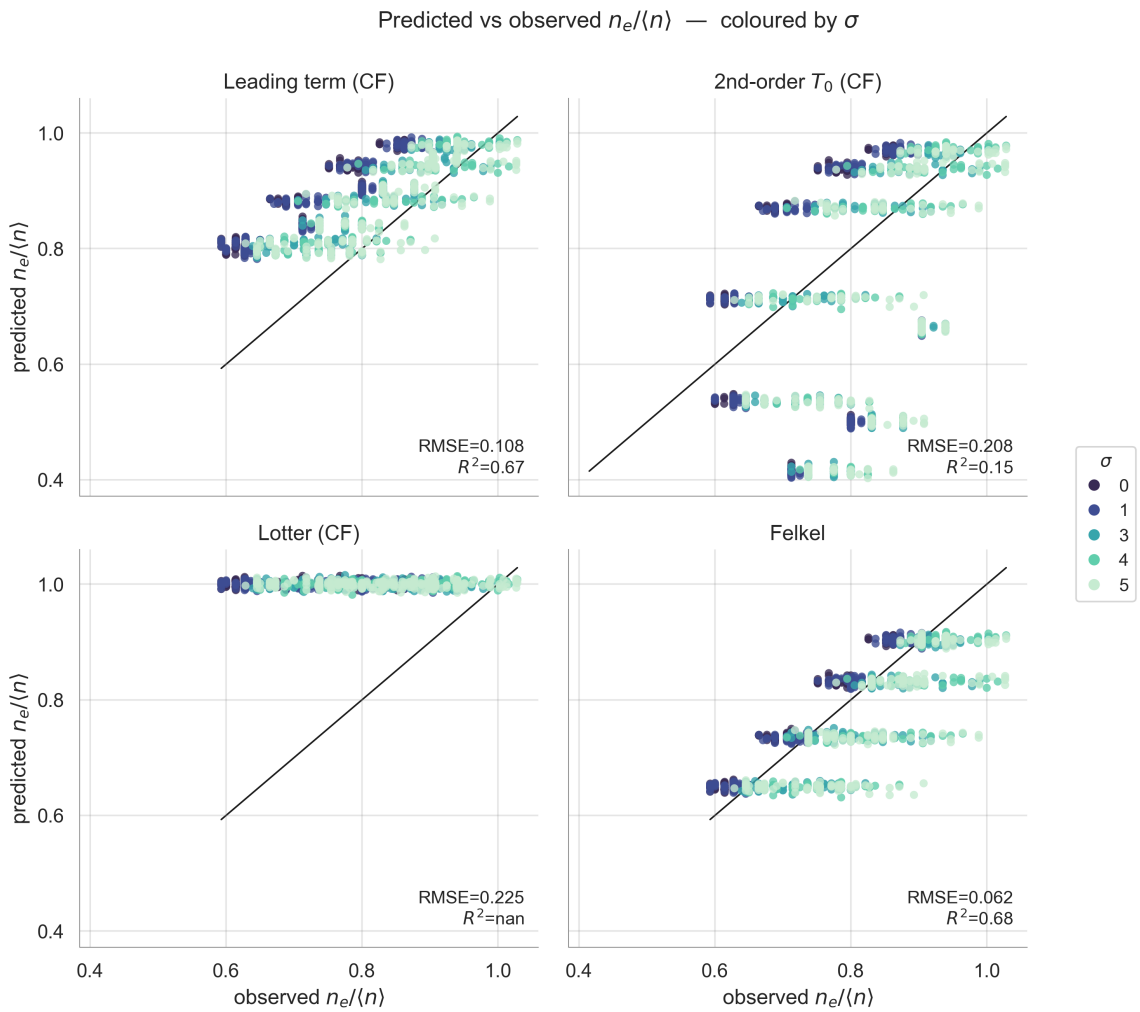

Figure 2: 2×2 predicted vs observed n_e/¡n¿ for four CF methods, coloured by sigma. Leading-term CF captures most variance ($R^2 \approx 0.67$); Lotter predicts a constant and cannot distinguish cases.