Portfolio 0.8 Documents

Release 1.0

Odys Zhou

Oct 10, 2026

CONTENTS:

1 Download Portfolio 1

2 Call for Play Testers 3

3 About 5

4 Portfolio Android Demo 7

5 Portfolio Synode (Demo) 11

6 Windows Desktop Demo 21

7 About Central Service 23

8 Credits 25

9 Portfolio Privacy Policy 27

10 Indices and tables 31

CHAPTER

ONE

DOWNLOAD PORTFOLIO

Check Portfolio 0.8 downlaod page.

All the latest resources can be download at Semantic-jserv, the Edge Computing backbone's release selection.

CHAPTER

TWO

CALL FOR PLAY TESTERS

The Portfolio 0.8 Demo's Android client is under Google Play's *Closed Testing* phase. Had you would like to vote for Portolio 0.8 to pass the tester's verification, please mail to the author at odys.zhou@gmail.com, and an opt-in link will follow up.

Thank you for your thumb up!

CHAPTER

THREE

ABOUT

Portfolio is a system for managing, synchronizing personal documents, including multiple deployed storage nodes and clients.

If you think keeping, saving and managing and sorting your documents on your own computer is essential, then Portfolio is the solution for you!

Portfolio is currently a demo version. Users must take care of their files uploaded to the server, usually a personal computer.

3.1 The Topology

The v0.8.# Demo version automatically sychronize files that users uploaded to any of the server, in the user's synchronization domain. Here after the file strage node is named as a *Synode*.

```
--------------------
|    domain-hub    |
|    ^       ^     |
|    |       |     |
| node-1    node-1 |
--------------------
    ^         ^
    |         |
mobile-1   device-2 ...
```

- domain-hub: The server can be accessed via public IP
- node 1 & 2: The private file storage, typically a personal computer.

This structure is based on an Edge Computing backbone, and the developer(s) is planning to extend this to peer-peer nodes without any network topology restriction.

3.2 About Volume

A volume is a folder within the server's file system, which is specified by the user while setting up the service node. uploaded files and data are saved there.

Warning

Don't change data in the volume folder. Moving, modification of files will cause unspecified results.

Also, do not switch volume to another location although in v 0.7.0 the service can still run.

3.3 Limitation of Portfolio 0.8

- Needing a hub syndoe deployed on a public IP host, which can be accessed by other synnodes.
- Only fixed number of Synodes and cannot be changed.
- File storage limitation is low - price for hub storage can be high.

3.3.1 What you can expect in the near future

- A cloud service that users can plan their domains.
- The hub node can schedule storage, by keeping only public accessable files.
- Synodes can join and leave the domain.

FYI, the Edge Computing backbone of Portfolio can do a lot more. Here is the the detailed techquenical discussion.

CHAPTER

FOUR

PORTFOLIO ANDROID DEMO

4.1 Quick Start


4.1.1 Prerequisit

The Portfolio Android client uploads files to any domain server which is usually deployed as the community's file server. The service nodes must be already setup.

See *How to setup Portfolio Synode*, the private file server.

4.1.2 Setup Protfolio Android

Once the server installed and the service is started up, open Portfolio for Android, and in the Settings page, setup device Id and user Id.

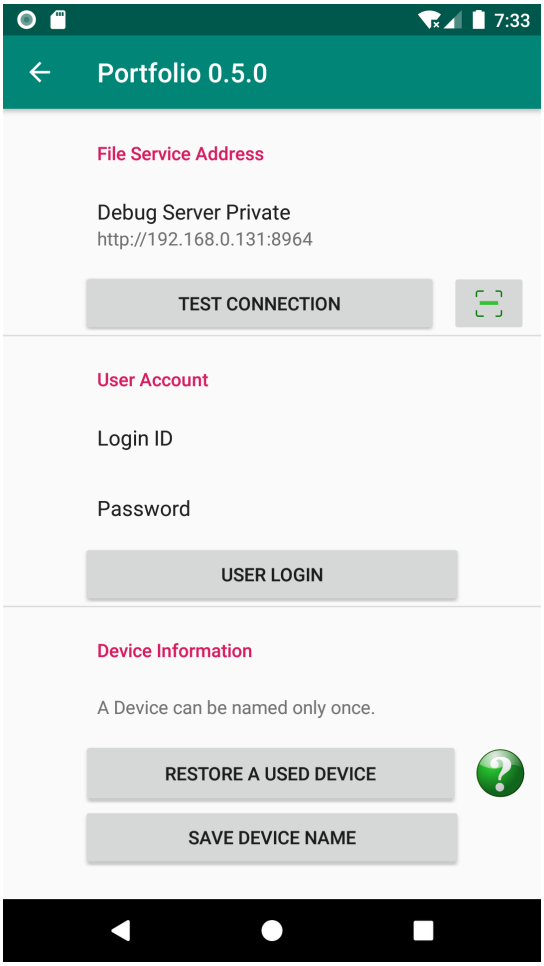

- Set Device Name

Portfolio uses device name to distinguish files from various file sources. Users must name their device with a unique name in the domain of the file server.

- Login

Login with user Id and password set by server administrator. Once login successfully, please go back to the home page.

4.1.3 Upload files

In the home page, tap *Add . . .* button to select and upload files.

4.2 Troubleshootings

4.2.1 Some videos are not showing

Please use the Windows client, or directly login in a web browser to check the video.

The most likely reason for this is the video codec is not supported by the Android version. E.g. Portfolio on Ahndord 10, Hhuawei H30, cannot show codec of hvc1, which is working once the video is converted to h.264.

4.3 About File Synchronization

Portfolio is designed to automatically synchronize database and resources (files) between nodes, called Synodes, and can be working in offline mode.

4.3.1 Devices must be Identically Registered

The resources, files from mobile devices, are distinguishd by their device name and full path. A device's file is considered as a new resource if the device is changed its ID. Also, if a device has restored its used ID, all files' synchronization can be restored.

Restoring a device name can only happen if a client has been reinstalled.

CHAPTER

FIVE

PORTFOLIO SYNODE (DEMO)

5.1 Install Portfolio-synode

Download synode package according the target OS type at the Portfolio Homepage.

5.1.1 Verified & Recommended Install Steps

1. Install the Hub Node

   Prerequisites:

   - Python 3.12

   Portfolio-synode requires Python 3.12. This means you need a Windows 10 if you decide to deploy the a synode on Windows.

   - Exiftool

   For Linux, please also install *Exiftool*.

   Follow the document or use *apt* to install:


   ```
   sudo apt install exiftool
   ```

   And make sure "exiftool -ver" is running.

   - About JDK 17

   Portfolio 0.8 will download and install it's own JDK 17. Please be aware of this if you have other JDKs installed.

   Install the hub node following this video.

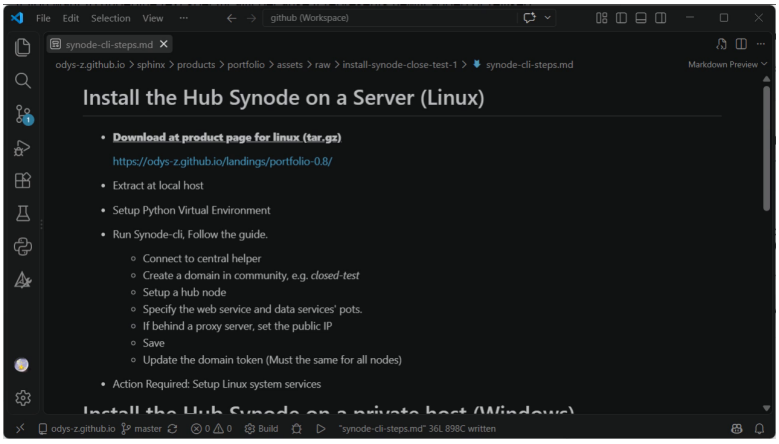

Watch the video online: https://odys-z.github.io/products/portfolio/synode/setup.html


2. Setup the Peer Nodes

   - Download and Unzip into a floder.

   For Windows, download the zip file, unzip and run *setup-gui.exe*.

   For Linux, download the tar ball, extract and run *synode-gui*.

   Here is what expected:

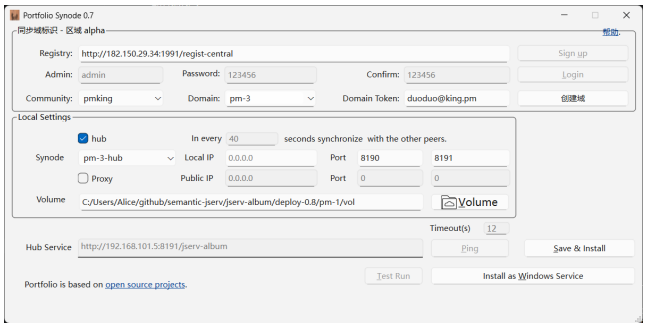

   - Select the domain created in the *hub node* step.
   - Setup local web page service port and data service port, e.g. 8964/8965.

     Check reverse proxy only if the host is mapped from a public Internet address.

     The local Ip is detected autmatically.
   - Modify Jservs' URL

     If is setting a public address, say central hub node, leave *Sync-in* as 0 seconds. No need to care about jservs, but make sure the reverse proxy is set correctly, e.g.

```
10.0.0.1   8964 / 8965
```

     If is setting a local service node, say your private storage device, or a computer, set *Sync-in* to typically 60 seconds, while 0 will make the machine stop visiting the hub.

     If you change the hub's url manually, follow exactly the format:

```
http://10.0.0.1:8964/jserv-album
```

     - Click *Save* if everything is OK.

   There should be a QR Code showing now. You can scan with a Portfolio client later, e.g. the Portfolio Android, to connect to this service node.

   - Install the service

   For Windows

   Click *Install Windows Serivce* to start 2 windows services.

   Users need confirm with Administrator's permission, 4 times, for setup & start service for each service.

   Note: Please note the permission dialogs can be hidden behind the current window.

   For Linux

   Copy the generated serivce templates to setup system services.

The service configuration files are named if format of [synode-id][.service] and [synode-id][.web-service]. E.g.:

```
closed-test-1-hub.service
closed-test-1-hub.web.service
```

3. Test in Browser

   - Check firewall configurations


     Protfolio-synode by default will listening on TCP port 8965, like above example, the data service, and port 8964, is the web page server.

   - Open the webpage in a browser

     Open the home page for listing uploaded files, e.g.:

     ```
     url: http://127.0.0.1:8964/login.html
     ```

     There should be the files once are uploaded with Portfolio Android.

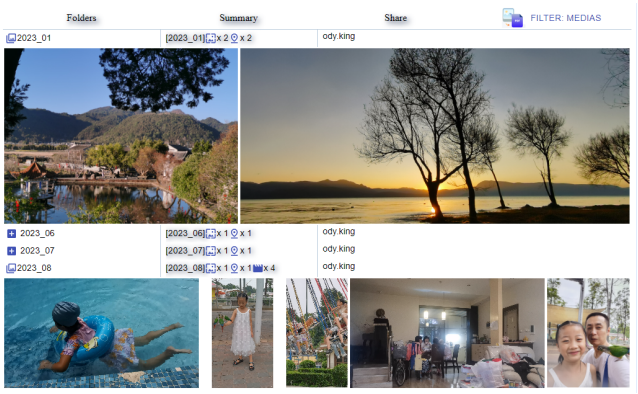

And this is the right time to download and scan with the Android client for login. *It also needs some setup*.

5.1.2 Uninstall Synodes

Uninstall Portfolio-synode on Windows

- Uninstall Services for Windows:

In CMD Termnial, or VS Code Bash Termnial,

```
# cd portfolio-synode
synode-uninstall-srv
```

This will uninstall the Windows services.

Now it's safe to delete the *portfolio-synode* folder, where the zip file is unzipped. The files saving location is specified by the *volume* path. You can delete the folder if you don't need the uploaded files anymore.

- If files damaged and the services cannot uninstalled, you can *uninstall Windows Service manually*.

Uninstall Portfolio-synode on Windows

Here is the command templates, for uninstall services of synode Id *closed-test-1-hub*:


```
sudo systemctl stop closed-test-1-hub.service closed-test-1-hub.web.service
sudo systemctl disable closed-test-1-hub.service closed-test-1-hub.web.service
sudo rm /etc/systemd/system/closed-test-1-hub.service
sudo rm /etc/systemd/system/closed-test-1-hub.web.service
sudo systemctl daemon-reload
sudo systemctl reset-failed
```

5.2 Tips

5.2.1 Downloading JRE Halt (From China)

Portfolio is using JRE 17, which is downloaded from Github while installation.

Frequently, downloading resouces from Gihub is blocked with any tools like Wget, Curl or pragrammally. The downloading progress can be halt at 0% infinitely.

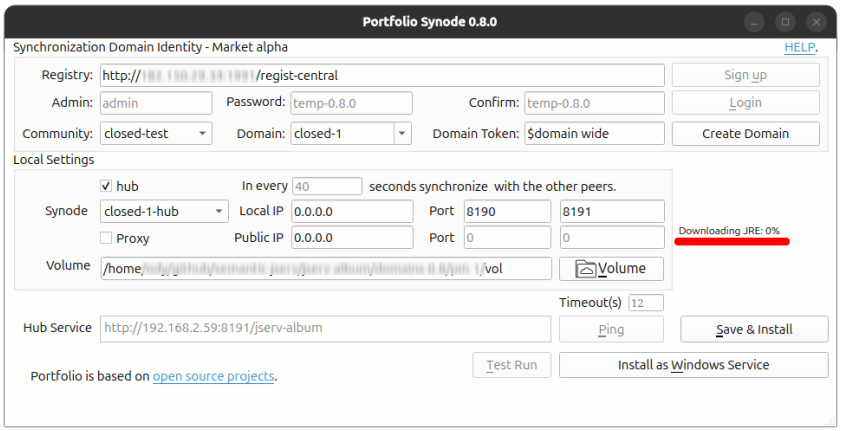

If you can download files from Github within a browser or someother ways, download and place it in the jre-temp folder, restart setup-gui should solve the problem.

To download the correct JRE, find the link in the terminal Window. Say:

```
JRE: ('OpenJDK17U-jre_x64_linux_hotspot_17.0.17_10.tar.gz', False, False, 'jdk-17.0.
↪17+10-jre')
Downloading JRE for Linux x86_64
https://github.com/adoptium/temurin17-binaries/releases/download/jdk-17.0.17%2B10/
↪OpenJDK17U-jre_x64_linux_hotspot_17.0.17_10.tar.gz
```

Place the download file, e.g. *OpenJDK17U-jre_x64_linux_hotspot_17.0.17_10.tar.gz* into the jre-temp folder, restart the installer should skip the downloading.

If you also cannot download with other tools, please contact the author.

5.3 Troubleshootings

- Externally Managed Environment Error (PEP 668)

When installing Portfolio by:

```
pip install bin/synode_py3-0.7-py3-none-any.whl
```

ther may be error of externally-managed-environment. Here is an example in Ubuntu 24.04 and Python 3.12 (Pip 24):

```
error: externally-managed-environment

× This environment is externally managed
╰─> To install Python packages system-wide, try apt install
    python3-xyz, where xyz is the package you are trying to
    install.

    If you wish to install a non-Debian-packaged Python package,
    create a virtual environment using python3 -m venv path/to/venv.
    Then use path/to/venv/bin/python and path/to/venv/bin/pip. Make
    sure you have python3-full installed.

    If you wish to install a non-Debian packaged Python application,
    it may be easiest to use pipx install xyz, which will manage a
    virtual environment for you. Make sure you have pipx installed.

    See /usr/share/doc/python3.12/README.venv for more information.

note: If you believe this is a mistake, please contact your Python
installation or OS distribution provider. You can override this, at
the risk of breaking your Python installation or OS, by passing
--break-system-packages.

hint: See PEP 668 for the detailed specification.
```

This is Pip telling users don't install Portfolio into system's python3 paths. Install a virtual environment to install:

```
sudo apt install python3.12-venv # replace the version number
python3 -m venv .env
source .env/bin/activate
```

Portfolio 0.7.6 only requires Python3 at the installation. Once it's installed, the Python environment is no longer needed.

- Uninstall Windows Service Manually

This is not recommended

The services should be uninstalled by the command above. If you have to uninstall the Windows service manually, please follow the steps below:

1. Copy and backup *WEB-INF/settings.json*
2. If any files are damanged, reinstall Portfolio-synode to the same folder, and make sure the version number is the same as the previous installation.
3. From the Startup Menu, open the Windows Service Control Panel to check the two service name, which should like:

   ```
   Synode.web-0.8.0-X29
   Synode-0.8.0-X29
   ```

   Open the *WEB-INF/settings.json* file, replace the synode id into the *"envars"* section, like:

```
"envars": {
    "winsrv.web": "Synode.web-0.8.0-X29",
    "winsrv.synode": "Synode-0.8.0-X29"
    ...
}
```

1. Open CMD terminal as administrator, go to the install folder.
2. Run synode-uninstall.exe
3. Refresh the Windows Service Control Panel if needed.

- PIP Cannot resolve Pillow version for Python 3.12 or higer.

The error like this:

```
$ pip install bin/synode_py3-0.7-py3-none-any.whl
Processing ./bin/synode_py3-0.7-py3-none-any.whl
...
INFO: pip is looking at multiple versions of synode-py3 to determine which
version is compatible with other requirements. This could take a while.
ERROR: Ignored the following versions that require a different python version: 6.0.0
Requires-Python >=3.6, <3.10; 6.0.0a1.dev1606911628 Requires-Python >=3.6, <3.10;
6.0.1 Requires-Python >=3.6, <3.10; 6.0.2 Requires-Python >=3.6, <3.10;
6.0.3 Requires-Python >=3.6, <3.10; 6.0.4 Requires-Python >=3.6, <3.10;
...
6.5.2 Requires-Python <3.12,>=3.7; 6.5.3 Requires-Python <3.12,>=3.7
ERROR: Could not find a version that satisfies the requirement psutil
(from synode-py3) (from versions: none)
ERROR: No matching distribution found for psutil
```

This is possiblly that pip is out of date.

The resolve this problem, we encountered another network problem:

```
ERROR: Exception:
Traceback (most recent call last):
File "...env-m7/lib/python3.12/site-packages/pip/_vendor/urllib3/response.py", line 438,␣
↪in _error_catcher
  yield
File "...env-m7/lib/python3.12/site-packages/pip/_vendor/urllib3/response.py", line 561,␣
↪in read
  data = self._fp_read(amt) if not fp_closed else b""
         ^^^^^^^^^^^^^^^^^^
...
File "...env-m7/lib/python3.12/site-packages/pip/_vendor/urllib3/response.py", line 443,␣
↪in _error_catcher
  raise ReadTimeoutError(self._pool, None, "Read timed out.")
pip._vendor.urllib3.exceptions.ReadTimeoutError: HTTPSConnectionPool(host='files.
↪pythonhosted.org', port=443): Read timed out.
```

And Grok is pretty sure that this is a GFW problem. User a mirror to install.


```
pip install bin/synode_py3-0.7-py3-none-any.whl -i https://pypi.tuna.tsinghua.edu.cn/
↪simple
```


FIY. You have more than one options, like filing a complaint to the ISP. And, BTW, arm yourself first. It's said some African brothers have very successfully argued on their salaries, with Kalashnikovs and with their Chinese employers.


- Windows Network Firewall / Defender

For Windows with Firewall enabled, please make sure your filewall settings allow the port you configured.

Microsoft Docs

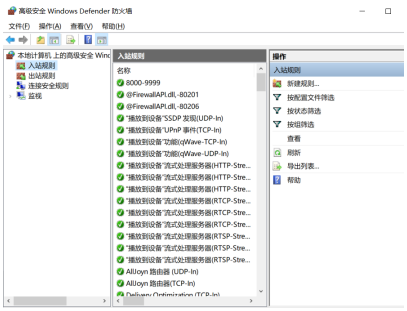

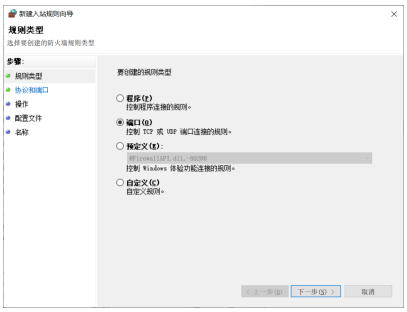


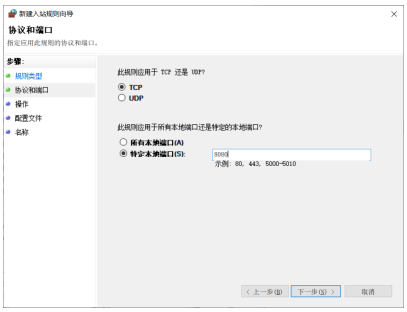

- Run with VS Code in Linux

Only tested in Ubuntu 24.04

To run Portfolio-synode from VS Code terminal in Ubuntu / Linux will result in errors like the report #179274.

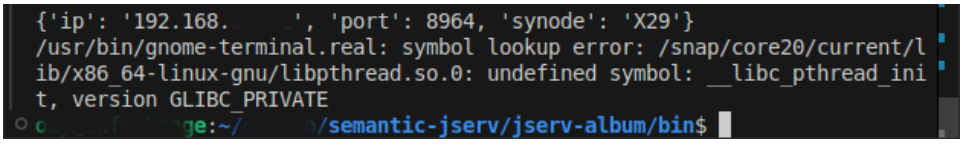

This error can be avoid by running like this:

```
export GTK_PATH= && python3 -m portfolio-synode
```

which is strongly discuraged as this is not fully tested.

5.3.1 Trouble by Ubuntu auto update

Only happens on Linux with auto-update enabled

If the system service configured on Linux (tested on Ubuntu 24.0.4) is using the JDK managed by system auto-updating, there will be error if the running service's JDK version is different from the latest version.

Here is the service log:

```
Incorrect Java version: 21.0.7+6-Ubuntu-0ubuntu124.04
jspawnhelper version 21.0.8+9-Ubuntu-0ubuntu124.04.1
This command is not for general use and should only be run as the result of a call to
ProcessBuilder.start() or Runtime.exec() in a java application
java.io.IOException: Cannot run program "exiftool": error=0, Failed to exec spawn␣
↪helper: pid: >
  at java.base/java.lang.ProcessBuilder.start(ProcessBuilder.java:1170)
  at java.base/java.lang.ProcessBuilder.start(ProcessBuilder.java:1089)
  at java.base/java.lang.Runtime.exec(Runtime.java:681)
  at java.base/java.lang.Runtime.exec(Runtime.java:530)
  at io.oz.album.helpers.Exiftool.parse(Exiftool.java:117)
  at io.oz.album.helpers.Exiftool.parseExif(Exiftool.java:62)
  at io.oz.syntier.serv.DocreateHandler.onCreate(DocreateHandler.java:57)
  at io.oz.jserv.docs.syn.ExpDoctier.lambda$endBlock$1(ExpDoctier.java:417)
  at java.base/java.lang.Thread.run(Thread.java:1583)
Caused by: java.io.IOException: error=0, Failed to exec spawn helper: pid: 546376, exit␣
↪value: 1
  at java.base/java.lang.ProcessImpl.forkAndExec(Native Method)
  at java.base/java.lang.ProcessImpl.<init>(ProcessImpl.java:295)
  at java.base/java.lang.ProcessImpl.start(ProcessImpl.java:225)
  at java.base/java.lang.ProcessBuilder.start(ProcessBuilder.java:1126)
  ... 8 more
```

The running JDK is an old version, 20.0.7_6, that will spawn a process using a newer version, 21.0.8+9. When jspawnhelper enhanced the version check [1], the *exiftool* process will fail.

The Apt changelog:

```
openjdk-21 (21.0.8+9~us1-0ubuntu1~24.04.1) noble-security; urgency=medium

  * Upload to Ubuntu 24.04.
  * CVEs:
    - CVE-2025-50059, 8350991: Improve HTTP client header handling
    - CVE-2025-30749, 8348989: Better Glyph drawing
    - CVE-2025-50106, 8360147: Better Glyph drawing redux
    - CVE-2025-30754, 8349594: Enhance TLS protocol support
  * Security fixes:
    - 8349111: Enhance Swing supports
    - 8345625: Better HTTP connections

-- Vladimir Petko <vladimir.petko@canonical.com>  Thu, 17 Jul 2025 09:55:59 +1200

...

openjdk-21 (21.0.7+6-1) unstable; urgency=high

  * OpenJDK 21.0.7 release, build 6.
```

(continues on next page)

(continued from previous page)

```
    - Addresses CVE-2025-30698, CVE-2025-30691, CVE-2025-21587.

  * Honour DEB_BUILD_OPTIONS=parallel=N while running jtreg tests (Helmut
    Grohne). Addresses: #1095920.

-- Matthias Klose <doko@ubuntu.com>  Thu, 24 Apr 2025 01:57:46 +0200
```

[1] ***Improve jspawnhelper version checks*****, JDK-8325621, Affects Version/s: 11, 17, 21, 22, 23,** https://bugs.openjdk.org/browse/JDK-8325621

- Failed to install portfolio-synode

  [closed by Portfolio 0.7.6]

  Error:

  ```
  ERROR: Could not find a version that satisfies the requirement anson.py3 (from␣
  ↪portfolio-synode) (from versions: none)
  ```

  Portfolio-synode requires a module which is still not published in PyPI. Install with this command:

  pip install –index-url https://test.pypi.org/simple –extra-index-url https://pypi.org/simple anson.py3

  If have to remove a package installed by a previous python version, e.g. installed by python 3.9, uninstall it with:

  ```
  pip3.9 uninstall portfolio-synode
  ```

CHAPTER

SIX

WINDOWS DESKTOP DEMO

Portfolio Windows Desktop App is the client for managing & synchronzing files on a Personal Computer. .. a screenshot is needed

6.1 Install Desktop


The Portfolio 0.8 only come with a desktop client on Windows, requiring Windows 10 and above.

The Portfolio Desktop is installed by default if the synode service is installed on Windows; A standalone desktop version can be download and installed separately.

With both way of installation, setting the computer is identity is necessary.

6.2 Setup Portfolio Desktop

A fresh new installed Portfolio Desktop will show up directly the setting pages.

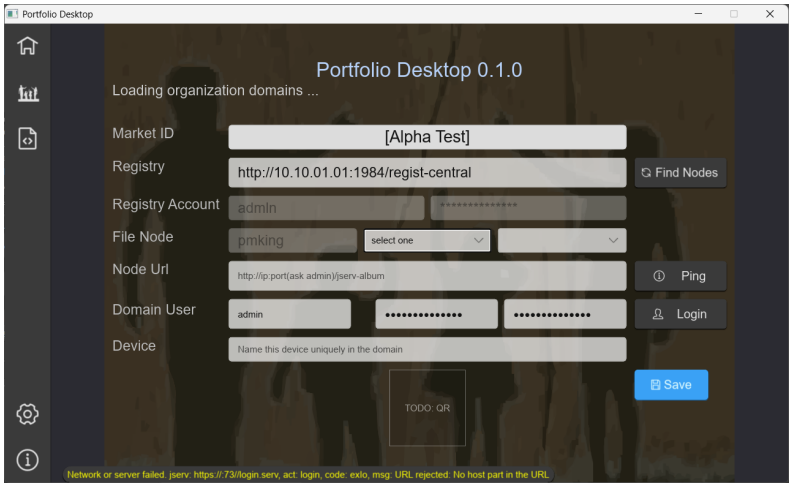

In the page above, you shouldn't change the registry URL, and in v0.8, cannot change the registry account.

The file node, i.e. Synode is pointed to by community / domain / synode-id. Just select the synode you have started in the *synode setup section*.

Device field is this computer you would like to named, and must not be empty. Once the user logged into a synode, the device name can be saved domain wide, and is automatically synchronized across the domain on all nodes.

6.3 Start / Run Desktop (Windows)

Just Double Click, the exe file, album-gui.exe, in the unpacked folder. Or run in the unpacked desktop folder in command line terminal.


In 0.8 Demo version, there is no short cut or startup menu Item (then no need to unstall).

If there are error says cannot find an *.ast.json* or settings, that means the working folder is not the folder containing album-gui.exe.

6.4 About Volume

The home page provides a shortcut to open the local synode's volume in file explorer.

If the Portfolio Desktop is installed as stand alone application without beside a synode, the Volume shortcut is disabled.

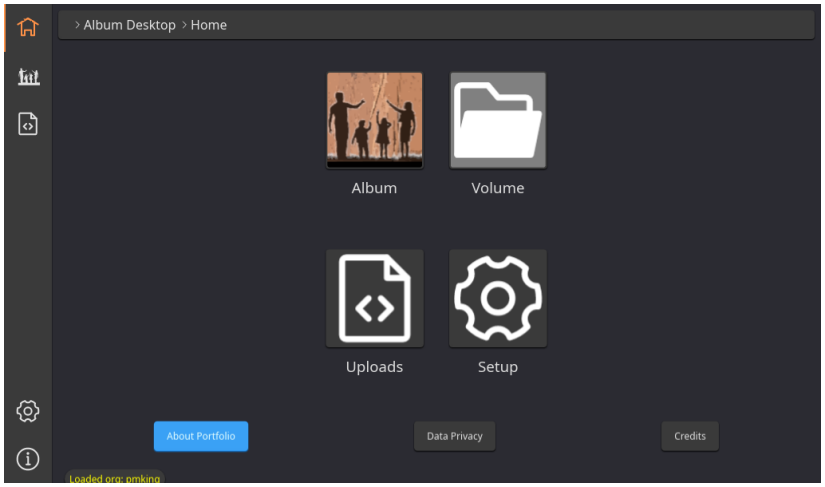

Warning

Don't change data or files in the volume folder. Moving, modification of files will cause unspecified results.

CHAPTER

SEVEN

ABOUT CENTRAL SERVICE

The Cenral Serivce is coming soon. Please stay tuned!

CHAPTER

EIGHT

CREDITS

Portfolio, the personal documents synchronizer, is built on open source projects & freeware:

- JDK 1.8, 17
- Tomcat & Docker
- Antlr 4 with BSD-3-Clause license
- Jetty Server 12 & Jetty EE8 12
- Apache Daemon
- Apache Common Libs, Common IO, Common Validators.
- Exiftool, by Phil Harvey, with a free license.
- React.js
- Node.js
- Material-UI (React) 4
- Mozilla PDF.js, Copyright 2016 Mozilla Foundation
- Zxing
- MultiType-FilePicker (Android)
- Image Viewer, PhotoView
- Image Loader, Glide
- Slint & SurrealismUI

CHAPTER

NINE

PORTFOLIO PRIVACY POLICY

Last Updated: Sep 09, 2026

Product: Portfolio 0.8, Demo Version, Synode, Anroid and Windows Clients (Ads Supported)

This privacy policy has been compiled to better serve those who are concerned with how their 'Personally Identifiable Information' (PII) is being used online. PII, as described in US privacy law and information security, is information that can be used on its own or with other information to identify, contact, or locate a single person, or to identify an individual in context.

Please read our privacy policy carefully to get a clear understanding of how we collect, use, protect or otherwise handle user's Personally Identifiable Information in accordance with our apps.

What personal information do we collect from the people using Portfolio?

On Android device, when installing Portfolio for file synchronization, as appropriate, you may be asked to allow Portfolio to have the permissions to access user's audio record, external storage or other details to help you synchronize (upload) user's files to the file server.

Portfolio is planned to use third party advertisement services, e.g. Google's Advertising, but not planning to analysis user's data with third part services, e.g. Google Analytics.

We want to inform users of Portfolio v0.8 that user's Personal Information will not be used anywhere else except for managing files at server.

AdMob & AdSense advertising requirements can be summed up by AdMob & AdSense advertising principles. They are put in place to provide a positive experience for users.

https://support.google.com/admob/answer/6128543?hl=en

9.1 Log Data

We want to inform you that whenever you use our Service, in the case of an error in the app we collect data and information (through third party products) on user's phone called Log Data. This Log Data may include information such as the user's device Internet Protocol ("IP") address, device name, operating system version, the configuration of the app when utilizing Service, the time and date of user's use of the Service, and other statistics.

9.2 Does Protfolio use 'cookies'?

Portfolio for Android & Windows does not use cookies in any case.

Portfolio shared files can be browsed with web browsers, which will use cookies for identifying logged users. The data is handled at client side, no transmission on network, and no further usages.

9.3 EXIF & Geolocation

EXIF is metadata of media files.

When each media file is uploaded to the family file server, the server will try to parse the EXIF data, and geolocation data are parsed and saved in databases. When a user shares photos, the geolocations are also accessible to other users.

If the file doesn't have geolocation data in the EXIF section, no geolocation is saved, and the user's current location is not be accessed, hence the geolocation data is not always guaranteed to be parsed correctly.

This function is designed to support photo grouping according to geolocation.

9.4 Safeguards and Third-party disclosure

Portfolio gets reports from the third part services regularly, includes Google Play & Admob.

The support team of Portfolio do not sell, trade, or otherwise transfer to outside parties Personal Identifiable Information unless we provide users with advance notice.

We may release information when its release is appropriate to comply with the law, enforce our app policies, or protect ours or others' rights, property or safety.

However, non-personally identifiable user information may be provided to other parties for marketing, advertising, or other uses.

9.5 Documents Sharing Policies

In Portfolio 0.8, all files uploaded to a synode will evatually copied to any device setup as a sychronization storage node in your synchornization domain. Such devices can be owned by other users, and have fully access to the domain's storages. It's the user's responsibility to not to share their sensitive documents (files) a specific domain.

- **Important**:

  All uploaded files are sent to a server that you, the user, own and set up. We do not store, process, or access your files on our own servers or systems. We do not sell, trade, or share your data with third parties, except as required by law.

9.6 Android App Permissions

Portfolio (Demo for Android) requests the following permissions:

- **Internet:**

  To upload files to your designated server.

- **Access Network State:**

  To check your network connection for optimal performance.

- **Read External Storage / Media:**

  To read audio, image, video, and other files from your device for uploading and management.

- **Camera Permission:**

  Portfolio Demo requests access to your device's camera to provide QR code recognition, which is used for adding server addresses. We are committed to protecting your privacy and ensuring that your personal information is handled responsibly. Below is how we use and manage camera access:

  – **Purpose:**

The camera permission is used solely for QR code scanning.

- **Data Collection:**

When you grant camera access, the app may capture QR Code images, and use the data only with the format of Portfolio Demo. Only server address is added as a new option. Other data won't be saved for any uses.

By granting camera permission, you agree to allow the app to use this feature as described. If you have any concerns or questions about how your data is used, please refer to our full Privacy Policy or contact us.

These permissions are necessary for the app to work as intended. You can manage permissions through your device settings.

9.7 Acceptance of terms

By using our products, you agree to the terms of this policy. If you do not have this policy to accept the terms, please do not use our products.

We indicate the date of the current Privacy Policy above, so you know when it was last updated. The continued use of our products after any revision of this Privacy Policy will be treated as acceptance of those changes, so please check the policy periodically for updates.

9.8 Contacting Us

If there are any questions regarding this privacy policy, you may contact us using the information below.

odys.zhou@gmail.com

CHAPTER

TEN

INDICES AND TABLES

- genindex
- modindex
- search