

Restaurant ordering interface

Outcome: a production-ready restaurant ordering application served privately on Computer 2.

The home page must visibly contain LOCAL MULTIMODAL PASS.


Guests browse categories, customize an item, review a cart, confirm the order, then pay.

Do not require GitHub, Vercel, a backend, accounts, or seeded demo records.

The production runtime must boot locally and return HTTP 200.

Visual evidence on page 2 is equally authoritative.

Home and cart composition

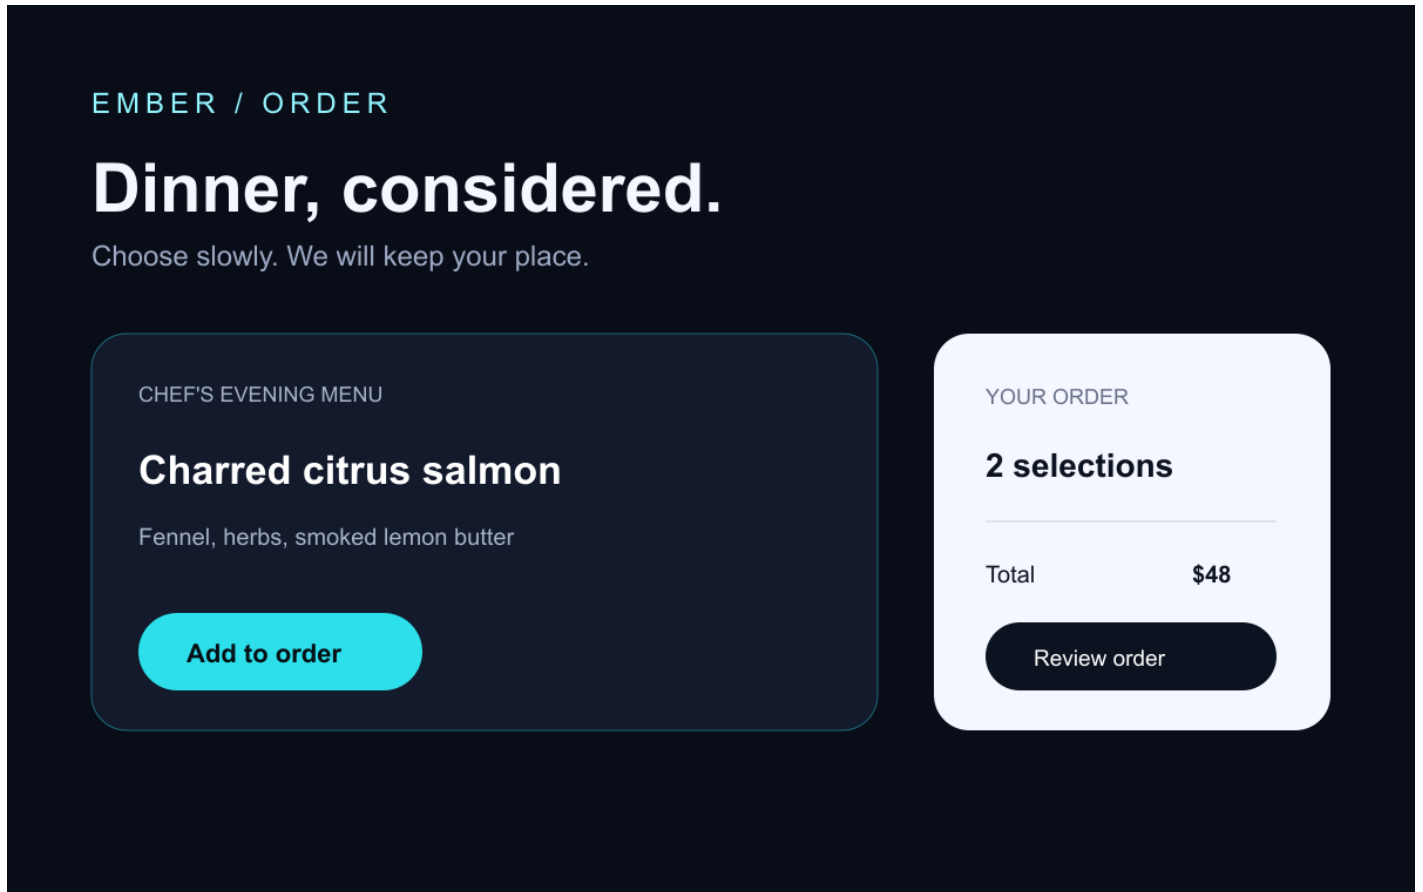

The embedded screenshot defines hierarchy, cyan accent, rounded action controls, and a persistent order summary.