



Kd-Trees

Write a data type to represent a set of points in the unit square (all points have x - and y -coordinates between 0 and 1) using a *2d-tree* to support efficient *range search* (find all of the points contained in a query rectangle) and *nearest neighbor search* (find a closest point to a query point). 2d-trees have numerous applications, ranging from classifying astronomical objects to computer animation to speeding up neural networks to mining data to image retrieval.

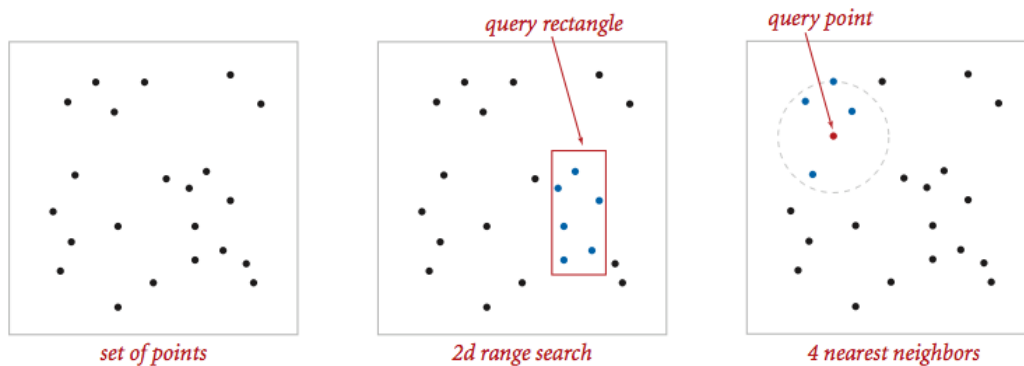

Geometric primitives. To get started, implement a geometric primitive for axis-aligned rectangles in the plane.

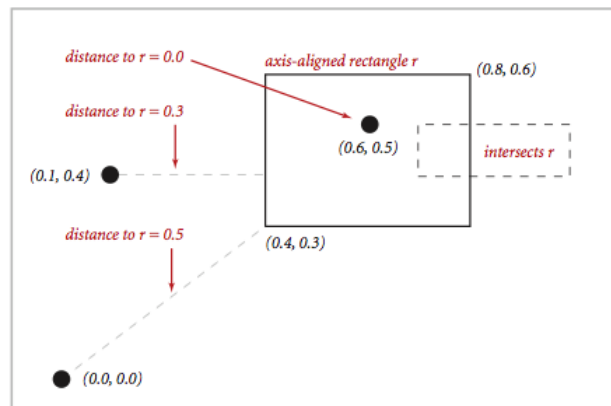

Use the immutable data type [Point2D.java](#) for points in the plane, which implements a superset of the following API:

```
public class Point2D implements Comparable<Point2D> {
    public Point2D(double x, double y) // construct the point (x, y)
    public double x() // x-coordinate
    public double y() // y-coordinate
    public double distanceTo(Point2D that) // Euclidean distance between two points
    public double distanceSquaredTo(Point2D that) // square of Euclidean distance between two points
    public int compareTo(Point2D that) // for use in an ordered symbol table
    public boolean equals(Object that) // does this point equal that?
    public void draw() // draw to standard draw
    public String toString() // string representation
}
```

Write an immutable data type `RectHV.java` that implements the following API:

```
public class RectHV {
    public RectHV(double xmin, double ymin, // construct the rectangle [xmin, xmax] x [ymin, ymax]
                  double xmax, double ymax) // throw an exception if (xmin > xmax) or (ymin > ymax)
    public double xmin() // minimum x-coordinate of rectangle
    public double ymin() // minimum y-coordinate of rectangle
    public double xmax() // maximum x-coordinate of rectangle
    public double ymax() // maximum y-coordinate of rectangle
    public boolean contains(Point2D p) // does this rectangle contain the point p (either inside or on boundary)?
    public boolean intersects(RectHV that) // does this rectangle intersect that rectangle (at one or more points)?
    public double distanceTo(Point2D p) // Euclidean distance from point p to the closest point in rectangle
    public double distanceSquaredTo(Point2D p) // square of Euclidean distance from point p to closest point in rectangle
    public boolean equals(Object that) // does this rectangle equal that?
    public void draw() // draw to standard draw
    public String toString() // string representation
}
```

Thoroughly test your data type before proceeding.

Brute-force implementation. Write a mutable data type `PointSET.java` that represents a set of points in the unit square. Implement the following API by using a red-black BST (using either `SET` or `java.util.TreeSet`).

```


public class PointSET {
    public PointSET()                // construct an empty set of points
    public boolean isEmpty()          // is the set empty?
    public int size()                 // number of points in the set
    public void insert(Point2D p)     // add the point p to the set (if it is not already in the set)
    public boolean contains(Point2D p) // does the set contain the point p?
    public void draw()                // draw all of the points to standard draw
    public Iterable<Point2D> range(RectHV rect) // all points in the set that are inside the rectangle
    public Point2D nearest(Point2D p) // a nearest neighbor in the set to p; null if set is empty
}

```

Your implementation should support `insert()` and `contains()` in time proportional to the logarithm of the number of points in the set; it should support `nearest()` and `range()` in time proportional to the number of points in the set.

2d-tree implementation. Write a mutable data type `KdTree.java` that uses a 2d-tree to implements the same API as `PointSET`. A 2d-tree is a generalization of a BST to two-dimensional keys. The idea is to build a BST with points in the nodes, using the x - and y -coordinates of the points as keys in strictly alternating sequence.

- Search and insert.* The algorithms for search and insert are similar to those for BSTs, but at the root we use the x -coordinate (if the point to be inserted has a smaller x -coordinate than the point at the root, go left; otherwise go right); then at the next level, we use the y -coordinate (if the point to be inserted has a smaller y -coordinate than the point in the node, go left; otherwise go right); then at the next level the x -coordinate, and so forth.

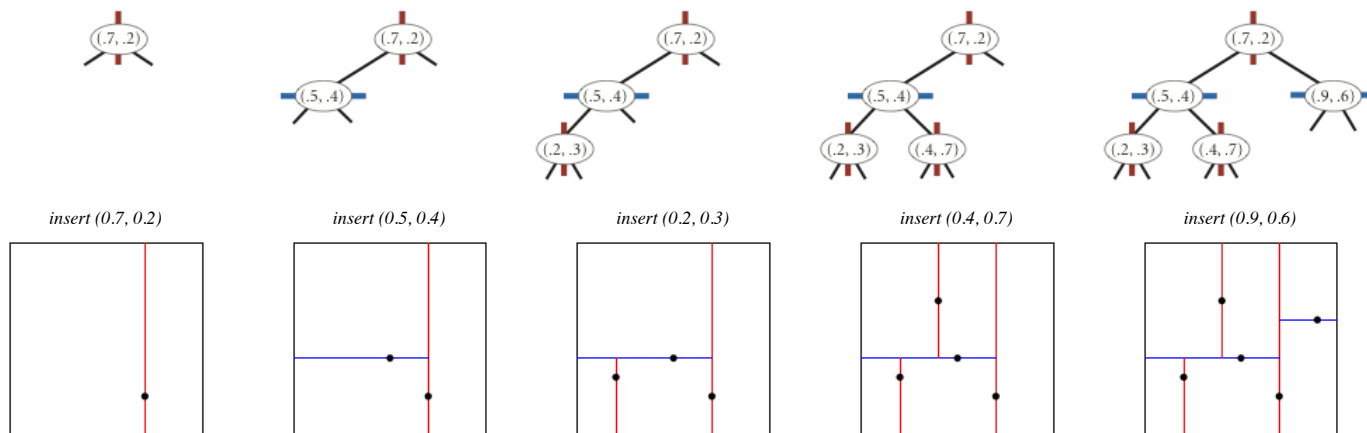

- Draw.* A 2d-tree divides the unit square in a simple way: all the points to the left of the root go in the left subtree; all those to the right go in the right subtree; and so forth, recursively. Your `draw()` method should draw all of the points to standard draw in black and the subdivisions in red (for vertical splits) and blue (for horizontal splits). This method need not be efficient—it is primarily for debugging.

The prime advantage of a 2d-tree over a BST is that it supports efficient implementation of range search and nearest neighbor search. Each node corresponds to an axis-aligned rectangle in the unit square, which encloses all of the points in its subtree. The root corresponds to the unit square; the left and right children of the root corresponds to the two rectangles split by the x -coordinate of the point at the root; and so forth.

- Range search.* To find all points contained in a given query rectangle, start at the root and recursively search for points in both subtrees using the following *pruning rule*: if the query rectangle does not intersect the rectangle corresponding to a node, there is no need to explore that node (or its subtrees). A subtree is searched only if it might contain a point contained in the query rectangle.
- Nearest neighbor search.* To find a closest point to a given query point, start at the root and recursively search in both subtrees using the following *pruning rule*: if the closest point discovered so far is closer than the distance between the query point and the rectangle corresponding to a node, there is no need to explore that node (or its subtrees). A subtree is searched only if it might contain a point that is closer than the best one found so far. The effectiveness of the pruning strategy depends on quickly finding a nearby point. To do this, *organize your recursive method so that it begins by moving down the 2d-tree by considering the same sequence of nodes that would be considered if you were inserting the query point.*

Clients. You may use the following interactive client programs to test and debug your code.

- [KdTreeVisualizer.java](#) computes and draws the 2d-tree that results from the sequence of points clicked by the user in the standard drawing window.
- [RangeSearchVisualizer.java](#) reads a sequence of points from standard input and inserts those points into a 2d-tree. Then, it performs range searches on the axis-aligned rectangles dragged by the user in the standard drawing window.
- [NearestNeighborVisualizer.java](#) reads a sequence of points from standard input and inserts those points into a 2d-tree. Then, it performs nearest neighbor queries on the point corresponding to the location of the mouse in the standard drawing window.

Analysis. Analyze your approach to this problem giving estimates of its time and space requirements by answering the relevant questions in the [readme.txt](#) file. In particular:

- Give the total memory usage in bytes (using tilde notation) of your 2d-tree data structure as a function of the number of points N , using the memory-cost model from Section 1.4. Count all memory that is used by your 2d-tree, including memory for the nodes, points, and rectangles.
- Give the expected running time in seconds (using tilde notation) to build a 2d-tree on N random points in the unit square. (Do not count the time to read in the points from standard input.)
- How many nearest neighbor calculations can your 2d-tree implementation perform per second for [input100K.txt](#) (100,000 points) and [input1M.txt](#) (1 million points), where the query points are random points in the unit square? (Do not count the time to read in the points or to build the 2d-tree.) Repeat this question but with the brute-force implementation.

Submission. Submit `RectHV.java`, `PointSET.java`, and `KdTree.java` and any other files needed by your program (excluding those in `stdlib.jar` and `algs4.jar`). Finally, submit a [readme.txt](#) file and answer the questions.

This assignment was developed by Kevin Wayne.