


$arrival = T0.finish + beta*vol = 5 + 4 = 9$
No link_intervals consulted.

$arrival = earliest_route_slot([L], 4, not_before=5) = 8+4 = 12$
Sees $[0,8)$. Pushes to $t=8$.


Same as probe but reserves $[8,12)$ on the link.
Next comm will see this interval.

Fig E -- Three communication models: what each scheduler sees during scheduling

A -- HEFT / CD-LS
(analytic, contention-blind)

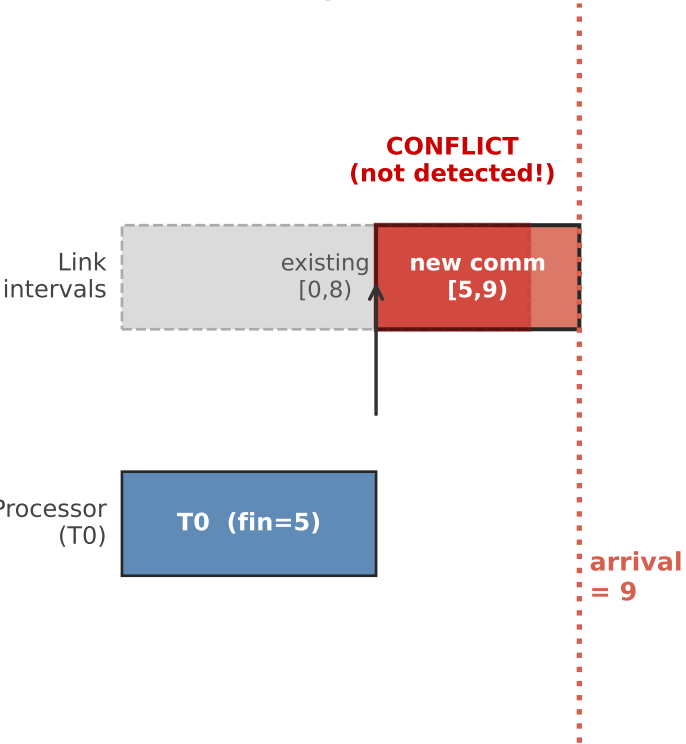

B -- CA-D during scheduling
(probe_communication_arrival, read-only)

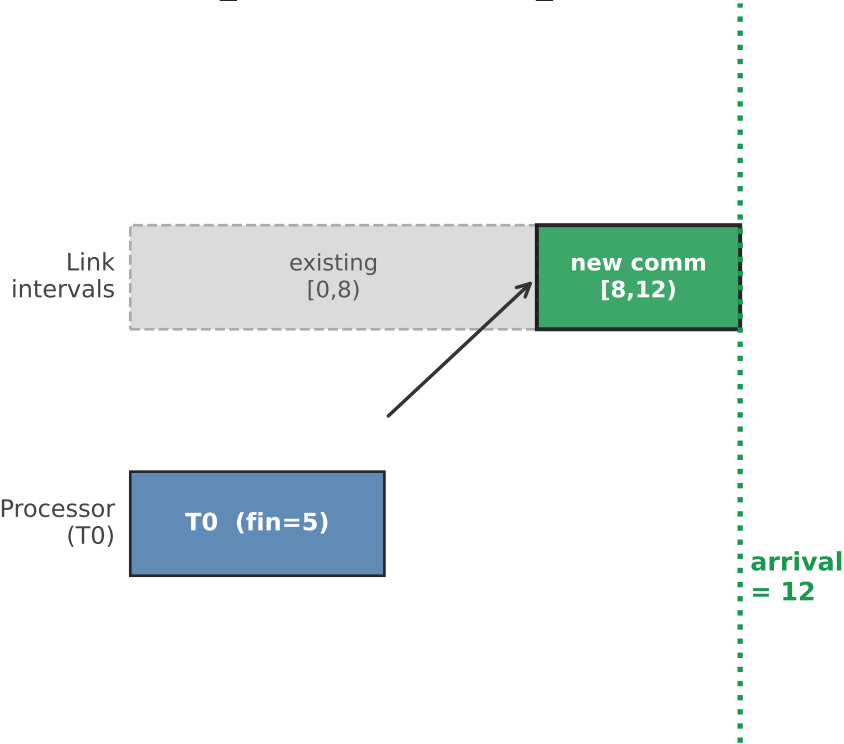

C -- Replay / CA-D scheduling
(reserve_communication, commits reservation)

