OSMB5A-SCR1-4

ISSUE	ALTERATIONS
A	ORIGINAL ISSUE

THIRD ANGLE PROJECTION

DO NOT SCALE

EXEECO LTD © 2007

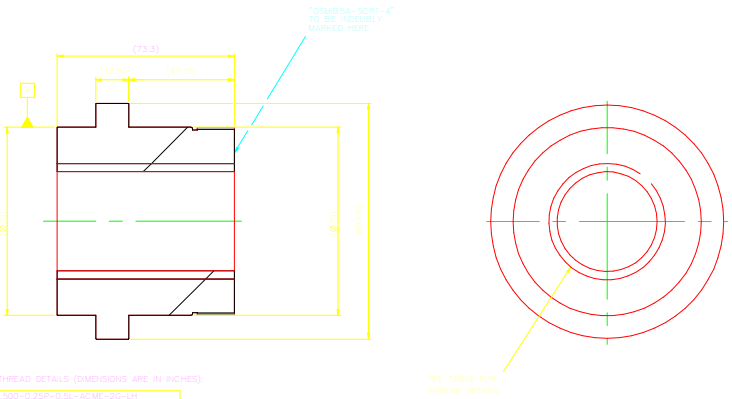

THREAD DETAILS (DIMENSIONS ARE IN INCHES):

1.500-0.25P-0.5L-ACME-2G-LH		
ACME		
NOMINAL DIAMETER	1.500	
PITCH	0.250	
TPI	4.000	
No. STARTS	2	
LEAD	0.500	
HANDING	LH	
CLASS	2G	
MAJOR DIAMETER	1.540	1.520
MINOR DIAMETER	1.263	1.250
PITCH DIAMETER	1.402	1.380

NOTES:
1. ALL DIMENSIONS IN MM UNLESS OTHERWISE STATED
2. ANGLES TO BE WITHIN ±1° OF POSITION SHOWN
3. BREAK ALL SHARP EDGES 0.5x45° MAX
4. MIN TOOL RAD 0.4
5. BLANK WEIGHT 2.3Kg APPROX

EXEECO LTD

REGINA HOUSE
RING ROAD
STRAILEY
LEEDS
WEST YORKSHIRE

◆ POSITIONAL TOLERANCE	◒ SYMMETRY TOLERANCE	MATERIAL:- ALUMINIUM BRONZE TO BS 1400 GRADE AB2	STD SLEEVE LENGTH 73.25 (MAX)	DRAWN:- MTMS 19/12/07	SCALE: NTS DOCUMENT	DESIGNER: MATTHEW PRATT
● CONCENTRICITY TOLERANCE	( ) REF DIMENSIONS ONLY			CHECKED: YES 19/12/07	N.T.S.	ISA STORAGE
⊥ SQUARENESS TOLERANCE	▭ BASIC DIMENSIONS ONLY	PROJECT:- IB5 FORM A CONTRACT G/T1695401 REV 0	MADE FROM:- IB5C30	OUTPUT SLEEVE	OSMB5A-SCR1-4	
∥ PARALLELISM TOLERANCE	Ø DIAMETER					