


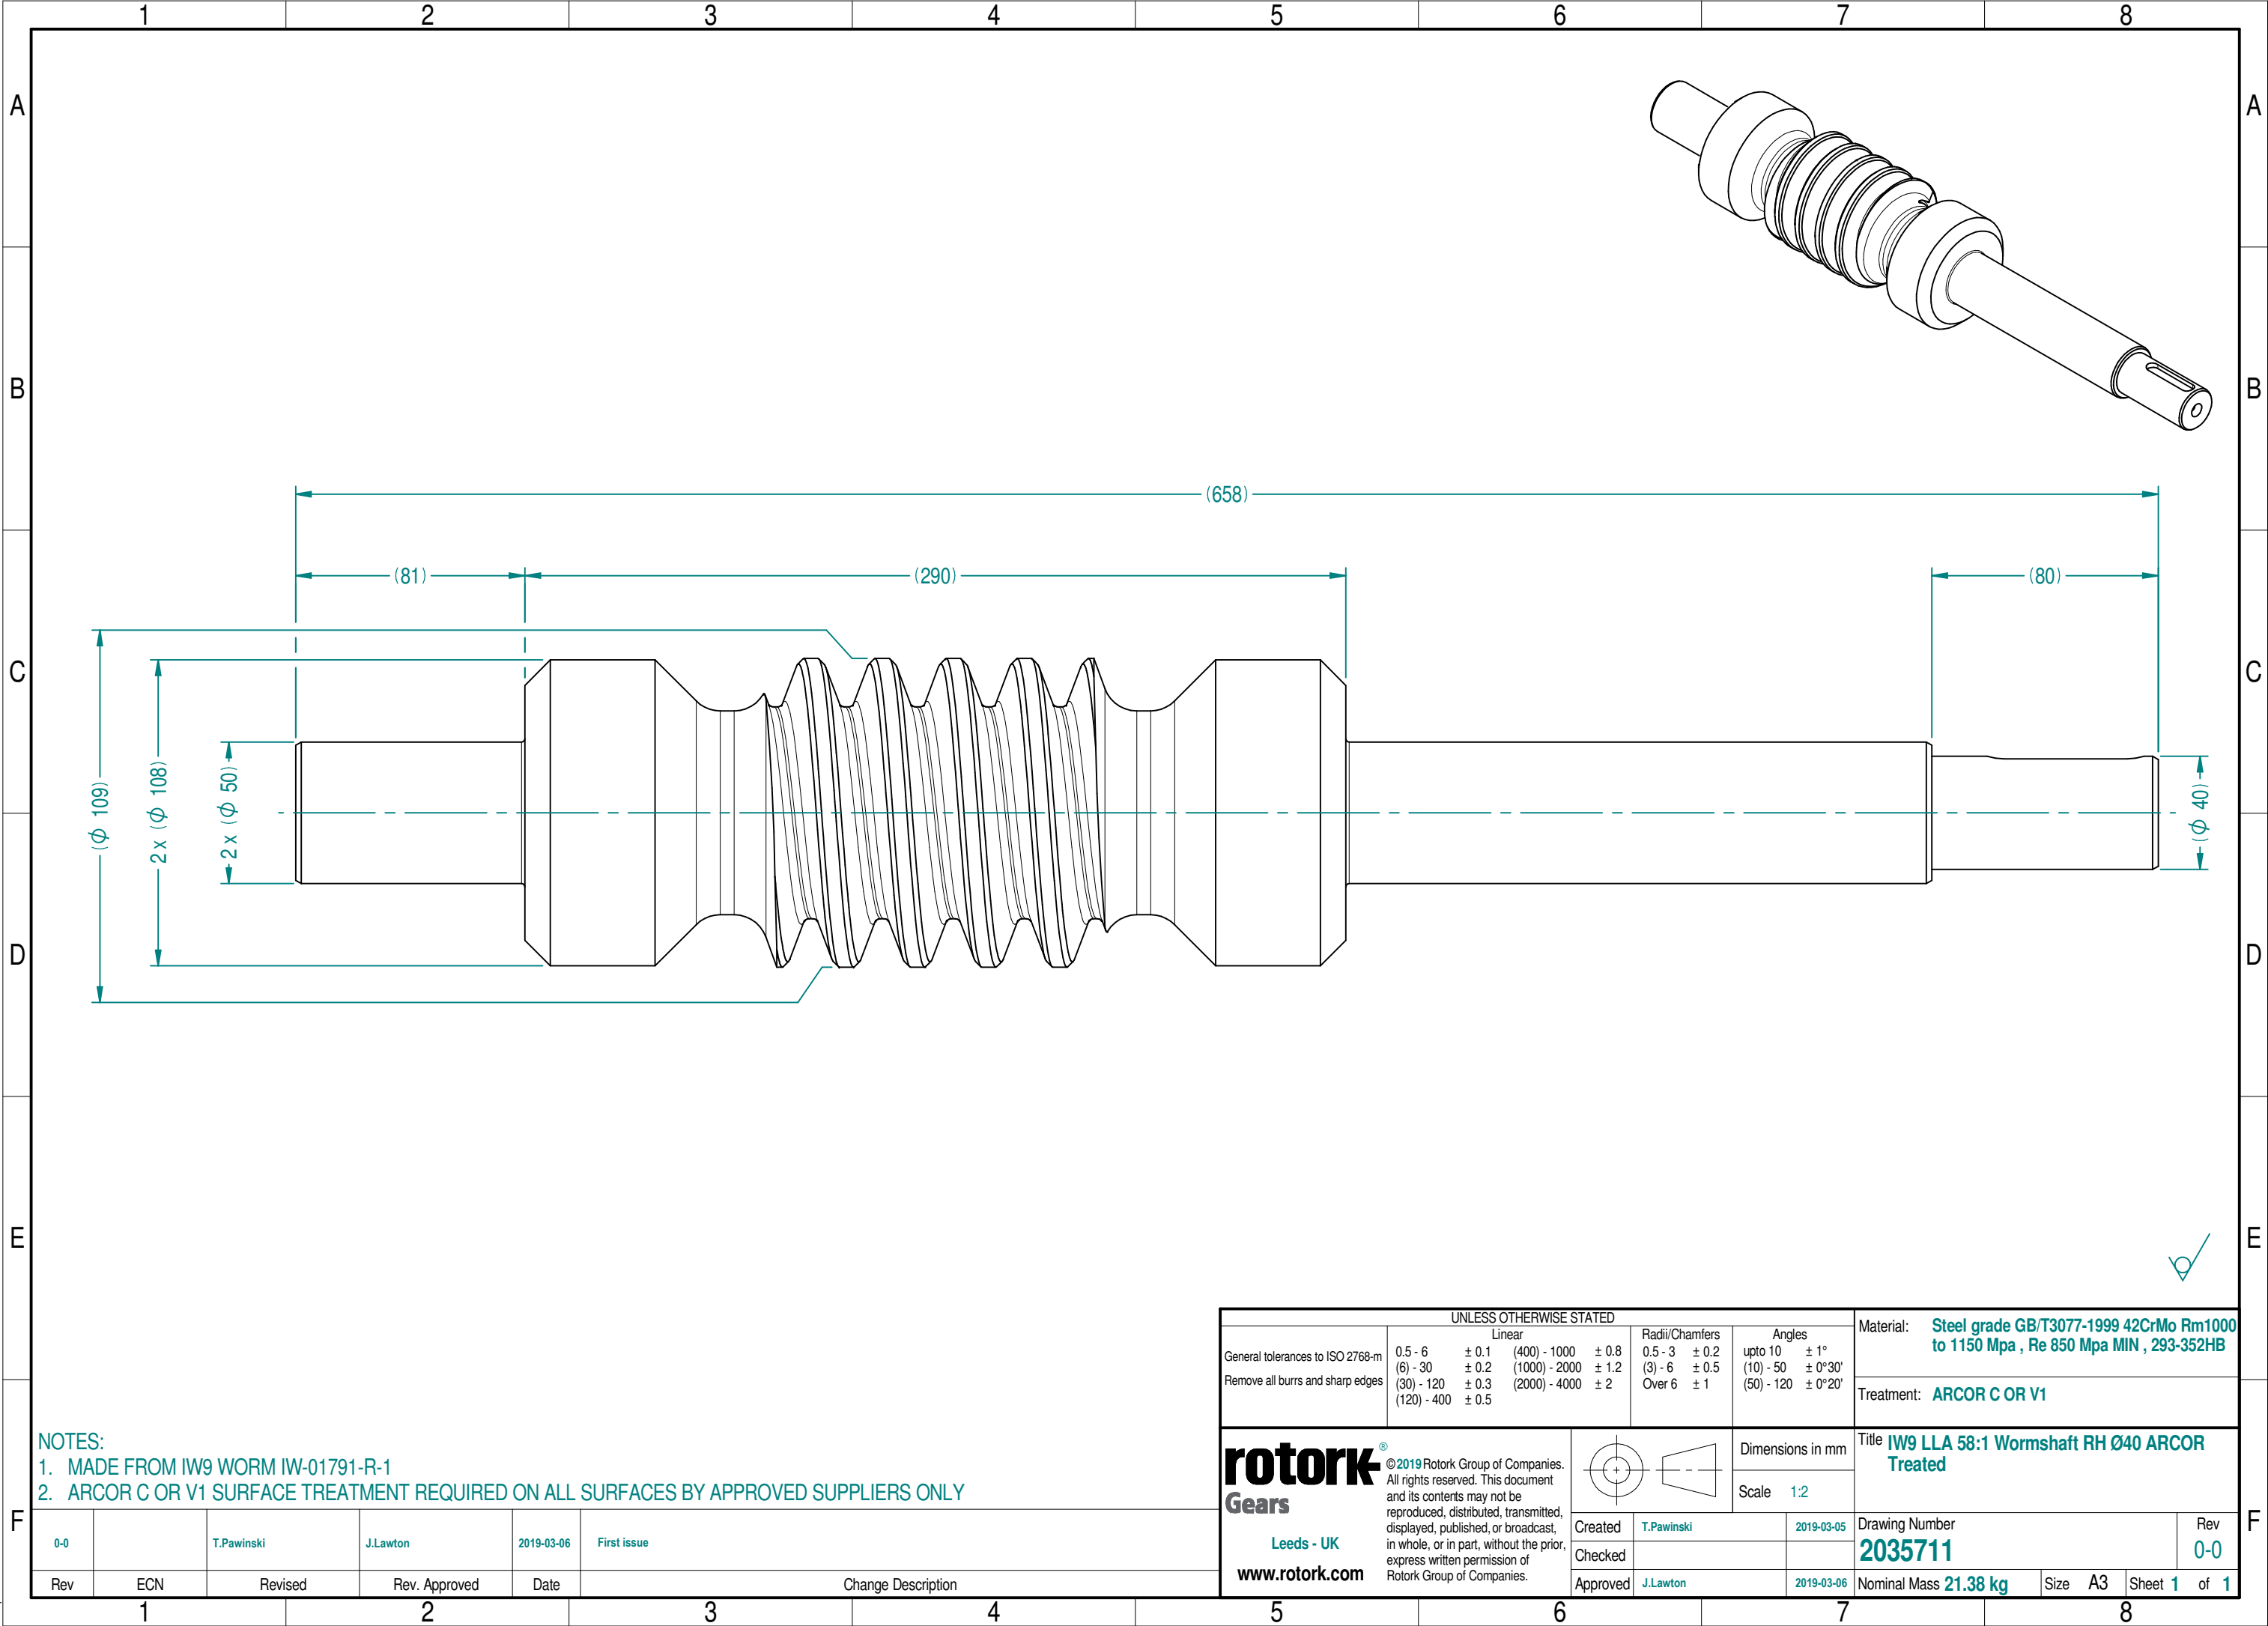

- NOTES:
- MADE FROM IW9 WORM IW-01791-R-1
 - ARCOR C OR V1 SURFACE TREATMENT REQUIRED ON ALL SURFACES BY APPROVED SUPPLIERS ONLY

0-0		T.Pawinski	J.Lawton	2019-03-06	First issue
Rev	ECN	Revised	Rev. Approved	Date	Change Description

UNLESS OTHERWISE STATED						Material: Steel grade GB/T3077-1999 42CrMo Rm1000 to 1150 Mpa , Re 850 Mpa MIN , 293-352HB									
General tolerances to ISO 2768-m Remove all burrs and sharp edges	Linear			Radii/Chamfers	Angles		Treatment: ARCOR C OR V1								
	0.5 - 6	± 0.1	(400) - 1000	± 0.8	0.5 - 3	± 0.2				upto 10	± 1°				
	(6) - 30	± 0.2	(1000) - 2000	± 1.2	(3) - 6	± 0.5				(10) - 50	± 0°30'				
	(30) - 120	± 0.3	(2000) - 4000	± 2	Over 6	± 1				(50) - 120	± 0°20'				
rotork® Gears Leeds - UK www.rotork.com © 2019 Rotork Group of Companies. All rights reserved. This document and its contents may not be reproduced, distributed, transmitted, displayed, published, or broadcast, in whole, or in part, without the prior, express written permission of Rotork Group of Companies.								Dimensions in mm		Title IW9 LLA 58:1 Wormshaft RH Ø40 ARCOR Treated					
								Scale 1:2							
						Created	T.Pawinski		2019-03-05		Drawing Number 2035711			Rev 0-0	
						Checked									
						Approved	J.Lawton		2019-03-06						