

GPX_chr1a

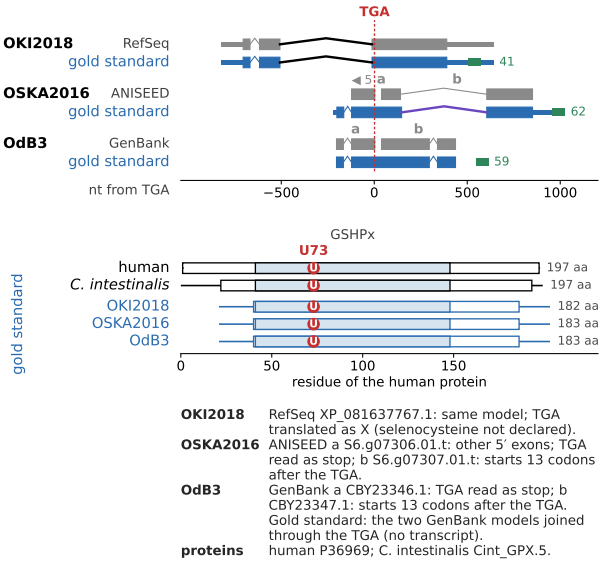


OKI2018 RefSeq XP_081637767.1: same model; TGA translated as X (selenocysteine not declared).
OSKA2016 ANISEED a S6.g07306.01.t: other 5′ exons; TGA read as stop; b S6.g07307.01.t: starts 13 codons after the TGA.
OdB3 GenBank a CBY23346.1: TGA read as stop; b CBY23347.1: starts 13 codons after the TGA. Gold standard: the two GenBank models joined through the TGA (no transcript).
proteins human P36969; C. intestinalis Cint_GPX.5.

GPX_chr1b

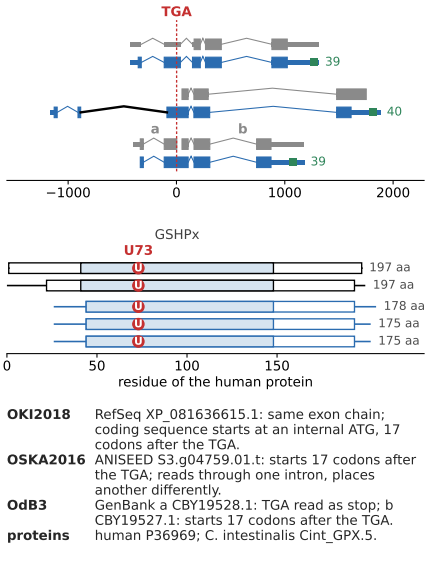


OKI2018 RefSeq XP_081636615.1: same exon chain; coding sequence starts at an internal ATG, 17 codons after the TGA.
OSKA2016 ANISEED S3.g04759.01.t: starts 17 codons after the TGA; reads through one intron, places another differently.
OdB3 GenBank a CBY19528.1: TGA read as stop; b CBY19527.1: starts 17 codons after the TGA.
proteins human P36969; C. intestinalis Cint_GPX.5.

GPX_chr2

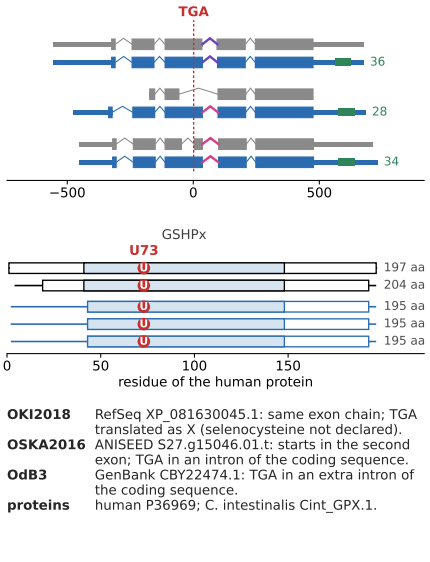


OKI2018 RefSeq XP_081630045.1: same exon chain; TGA translated as X (selenocysteine not declared).
OSKA2016 ANISEED S27.g15046.01.t: starts in the second exon; TGA in an intron of the coding sequence.
OdB3 GenBank CBY22474.1: TGA in an extra intron of the coding sequence.
proteins human P36969; C. intestinalis Cint_GPX.1.

SELENOF

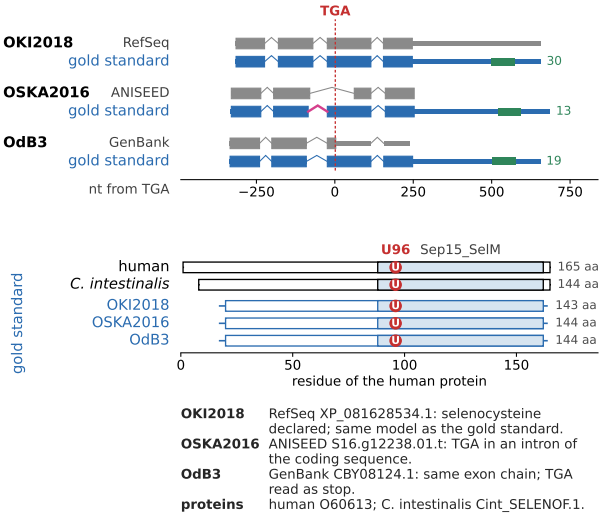


OKI2018 RefSeq XP_081628534.1: selenocysteine declared; same model as the gold standard.
OSKA2016 ANISEED S16.g12238.01.t: TGA in an intron of the coding sequence.
OdB3 GenBank CBY08124.1: same exon chain; TGA read as stop.
proteins human O60613; C. intestinalis Cint_SELENOF.1.

SELENOO

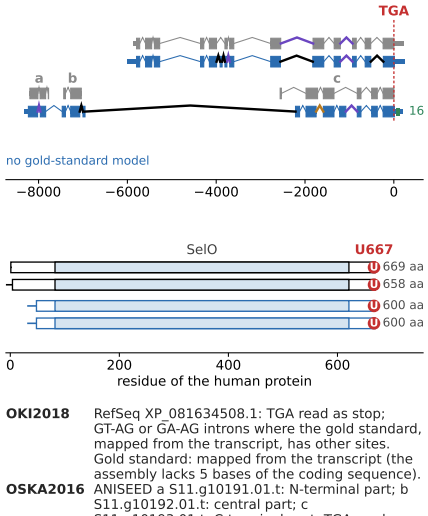


OKI2018 RefSeq XP_081634508.1: TGA read as stop; GT-AG or GA-AG introns where the gold standard, mapped from the transcript, has other sites. Gold standard: mapped from the transcript (the assembly lacks 5 bases of the coding sequence).
OSKA2016 ANISEED a S11.g10191.01.t: N-terminal part; b S11.g10192.01.t: central part; c S11.g10193.01.t: C-terminal part, TGA read as stop, skips one exon.
OdB3 no gold-standard model: the exon of the TGA is not in the assembly.
proteins human Q9BVL4; C. intestinalis Cint_SELENOO.1.

SELENOW_chr1a

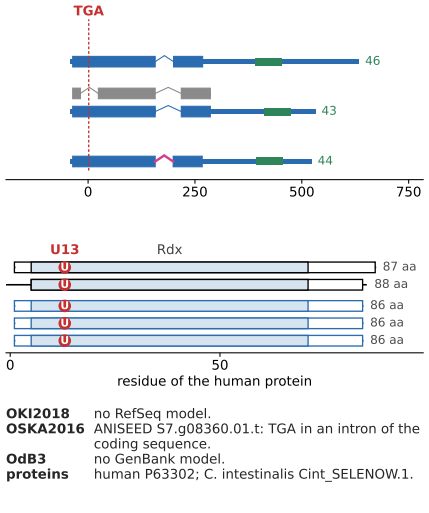

OKI2018 no RefSeq model.
OSKA2016 ANISEED S7.g08360.01.t: TGA in an intron of the coding sequence.
OdB3 no GenBank model.
proteins human P63302; C. intestinalis Cint_SELENOW.1.

SELENOW_chr2

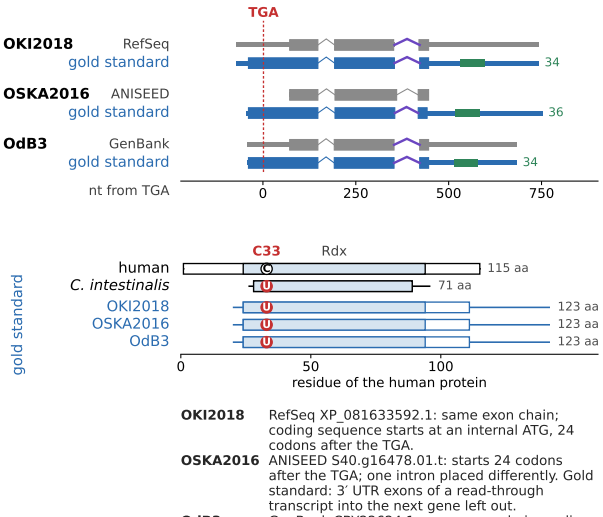


OKI2018 RefSeq XP_081633592.1: same exon chain; coding sequence starts at an internal ATG, 24 codons after the TGA.
OSKA2016 ANISEED S40.g16478.01.t: starts 24 codons after the TGA; one intron placed differently. Gold standard: 3′ UTR exons of a read-through transcript into the next gene left out.
OdB3 GenBank CBY22624.1: same exon chain; coding sequence starts at an internal ATG, 24 codons after the TGA.
proteins human Q9BRT3 (MIEN1, best human hit, a cysteine homolog); C. intestinalis Cint_SELENOW.3.

SELENOW_pair1



OKI2018 RefSeq XP_081628722.1: mRNA of another protein (674 aa), with SELENOW_pair2 and this gene in its 3′ UTR.
OSKA2016 ANISEED S5.g07175.01.t: one model across SELENOW_pair2 and this gene; both TGAs in introns.
OdB3 GenBank CBY21827.1: TGA in an intron of the coding sequence.
proteins human P63302; C. intestinalis Cint_SELENOW.1.

SELENOW_pair2

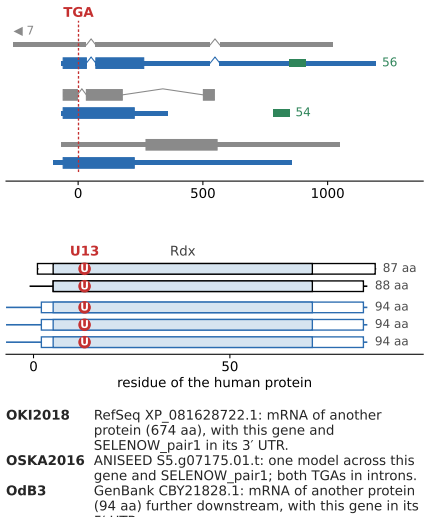

OKI2018 RefSeq XP_081628722.1: mRNA of another protein (674 aa), with this gene and SELENOW_pair1 in its 3′ UTR.
OSKA2016 ANISEED S5.g07175.01.t: one model across this gene and SELENOW_pair1; both TGAs in introns.
OdB3 GenBank CBY21828.1: mRNA of another protein (94 aa) further downstream, with this gene in its 5′ UTR.
proteins human P63302; C. intestinalis Cint_SELENOW.1.

