

SELENOW_PAR

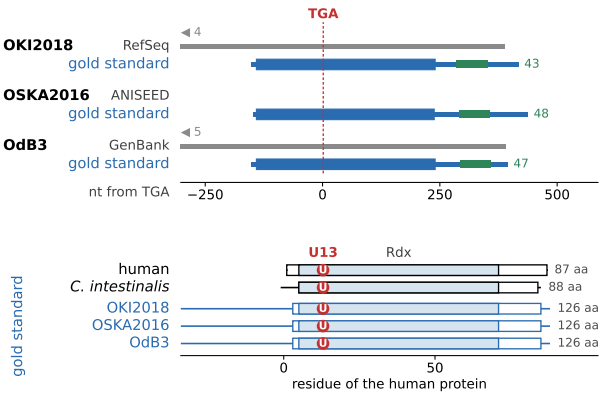


OKI2018 RefSeq XP_081636423.1: mRNA of another protein (592 aa), with the gene in its 3′ UTR.
OSKA2016 no ANISEED model. Gold standard: mapped from the transcript (the assembly lacks 2 bases of the coding sequence).
OdB3 GenBank CBY23864.1: mRNA of another protein (589 aa), with the gene in its 3′ UTR.
proteins human P63302; C. intestinalis Cint_SELENOW.1.

SELENOW_chr1a

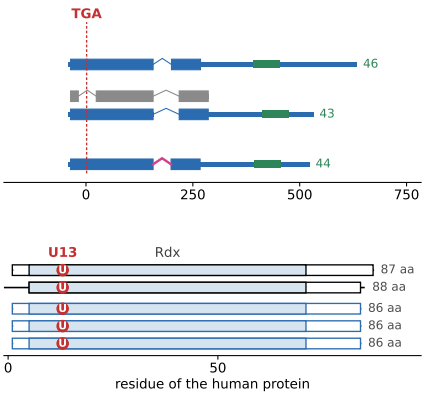


OKI2018 no RefSeq model.
OSKA2016 ANISEED S7.g08360.01.t: TGA in an intron of the coding sequence.
OdB3 no GenBank model.
proteins human P63302; C. intestinalis Cint_SELENOW.1.

SELENOW_chr2

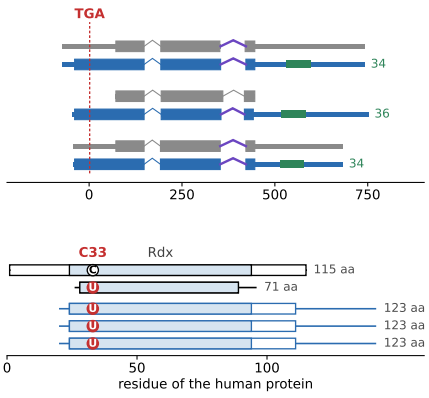


OKI2018 RefSeq XP_081633592.1: same exon chain; coding sequence starts at an internal ATG, 24 codons after the TGA.
OSKA2016 ANISEED S40.g16478.01.t: starts 24 codons after the TGA; one intron placed differently. Gold standard: 3′ UTR exons of a read-through transcript into the next gene left out.
OdB3 GenBank CBY22624.1: same exon chain; coding sequence starts at an internal ATG, 24 codons after the TGA.
proteins human Q9BRT3 (MIEN1, best human hit, a cysteine homolog); C. intestinalis Cint_SELENOW.3.

SELENOW_pair1

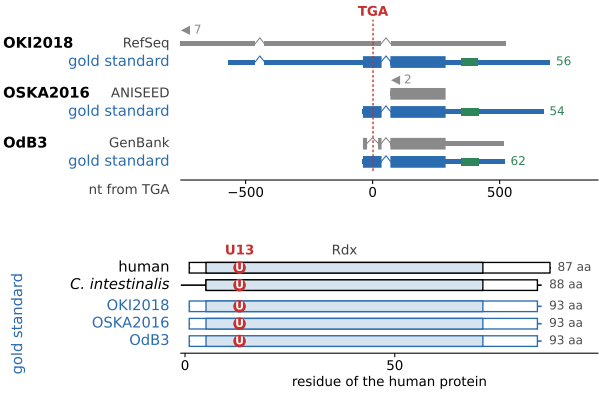


OKI2018 RefSeq XP_081628722.1: mRNA of another protein (674 aa), with SELENOW_pair2 and this gene in its 3′ UTR.
OSKA2016 ANISEED S5.g07175.01.t: one model across SELENOW_pair2 and this gene; both TGAs in introns.
OdB3 GenBank CBY21827.1: TGA in an intron of the coding sequence.
proteins human P63302; C. intestinalis Cint_SELENOW.1.

SELENOW_pair2

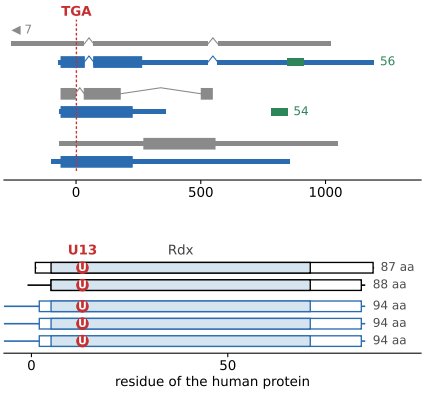


OKI2018 RefSeq XP_081628722.1: mRNA of another protein (674 aa), with this gene and SELENOW_pair1 in its 3′ UTR.
OSKA2016 ANISEED S5.g07175.01.t: one model across this gene and SELENOW_pair1; both TGAs in introns.
OdB3 GenBank CBY21828.1: mRNA of another protein (94 aa) further downstream, with this gene in its 5′ UTR.
proteins human P63302; C. intestinalis Cint_SELENOW.1.

SELENOT

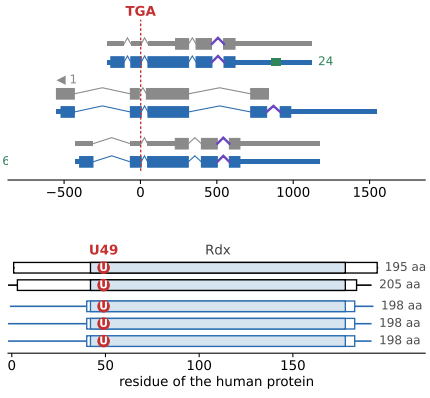


OKI2018 RefSeq XP_081643256.1: same exon chain; coding sequence starts at an internal ATG, 62 codons after the TGA.
OSKA2016 ANISEED S10.g09589.01.t: TGA in an intron of the coding sequence; extra 5′ exon; ends in the GA-AG intron.
OdB3 GenBank CBY23255.1: same exon chain; coding sequence starts at an internal ATG, 62 codons after the TGA.
proteins human P62341; C. intestinalis Cint_SELENOT.2.

SELENOF

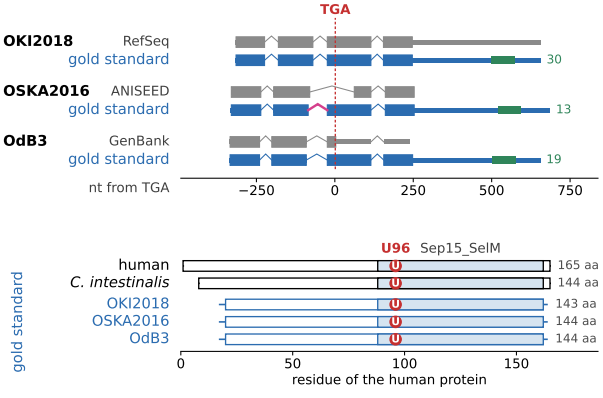


OKI2018 RefSeq XP_081628534.1: selenocysteine declared; same model as the gold standard.
OSKA2016 ANISEED S16.g12238.01.t: TGA in an intron of the coding sequence.
OdB3 GenBank CBY08124.1: same exon chain; TGA read as stop.
proteins human O60613; C. intestinalis Cint_SELENOF.1.

SELENOK

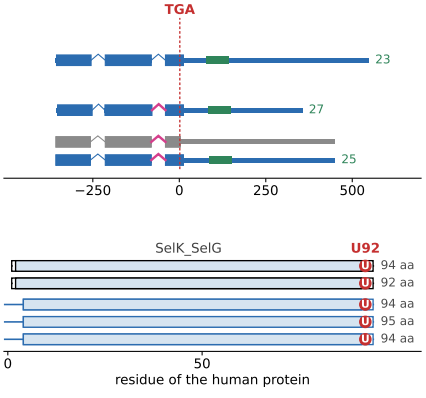

OKI2018 no RefSeq model.
OSKA2016 no ANISEED model.
OdB3 GenBank CBY09056.1: same exon chain; TGA read as stop.
proteins human Q9Y6D0; C. intestinalis Cint_SELENOK.2.

SELENOS

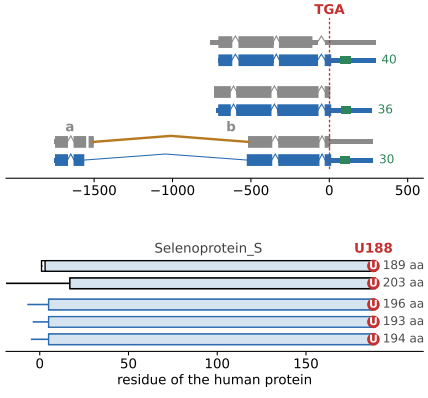

OKI2018 RefSeq XP_081639144.1: same exon chain; frame lost where the assembly lacks 13 bases; ends before the TGA. Gold standard: mapped from the transcript (the assembly lacks 13 bases of the coding sequence).
OSKA2016 ANISEED S13.g10968.01.t: starts 9 codons upstream; TGA read as stop.
OdB3 GenBank a CBY08859.1: N-terminal part; ends in an intron; b CBY08858.1: other first exon; TGA read as stop.
proteins human Q9BQE4; C. intestinalis Cint_SELENOS.1.

exon: coding (thick), UTR (thin) — public model — gold-standard model — coding sequence in another frame
selenocysteine TGA (x axis: nucleotides from it, gene orientation) — 37 SECIS element and bit score (current model)
◂ n number of exons beyond the drawn region — a b public models of the same row, as named in the paragraph
intron splice sites (drawn length unchanged): GT-AG (colour of the model) — GA-AG — GC-AG — GG-AG
Pfam domain of the first reference — selenocysteine aligned to one of the first reference — other residue aligned to it
residues not aligned to the first reference — human: UniProt; C. intestinalis: stage 1 predictions on its genome (accessions in the paragraphs)