Name - Ojas Denge

PRN - 202201070072

Batch - G4

Roll No -777

```
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
from pandas import Series, DataFrame
```

```
# Reading the tips.csv file
df1=pd.read_csv('/content/tips.csv')
```

```
df1.head()
```

1 to 5 of 5 entries   Filter

index	total_bill	tip	sex	smoker	day	time	size
0	16.99	1.01	Female	No	Sun	Dinner	2
1	10.34	1.66	Male	No	Sun	Dinner	3
2	21.01	3.5	Male	No	Sun	Dinner	3
3	23.68	3.31	Male	No	Sun	Dinner	2
4	24.59	3.61	Female	No	Sun	Dinner	4

Show 25 per page
Like what you see? Visit the data table notebook to learn more about interactive tables.

```
df1.tail()
```

	total_bill	tip	sex	smoker	day	time	size
239	29.03	5.92	Male	No	Sat	Dinner	3
240	27.18	2.00	Female	Yes	Sat	Dinner	2
241	22.67	2.00	Male	Yes	Sat	Dinner	2
242	17.82	1.75	Male	No	Sat	Dinner	2
243	18.78	3.00	Female	No	Thur	Dinner	2

```
df1.columns
```

```
Index(['total_bill', 'tip', 'sex', 'smoker', 'day', 'time', 'size'], dtype='object')
```

```
df1.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 244 entries, 0 to 243
Data columns (total 7 columns):
 #   Column      Non-Null Count   Dtype
---  ------      --------------   -----

 0   total_bill  244 non-null     float64
 1   tip         244 non-null     float64
 2   sex         244 non-null     object
 3   smoker      244 non-null     object
 4   day         244 non-null     object
 5   time        244 non-null     object
 6   size        244 non-null     int64
dtypes: float64(2), int64(1), object(4)
memory usage: 13.5+ KB
```
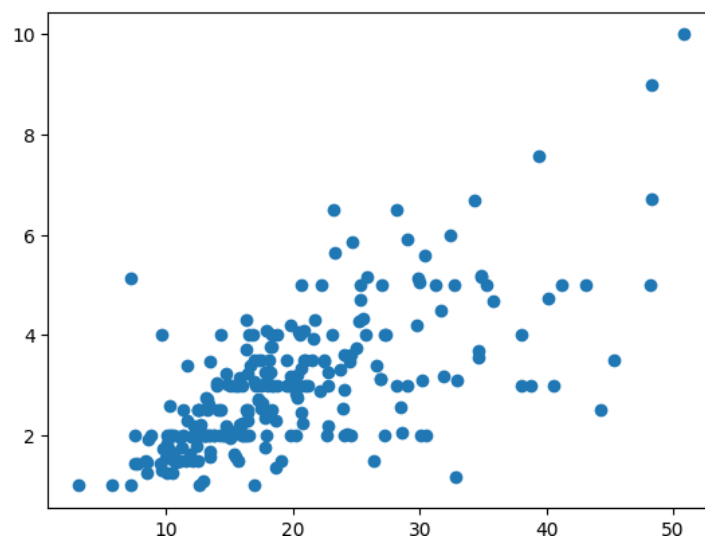
```
df1.describe()
```

	total_bill	tip	size
count	244.000000	244.000000	244.000000
mean	19.785943	2.998279	2.569672
std	8.902412	1.383638	0.951100
min	3.070000	1.000000	1.000000
25%	13.347500	2.000000	2.000000

```
a=pd.DataFrame(df1['day'].value_counts())
a.reset_index(inplace=True)
plt.bar(a['index'],a['day'])
```
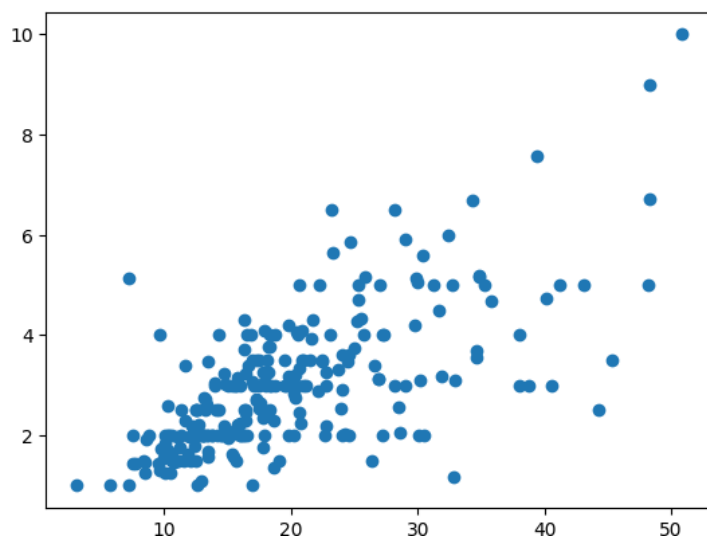
```
<BarContainer object of 4 artists>
```
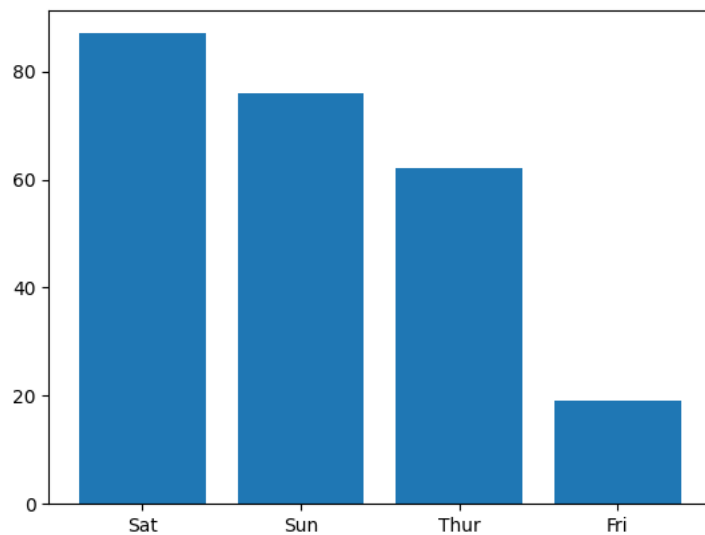


```
plt.scatter(df1['total_bill'],df1['tip'])
plt.show()
```



```
plt.scatter(x='total_bill',y='tip',data=df1)
fig=plt.figure(figsize=(5,4))
ax=fig.add_axes([1,1,1,1])
ax.legend(labels=('sun','mon','tue'))
plt.show()
```

```
#Different types of Matplotlib Plots
#bar chart
import matplotlib.pyplot as plt
import pandas as pd

# Reading the tips.csv file
data = pd.read_csv('/content/tips.csv')

# initializing the data
x = data['day']
y = data['total_bill']

# plotting the data
plt.bar(x, y)

# Adding title to the plot
plt.title("Tips Dataset")

# Adding label on the y-axis
plt.ylabel('Total Bill')

# Adding label on the x-axis
plt.xlabel('Day')

plt.show()
```
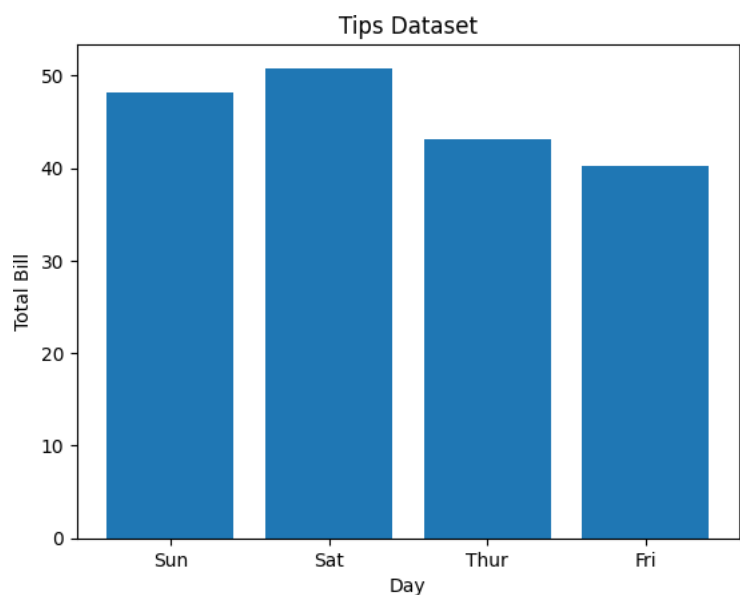
```python
import matplotlib.pyplot as plt
import pandas as pd
```

```python
# initializing the data
x = data['day']
y = data['total_bill']

# plotting the data
plt.bar(x, y, color='green', edgecolor='blue',
        linewidth=2)

# Adding title to the plot
plt.title("Tips Dataset")

# Adding label on the y-axis
plt.ylabel('Total Bill')

# Adding label on the x-axis
plt.xlabel('Day')

plt.sho
```
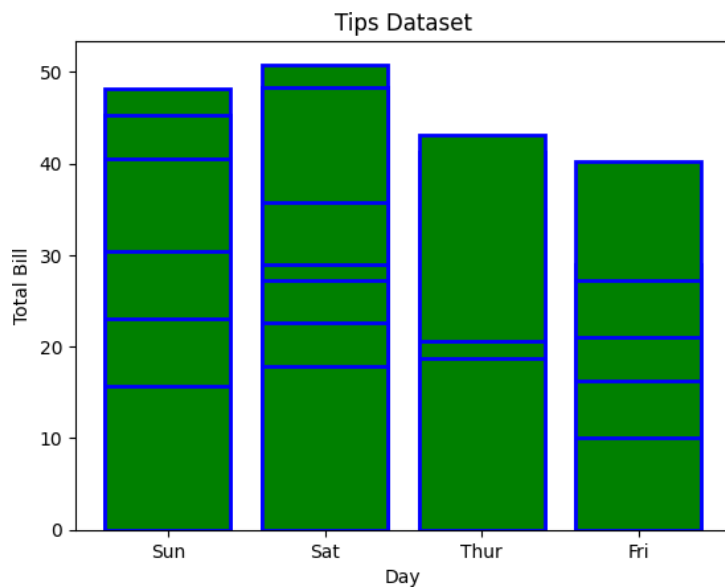
Histogram A histogram is basically used to represent data provided in a form of some groups. It is a type of bar plot where the X-axis represents the bin ranges while the Y-axis gives information about frequency. The hist() function is used to compute and create histogram of x.

```python
import matplotlib.pyplot as plt
import pandas as pd



# initializing the data
x = data['total_bill']

# plotting the data
plt.hist(x)

# Adding title to the plot
plt.title("Tips Dataset")

# Adding label on the y-axis
plt.ylabel('Frequency')

# Adding label on the x-axis
plt.xlabel('Total Bill')

plt.show()
```
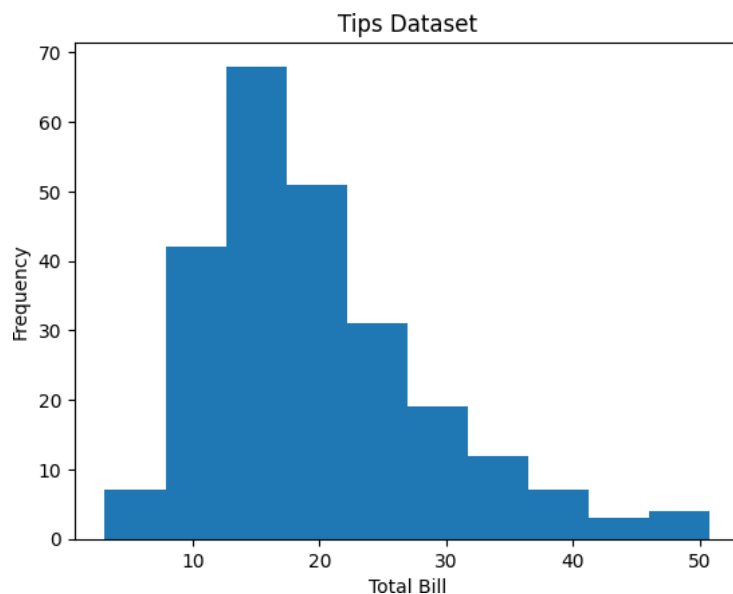

Customization that is available for the Histogram –

bins: Number of equal-width bins color: For changing the face color edgecolor: Color of the edges linestyle: For the edgelines alpha: blending value, between 0 (transparent) and 1 (opaque)

```python
import matplotlib.pyplot as plt
import pandas as pd



# initializing the data
x = data['total_bill']

# plotting the data
plt.hist(x, bins=25, color='green', edgecolor='blue',
         linestyle='--', alpha=0.5)

# Adding title to the plot
plt.title("Tips Dataset")

# Adding label on the y-axis
plt.ylabel('Frequency')
```
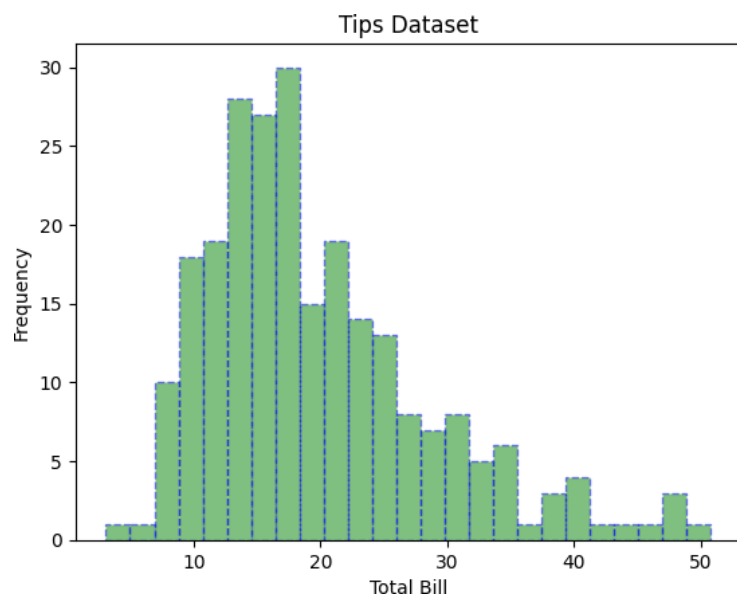
```
# Adding label on the x-axis
plt.xlabel('Total Bill')

plt.show()
```


Scatter Plot Scatter plots are used to observe relationships between variables. The scatter() method in the matplotlib library is used to draw a scatter plot.

```
import matplotlib.pyplot as plt
import pandas as pd
```
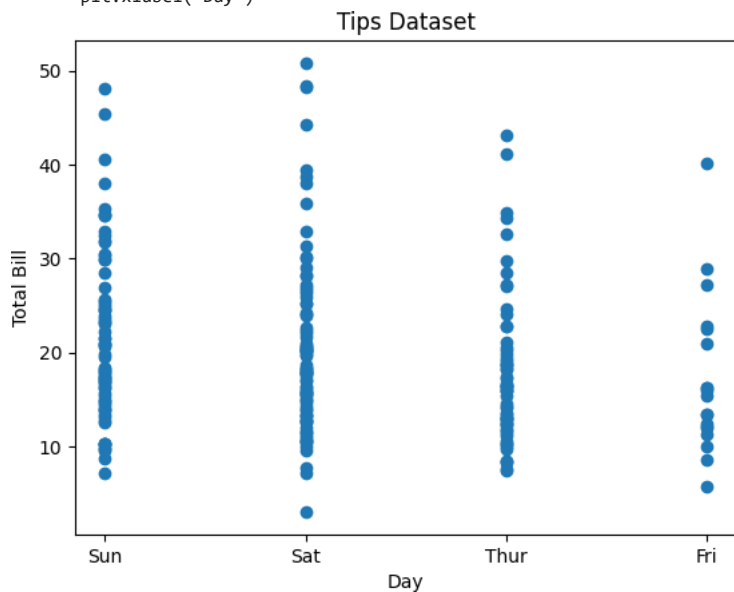
```
# initializing the data
x = data['day']
y = data['total_bill']

# plotting the data
plt.scatter(x, y)

# Adding title to the plot
plt.title("Tips Dataset")

# Adding label on the y-axis
plt.ylabel('Total Bill')

# Adding label on the x-axis
plt.xlabel('Day')
```

Customizations that are available for the scatter plot are –

s: marker size (can be scalar or array of size equal to size of x or y)c: color

of sequence of colors for markers

marker: marker style

linewidths: width of marker border

edgecolor: marker border color

alpha: blending value, between 0 (transparent) and 1 (opaque)

```python
import matplotlib.pyplot as plt
import pandas as pd


# initializing the data
x = data['day']
y = data['total_bill']

# plotting the data
plt.scatter(x, y, c=data['size'], s=data['total_bill'],
            marker='D', alpha=0.5)

# Adding title to the plot
plt.title("Tips Dataset")

# Adding label on the y-axis
plt.ylabel('Total Bill')

# Adding label on the x-axis
plt.xlabel('Day')

plt.show()
```
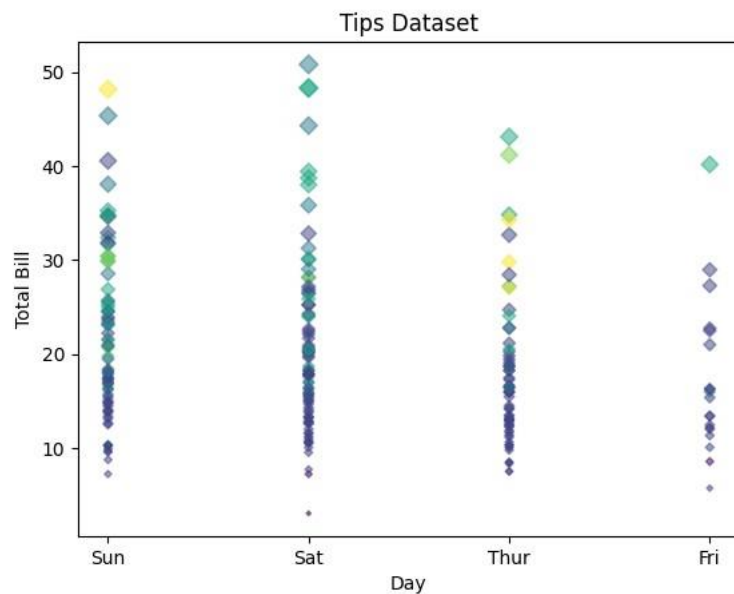

Pie Chart Pie chart is a circular chart used to display only one series of data. The area of slices of the pie represents the percentage of the parts of the data. The slices of pie are called wedges. It can be created using the pie() method.
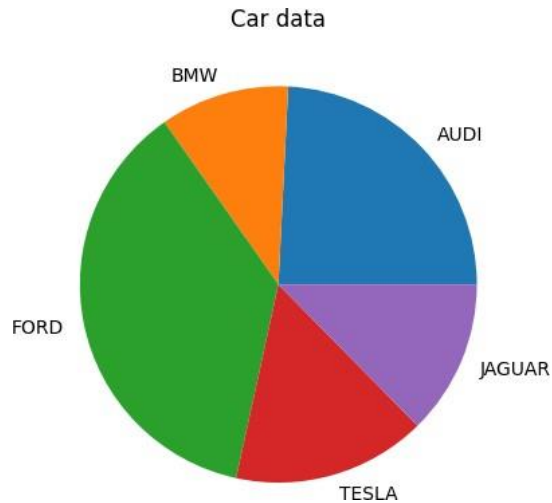
```python
import matplotlib.pyplot as plt
import pandas as pd


# initializing the data
cars = ['AUDI', 'BMW', 'FORD',
        'TESLA', 'JAGUAR',]
data = [23, 10, 35, 15, 12]

# plotting the data
plt.pie(data, labels=cars)

# Adding title to the plot
plt.title("Car data")

plt.show()
```


Customizations that are available for the Pie chart are –

explode: Moving the wedges of the plot autopct: Label the wedge with their numerical value. color: Attribute is used to provide color to the wedges. shadow: Used to create shadow of wedge.

```python
import matplotlib.pyplot as plt
import pandas as pd

# initializing the data
cars = ['AUDI', 'BMW', 'FORD',
        'TESLA', 'JAGUAR',]
data = [23, 13, 35, 15, 12]

explode = [0.1, 0.5, 0, 0, 0]

colors = ( "orange", "cyan", "yellow",
        "grey", "green",)

# plotting the data
plt.pie(data, labels=cars, explode=explode, autopct='%1.2f%%',
        colors=colors, shadow=True)

plt.show()
```
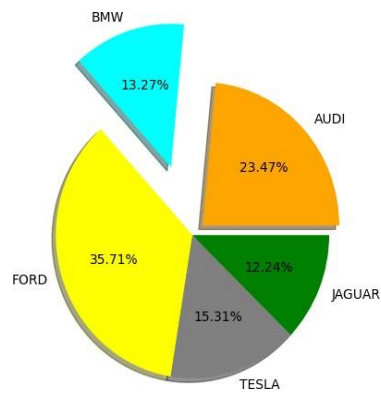
Saving a Plot

For saving a plot in a file on storage disk, savefig() method is used. A file can be saved in many formats like .png, .jpg, .pdf, etc.

```
import matplotlib.pyplot as plt

# Creating data
year = ['2010', '2002', '2004', '2006', '2008']
production = [25, 15, 35, 30, 10]

# Plotting barchart
plt.bar(year,  production)

# Saving the figure.
plt.savefig("output.jpg")

# Saving figure by changing parameter values
plt.savefig("output1",  facecolor='y',  bbox_inches="tight",
      pad_inches=0.3,  t
```