

Loading your lab content

Close Window

1

---

Close

2

3

- Reconnect
- Power On
- Pause
- Resume
- Reset/Reboot
- Power Off
- Fit Window to Machine
- Fit Machine To Window
- Open in New Window
- Split Windows
- Revert Machine
- Reset Internet Gateway

4

- Ctrl+Alt+Delete
- ALT+Tab
- Windows Key
  - ☐ Windows Key
  - ☐ Windows Key + D
  - ☐ Windows Key + E
  - ☐ Windows Key + F
  - ☐ Windows Key + M
  - ☐ Windows Key + R
  - ☐ Windows Key + X
  - ☐ Windows Key + ...
- Windows Key
- Type Text
  - ☐ Type Username
  - ☐ Type Password
  - ☐ Type Clipboard Text
- Virtual Keyboard

Windows 11<sup>5</sup>

Windows 11  
Parrot Security

## Poor Connection

This machine must be controlled outside of your browser via Remote Desktop.

---

Full Screen  
Power and Display  
Keyboard  
Machine Selection

Launch Remote Desktop

Username:

Password:

The selected machine is off.

Start

Machine is open in a separate window. [Close Window](#)

X

- Esc
- F1
  - F2
  - F3
  - F4
  - F5
  - F6
  - F7
  - F8
  - F9
  - F10
  - F11
  - F12
  - PrtSc
  - ScrLk
  - Pause
  - `
  - 1
  - 2
  - 3
  - 4
  - 5
  - 6
  - 7
  - 8
  - 9
  - 0
  - -
  - =
  - ← Backspace
  - Insert
  - Home
  - P Up

- NLock
  - /
  - \*
  - -
  - Tab
  - q
  - w
  - e
  - r
  - t
  - y
  - u
  - i
  - o
  - p
  - [
  - ]
  - \
  - Delete
  - End
  - P Down

- 7

- 8
- 9
- +
- Caps
- a
- s
- d
- f
- g
- h
- j
- k
- l
- ;
- '
- ↵ Enter

- 4

- 5
- 6
- Shift
- z
- x
- c
- v
- b
- n

- m
- ,
- .
- /
- Shift
- ↑

- 1

- 2
- 3
- Enter
- Ctrl
- Win
- Alt
- Alt
- Win
- Ctrl
- ←
- ↓
- →

- 0

- .

To release mouse, press **Ctrl+Alt+Left Arrow**

Username

6

Password

7

DVD Drive

- No Media

Ctrl+Alt+Delete [Open in New Window](#)

- Not Connected

Username

Password

Reconnect

Cloud Computing<sup>8</sup>

[Exit Lab](#)

Save Progress And Exit

End Lab

[InstructionsResources](#)

## Module 19: Cloud Computing

### Scenario

Cloud computing is an emerging technology that delivers computing services such as online business applications, online data storage, and webmail over the Internet. Cloud implementation enables a distributed workforce, reduces organization expenses, provides data security, etc. As enterprises are increasingly adopting cloud services, cloud

---

Type Text

Type Text

Cloud Computing

systems have emerged as targets for attackers to gain unauthorized access to the valuable data stored in them. Therefore, it is essential to regularly perform pen testing on cloud systems to monitor their security posture. Security administrators claim that cloud systems are more vulnerable to DoS assaults, because they involve numerous individuals or clients, making DoS assaults potentially very harmful. Because of the high workload on a flooded service, these systems attempt to provide additional computational power (more virtual machines, more service instances) to cope with the workload, and they will eventually fail.

Although cloud systems try to thwart attackers by providing additional computational power, they inadvertently aid attackers by allowing the most significant possible damage to the availability of a service—a process that starts from a single flooding-attack entry point. Thus, attackers need not flood all servers that provide a particular service but merely flood a single, cloud-based address to a service that is unavailable. Thus, adequate security is vital in this context, because cloud-computing services are based on sharing.

As an ethical hacker and penetration tester, you must have sound knowledge of hacking cloud platforms using various tools and techniques. The labs in this module will provide you with real-time experience in exploiting the underlying vulnerabilities in a target cloud platform using various hacking methods and tools. However, hacking the cloud platform may be illegal depending on the organization's policies and any laws that are in effect. As an ethical or pen tester, you should always acquire proper authorization before performing system hacking.

### **Objective**

The objective of the lab is to perform cloud platform hacking and other tasks that include, but are not limited to:

- Performing S3 bucket enumeration
- Exploiting misconfigured S3 buckets
- Escalating privileges of a target IAM user account by exploiting misconfigurations in a user policy

### **Overview of Cloud Computing**

Cloud computing refers to on-demand delivery of IT capabilities, in which IT infrastructure and applications are provided to subscribers as metered services over a network. Cloud services are classified into three categories, namely infrastructure-as-a-service (IaaS), platform-as-a-service (PaaS), and software-as-a-service (SaaS), which offer different techniques for developing cloud.

### **Lab Tasks**

Ethical hackers or pen testers use numerous tools and techniques to hack the target cloud platform. Recommended labs that will assist you in learning various cloud platform hacking techniques include:

1. Perform Reconnaissance on Azure
  - o Azure reconnaissance with AADInternals
2. Exploit S3 buckets
  - o Exploit open S3 buckets using AWS CLI
3. Perform privilege escalation to gain higher privileges
  - o Escalate IAM user privileges by exploiting misconfigured user policy
4. Perform vulnerability assessment on Docker images
  - o Vulnerability assessment on Docker images using Trivy

### **Lab 1: Perform Reconnaissance on Azure**

#### **Lab Scenario**

As an ethical hacker, you need to know how to utilize PowerShell command-based scripting tools for conducting reconnaissance and gathering information. This information can then be used to assess the security posture of other systems within the network.

#### **Lab Objectives**

- Azure Reconnaissance with AADInternals

#### **Overview of Reconnaissance Tools**


Reconnaissance tools serve as indispensable assets for attackers in cloud hacking, providing them with the essential information and insights needed to orchestrate successful attacks against cloud environments.

#### **Task 1: Azure Reconnaissance with AADInternals**

AADInternals is primarily focused on auditing and attacking Azure Active Directory (AAD) environments, it can still be utilized as part of a broader cloud reconnaissance effort. This tool has several features such as user enumeration, credential extraction, token extraction and manipulation, privilege escalation, etc.


In this lab we will perform Azure Active Directory reconnaissance as an outsider.

1. Click [Windows 11](#) to switch to the **Windows 11** machine. Click [Ctrl+Alt+Delete](#) to activate the machine and login with **Admin/Pa\$\$w0rd**.
2. Navigate to **E:\CEH-Tools\CEHv13 Module 19 Cloud Computing\GitHub Tools\** and copy **AADInternals** folder and paste it on **Desktop**.
- 3.

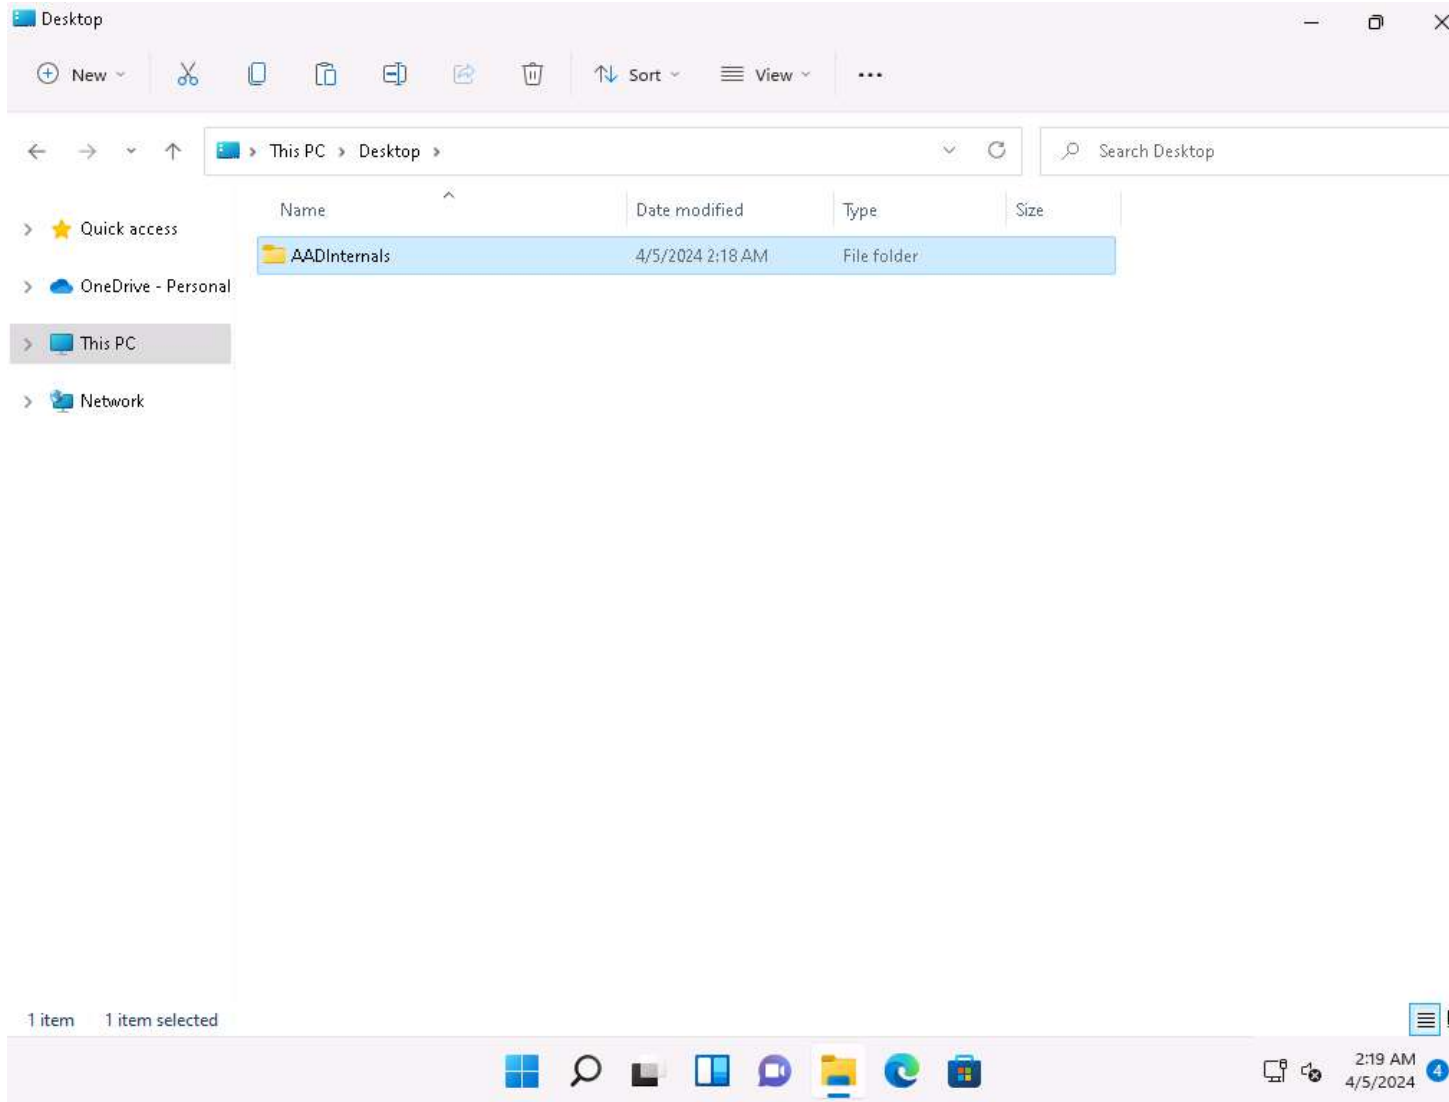

4. In the Windows search type **powershell** and under **PowerShell** click on **Run as Administrator** to open an administrator PowerShell window.
5. If a **User Account Control** window appears, click **Yes**.
6. In the PowerShell window run **cd C:\Users\Admin\Desktop\AADInternals** command to navigate to **AADInternals** folder.
7. In the PowerShell window run **Install-Module AADInternals** command to install AADInternals module.
8. In the **Do you want PowerShellGet to install and import the NuGet provider now?** Question type **Y** and press **Enter**. In the Are you sure you want to install the modules from "PSGallery"? question type **A** and press **Enter**.

9.

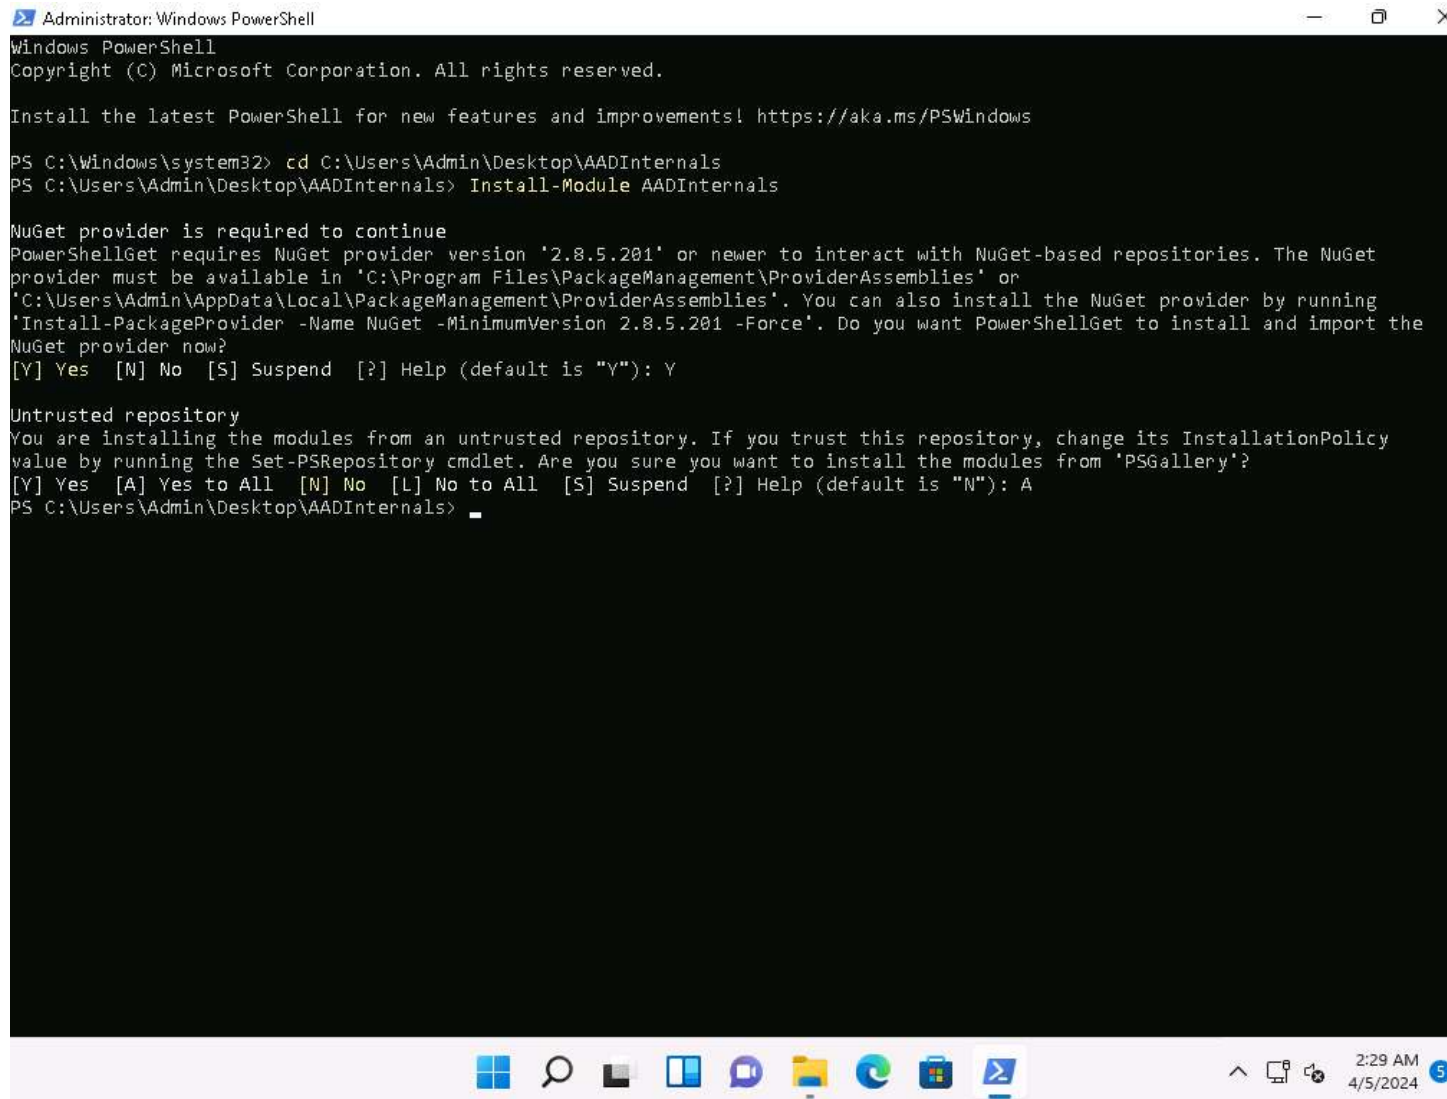

```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows

PS C:\Windows\system32> cd C:\Users\Admin\Desktop\AADInternals
PS C:\Users\Admin\Desktop\AADInternals> Install-Module AADInternals


NuGet provider is required to continue
PowerShellGet requires NuGet provider version '2.8.5.201' or newer to interact with NuGet-based repositories. The NuGet
provider must be available in 'C:\Program Files\PackageManagement\ProviderAssemblies' or
'C:\Users\Admin\AppData\Local\PackageManagement\ProviderAssemblies'. You can also install the NuGet provider by running
'Install-PackageProvider -Name NuGet -MinimumVersion 2.8.5.201 -Force'. Do you want PowerShellGet to install and import the
NuGet provider now?
[Y] Yes [N] No [S] Suspend [?] Help (default is "Y"): Y

Untrusted repository
You are installing the modules from an untrusted repository. If you trust this repository, change its InstallationPolicy
value by running the Set-PSRepository cmdlet. Are you sure you want to install the modules from 'PSGallery'?
[Y] Yes [A] Yes to All [N] No [L] No to All [S] Suspend [?] Help (default is "N"): A
PS C:\Users\Admin\Desktop\AADInternals> _
```

10. Now, run **Import-Module AADInternals** command, to import **AADInternals** module.



11.

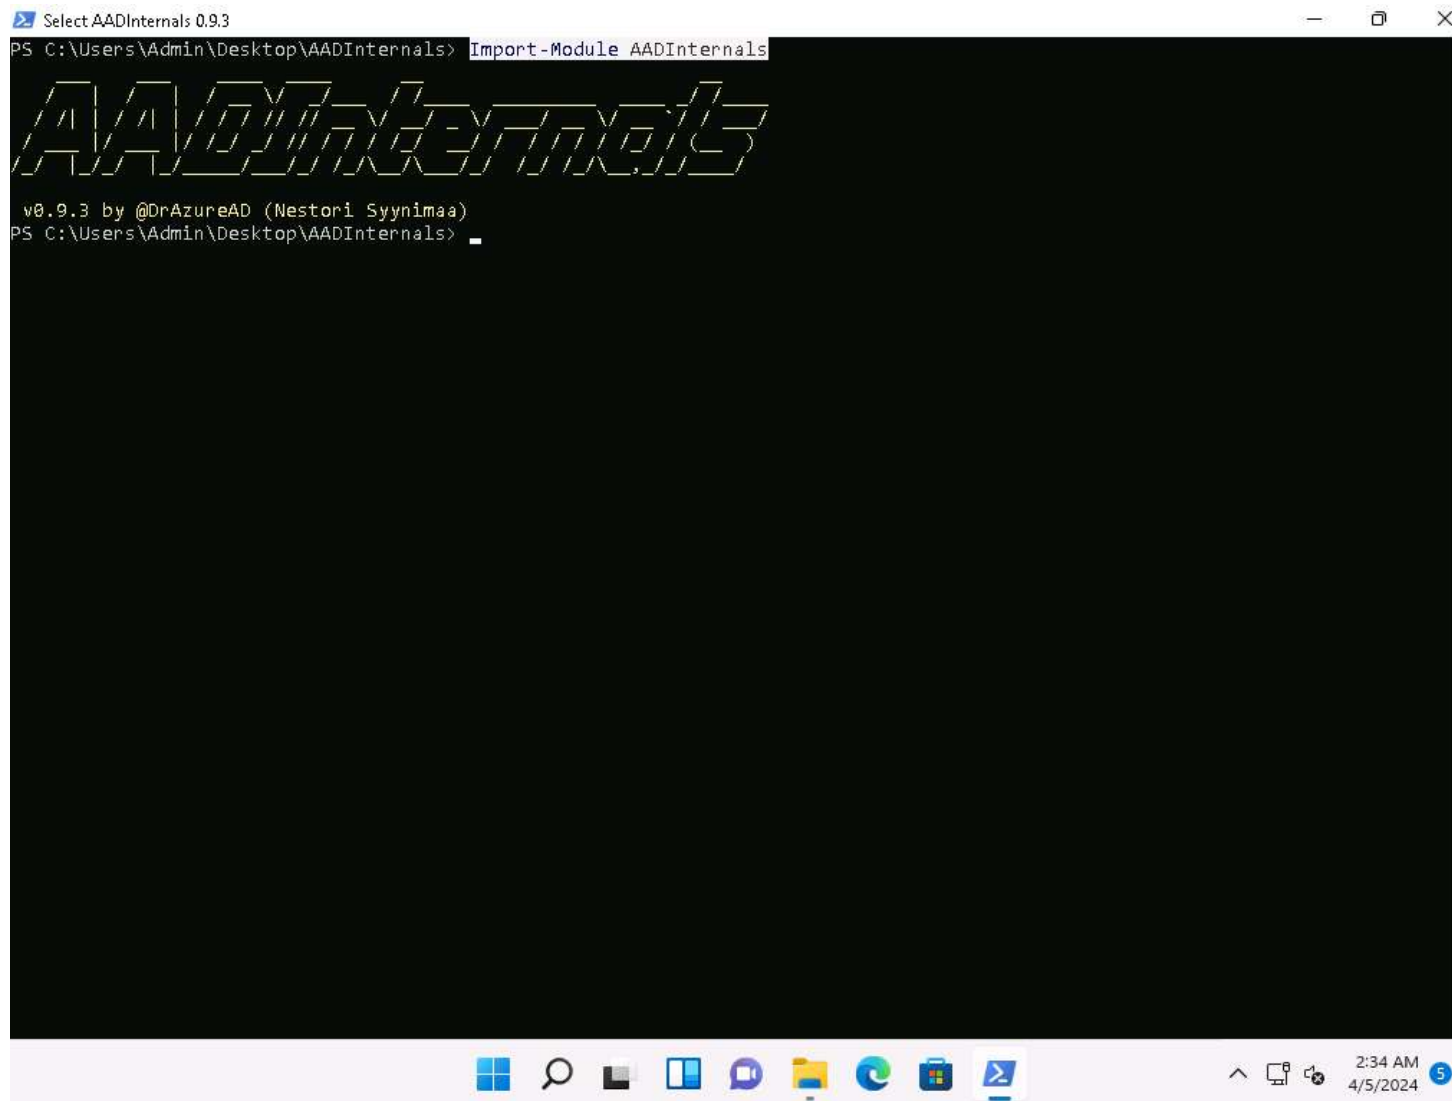

```
Select AADInternals 0.9.3
PS C:\Users\Admin\Desktop\AADInternals> Import-Module AADInternals

AADInternals

v0.9.3 by @DrAzureAD (Nestori Ssynimaa)
PS C:\Users\Admin\Desktop\AADInternals>
```

12. Now, we will gather the publicly available information of a target Azure AD such as Tenant brand, Tenant name, Tenant ID along with the names of the verified domains.
13. In the PowerShell window run **Invoke-AADIntReconAsOutsider -DomainName company.com | Format-table** command.
14. In the above command replace the company.com with the target company's domain (here, we are using eccouncil.org).

15.

```
Select AADInternals 0.9.3
PS C:\Users\Admin\Desktop\AADInternals> Invoke-AADIntReconAsOutsider -DomainName eccouncil.org | Format-table
Tenant brand:      EC-Council
Tenant name:       ECCouncilAbq.onmicrosoft.com
Tenant id:         307907f7-4bb6-4f16-a67d-b9fb26158293
Tenant region:     NA
DesktopSSO enabled: False

Name                DNS    MX    SPF DMARC  DKIM  MTA-STX  Type    STS
----                -
cisomag.com         True  False True  True   True   False  Managed
cyberq.io           True  False True  False  False  False  Managed
cyberresearch.eccouncil.org True  True  True  False  False  False  Managed
cybersecurity-iclass.eccouncil.org True  False False  False  False  False  Managed
docserver.eccouncil.org True  False True  False  False  False  Managed
eccouncil.org        True  True  True  True   True   False  Managed
ECCouncilAbq.mail.onmicrosoft.com True  True  True  False  False  False  Managed
ECCouncilAbq.onmicrosoft.com True  True  True  False  False  False  Managed
egs.eccouncil.org   True  True  False False  False  False  Managed
examspecialists.com True  True  True  True   True   False  Managed
iibcouncil.org      True  False True  True   True   False  Managed
library.eccouncil.org True  False False  False  False  False  Managed
shieldalliance.com  True  True  True  True   True   False  Managed

PS C:\Users\Admin\Desktop\AADInternals> _
```

16. From the above screenshot we can gather information such as **DNS**, **MX**, **SPF**, **DMARC**, **DKIM** etc.
17. Now, we will perform user enumeration in Azure AD, in the PowerShell window type **Invoke-AADIntUserEnumerationAsOutsider -UserName user@company.com** and press **Enter**.
18. In the above command replace the user@company.com with the target users email address.

19.

```
AAInternals 0.9.3
PS C:\Users\Admin\Desktop\AAInternals> Invoke-AADIntUserEnumerationAsOutsider -UserName k@eccouncil.org

UserName      Exists
-----
k@eccouncil.org True

PS C:\Users\Admin\Desktop\AAInternals>
```

20. We can see that the result appears, **True** under **Exists** field which implies that the Azure account with the given username exists and the attacker can perform further attacks.
21. We can also perform the user enumeration by placing the usernames in a text file, by running **Get-Content .\users.txt | Invoke-AADIntUserEnumerationAsOutsider -Method Normal**. Where the users.txt file contains the target email addresses.
22. Now, to get login information for a domain type **Get-AADIntLoginInformation -Domain company.com** and press **Enter**.
23. In the above command replace the company.com with the target company's domain (here, we are using eccouncil.org).

24.

```
Select AADInternals 0.9.3
PS C:\Users\Admin\Desktop\AADInternals> Set-AADIntLoginInformation -Domain eccouncil.org

Has Password           : True
Federation Protocol    : 
Pref Credential        : 1
Consumer Domain       : 
Cloud Instance audience urn : urn:federation:MicrosoftOnline
Authentication Url     : 
Throttle Status       : 0
Account Type          : Managed
Federation Active Authentication Url : 
Exists                : 1
Federation Metadata Url : 
Desktop Sso Enabled   : 
Tenant Banner Logo    : https://aadcdn.msauthimages.net/dbd5a2dd-vr1bobuqdhxox5jqyhrpb5-9r18ndfouniwh6zqtu/
                        logintenantbranding/0/bannerlogo?ts=636842772025334280
Tenant Locale         : 0
Cloud Instance        : microsoftonline.com
State                 : 4
Domain Type           : 3
Domain Name           : eccouncil.org
Tenant Banner Illustration : https://aadcdn.msauthimages.net/dbd5a2dd-vr1bobuqdhxox5jqyhrpb5-9r18ndfouniwh6zqtu/
                        logintenantbranding/0/illustration?ts=636844291552047322
Federation Brand Name  : EC-Council
Federation Global Version : 
User State            : 1

PS C:\Users\Admin\Desktop\AADInternals>
```

25. Now, to get login information for a user type **Get-AADIntLoginInformation -Domain user@company** and press **Enter**.
26. In the above command replace the user@company.com with the target users email address.

27.


```
AAInternals 0.9.3
PS C:\Users\Admin\Desktop\AAInternals> Get-AADIntLoginInformation -Domain g@eccouncil.org

Has Password           : True
Federation Protocol    : 
Pref Credential        : 1
Consumer Domain        : 
Cloud Instance audience urn : urn:federation:MicrosoftOnline
Authentication Url      : 
Throttle Status        : 1
Account Type           : Unknown
Federation Active Authentication Url : 
Exists                 : 4
Federation Metadata Url : 
Desktop Sso Enabled    : 
Tenant Banner Logo     : 
Tenant Locale          : 
Cloud Instance         : microsoftonline.com
State                  : 4
Domain Type            : 1
Domain Name            : 
Tenant Banner Illustration : 
Federation Brand Name  : 
Federation Global Version : 
User State             : 1

PS C:\Users\Admin\Desktop\AAInternals> _
```

28. To get the tenant ID for the given user, domain, or Access Token, type **Get-AADIntTenantID -Domain company.com**.
29. In the above command replace the company.com with the target company's domain (here, we are using eccouncil.org).

30.

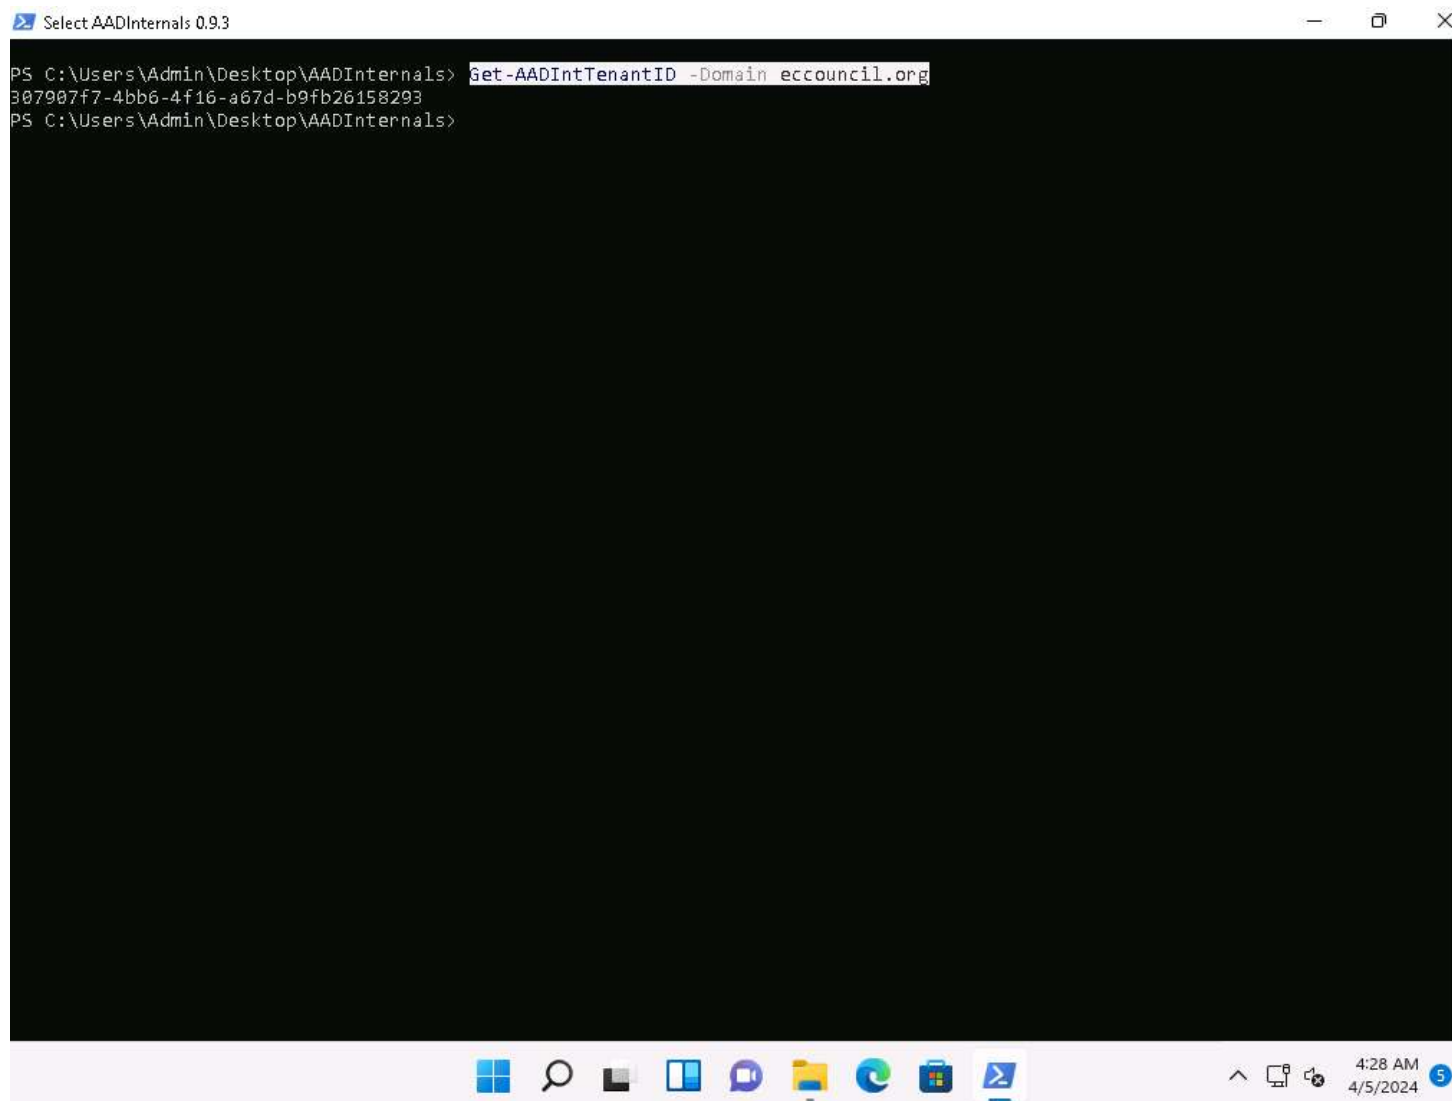

```
PS C:\Users\Admin\Desktop\AADInternals> Get-AADIntTenantID -Domain eccouncil.org
307907f7-4bb6-4f16-a67d-b9fb26158293
PS C:\Users\Admin\Desktop\AADInternals>
```

31. To get registered domains from the tenant of the given domain **Get-AADIntTenantDomains -Domain company.com**
32. In the above command replace the company.com with the target company's domain (here, we are using eccouncil.org).

33.

```
Select AADInternals 0.9.3
PS C:\Users\Admin\Desktop\AADInternals> Get-AADIntTenantDomains -Domain eccouncil.org
cisomag.com
cyberq.io
cyberresearch.eccouncil.org
cybersecurity-iclass.eccouncil.org
docserver.eccouncil.org
eccouncil.org
ECCouncilAbq.mail.onmicrosoft.com
ECCouncilAbq.onmicrosoft.com
egs.eccouncil.org
examspecialists.com
iibcouncil.org
library.eccouncil.org
shieldalliance.com
PS C:\Users\Admin\Desktop\AADInternals> _
```

34. We can see that all the domains associated with the tenant will be listed.
35. Alternatively you can visit <https://aadinternals.com/osint/> site and type the tenant ID, domain name, or email to get the openly available information for the given tenant.
36. Launch Firefox browser and go to <https://aadinternals.com/osint/> and type the **domain name** in the search box and click on **Get information** button.
37. Here we are giving the domain name as eccouncil.org.
38. We will get the Domain information and the list of domains connected with the provided domain name.

39.

OSINT

https://aadinternals.com/osint/

**Note:** CBA status is valid ONLY if email of an **existing user** is given. Using tenant id, domain name, or email of non-existing user may show false negatives.

**Note:** AAD Connect cloud sync status may return false negatives.

Enter **tenant id**, **domain name**, or **email**:

Get information


# EC-Council

Property	Value
Default domain	eccouncil.org
Tenant name	ECCouncilAbq.onmicrosoft.com
Tenant brand	EC-Council
Tenant id	307907f7-4bb6-4f16-a67d-b9fb26158293
Tenant region	NA
Seamless single sign-on (SSSO)	disabled
Uses Azure AD Connect cloud sync	N/A
Certificate-based authentication (CBA)	N/A
Verified domains	13

4:58 AM  
4/5/2024



40.

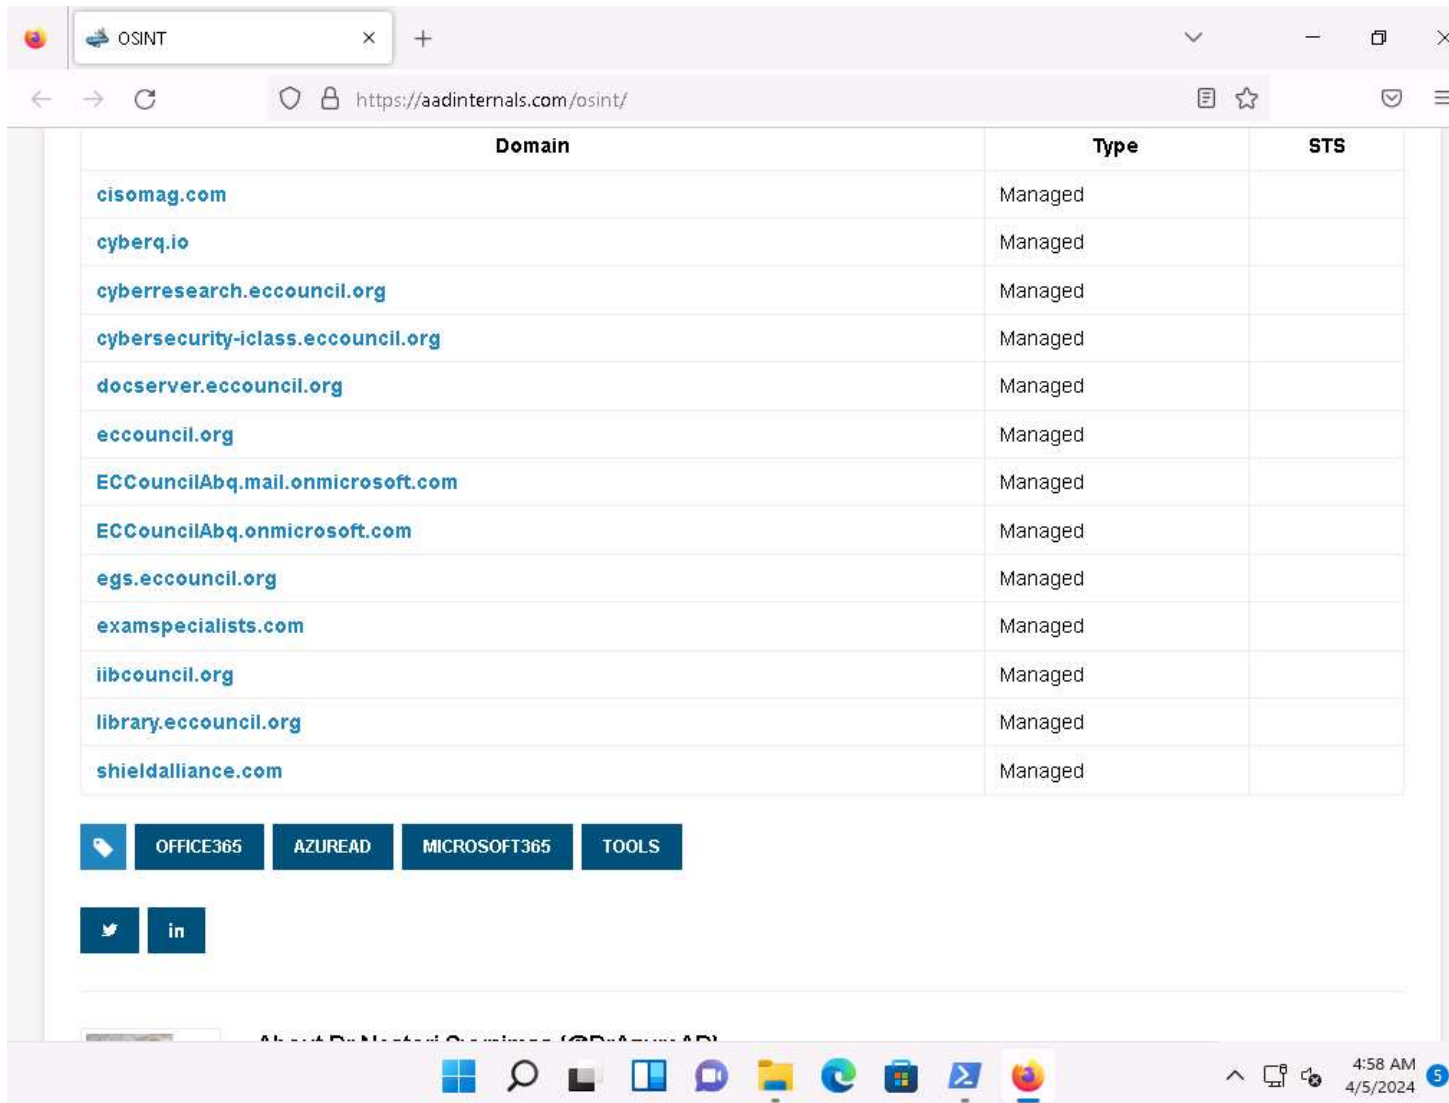

41. In similar way you can enter the tenant ID and email in the search field to view the information regarding the tenant and the user.
42. This concludes the demonstration of Azure reconnaissance with AADInternals.
43. Close all open windows and document all acquired information.

#### Question 19.1.1.1

On windows 11 machine use AADInternals tool located at E:\CEH-Tools\CEHv13 Module 19 Cloud Computing\GitHub Tools\ to perform Reconnaissance on Azure AD.While performing user enumeration in Azure AD what does the Exists field display if the user exists.

Score

## Lab 2: Exploit S3 Buckets

### Lab Scenario

As a professional ethical hacker or pen tester, you must have sound knowledge of enumerating S3 buckets. Using various techniques, you can exploit misconfigurations in bucket implementation and breach the security mechanism to compromise data privacy. Leaving the S3 bucket session running enables you to modify files such as JavaScript or related code and inject malware into the bucket files. Furthermore, finding the bucket's location and name will help you in testing its security and identifying vulnerabilities in the implementation.

### Lab Objectives

- Exploit open S3 buckets using AWS CLI

## Overview of S3 Buckets

S3 buckets are used by customers and end users to store text documents, PDFs, videos, images, etc. To store all these data, the user needs to create a bucket with a unique name.

Listed below are several techniques that can be adopted to identify AWS S3 Buckets:

- **Inspecting HTML:** Analyze the source code of HTML web pages in the background to find URLs to the target S3 buckets
- **Brute-Forcing URL:** Use Burp Suite to perform a brute-force attack on the target bucket's URL to identify its correct URL
- **Finding subdomains:** Use tools such as Findsubdomains and Robtex to identify subdomains related to the target bucket
- **Reverse IP Search:** Use search engines such as Bing to perform reverse IP search to identify the domains of the target S3 buckets
- **Advanced Google hacking:** Use advanced Google search operators such as **"inurl"** to search for URLs related to the target S3 buckets


## Task 1: Exploit Open S3 Buckets using AWS CLI

The AWS command line interface (CLI) is a unified tool for managing AWS services. With just one tool to download and configure, you can control multiple AWS services from the command line and automate them through scripts.

Before starting this task, you must create your AWS account (<https://aws.amazon.com>).


1. In the **Parrot Security** machine, click the **MATE Terminal** icon in the menu to launch the terminal.
2. A **Parrot Terminal** window appears. In the terminal window, type **sudo su** and press **Enter** to run the programs as a root user use **toor** as password.
3. The password that you type will not be visible.
4. Now, type **cd** and press **Enter** to jump to the root directory.

5.

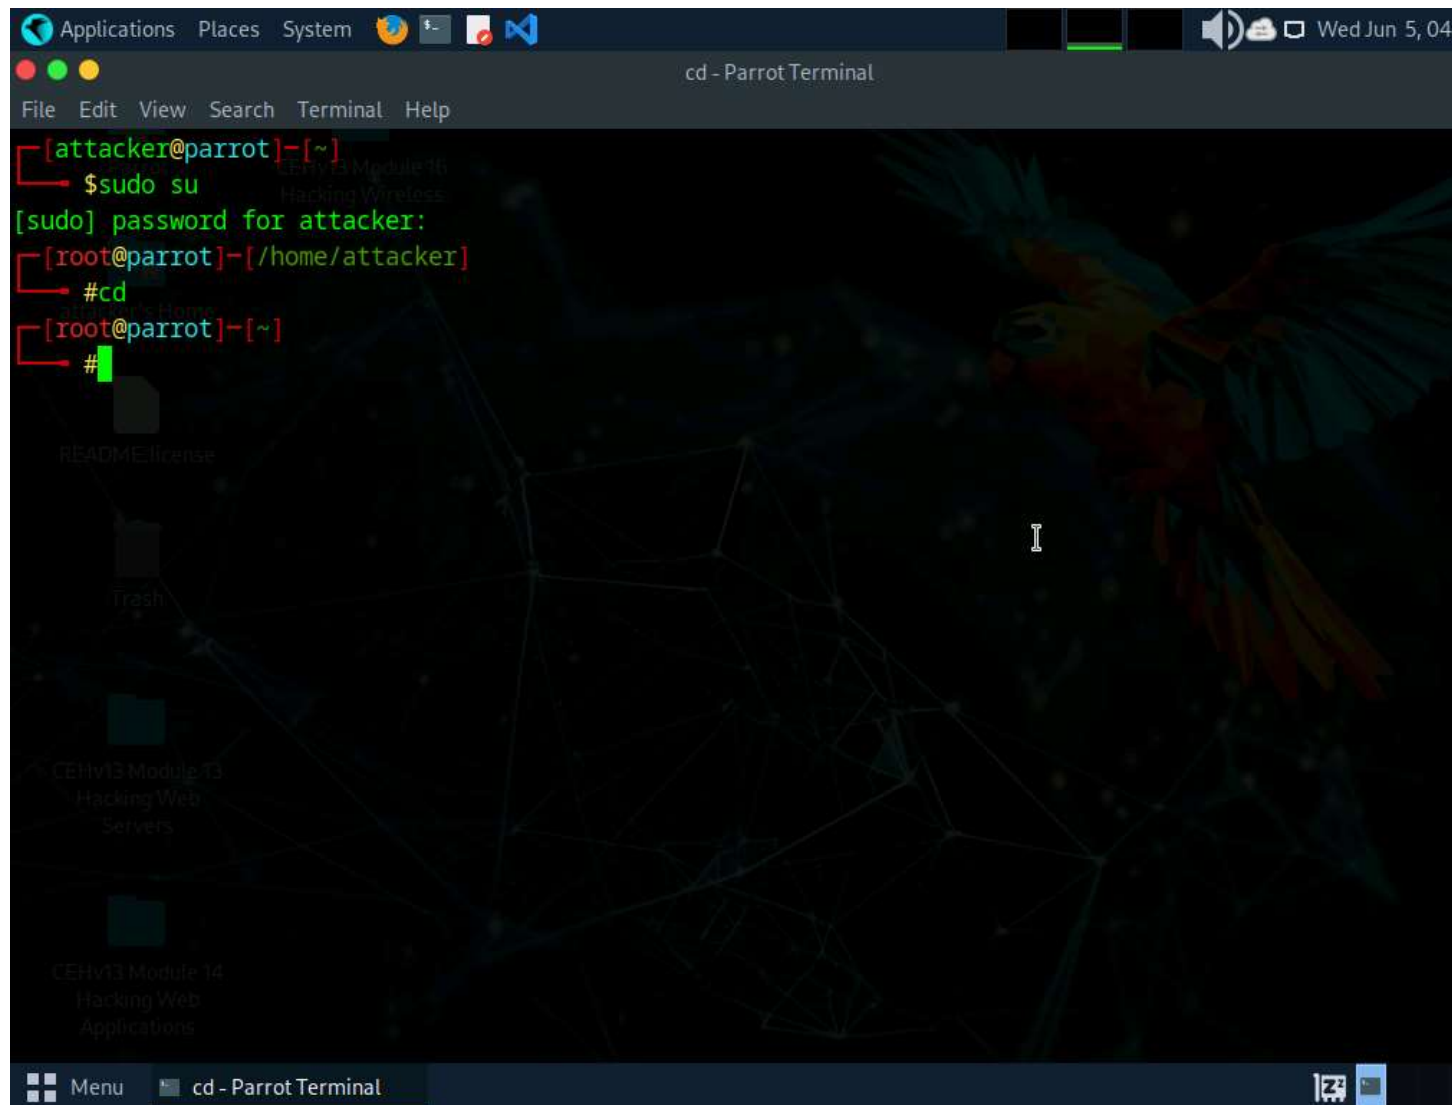

6. In the terminal window, type **pip3 install awscli** and press **Enter** to install AWS CLI.

7.

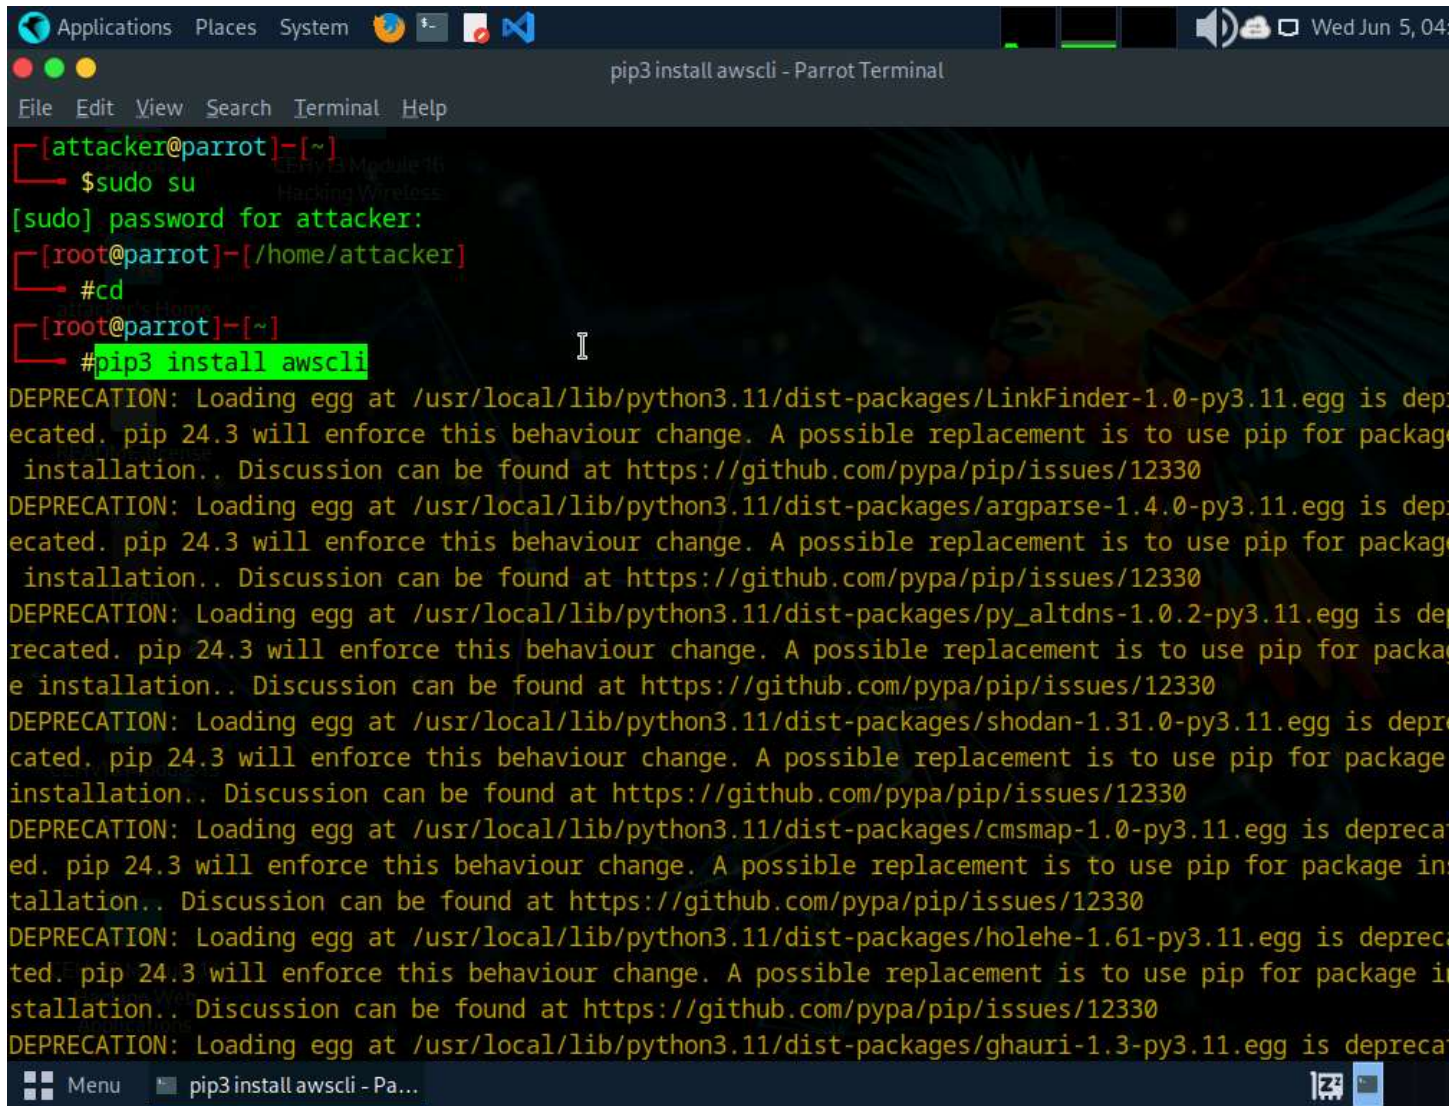


The screenshot shows a terminal window titled "pip3 install awscli - Parrot Terminal". The user starts as "attacker@parrot" in the home directory. They run `$sudo su` to become root. The prompt changes to `[root@parrot]~`. They then run `#cd` to stay in the home directory. Finally, they run `#pip3 install awscli`, which is highlighted in green. The terminal output shows several deprecation warnings from pip 24.3 regarding various packages (LinkFinder, argparse, py\_altdns, shodan, cmsmap, holehe, ghauri) and their replacement by pip for package installation. The background of the terminal has a dark theme with a parrot illustration.

```
[attacker@parrot]~  
$sudo su  
[sudo] password for attacker:  
[root@parrot]~/home/attacker  
#cd  
[root@parrot]~  
#pip3 install awscli  
DEPRECATION: Loading egg at /usr/local/lib/python3.11/dist-packages/LinkFinder-1.0-py3.11.egg is deprecated. pip 24.3 will enforce this behaviour change. A possible replacement is to use pip for package installation.. Discussion can be found at https://github.com/pypa/pip/issues/12330  
DEPRECATION: Loading egg at /usr/local/lib/python3.11/dist-packages/argparse-1.4.0-py3.11.egg is deprecated. pip 24.3 will enforce this behaviour change. A possible replacement is to use pip for package installation.. Discussion can be found at https://github.com/pypa/pip/issues/12330  
DEPRECATION: Loading egg at /usr/local/lib/python3.11/dist-packages/py_altdns-1.0.2-py3.11.egg is deprecated. pip 24.3 will enforce this behaviour change. A possible replacement is to use pip for package installation.. Discussion can be found at https://github.com/pypa/pip/issues/12330  
DEPRECATION: Loading egg at /usr/local/lib/python3.11/dist-packages/shodan-1.31.0-py3.11.egg is deprecated. pip 24.3 will enforce this behaviour change. A possible replacement is to use pip for package installation.. Discussion can be found at https://github.com/pypa/pip/issues/12330  
DEPRECATION: Loading egg at /usr/local/lib/python3.11/dist-packages/cmsmap-1.0-py3.11.egg is deprecated. pip 24.3 will enforce this behaviour change. A possible replacement is to use pip for package installation.. Discussion can be found at https://github.com/pypa/pip/issues/12330  
DEPRECATION: Loading egg at /usr/local/lib/python3.11/dist-packages/holehe-1.61-py3.11.egg is deprecated. pip 24.3 will enforce this behaviour change. A possible replacement is to use pip for package installation.. Discussion can be found at https://github.com/pypa/pip/issues/12330  
DEPRECATION: Loading egg at /usr/local/lib/python3.11/dist-packages/ghauri-1.3-py3.11.egg is deprecated.
```

8. Now, we need to configure AWS CLI. To configure AWS CLI in the terminal window, type **aws configure** and press **Enter**.

9.

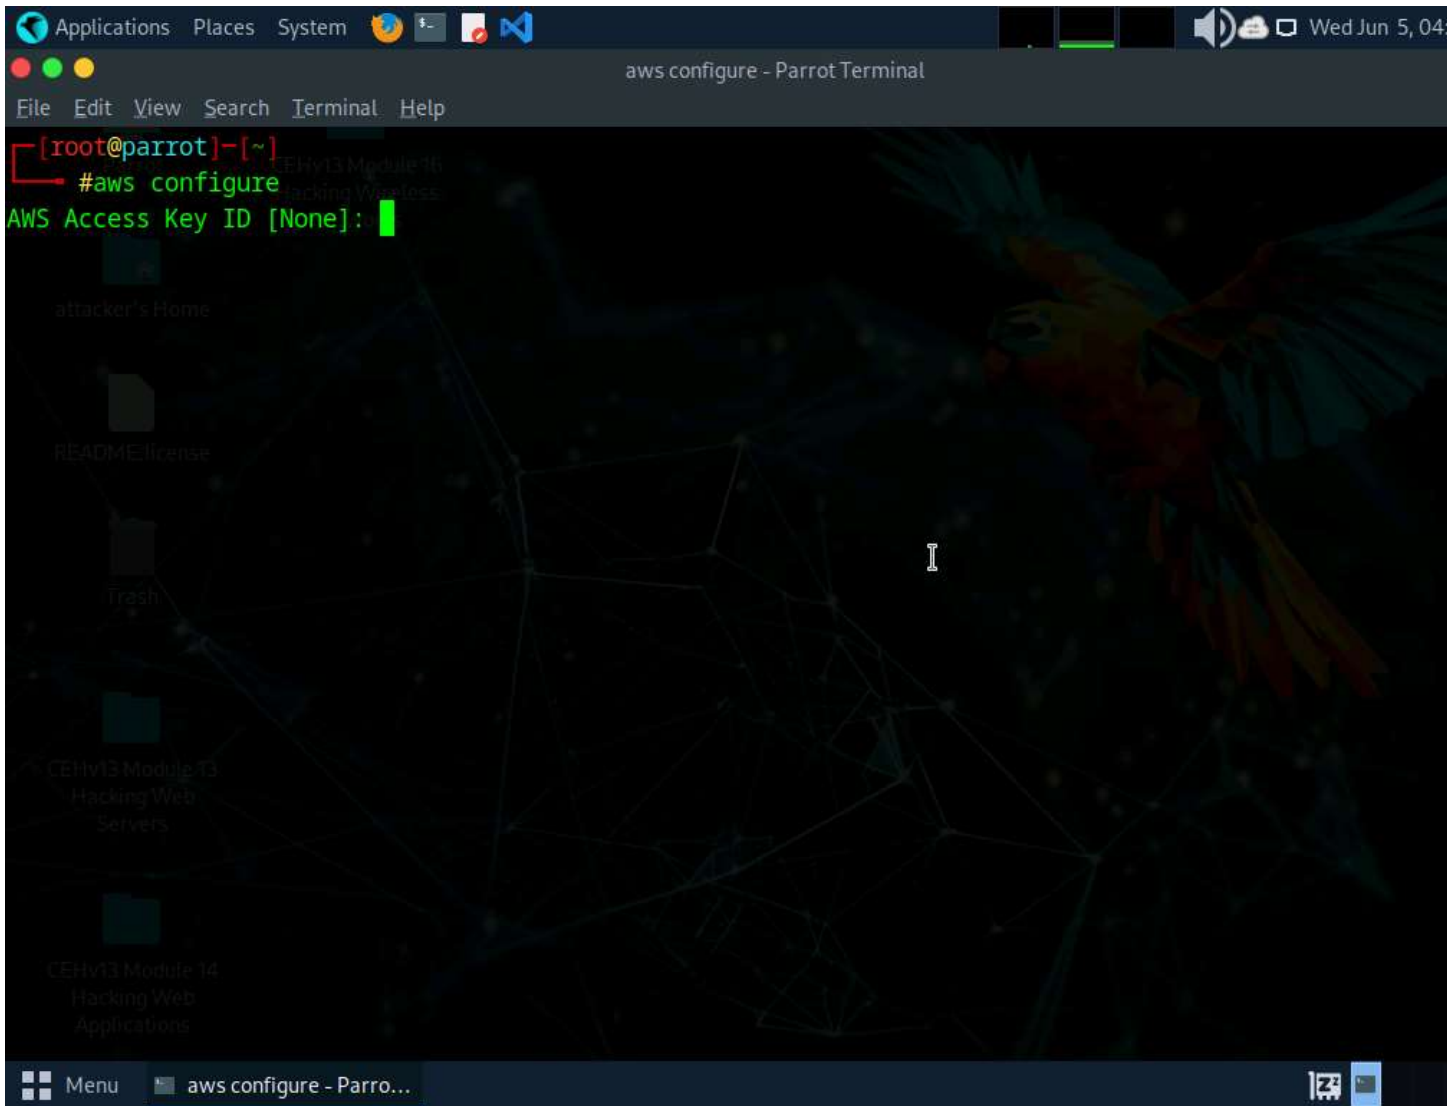

10. It will ask for the following details:
  - o AWS Access Key ID
  - o AWS Secret Access Key
  - o Default region name
  - o Default output format
11. To provide these details, you need to login to your AWS account.
12. Click **Firefox** icon from the top-section of the **Desktop**.
13. Login to your AWS account that you created at the beginning of this task. Click the **Firefox** browser icon in the menu, type **<https://console.aws.amazon.com>** in the address bar, and press **Enter**.
14. If you do not have an AWS account, create one with the Basic Free Plan, and then proceed with the tasks.
15. The **Amazon Web Services Sign-In** page appears; type your email account in the **Root user email address** field and click **Next**.




16.

The screenshot shows a web browser window with the AWS Sign in page. The browser's address bar displays the URL `https://signin.aws.amazon.com/signin?redirect_uri=https%3A%2F%2Fconsole.aws.amazon.com`. The page features the AWS logo and a "Sign in" heading. There are two radio button options: "Root user" (selected) and "IAM user". Below these is a text input field for the "Root user email address" containing the text "example@example.com". A blue "Next" button is positioned below the input field. At the bottom of the sign-in section, there is a link for "New to AWS?". To the right of the sign-in section is a large banner for "AWS re:Invent". The banner includes the text "Registration is open for our annual learning event devoted to the latest AWS technology advancements", a "Register now" button, and the event details "DEC. 2-6, 2024 | LAS VEGAS, NV". The banner also features a background image of the Eiffel Tower.

17. Type your AWS account password in the **Password** field and click **Sign in**.


18. If a **Security check** window appears, enter the captcha and click on **Submit**.

19.

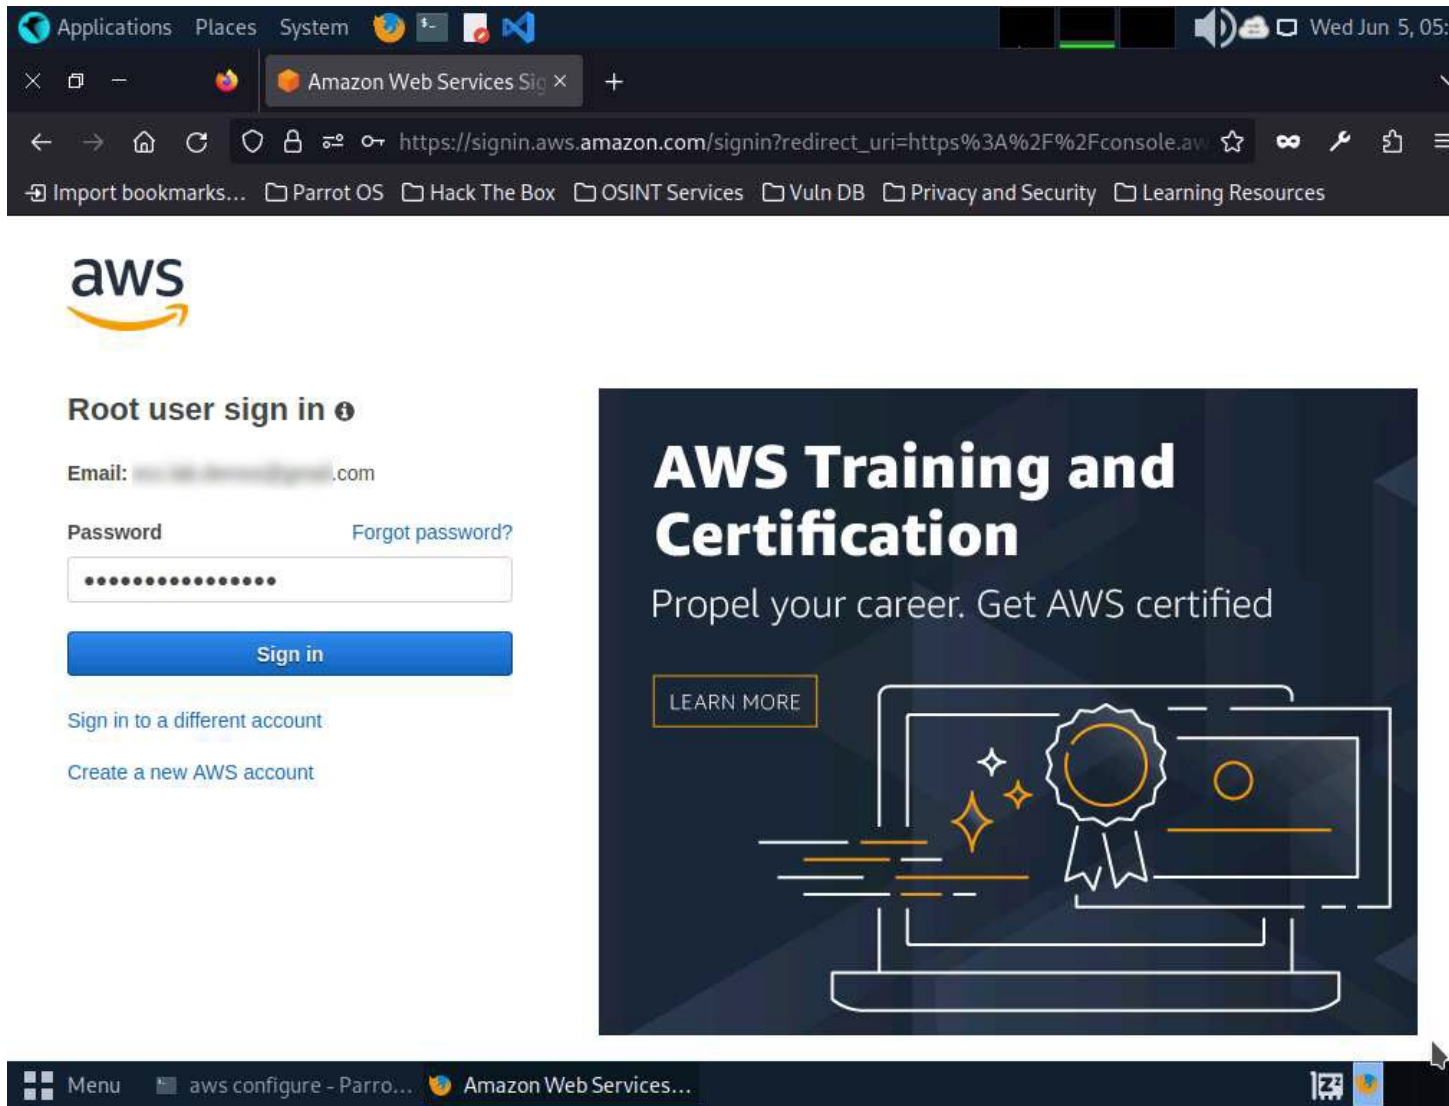

20. Click the AWS account drop-down menu and click **Security credentials**, as shown in the screenshot.

21.

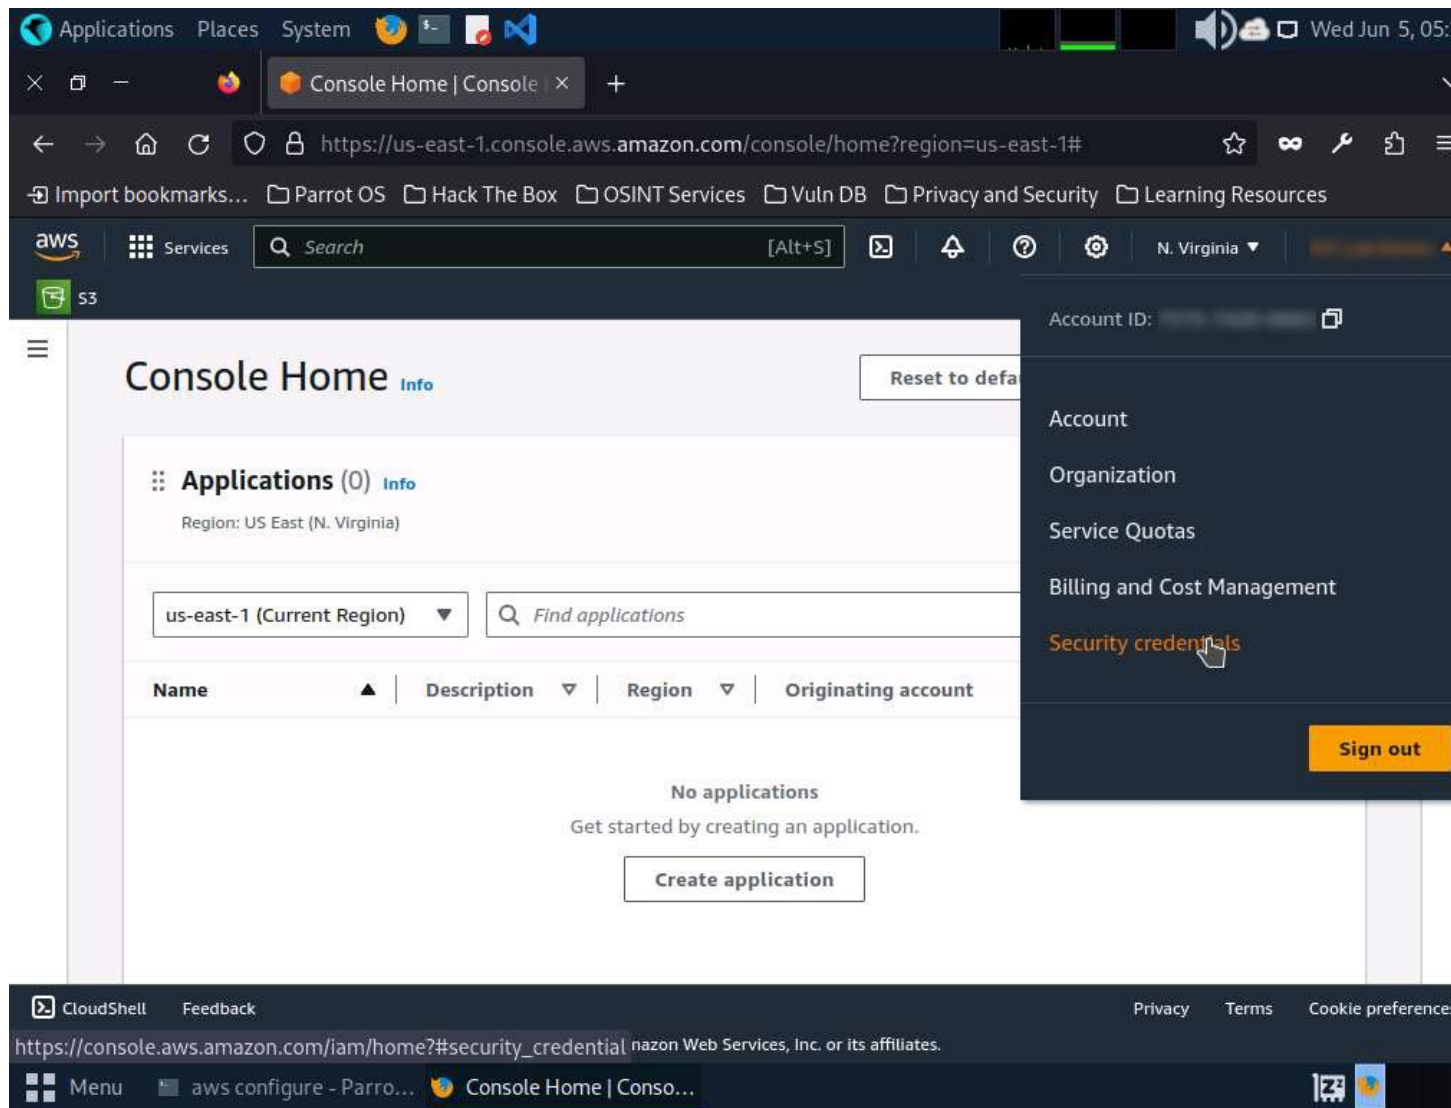

22. Scroll down to **Access Keys** section.

23. Click the **Create Access Key** button. In **Continue to create access key?**; check the check box and click **Create access key**.



24.

The screenshot shows the AWS IAM console interface. The top navigation bar includes the AWS logo, a 'Services' menu, a search bar, and a 'Global' region selector. The left sidebar displays the 'Identity and Access Management (IAM)' title and a search bar, with a list of navigation links: Dashboard, Access management (expanded), User groups, Users, Roles, Policies, Identity providers, and Account settings. The main content area is divided into two sections. The first section, 'MFA Factor authentication (1)', contains buttons for 'Remove', 'Resync', and 'Assign MFA device', followed by a text block explaining MFA and a 'Learn more' link. Below this is a table with headers 'Type', 'Identifier', 'Certifications', and 'Created on', which is currently empty. The second section, 'Access keys (1)', features an 'Actions' dropdown and a 'Create access key' button, followed by a text block explaining access keys and another 'Learn more' link. Below this is a table with headers 'Access key ID', 'Created on', 'Access key last used', and 'Region', which is also empty. The bottom of the screen shows a footer with 'CloudShell', 'Feedback', 'Privacy', 'Terms', and 'Cookie preferences' links, along with a copyright notice for 2024 Amazon Web Services.

Applications Places System Wed Jun 5, 05:...

× - IAM | Global × +

← → 🏠 ↻ 🔒 [https://us-east-1.console.aws.amazon.com/iam/home?region=us-east-1#/security\\_credentials](https://us-east-1.console.aws.amazon.com/iam/home?region=us-east-1#/security_credentials) ☆ ∞ 🔧 📌 ☰

Import bookmarks... Parrot OS Hack The Box OSINT Services Vuln DB Privacy and Security Learning Resources

aws Services 🔍 Search [Alt+S] Global ▾

S3

## Identity and Access Management (IAM)

🔍 Search IAM

Dashboard

▼ Access management

- User groups
- Users
- Roles
- Policies
- Identity providers
- Account settings

Access reports

### MFA Factor authentication (1)

[Remove](#) [Resync](#) [Assign MFA device](#)

Use MFA to increase the security of your AWS environment. Signing in with MFA requires an authentication code from an MFA device. Each user can have a maximum of 8 MFA devices assigned. [Learn more](#)

Type	Identifier	Certifications	Created on
No MFA devices. Assign an MFA device to improve the security of your AWS environment			

[Assign MFA device](#)

### Access keys (1)

[Actions](#) [Create access key](#)

Use access keys to send programmatic calls to AWS from the AWS CLI, AWS Tools for PowerShell, AWS SDKs, or direct AWS API calls. You can have a maximum of two access keys (active or inactive) at a time. [Learn more](#)


Access key ID	Created on	Access key last used	Region
---------------	------------	----------------------	--------

CloudShell Feedback

© 2024, Amazon Web Services, Inc. or its affiliates.


Menu aws configure - Parro... IAM | Global — Mozill...

25.

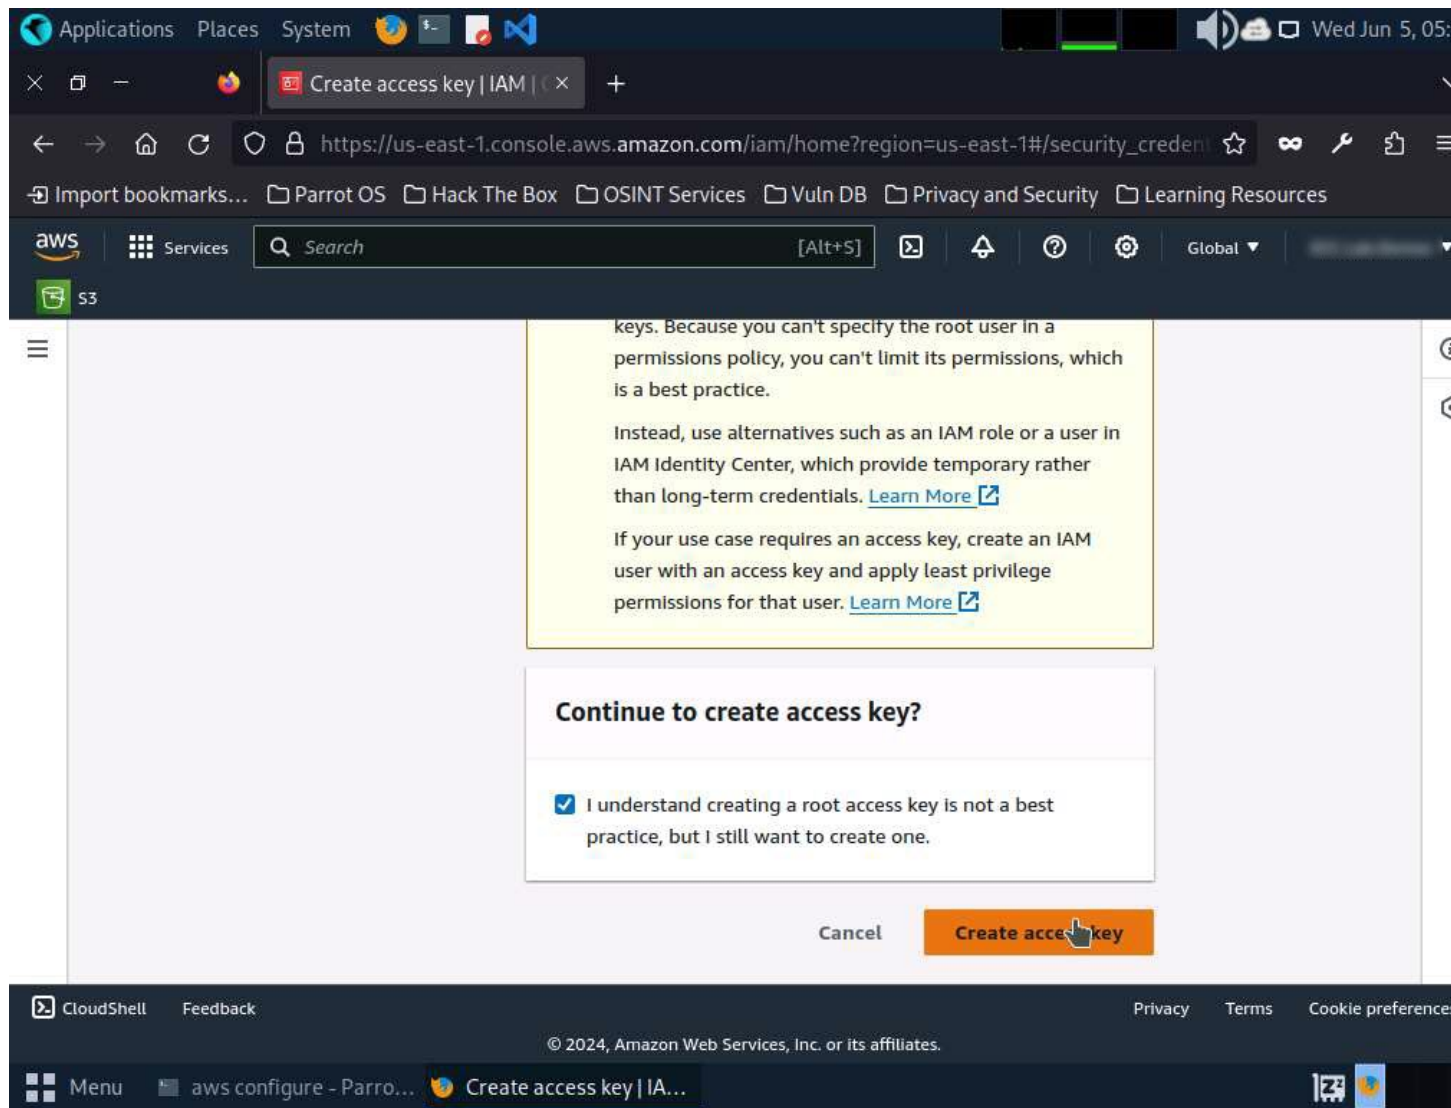


26. Copy the **Access Key** and switch to the **Terminal** window.

27.

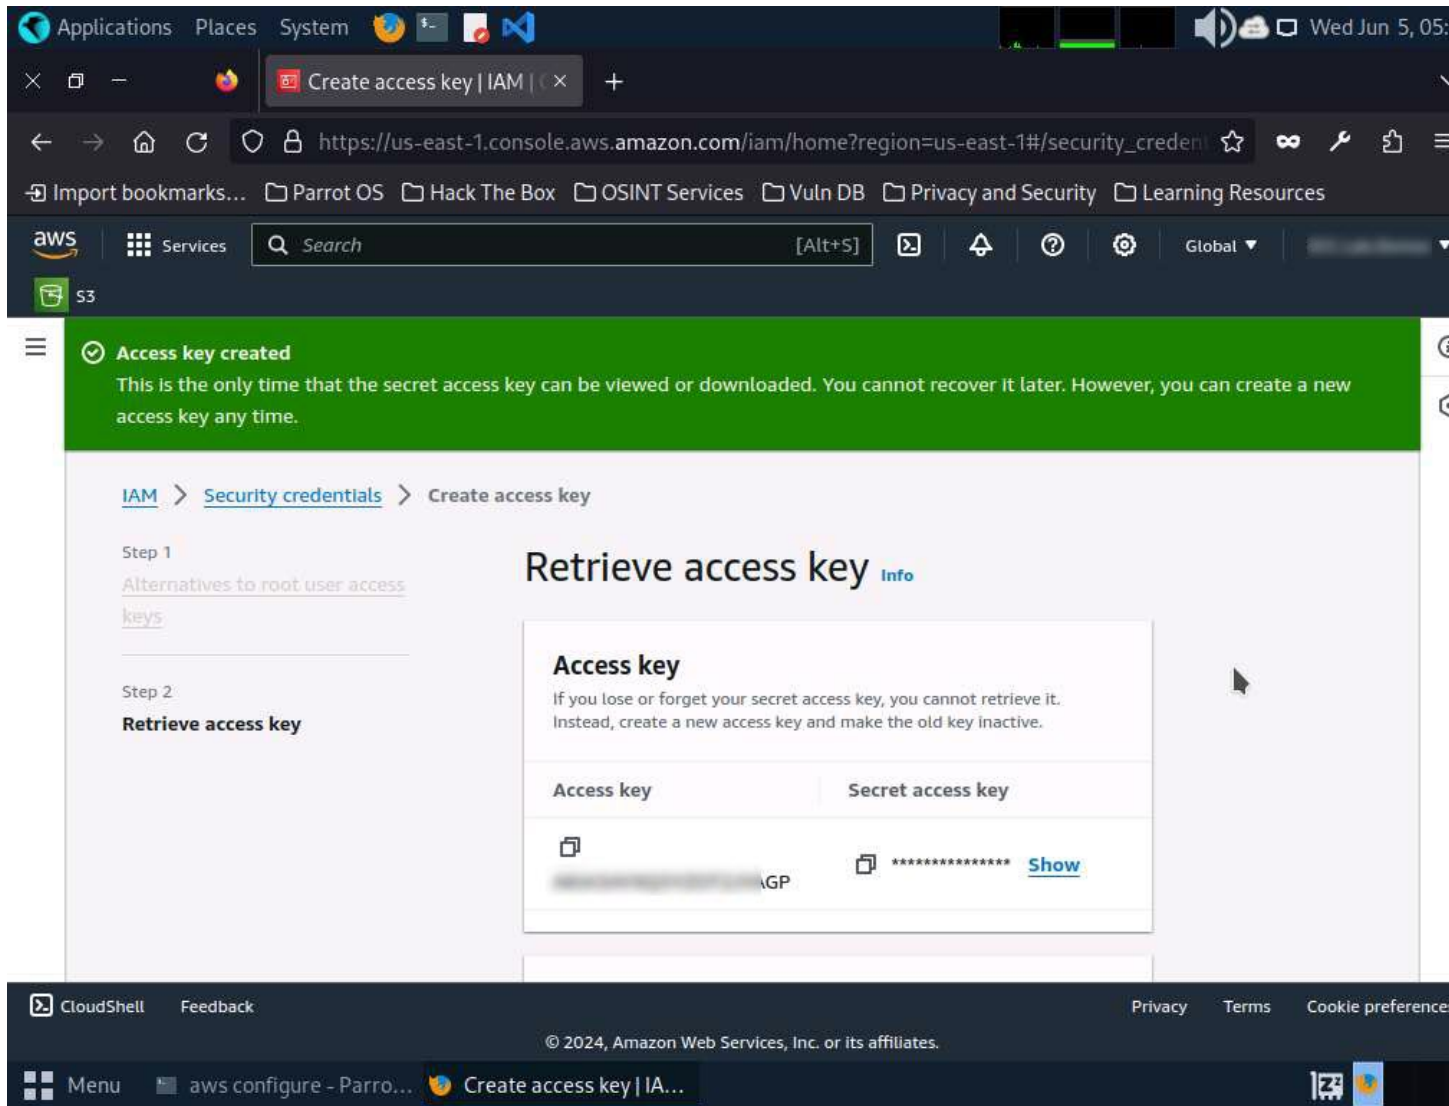

28. In the terminal window, right-click your mouse; select **Paste** from the context menu to paste the copied **AWS Access Key ID** and press **Enter**. It will prompt you to the **AWS Secret Access Key**. Switch to your AWS Account in the browser.
29. Copy the **Secret Access Key** and minimize the browser window. Switch to the **Terminal** window.
30. In the terminal window, right-click your mouse, select **Paste** from the context menu to paste the copied **Secret Access Key** and press **Enter**. It will prompt you for the default region name.
31. In the **Default region name** field, type **eu-west-1** and press **Enter**.
32. The **Default output format** prompt appears; leave it as default and press **Enter**.


33.

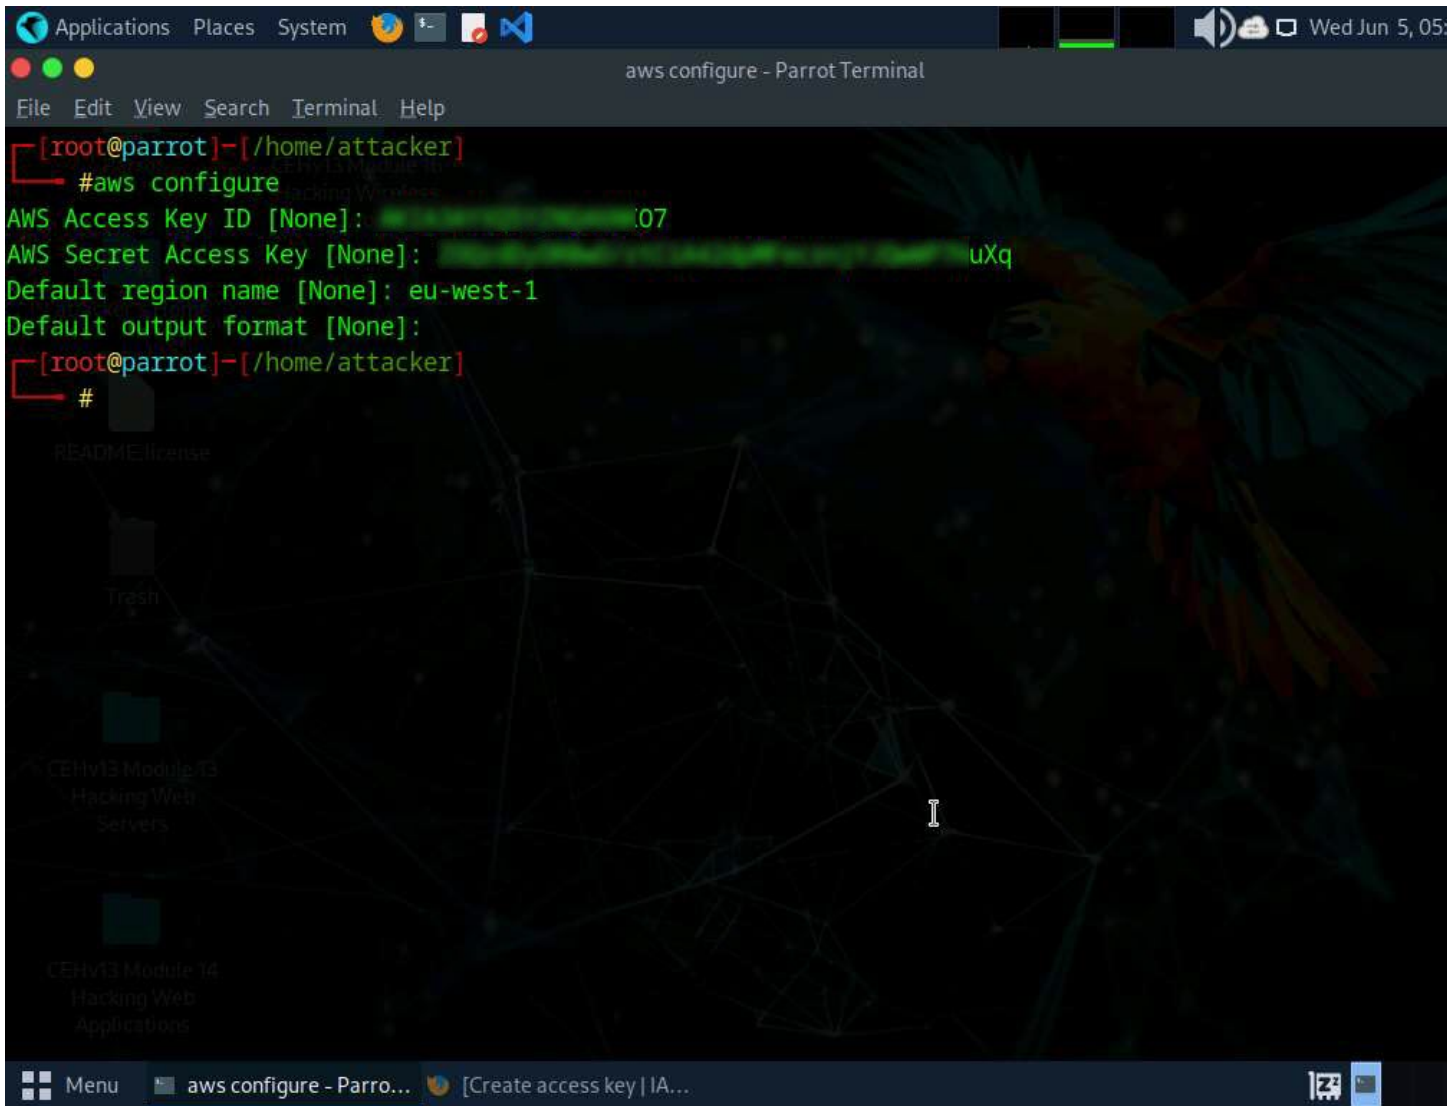

```
[root@parrot]-[/home/attacker]
#aws configure
AWS Access Key ID [None]: [redacted]07
AWS Secret Access Key [None]: [redacted]uXq
Default region name [None]: eu-west-1
Default output format [None]:
[root@parrot]-[/home/attacker]
#
```

34. For demonstration purposes, we have created an open S3 bucket with the name **certifiedhacker02** in the AWS service. We are going to use that bucket in this task.
35. The public S3 buckets can be found during the enumeration phase.
36. Let us list the directories in the certifiedhacker02 bucket. In the terminal window, type **aws s3 ls s3://[Bucket Name]** (here, Bucket Name is **certifiedhacker02**) and press **Enter**.
37. The bucket name may be different in your lab environment depending on the bucket you are targeting.
38. This will show you the list of directories in the **certifiedhacker02** S3 bucket, as shown in the screenshot.

39.

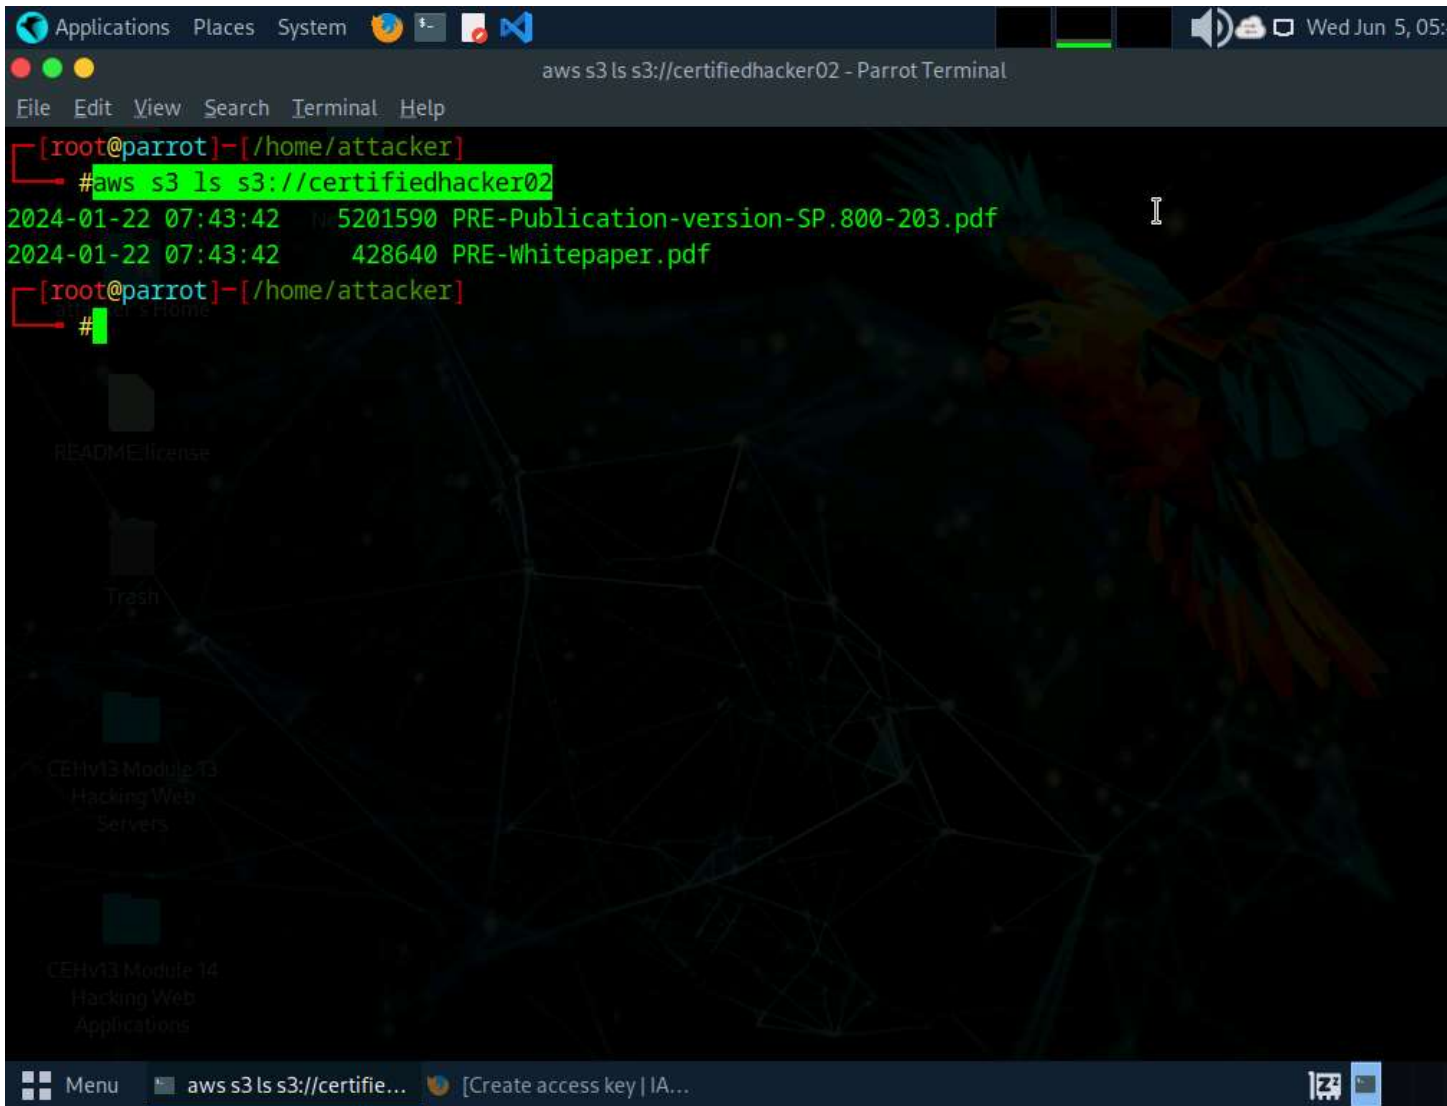

The screenshot shows a Parrot Terminal window with a dark background and a parrot illustration on the right. The terminal title bar reads "aws s3 ls s3://certifiedhacker02 - Parrot Terminal". The menu bar includes "File", "Edit", "View", "Search", "Terminal", and "Help". The terminal content shows a root user at the parrot machine in the /home/attacker directory. The command `#aws s3 ls s3://certifiedhacker02` has been executed, resulting in two lines of output: `2024-01-22 07:43:42 5201590 PRE-Publication-version-SP.800-203.pdf` and `2024-01-22 07:43:42 428640 PRE-Whitepaper.pdf`. The prompt `#` is visible on the next line. On the left side of the terminal, there is a sidebar with icons for "README.license", "Trash", "CEHV13 Module 13 Hacking Web Servers", and "CEHV13 Module 14 Hacking Web Applications". The bottom status bar shows a "Menu" button, the command `aws s3 ls s3://certifie...`, a Firefox icon, and a link "[Create access key | IA...".

```
[root@parrot]~[/home/attacker]
#aws s3 ls s3://certifiedhacker02
2024-01-22 07:43:42    5201590 PRE-Publication-version-SP.800-203.pdf
2024-01-22 07:43:42    428640 PRE-Whitepaper.pdf
[root@parrot]~[/home/attacker]
#
```

40. Now, maximize the browser window, type **certifiedhacker02.s3.amazonaws.com** in the address bar, and press **Enter**.
41. This will show you the complete list of directories and files available in this bucket.



42.

Applications Places System Wed Jun 5, 05:

certifiedhacker02.s3.amazonaws.com

http://certifiedhacker02.s3.amazonaws.com/

Import bookmarks... Parrot OS Hack The Box OSINT Services Vuln DB Privacy and Security Learning Resources

This XML file does not appear to have any style information associated with it. The document tree is shown below.

```
-<ListBucketResult>
  <Name>certifiedhacker02</Name>
  <Prefix/>
  <Marker/>
  <MaxKeys>1000</MaxKeys>
  <IsTruncated>>false</IsTruncated>
  -<Contents>
    <Key>PRE-Publication-version-SP800-203.pdf</Key>
    <LastModified>2024-01-22T12:43:42.000Z</LastModified>
    <ETag>"79070021091ecf16d13fbe7be58d474b"</ETag>
    <Size>5201590</Size>
    <StorageClass>STANDARD</StorageClass>
  </Contents>
  -<Contents>
    <Key>PRE-Whitepaper.pdf</Key>
    <LastModified>2024-01-22T12:43:42.000Z</LastModified>
    <ETag>"d354f7b7bccca0d942f3ef75b7ef9fa1"</ETag>
    <Size>428640</Size>
    <StorageClass>STANDARD</StorageClass>
  </Contents>
</ListBucketResult>
```


Menu aws s3 ls s3://certifie... Mozilla Firefox

43. Minimize the browser window and switch to **Terminal**.

44. Let us move some files to the certifiedhacker02 bucket. To do this, in the terminal window, type **echo "You have been hacked" >> Hack.txt** and press **Enter**.

45. By issuing this command, you are creating a file named **Hack.txt**.

46.

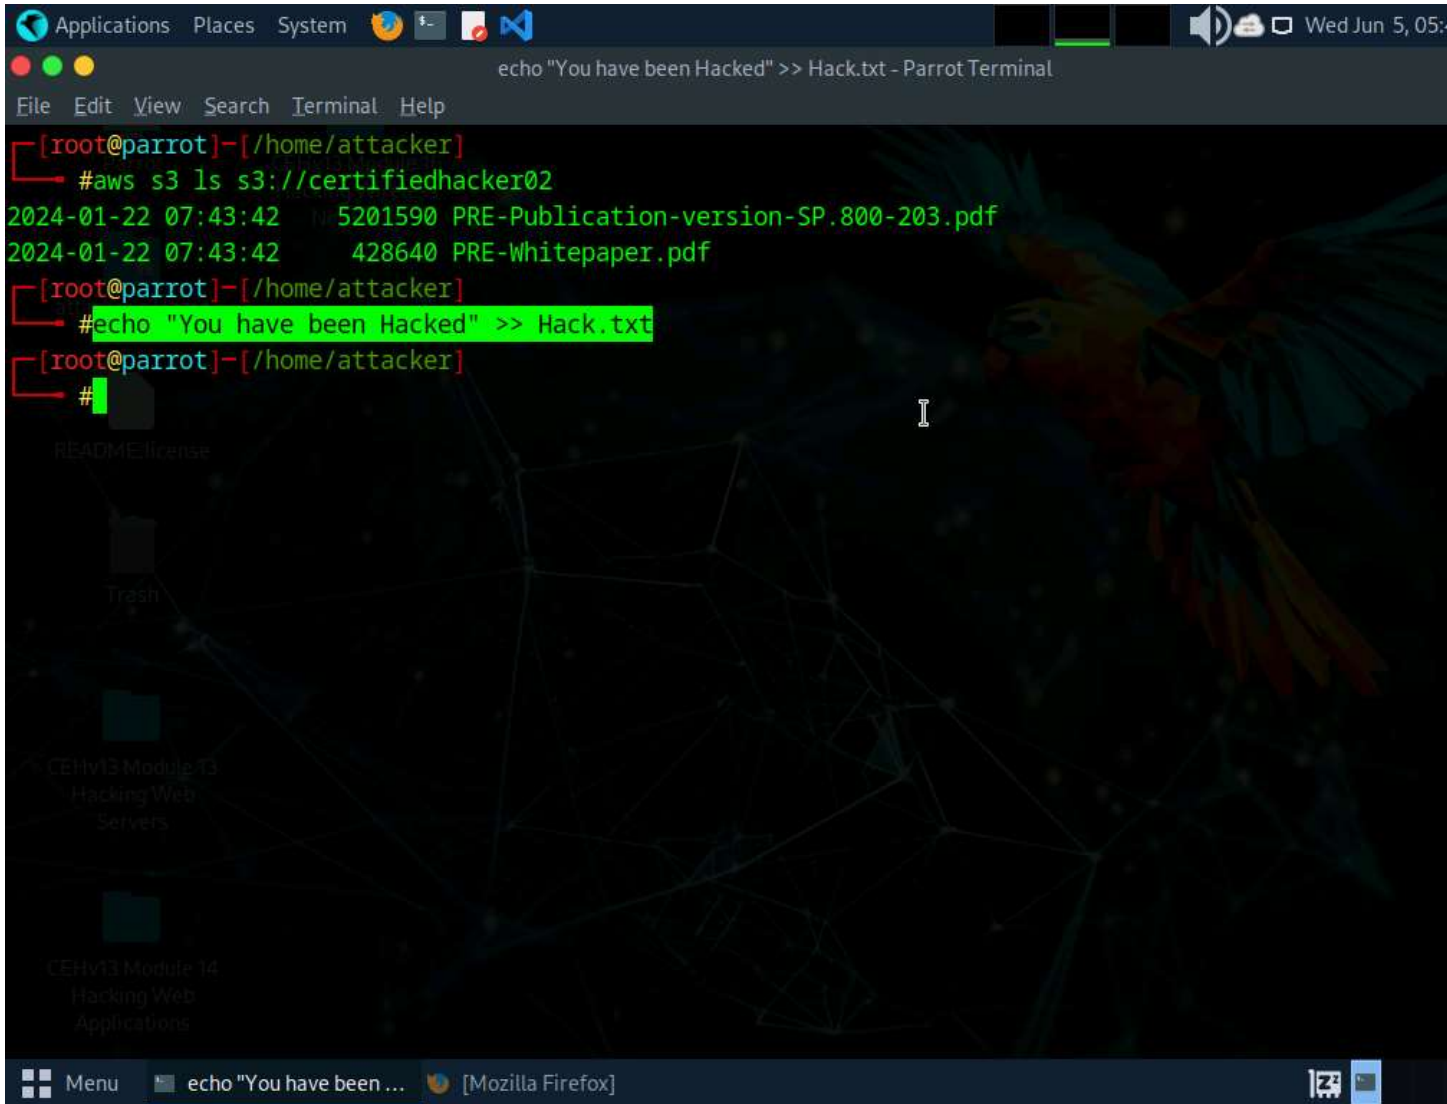


The screenshot shows a Parrot OS desktop environment with a terminal window titled "Hack.txt - Parrot Terminal". The terminal output is as follows:

```
echo "You have been Hacked" >> Hack.txt - Parrot Terminal
File Edit View Search Terminal Help
[root@parrot]~/home/attacker
#aws s3 ls s3://certifiedhacker02
2024-01-22 07:43:42    5201590 PRE-Publication-version-SP.800-203.pdf
2024-01-22 07:43:42    428640 PRE-Whitepaper.pdf
[root@parrot]~/home/attacker
#echo "You have been Hacked" >> Hack.txt
[root@parrot]~/home/attacker
#
```

The terminal window is set against a dark background with a parrot illustration on the right and a network diagram on the left. The desktop taskbar at the bottom includes a menu, a terminal window titled "echo 'You have been ...", and a Mozilla Firefox browser window.

47. Let us try to move the **Hack.txt** file to the **certifiedhacker02** bucket. In the terminal window, type **aws s3 mv Hack.txt s3://certifiedhacker02** and press **Enter**.
48. You have successfully moved the **Hack.txt** file to the **certifiedhacker02** bucket.

49.

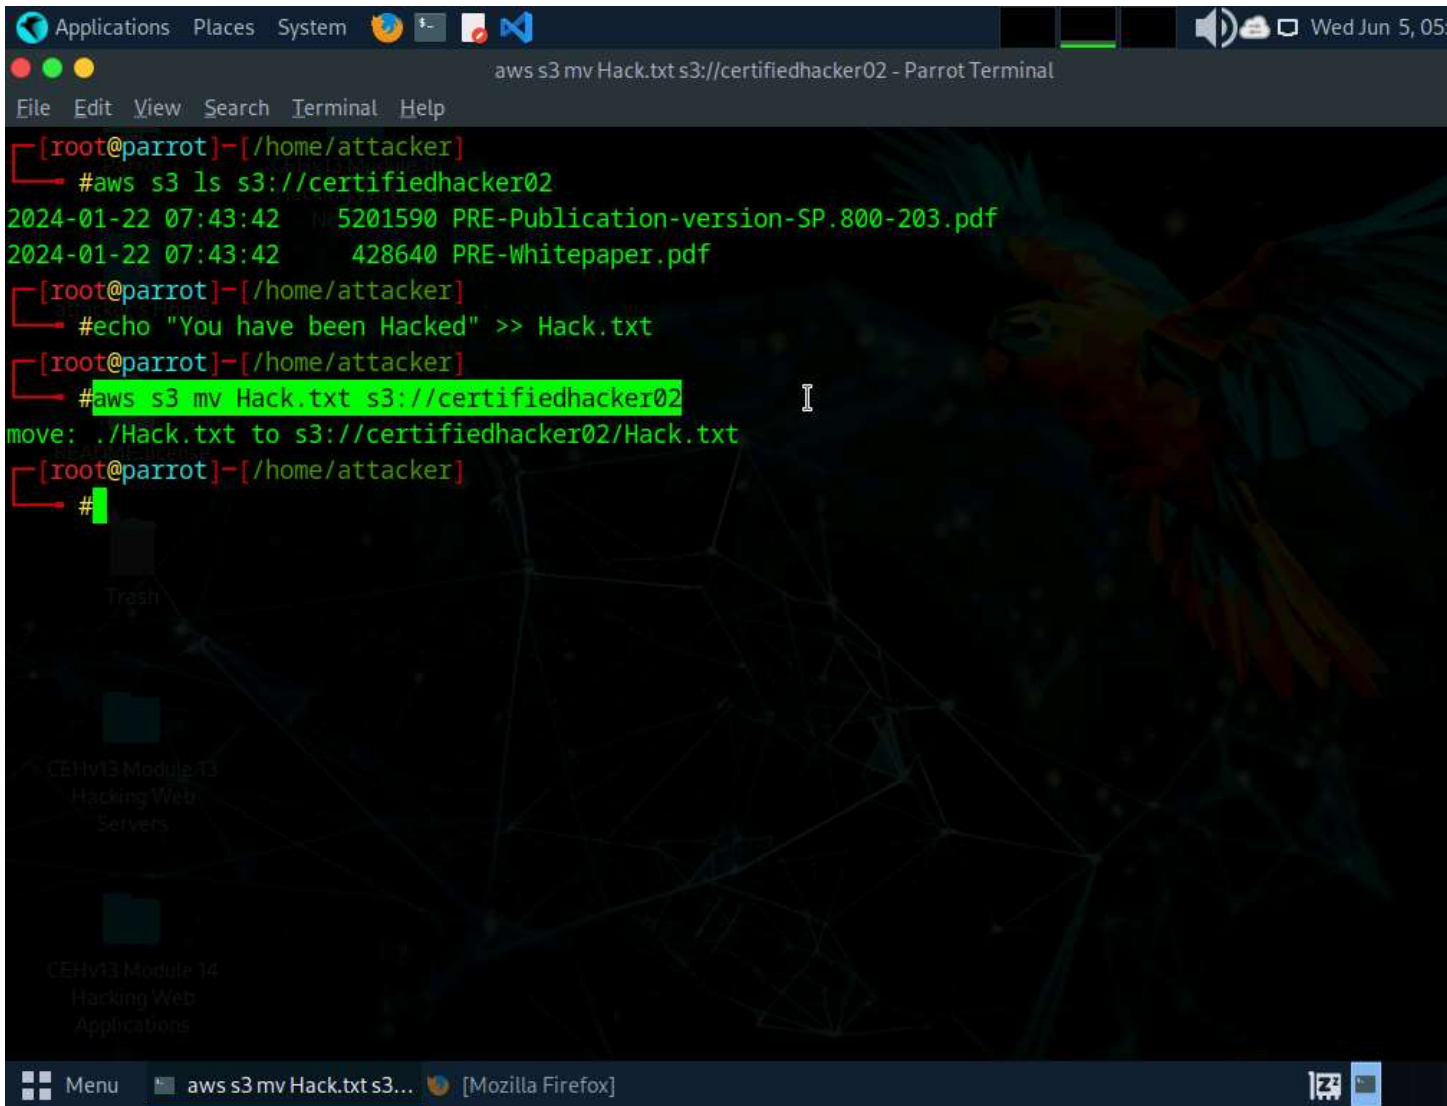

```
Applications  Places  System  [Icons]  [Volume]  [Network]  [Battery]  Wed Jun 5, 05:12
aws s3 mv Hack.txt s3://certifiedhacker02 - Parrot Terminal
File Edit View Search Terminal Help
[root@parrot]~/home/attacker
#aws s3 ls s3://certifiedhacker02
2024-01-22 07:43:42    5201590 PRE-Publication-version-SP.800-203.pdf
2024-01-22 07:43:42    428640 PRE-Whitepaper.pdf
[root@parrot]~/home/attacker
#echo "You have been Hacked" >> Hack.txt
[root@parrot]~/home/attacker
#aws s3 mv Hack.txt s3://certifiedhacker02
move: ./Hack.txt to s3://certifiedhacker02/Hack.txt
[root@parrot]~/home/attacker
#
```

The screenshot shows a Parrot OS desktop environment. The terminal window is titled "aws s3 mv Hack.txt s3://certifiedhacker02 - Parrot Terminal". The desktop background features a parrot and a network diagram. On the left sidebar, there are icons for "Trash", "CEHV13 Module 13 Hacking Web Servers", and "CEHV13 Module 14 Hacking Web Applications". The terminal output shows the execution of AWS S3 commands to list and move files. The file "Hack.txt" is successfully moved to the "s3://certifiedhacker02/Hack.txt" location. The terminal prompt is currently at the root of the parrot machine in the /home/attacker directory.

50. To verify whether the file is moved, switch to the browser window and maximize it. Reload the page.

51. You can observe that the **Hack.txt** file is moved to the certifiedhacker02 bucket, as shown in the screenshot.



52.

Applications Places System Wed Jun 5, 05:00

certifiedhacker02.s3.amazonaws.com

http://certifiedhacker02.s3.amazonaws.com/

Import bookmarks... Parrot OS Hack The Box OSINT Services Vuln DB Privacy and Security Learning Resources

This XML file does not appear to have any style information associated with it. The document tree is shown below.

```
--<ListBucketResult>
  <Name>certifiedhacker02</Name>
  <Prefix/>
  <Marker/>
  <MaxKeys>1000</MaxKeys>
  <IsTruncated>>false</IsTruncated>
  --<Contents>
    <Key>Hack.txt</Key>
    <LastModified>2024-06-05T09:51:00.000Z</LastModified>
    <ETag>"5e8ede80faa0c0479e192ce445cd4e0c"</ETag>
    <Size>21</Size>
    <StorageClass>STANDARD</StorageClass>
  </Contents>
  --<Contents>
    <Key>PRE-Publication-version-SP.800-203.pdf</Key>
    <LastModified>2024-01-22T12:43:42.000Z</LastModified>
    <ETag>"79070021091ecf16d13fbe7be58d474b"</ETag>
    <Size>5201590</Size>
    <StorageClass>STANDARD</StorageClass>
  </Contents>
  --<Contents>
    <Key>PRE-Whitepaper.pdf</Key>
    <LastModified>2024-01-22T12:43:42.000Z</LastModified>
    <ETag>"d354f7b7bccca0d942f3ef75b7ef9fa1"</ETag>
    <Size>428640</Size>
```


Menu aws s3 mv Hack.txt s3... Mozilla Firefox

53. Minimize the browser window and switch to the **Terminal** window.

54. Let us delete the **Hack.txt** file from the **certifiedhacker02** bucket. In the terminal window, type **aws s3 rm s3://certifiedhacker02/Hack.txt** and press **Enter**.

55. By issuing this command, you have successfully deleted the **Hack.txt** file from the **certifiedhacker02** bucket.


56.

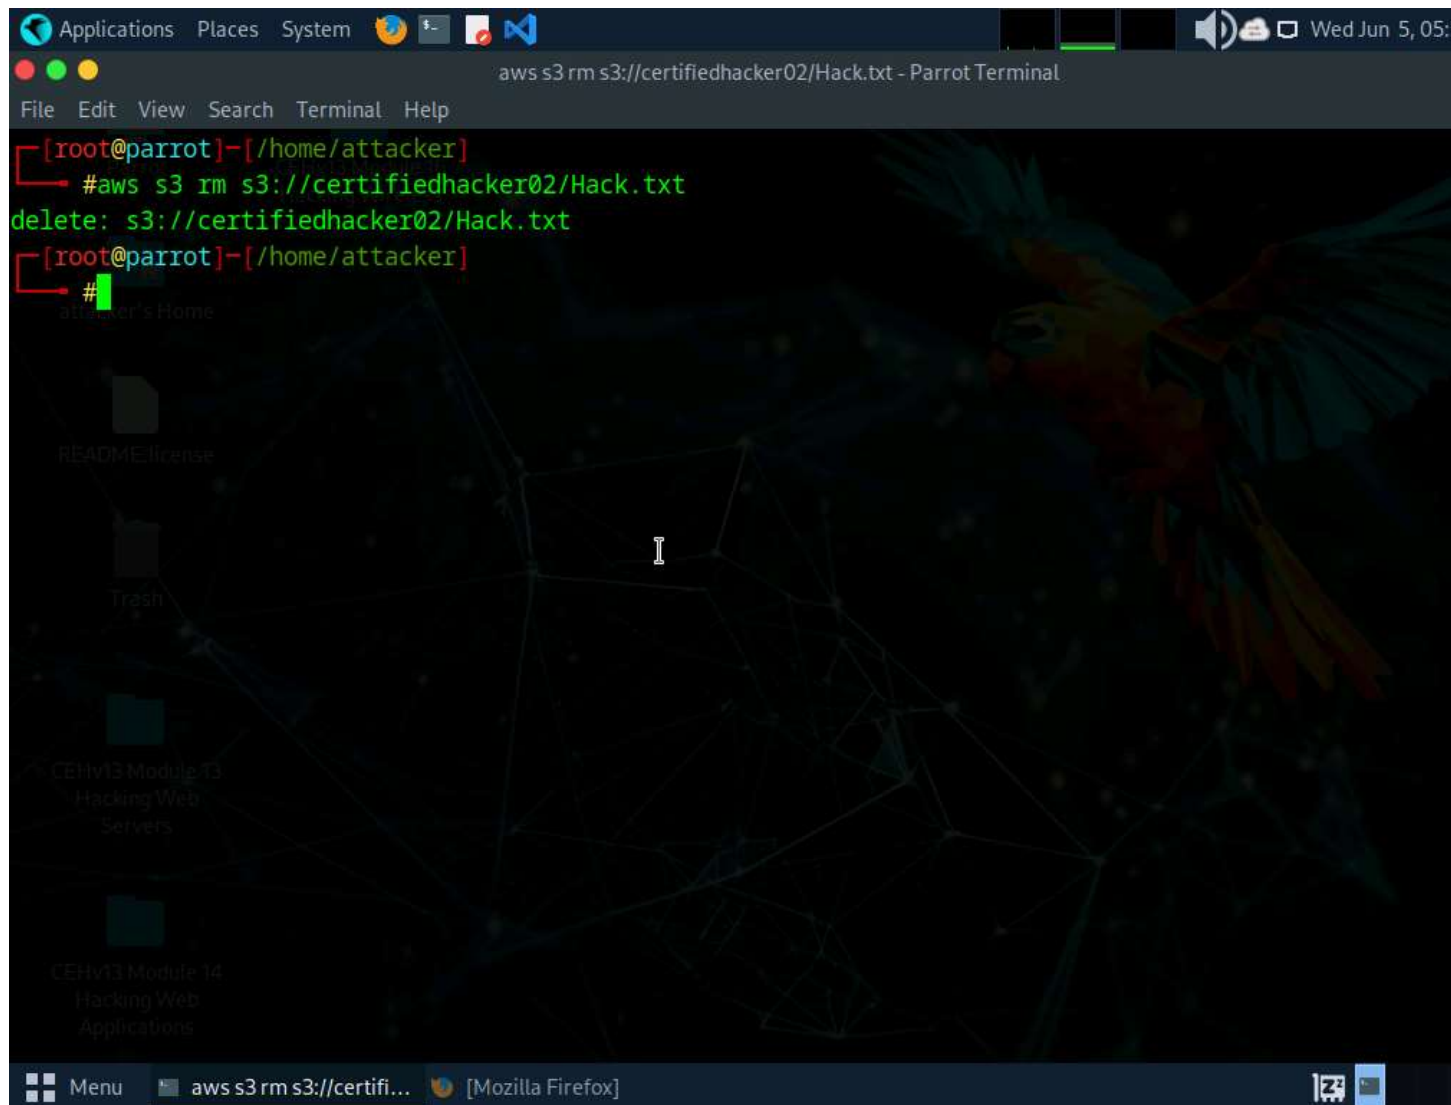

57. To verify whether the file is deleted, switch to the browser window and reload the page.

58. The **Hack.txt** file is deleted from the **certifiedhacker02** bucket.

59.

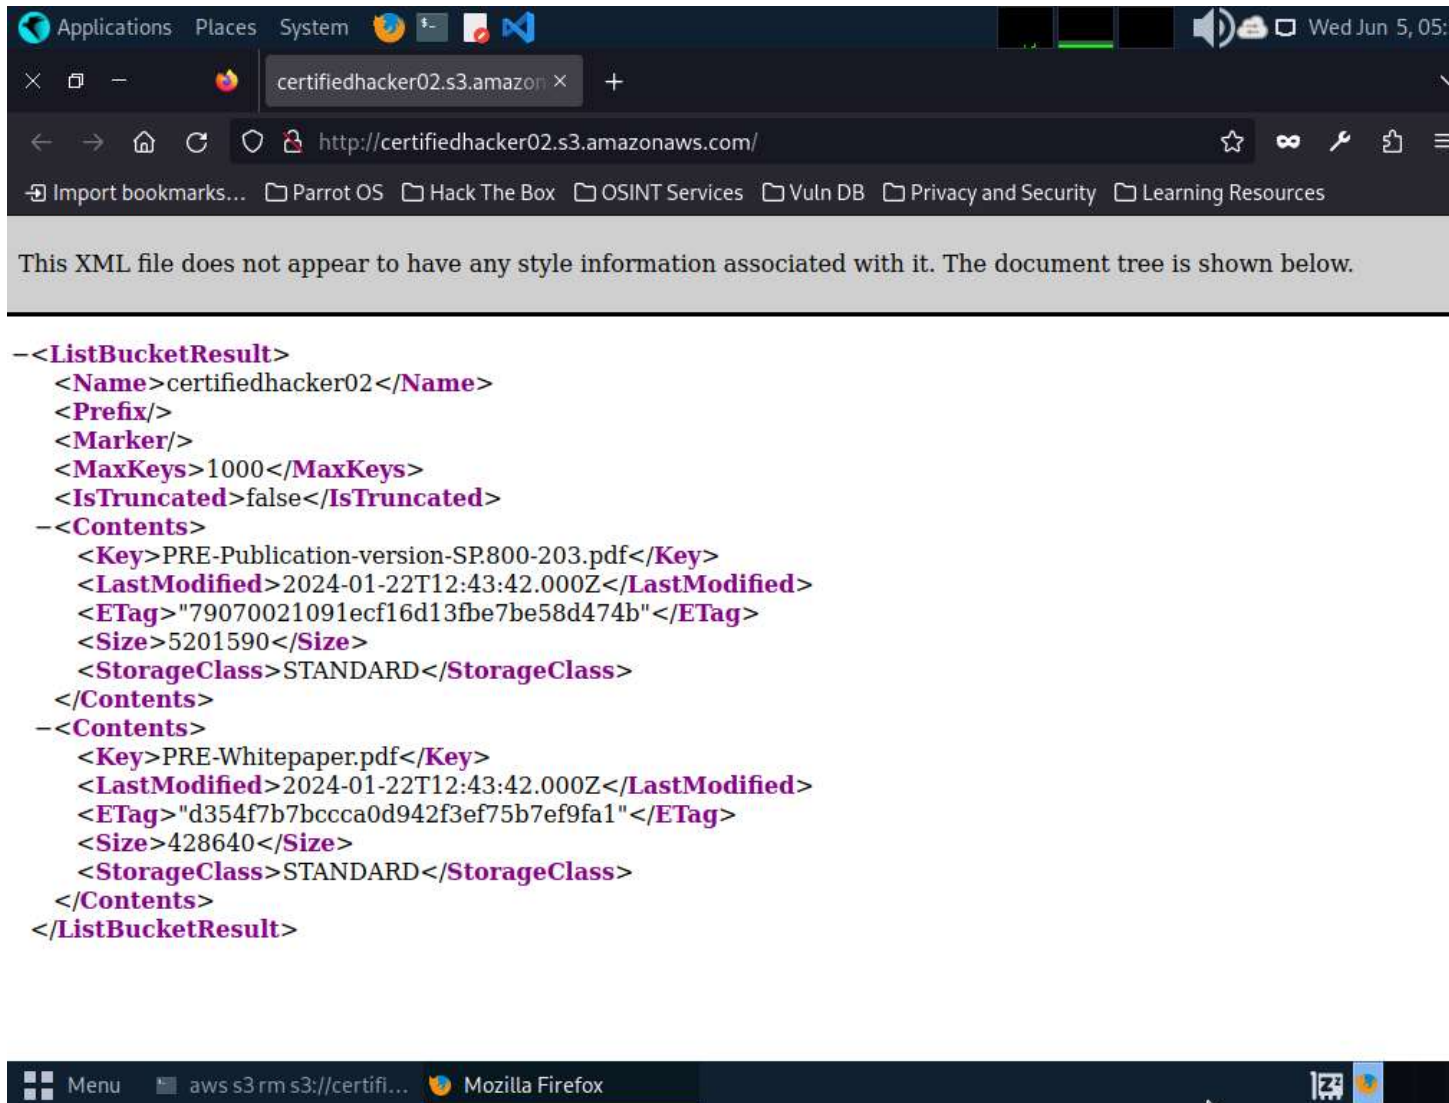

60. Thus, you can add or delete files from open S3 buckets.

61. This concludes the demonstration of exploiting public S3 buckets.

62. Do not end the lab as we will be continuing it in next #Task.

#### Question 19.2.1.1

Use the AWS CLI tool to exploit open S3 buckets (certifiedhacker02) in the AWS service. Determine the command to list the total number of files available in the "certifiedhacker02" S3 bucket. Note: You must create an AWS account (<https://aws.amazon.com>) to perform this task. Enter the command that was used in this lab to list the contents of certifiedhacker02 bucket.

Score

### Lab 3: Perform Privilege Escalation to Gain Higher Privileges

#### Lab Scenario

As a professional ethical hacker or pen tester, you must try to escalate privileges by employing a user account access key and secret access key obtained using various social engineering techniques. In privilege escalation, you attempt to gain complete access to the target IAM user's account and, then try to attain higher-level privileges in the AWS environment.

In the cloud platform, owing to mistakes in the access allocation system such as coding errors and design flaws, a customer, a third party, or an employee can obtain higher access rights than those that they are authorized to use. This threat arises, because of authentication, authorization, and accountability (AAA) vulnerabilities, user

provisioning and de-provisioning vulnerabilities, hypervisor vulnerabilities, unclear roles and responsibilities, misconfiguration, etc.

In this lab, we will exploit a misconfigured user permission policy to escalate privileges to the administrator level.

### Lab Objectives

- Escalate IAM user privileges by exploiting misconfigured user policy

### Overview of Privilege Escalation

Privileges are security roles assigned to users for using specific programs, features, OSES, functions, files, code, etc. to limit access depending on the type of user. Privilege escalation is required when you want to access system resources that you are not authorized to access. It takes place in two forms: vertical and horizontal.

- **Horizontal Privilege Escalation:** An unauthorized user tries to access the resources, functions, and other privileges of an authorized user who has similar access permissions
- **Vertical Privilege Escalation:** An unauthorized user tries to access the resources and functions of a user with higher privileges such as application or site administrators

### Task 1: Escalate IAM User Privileges by Exploiting Misconfigured User Policy

A policy is an entity that, when attached to an identity or resource, defines its permissions. You can use the AWS Management Console, AWS CLI, or AWS API to create customer-managed policies in IAM. Customer-managed policies are standalone policies that you administer in your AWS account. You can then attach the policies to the identities (users, groups, and roles) in your AWS account. If the user policies are not configured properly, they can be exploited by attackers to gain full administrator access to the target user's AWS account.

You need to configure aws cli for this lab refer to **Lab 2: Exploit S3 Buckets, Task 1: Exploit Open S3 Buckets using AWS CLI, Steps#1-20**.


Before starting this task, create an **IAM user (Test)** with default settings and create a policy (**Test**) with permissions including, iam:AttachUserPolicy, iam:ListUserPolicies, sts:AssumeRole, and iam:ListRoles, as shown in the below screenshot. These policies can be exploited by attackers to gain administrator-level privileges.

The screenshot shows the AWS IAM console interface for editing a policy named 'Test'. The breadcrumb navigation at the top is 'IAM > Policies > Test > Edit policy'. The page title is 'Modify permissions in Test' with an 'Info' link. Below the title is a description: 'Add permissions by selecting services, actions, resources, and conditions. Build permission statements using the JSON editor.' The 'Policy editor' section shows a JSON policy document with the following content:

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Effect": "Allow",
6       "Action": [
7         "iam:AttachUserPolicy",
8         "iam:ListUserPolicies",
9         "iam:ListRoles",
10        "sts:AssumeRole"
11      ],
12      "Resource": "*"
13    }
14  ]
15 }
```

1. In the **Parrot Security** machine, click the **MATE Terminal** icon in the menu to launch the terminal.
2. A **Parrot Terminal** window appears. In the terminal window, type **sudo su** and press **Enter** to run the programs as a root user and user **toor** as password.
3. After configuring the AWS CLI, we create a user policy and attach it to the target IAM user account to escalate the privileges.
4. In the terminal window, type **vim user-policy.json** and press **Enter**.
5. This command will create a file named **user-policy** in the **attacker** directory.

6.

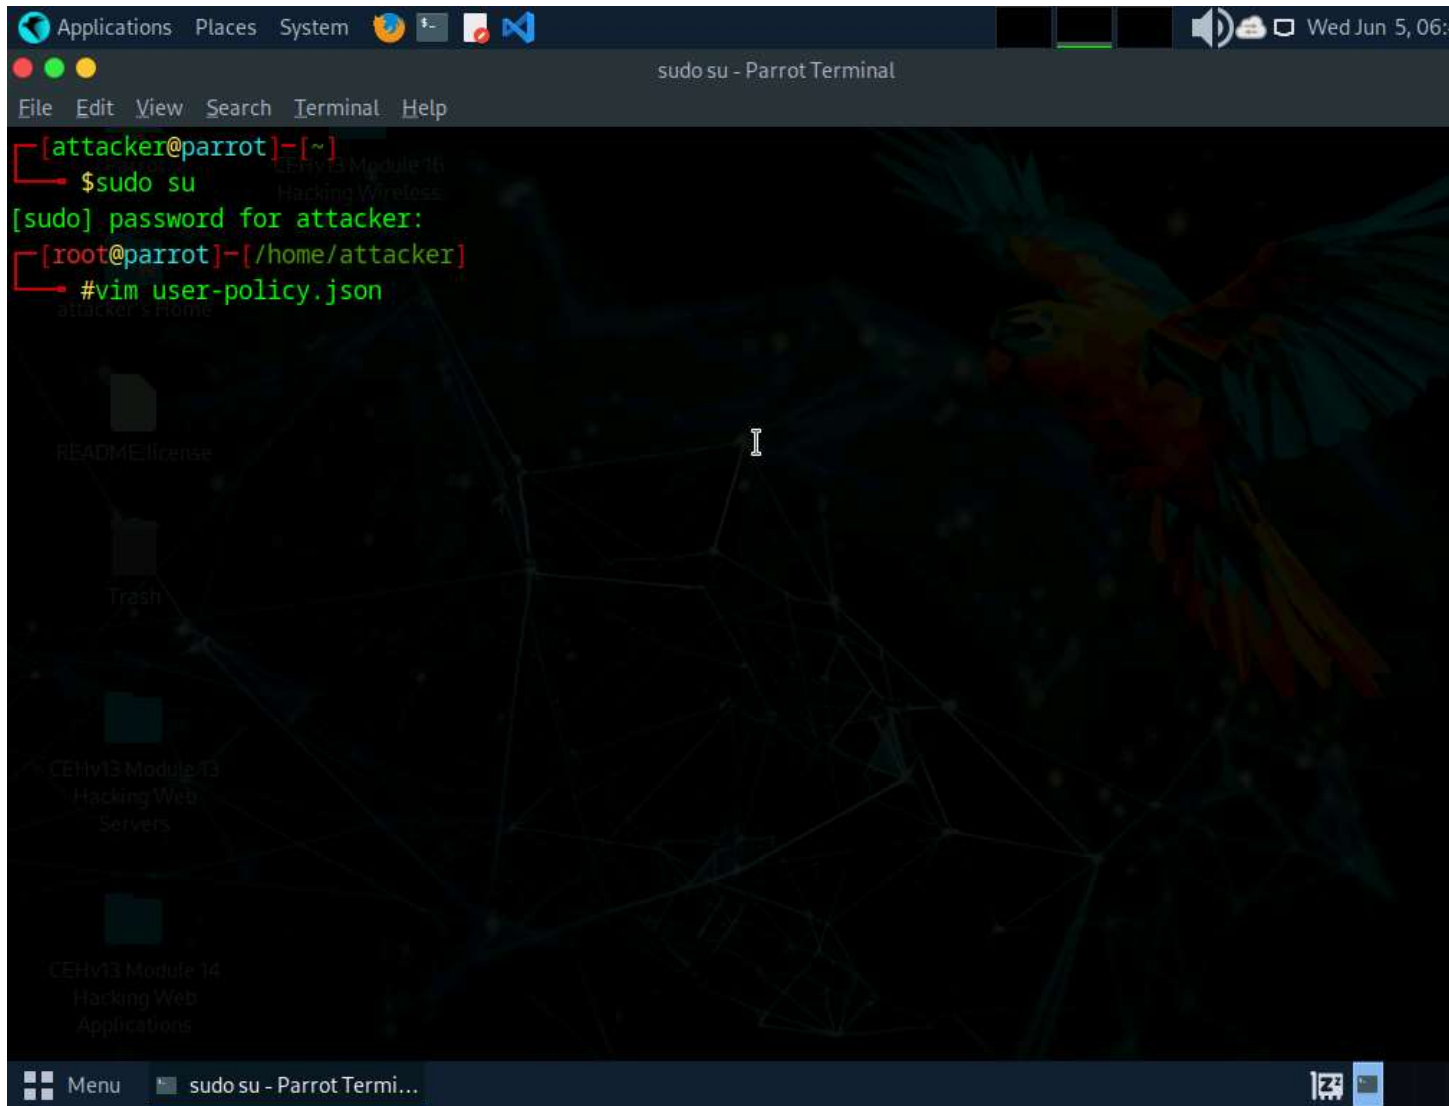

The screenshot shows a Parrot OS desktop environment with a terminal window titled "sudo su - Parrot Terminal". The terminal output is as follows:

```
[attacker@parrot]-[~]  
$sudo su  
[sudo] password for attacker:  
[root@parrot]-[/home/attacker]  
#vim user-policy.json
```

The terminal background features a dark theme with a parrot illustration on the right and a network diagram on the left. The desktop background is dark with a parrot illustration on the right and a network diagram on the left. The terminal window has a menu bar with "File", "Edit", "View", "Search", "Terminal", and "Help". The bottom status bar shows "Menu" and "sudo su - Parrot Termi...".

7. A command line text editor appears; press **I** and type the script given below:
8. {
9. TypeCopy
10. "Version":"2012-10-17", "Statement": [ "Effect":"Allow", "Action": "\*", "Resource": "\*" ]
11. }
12. This is an AdministratorAccess policy that gives administrator access to the target IAM user.
13. Ignore the \$ symbols in the script.
14. After entering the script given in the previous step, press the **Esc** button. Then, type **:wq!** and press **Enter** to save the text document.



[illegible]

16. Now, we will attach the created policy (**user-policy**) to the target IAM user's account. To do so, type **aws iam create-policy --policy-name user-policy --policy-document file:///user-policy.json** and press **Enter**.
17. If you receive an error that policy already exists, rename the file and try again.
18. The created user policy is displayed, showing various details such as **PolicyName**, **PolicyId**, and **Arn**.


19.

```
Applications Places System [Terminal Icon] [Speaker Icon] [Network Icon] Wed Jun 5, 06:00
aws iam create-policy --policy-name user-policy --policy-document file:///user-policy.json - Parrot Terminal
File Edit View Search Terminal Help
[root@parrot]-[/home/attacker]
#aws iam create-policy --policy-name user-policy --policy-document file:///user-policy.json
{
  "Policy": {
    "PolicyName": "user-policy",
    "PolicyId": "arn:aws:iam::123456789012:policy/user-policy",
    "Arn": "arn:aws:iam::123456789012:policy/user-policy",
    "Path": "/",
    "DefaultVersionId": "v1",
    "AttachmentCount": 0,
    "PermissionsBoundaryUsageCount": 0,
    "IsAttachable": true,
    "CreateDate": "2024-06-05T10:51:04+00:00",
    "UpdateDate": "2024-06-05T10:51:04+00:00"
  }
}
[root@parrot]-[/home/attacker]
#
```

20. In the terminal, type **aws iam attach-user-policy --user-name [Target Username] --policy-arn arn:aws:iam::[Account ID]:policy/user-policy** and press **Enter**.

21. The above command will attach the policy (**user-policy**) to the target IAM user account (here, **test**).

22.

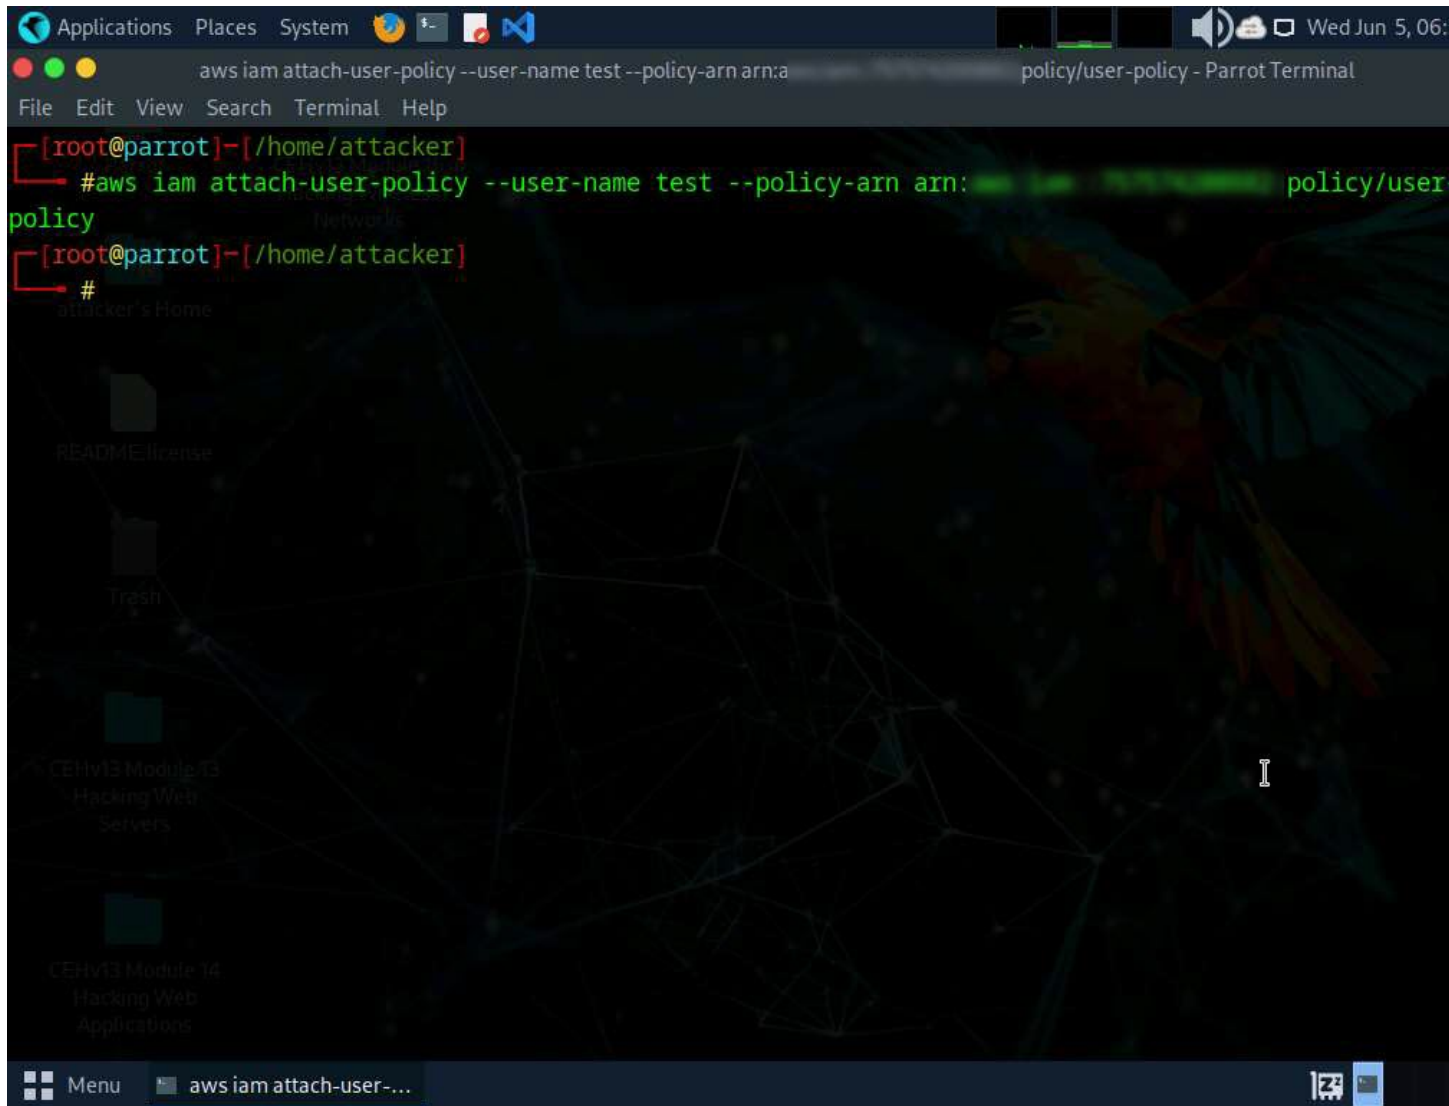


```
Applications Places System [Icons] [System Tray] Wed Jun 5, 06:
aws iam attach-user-policy --user-name test --policy-arn arn:a policy/user-policy - Parrot Terminal
File Edit View Search Terminal Help
[root@parrot]-[/home/attacker]
#aws iam attach-user-policy --user-name test --policy-arn arn: policy/user-policy
[root@parrot]-[/home/attacker]
#
```

23. Now, type **aws iam list-attached-user-policies --user-name [Target Username]** and press **Enter** to view the attached policies of the target user (here, **test**).
24. The result appears, displaying the attached policy name (**user-policy**), as shown in the screenshot.




25.

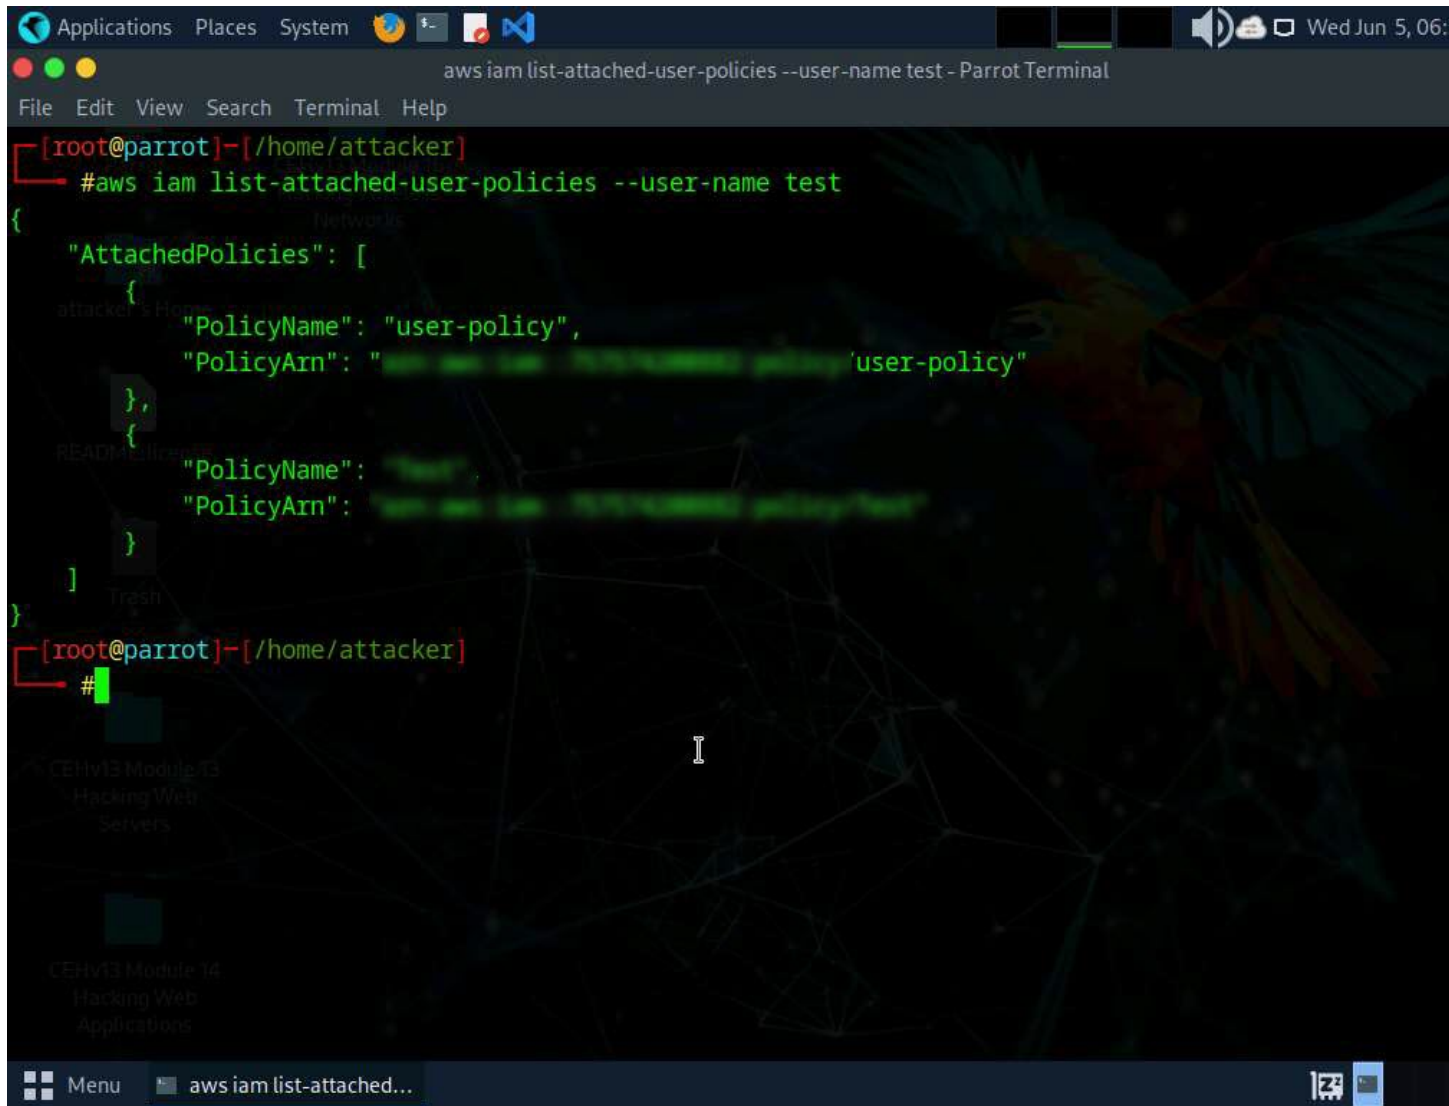

```
Applications Places System [Icons] [Volume] [Network] [Battery] [Time] Wed Jun 5, 06:
aws iam list-attached-user-policies --user-name test - Parrot Terminal
File Edit View Search Terminal Help
[root@parrot]~/home/attacker
#aws iam list-attached-user-policies --user-name test
{
  "AttachedPolicies": [
    {
      "PolicyName": "user-policy",
      "PolicyArn": "arn:aws:iam::123456789012:policy/user-policy"
    },
    {
      "PolicyName": "test",
      "PolicyArn": "arn:aws:iam::123456789012:policy/test"
    }
  ]
}
```

26. Now that you have successfully escalated the privileges of the target IAM user account, you can list all the IAM users in the AWS environment. To do so, type **aws iam list-users** and press **Enter**.
27. The result appears, displaying the list of IAM users, as shown in the screenshot.

28.

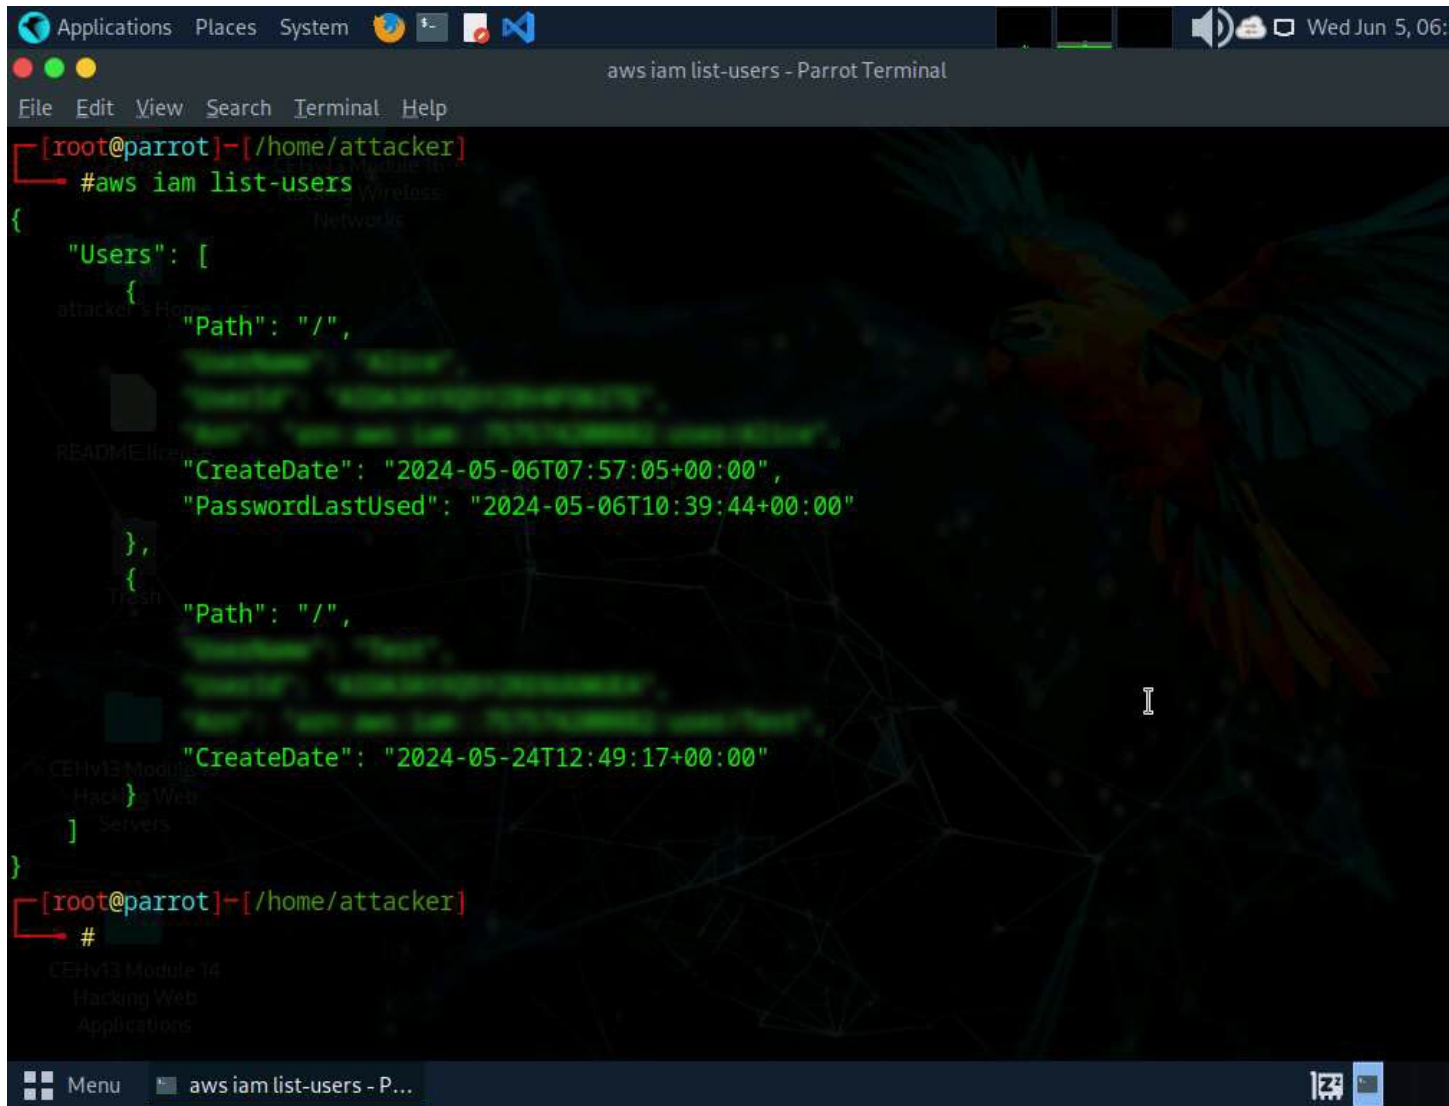

```
[root@parrot]~[/home/attacker]
#aws iam list-users
{
  "Users": [
    {
      "Path": "/",
      "CreateDate": "2024-05-06T07:57:05+00:00",
      "PasswordLastUsed": "2024-05-06T10:39:44+00:00"
    },
    {
      "Path": "/",
      "CreateDate": "2024-05-24T12:49:17+00:00"
    }
  ]
}
```

29. Similarly, you can use various commands to obtain complete information about the AWS environment such as the list of S3 buckets, user policies, role policies, and group policies, as well as to create a new user.
- o List of S3 buckets: **aws s3api list-buckets --query "Buckets[].Name"**
  - o User Policies: **aws iam list-user-policies**
  - o Role Policies: **aws iam list-role-policies**
  - o Group policies: **aws iam list-group-policies**
  - o Create user: **aws iam create-user**
30. This concludes the demonstration of escalating IAM user privileges by exploiting a misconfigured user policy.
31. Close all open windows and document all acquired information.

#### Question 19.3.1.1

Escalate IAM user privileges by exploiting a misconfigured user policy. Which aws command will list all user policies?

Score

### Lab 4: Perform Vulnerability Assessment on Docker Images

#### Lab Scenario

As a professional ethical hacker or pen tester, expertise in Docker vulnerability assessment is crucial. By leveraging tools like Trivy, you can analyze Docker images, identifying and exploiting vulnerabilities. Active scanning and

manual inspection reveal weak configurations, enabling you to breach security and implant malicious code, while understanding image location aids in comprehensive security testing and mitigation.

### Lab Objectives

- Vulnerability assessment on Docker images using Trivy


### Overview of Docker Images

Docker images are lightweight, standalone, executable packages that contain everything needed to run a software application, including the code, runtime, libraries, and dependencies. They enable consistent deployment across various environments, simplify software distribution, and facilitate scalability and reproducibility in containerized environments.


### Task 1: Vulnerability Assessment on Docker Images using Trivy

Trivy is a powerful security scanner that detects vulnerabilities and misconfigurations across a wide range of targets, including container images, file systems, Git repositories, virtual machine images, Kubernetes, and AWS. With its comprehensive scanners, Trivy identifies OS package vulnerabilities, sensitive information, IaC issues, and more, providing a robust security solution for your infrastructure.

1. In the **Parrot Security** machine, click the **MATE Terminal** icon in the menu to launch the terminal.
2. A **Parrot Terminal** window appears. In the terminal window, type **sudo su** and press **Enter** to run the programs as a root user.
3. In the **[sudo] password for attacker** field, type **toor** as a password and press **Enter**.
4. The password that you type will not be visible.
5. Minimise the terminal for better view of output
- 6.

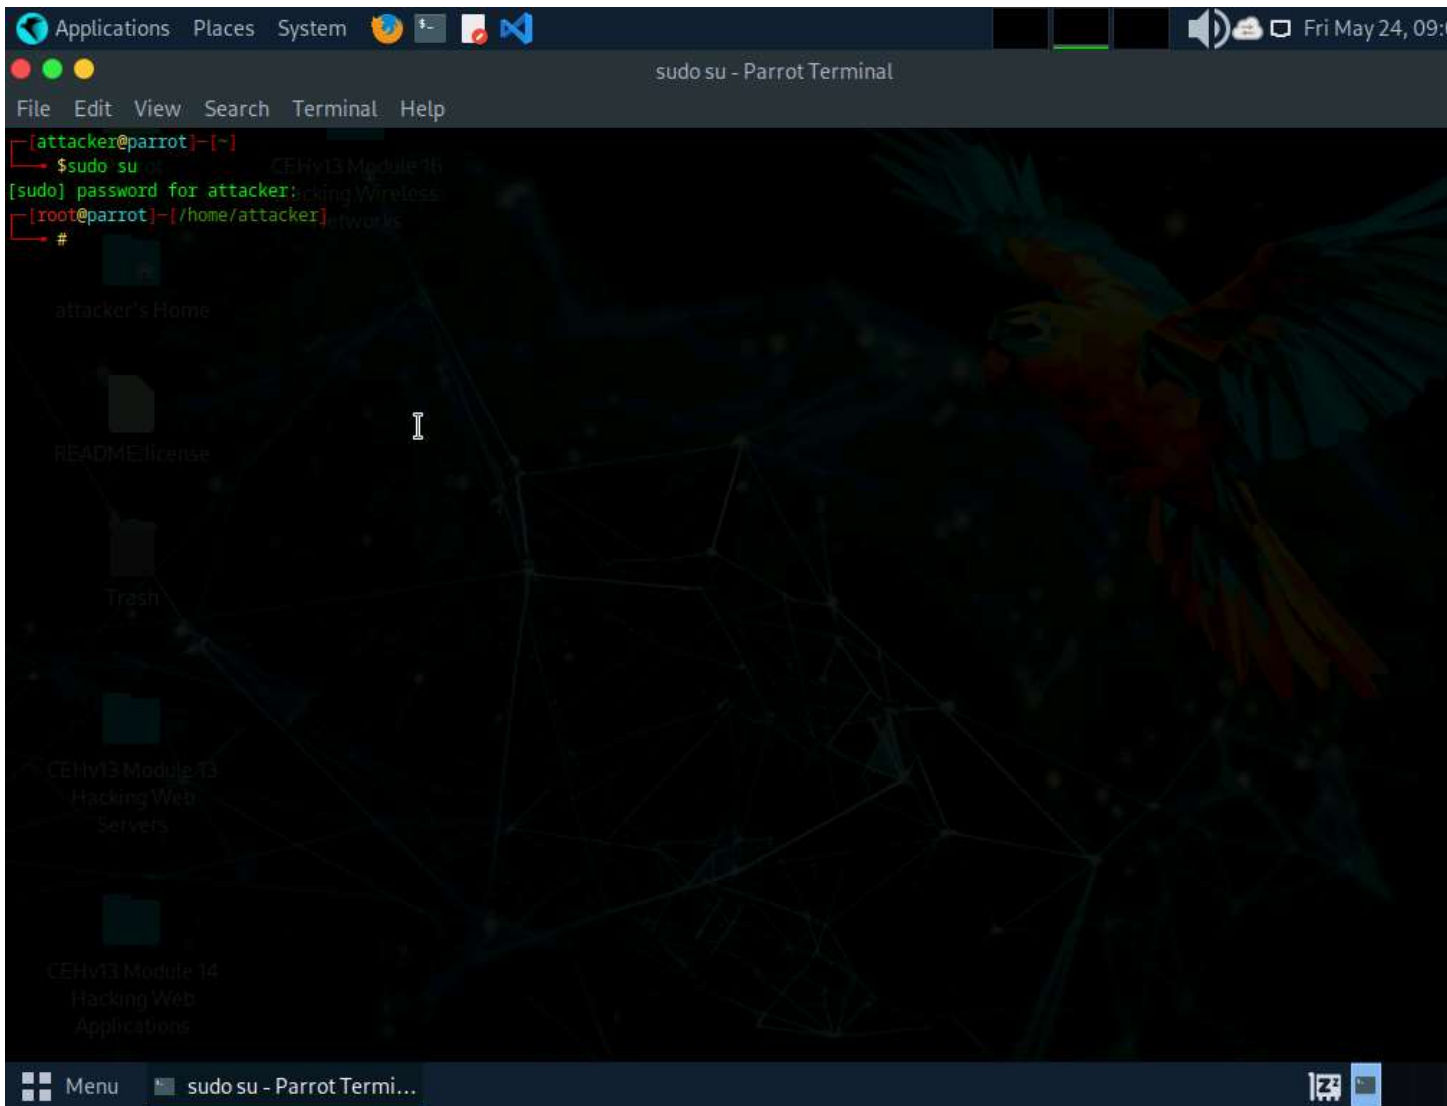


7. In this lab we will be scanning two docker images, first the secure one and second the vulnerable one.
8. Execute command **docker pull ubuntu** to install the first docker image.
- 9.

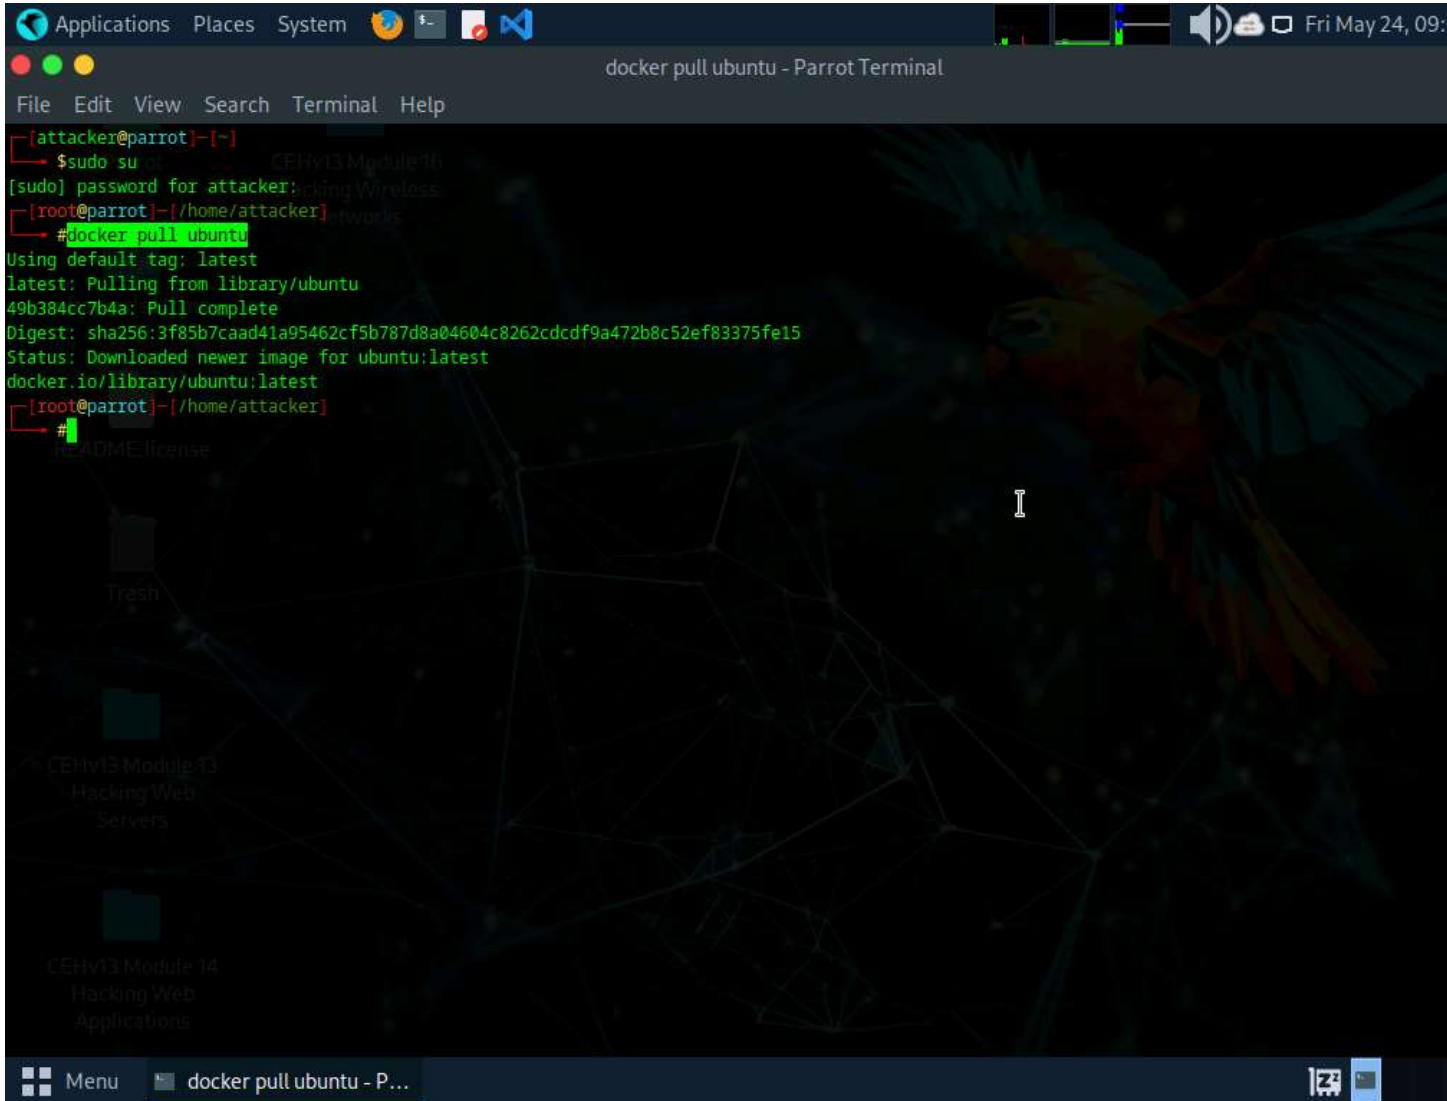

```
[attacker@parrot]~$ sudo su
[sudo] password for attacker:
[root@parrot]~# docker pull ubuntu
Using default tag: latest
latest: Pulling from library/ubuntu
49b384cc7b4a: Pull complete
Digest: sha256:3f85b7caad41a95462cf5b787d8a04604c8262cdcdf9a472b8c52ef83375fe15
Status: Downloaded newer image for ubuntu:latest
docker.io/library/ubuntu:latest
[root@parrot]~#
```

10. Once the image is pulled we will be performing vulnerability assessment. Execute command **trivy image ubuntu**.

11.

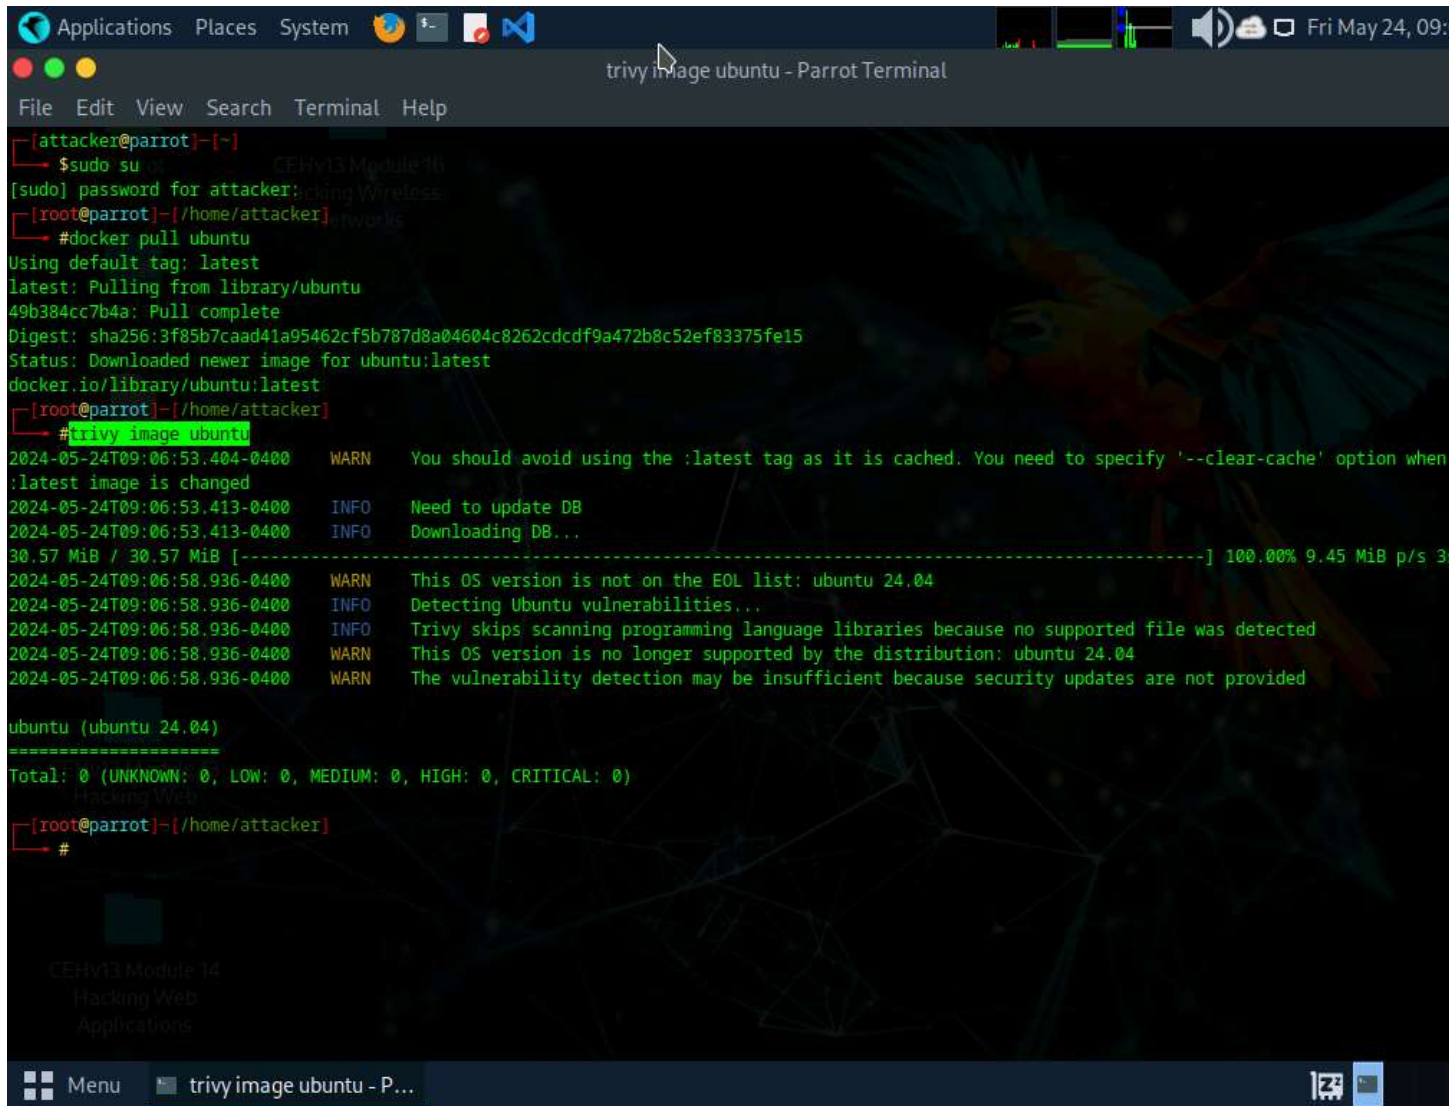


```
[attacker@parrot]~$ sudo su
[sudo] password for attacker:
[root@parrot]~$ #docker pull ubuntu
Using default tag: latest
latest: Pulling from library/ubuntu
49b384cc7b4a: Pull complete
Digest: sha256:3f85b7caad41a95462cf5b787d8a04604c8262cdcdf9a472b8c52ef83375fe15
Status: Downloaded newer image for ubuntu:latest
docker.io/library/ubuntu:latest
[root@parrot]~$ #trivy image ubuntu
2024-05-24T09:06:53.404-0400    WARN    You should avoid using the :latest tag as it is cached. You need to specify '--clear-cache' option when
:latest image is changed
2024-05-24T09:06:53.413-0400    INFO    Need to update DB
2024-05-24T09:06:53.413-0400    INFO    Downloading DB...
30.57 MiB / 30.57 MiB [-----] 100.00% 9.45 MiB p/s 3
2024-05-24T09:06:58.936-0400    WARN    This OS version is not on the EOL list: ubuntu 24.04
2024-05-24T09:06:58.936-0400    INFO    Detecting Ubuntu vulnerabilities...
2024-05-24T09:06:58.936-0400    INFO    Trivy skips scanning programming language libraries because no supported file was detected
2024-05-24T09:06:58.936-0400    WARN    This OS version is no longer supported by the distribution: ubuntu 24.04
2024-05-24T09:06:58.936-0400    WARN    The vulnerability detection may be insufficient because security updates are not provided

ubuntu (ubuntu 24.04)
=====
Total: 0 (UNKNOWN: 0, LOW: 0, MEDIUM: 0, HIGH: 0, CRITICAL: 0)
[root@parrot]~$ #
```

12. In the above screenshot, we can observe that we have total **0** vulnerability and it's completely secure.
13. Now, we will analyse the vulnerbale image. execute command **docker pull nginx:1.19.6** to pull the vulnerable image.



14.

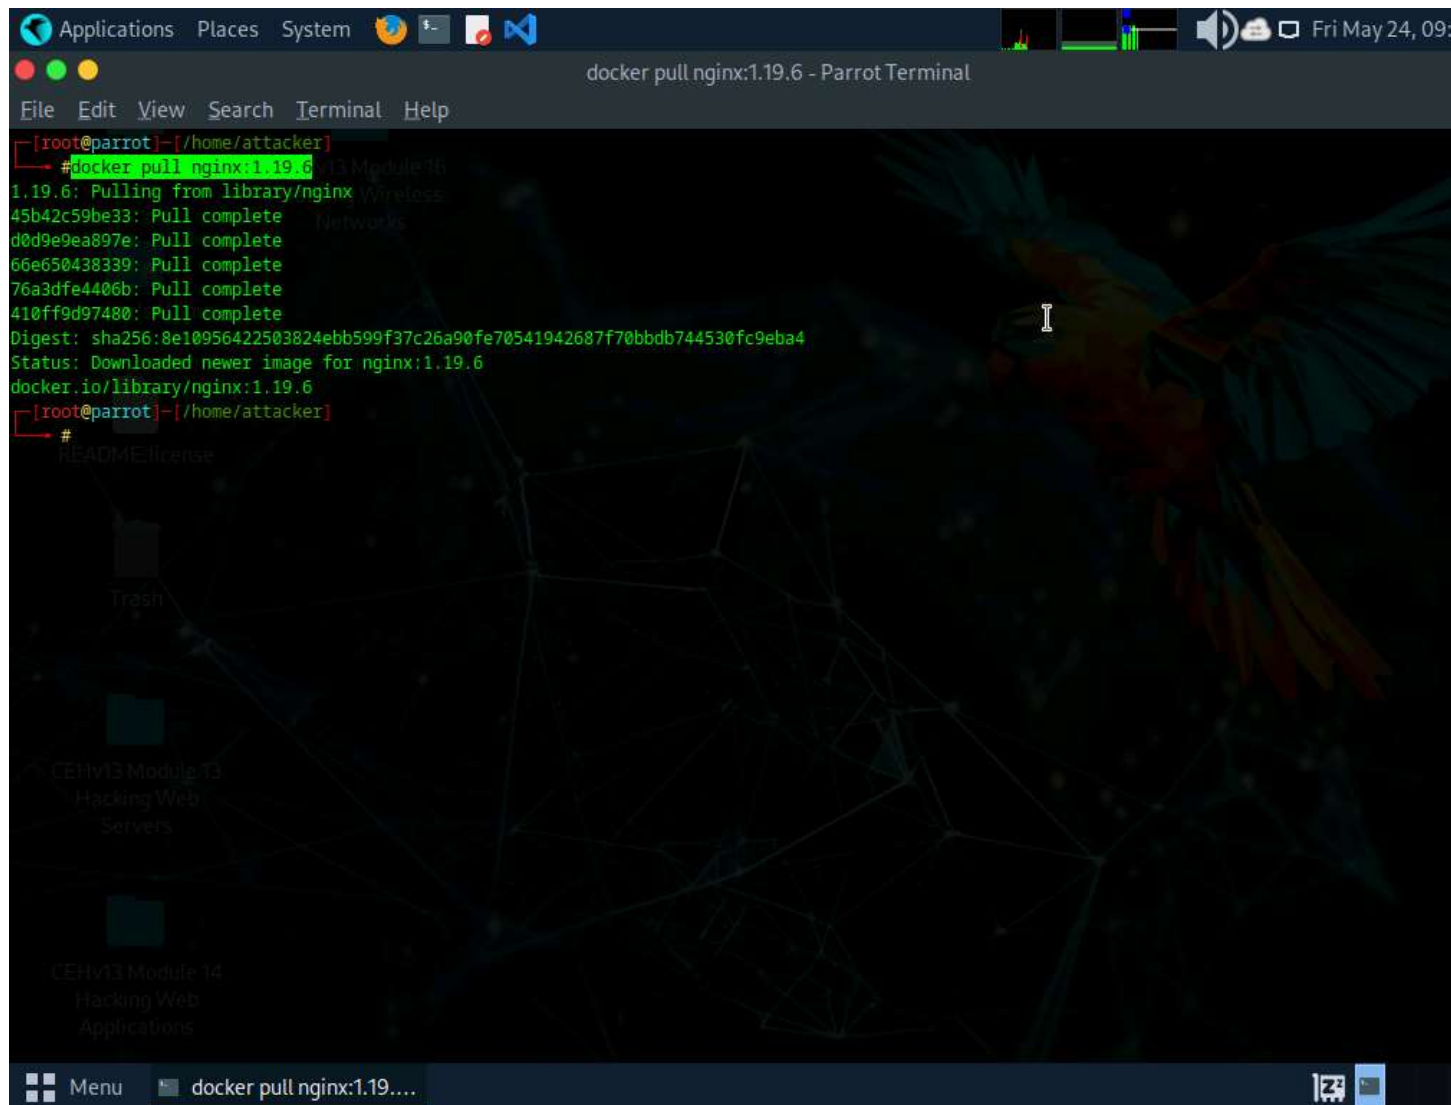

```
Applications Places System [Icons] [Terminal] [Help]
[root@parrot]~[/home/attacker]
# docker pull nginx:1.19.6
1.19.6: Pulling from library/nginx
45b42c59be33: Pull complete
d0d9e9ea897e: Pull complete
66e650438339: Pull complete
76a3dfe4406b: Pull complete
410ff9d97480: Pull complete
Digest: sha256:8e10956422503824ebb599f37c26a90fe70541942687f70bbdb744530fc9eba4
Status: Downloaded newer image for nginx:1.19.6
docker.io/library/nginx:1.19.6
[root@parrot]~[/home/attacker]
#
```

15. Execute command **trivy image nginx:1.19.6** to scan the image.

16.

```
Applications Places System [Icons] [Networks] [Sound] [Fri May 24, 09:00]
trivy image nginx:1.19.6 - Parrot Terminal

File Edit View Search Terminal Help

[root@parrot]~/home/attacker
#docker pull nginx:1.19.6
1.19.6: Pulling from library/nginx
45b42c59be33: Pull complete
d0d9e9ea897e: Pull complete
66e650438339: Pull complete
76a3dfe4406b: Pull complete
410ff9d97480: Pull complete
Digest: sha256:8e10956422503824ebb599f37c26a90fe70541942687f70bbdb744530fc9eba4
Status: Downloaded newer image for nginx:1.19.6
docker.io/library/nginx:1.19.6
[root@parrot]~/home/attacker
#trivy image nginx:1.19.6
2024-05-24T09:11:10.061-0400 INFO Detecting Debian vulnerabilities...
2024-05-24T09:11:10.084-0400 INFO Trivy skips scanning programming language libraries because no supported file was detected






nginx:1.19.6 (debian 10.8)
=====
Total: 402 (UNKNOWN: 6, LOW: 29, MEDIUM: 168, HIGH: 149, CRITICAL: 50)

+-----+-----+-----+-----+-----+-----+
| LIBRARY | VULNERABILITY ID | SEVERITY | INSTALLED VERSION | FIXED VERSION | TITLE |
+-----+-----+-----+-----+-----+-----+
| apt | CVE-2011-3374 | LOW | 1.8.2.2 | | It was found that apt-key in apt, |
| Hacking Web | | | | | all versions, do not correctly... |
| Servers | | | | | -->avd.aquasec.com/nvd/cve-2011-3 |
| 74 | | | | | |
+-----+-----+-----+-----+-----+-----+
| bash | CVE-2019-18276 | HIGH | 5.0-4 | | bash: when effective UID is not |
| Hacking Web | | | | | equal to its real UID the... |
| Applications | | | | | |
+-----+-----+-----+-----+-----+-----+

Menu trivy image nginx:1.19.... [Icons]
```





17.

Applications Places System      Fri May 24, 09:...


trivy image nginx:1.19.6 - Parrot Terminal

File Edit View Search Terminal Help

Parrot	CEHV13 Module 16				in valid_parameter_transform
15	Hacking Wireless				-->avd.aquasec.com/nvd/cve-2022-3
+-----+-----+-----+-----+-----+					
bsdutils	CVE-2021-37600	MEDIUM	2.33.1-0.1		util-linux: integer overflow
attacker's Home					can lead to buffer overflow
					in get_sem_elements() in
README.license					sys-utils/ipcutils.c...
600					-->avd.aquasec.com/nvd/cve-2021-3
+-----+-----+-----+-----+-----+					
Trash	CVE-2022-0563				util-linux: partial disclosure
					of arbitrary files in chfn
					and chsh when compiled...
63					-->avd.aquasec.com/nvd/cve-2022-0
+-----+-----+-----+-----+-----+					
coreutils/vers	CVE-2016-2781		8.30-3		coreutils: Non-privileged
					session can escape to the
					parent session in chroot
81					-->avd.aquasec.com/nvd/cve-2016-2
+-----+-----+-----+-----+-----+					

Menu trivy image nginx:1.19....  

18.

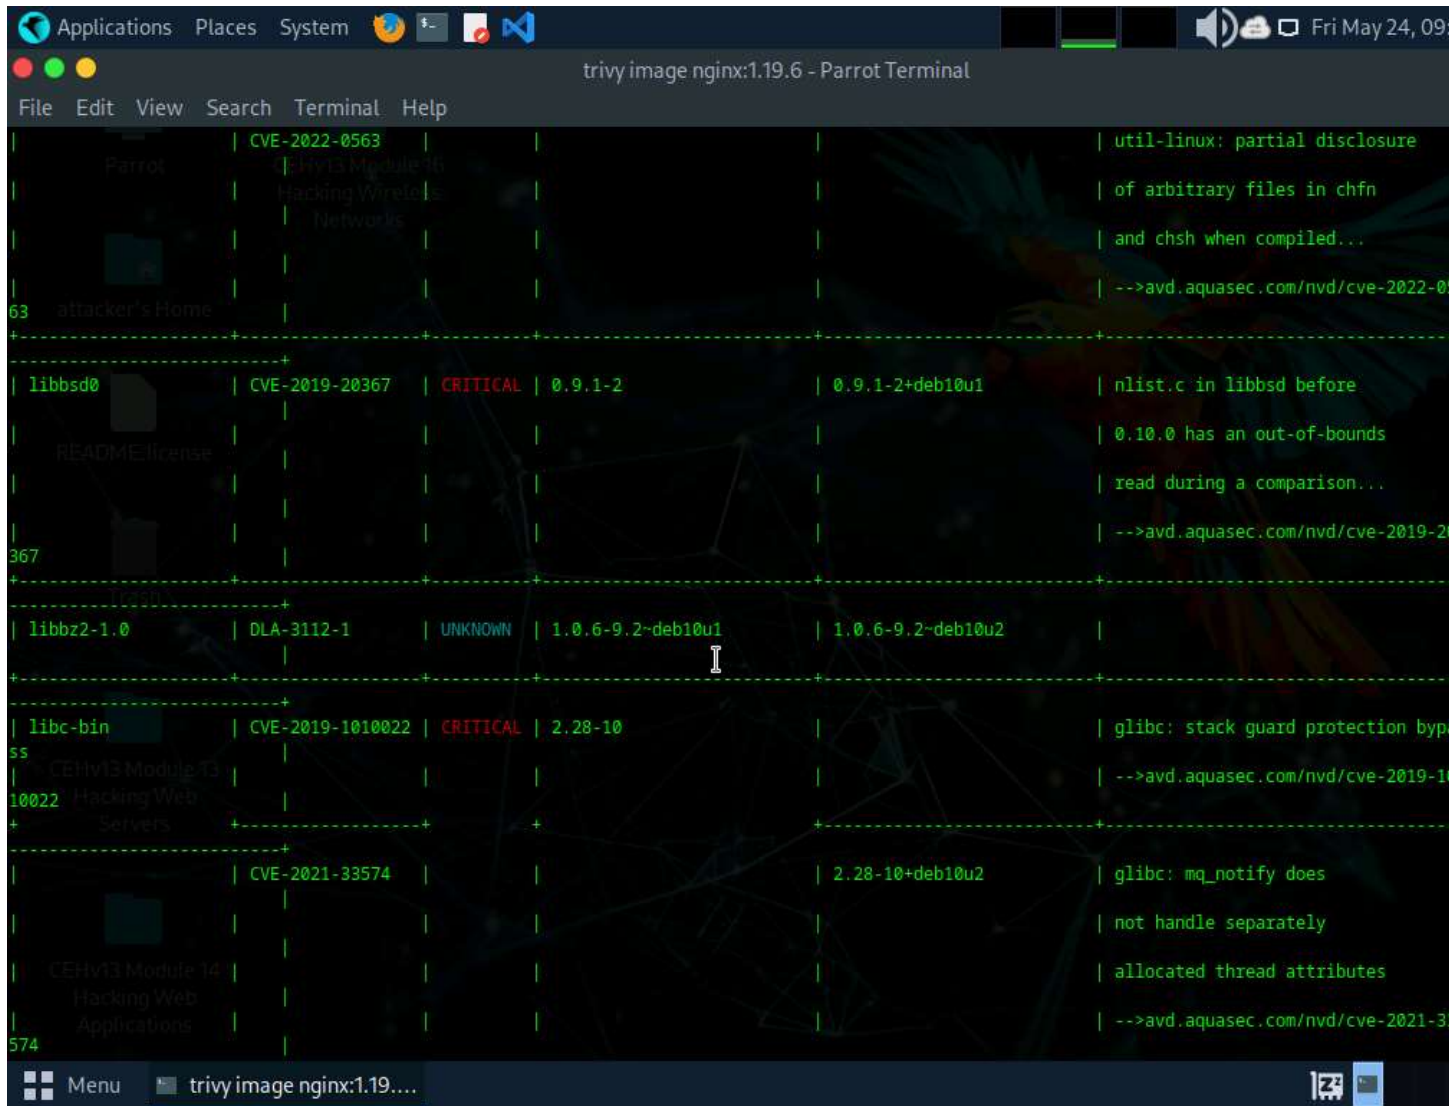

19. In the above screenshot we can see that we have total **401** vulnerabilities which is categorized as well along with **CVEs** mentioned.
20. This concludes the demonstration of vulnerability assessment on docker images using Trivy
21. Close all open windows and document all acquired information.

#### Question 19.4.1.1

In Parrot machine install ubuntu and nginx:1.19.6 images and scan with trivy security scanner. Enter the severity level that can be observed for bsduits vulnerability of nginx:1.19.6 docker image.

Score

- Check this box to confirm completion of this module.

Previous<sup>9</sup>Next<sup>10</sup>

11

39 Minutes Remaining

Previous: Lab 3: Perform Privilege Escalation to Gain Higher Privileges

Next

0/93 (0%) Tasks Complete

Thumbnail screenshot of virtual machineLab52683454-Windows 11

Windows 11

To release mouse, press **Ctrl+Alt+Left Arrow**

Username

Admin<sup>12</sup>

Password

Pa\$\$w0rd<sup>13</sup>

DVD Drive

- No Media

Ctrl+Alt+Delete [Open in New Window](#)

Thumbnail screenshot of virtual machineLab52683454-Parrot Security

Parrot Security

To release mouse, press **Ctrl+Alt+Left Arrow**

Username

Attacker<sup>14</sup>

Password

toor<sup>15</sup>

DVD Drive

- No Media

Ctrl+Alt+Delete [Open in New Window](#)

**Help**

## Support Information

ID

52683454

Host

EU-HV27

Datacenter

EU North (London)

## FAQs

[Frequently asked questions about the lab interface](#)

## Other Help Options

[Submit a Support Request](#)

Powered by [Skillable](#)•[Review Us](#)

## Notifications

## Settings

### Text Size

100 Standard

150 Large Text

200 Extra Large Text

---

### Color Mode

- Light
- Dark
- High Contrast

---

### Actions

[Split Windows](#)

Close Window

Close Window

---

Type Text

Type Text

Type Text

Type Text