Inji Interoperability Playground

Find where a verifiable credential journey succeeds or fails.

Bhole Chature

Soham Banerjee (Lead) · Pulkit Pandey · Dayal Gupta
Thrissha Arcot · Harsh Kumar

Working prototype · 26 October 2026

The interoperability problem

A credential can issue correctly and still fail when another wallet presents it.

The failure may sit in the offer, format, proof binding, request profile or verifier policy. A final “invalid” screen rarely names the broken boundary.

Our goal


Record the exact role combination, the observed boundary and the verifier outcome so a team can reproduce the mismatch.

How the playground works

Issuer	**Certify or independent mock**	Offer and credential
Wallet	**Reference Wallet or Inji wallet**	Hold and present
Verifier	**Inji Verify or independent mock**	Validate and return result

React web + Express BFF + PostgreSQL; redaction before storage.

Inspect the actual run

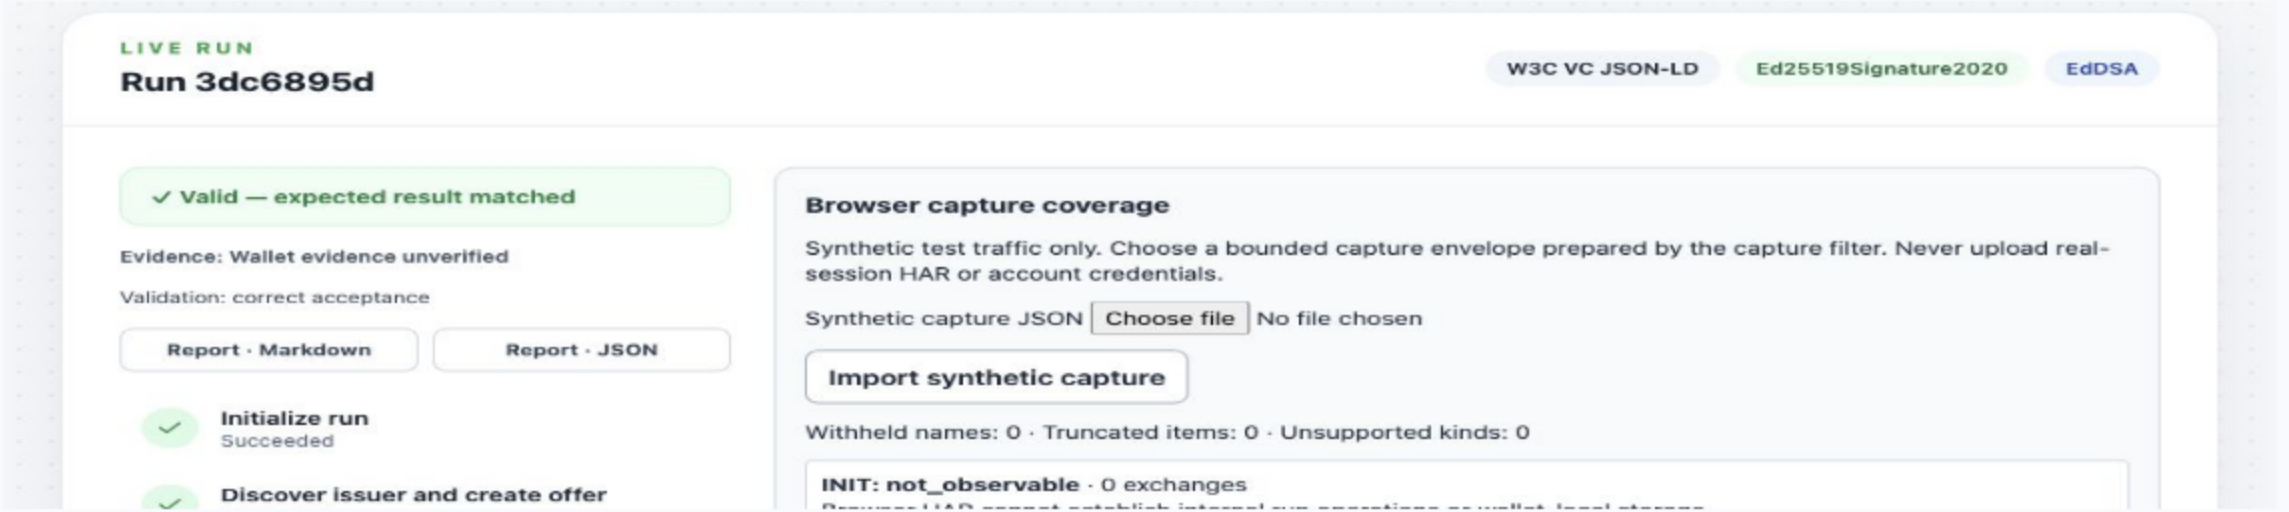



10 steps succeeded

7 sanitized exchanges

Open the timeline, inspect a boundary, then download JSON or Markdown. The committed A1 record remains read only in a fresh demo.

Two real-wallet checkpoints

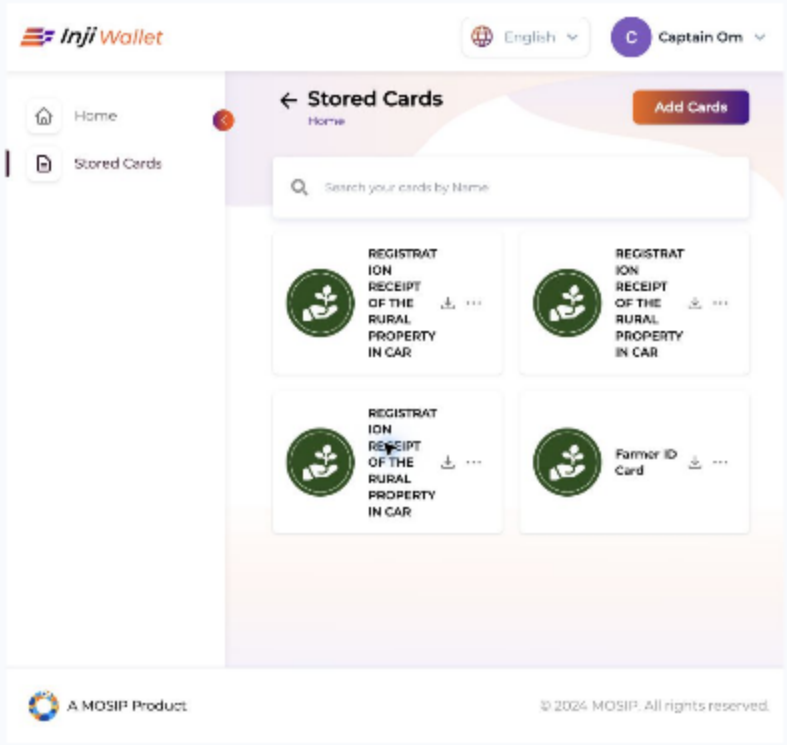

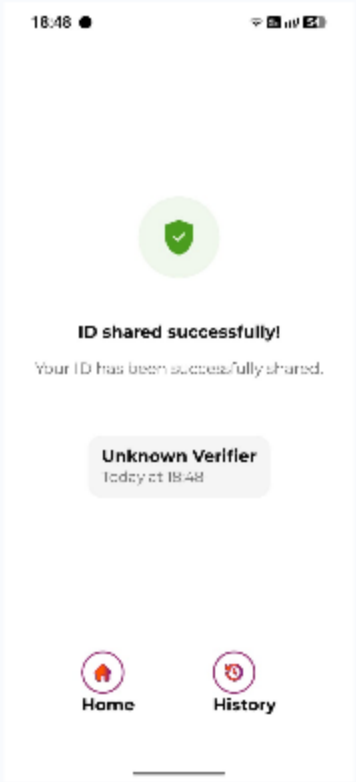

Inji Web · JSON-LD

Hosted Collab: reload-backed storage, correlated presentation, Verify valid. Releases unreported.

Android · SD-JWT

Local Certify → real Android wallet → Collab Verify valid. Hybrid deployment.

A demo judges can inspect

6 cross-container mock scenarios

445 tests passed · 5 optional DB skips

18 Chromium browser checks passed


For MOSIP integrators and QA teams: faster diagnosis of credential failures with a repeatable, sanitized record.

Local same-wallet JSON-LD journey

Certify 0.14.0 → Inji Web 0.17.0 / Mimoto 0.22.0 → Verify 0.18.2

Exact newly issued card survived reload. The same wallet presented that card. Independent Verify returned valid with credential and holder proofs true.

UI-managed run 8fc582b8… links captured token, credential and direct-post exchanges.

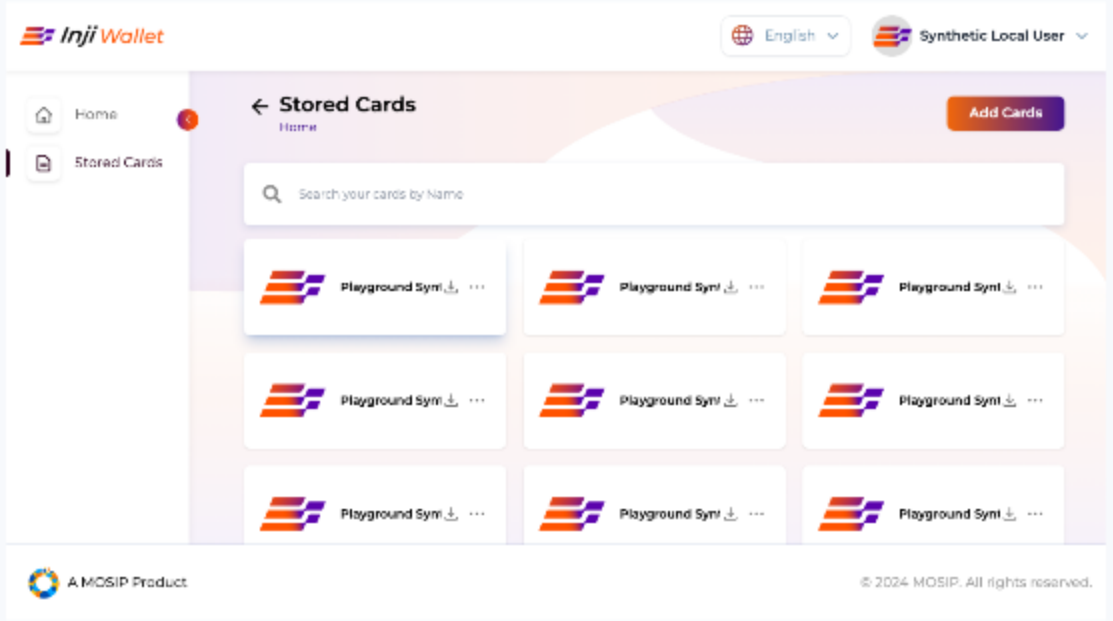

Limits: synthetic authorization fixture, declared DID adapter and network-fetched public contexts. Generic evidence tier remains unverified.

Observed findings and limits

G-05 Local initialization contract

Pinned SQL/configuration behavior needs a reproducible setup adjustment.

G-09 Version-specific JWT proof binding

The alpha SD-JWT issuance profile uses its own proof contract; keep it separate from 0.14.

G-10 DID assertion-method reference

The local JSON-LD route declares its DID adapter rather than concealing it.

G-05 filed; G-09/G-10 evidence added to existing issues. G-06/G-07 reported privately on 26 October; maintainer triage pending.