Inji Interoperability Playground

Find where a verifiable credential journey succeeds or fails.

Bhole Chature

Soham Banerjee (Lead) · Pulkit Pandey · Dayal Gupta
Thrissha Arcot · Harsh Kumar

Working prototype · 26 October 2026

The interoperability problem

A credential can issue correctly and still fail when another wallet presents it.

The failure may sit in the offer, format, proof binding, request profile or verifier policy. A final “invalid” screen rarely names the broken boundary.

Our goal


Record the exact role combination, the observed boundary and the verifier outcome so a team can reproduce the mismatch.

How the playground works

Issuer	**Certify or independent mock**	Offer and credential
Wallet	**Reference Wallet or Inji wallet**	Hold and present
Verifier	**Inji Verify or independent mock**	Validate and return result

React web + Express BFF + PostgreSQL; redaction before storage.

Inspect the actual run

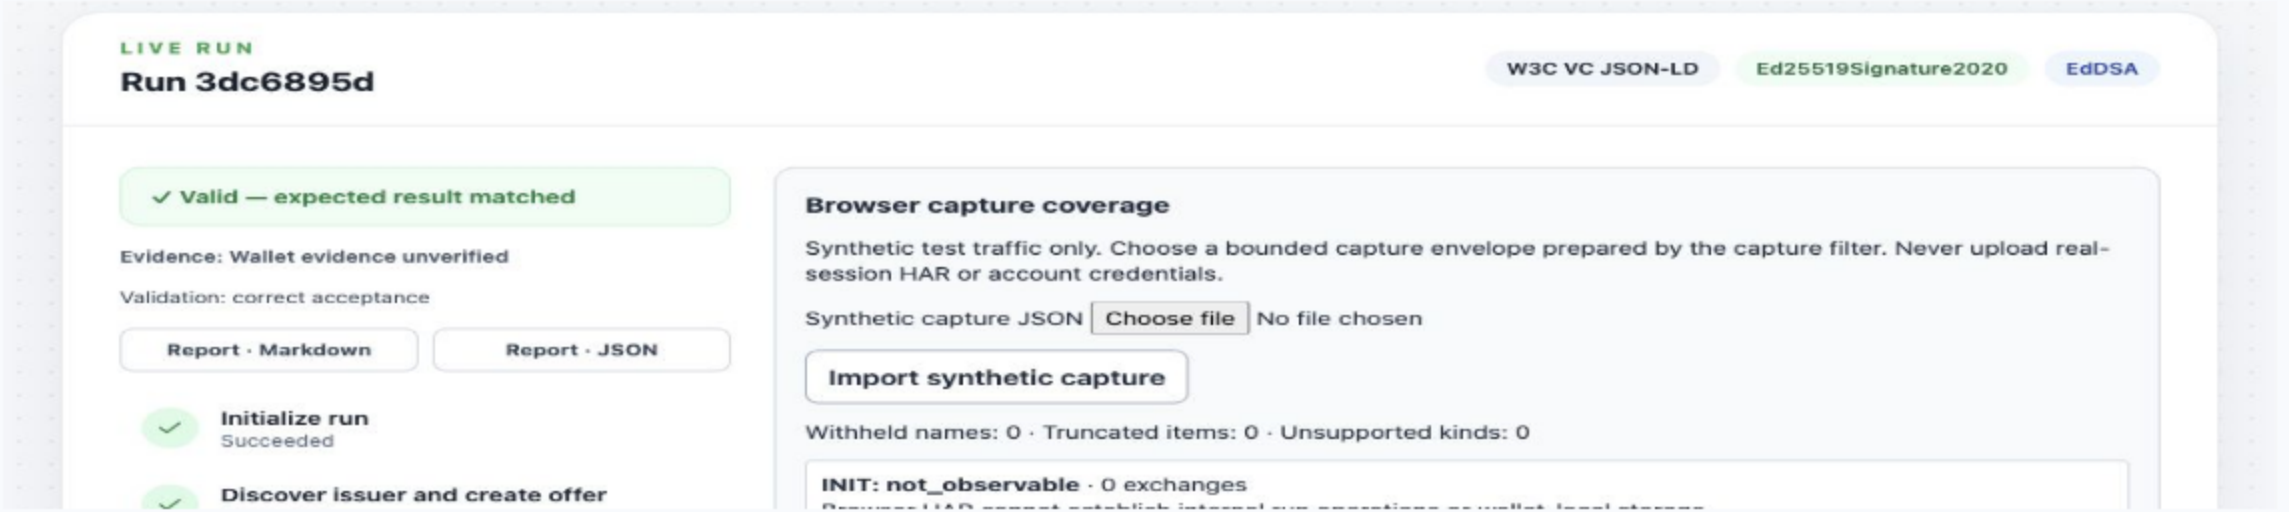



10 steps succeeded

7 sanitized exchanges

Open the timeline, inspect a boundary, then download JSON or Markdown. The committed A1 record remains read only in a fresh demo.

Two real-wallet checkpoints

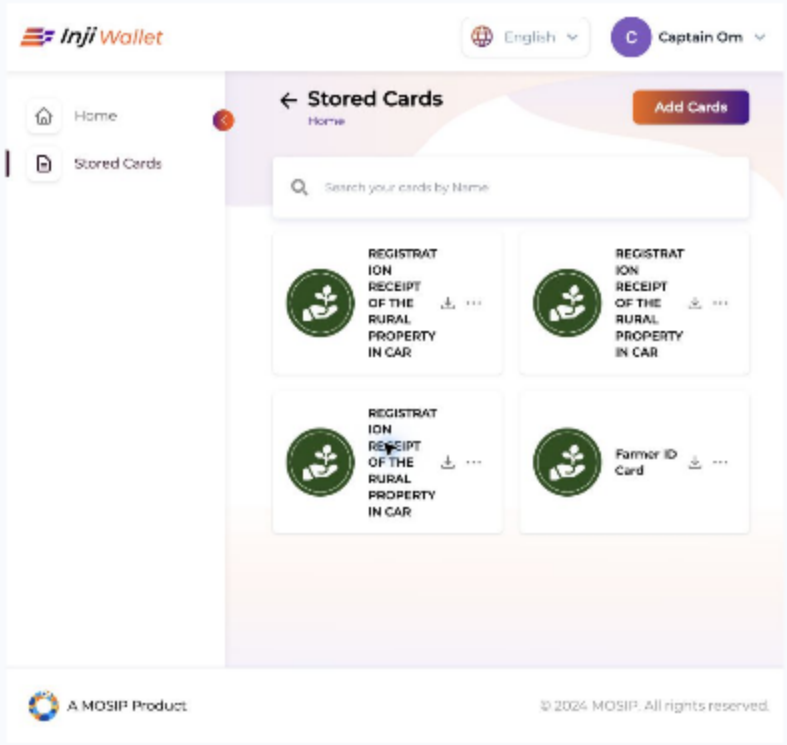

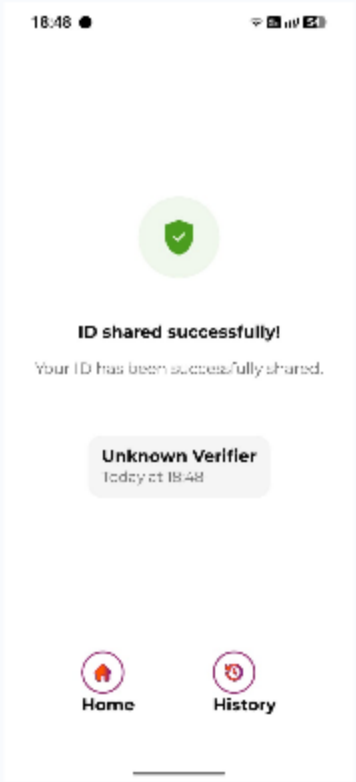

Inji Web · JSON-LD

Hosted Collab: reload-backed storage, correlated presentation, Verify valid. Releases unreported.

Android · SD-JWT

Local Certify → real Android wallet → Collab Verify valid. Hybrid deployment.

A demo judges can inspect

6 cross-container mock scenarios

435 tests passed at the 26 October audit


17 Chromium browser checks passed

For MOSIP integrators and QA teams: faster diagnosis of credential failures with a repeatable, sanitized record.

Local same-wallet JSON-LD journey

Certify 0.14.0 → Inji Web 0.17.0 / Mimoto 0.22.0 → Verify 0.18.2

Exact newly issued card survived reload. The same wallet presented that card. Independent Verify returned valid with credential and holder proofs true.

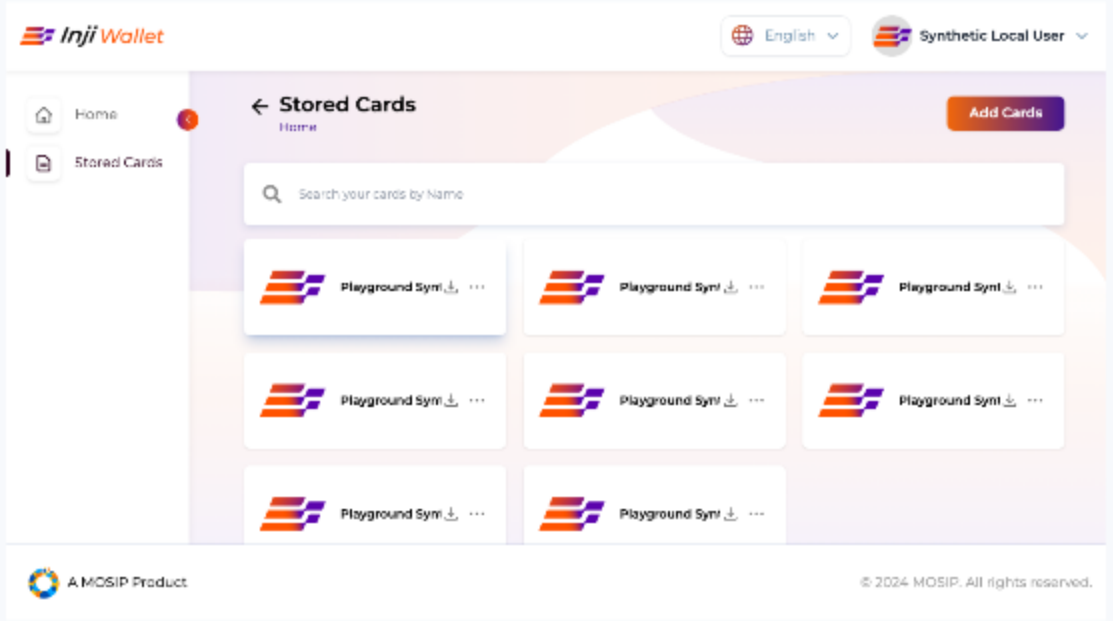

Managed run f5f56b45… links captured token, credential and direct-post exchanges.

Limits: synthetic authorization fixture, declared DID adapter and network-fetched public contexts. Generic evidence tier remains unverified.

Observed findings and limits

G-05 Local initialization contract

Pinned SQL/configuration behavior needs a reproducible setup adjustment.

G-09 Version-specific JWT proof binding

The alpha SD-JWT issuance profile uses its own proof contract; keep it separate from 0.14.

G-10 DID assertion-method reference

The local JSON-LD route declares its DID adapter rather than concealing it.

Upstream issues and private G-06/G-07 reports are still pending owner submission. No upstream confirmation is claimed.