

Program Design Phase

❖ Write Program Specifications

- ◆ Analysis of requirements
- ◆ Program specifications description
 - ◆ Describe what the goals of the program
 - ◆ Describe appearance of input and output

❖ Algorithm Design

- ◆ Mathematical Analysis and Algorithm
- ◆ Flow Chart to describe event sequencing

❖ Verify algorithm

- ◆ Test with known data
- ◆ Solve manually

Copyright © 2009 R.M. Laurie 1

Algorithm Design - Mathematical


❖ Mathematical Description

◆ Boiling point

F = 212
C = 100

◆ Freezing point

F = 32
C = 0

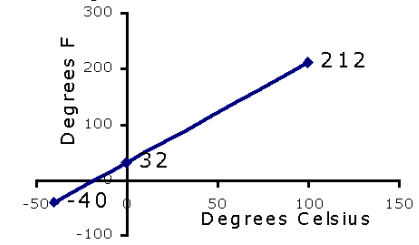


$$Y = MX + B$$

$$\begin{aligned} F &= (180 / 100) C + 32 \\ &= (9/5) C + 32 \\ &= 1.8 C + 32 \end{aligned}$$

Copyright © 2009 R.M. Laurie 2

Algorithm Design - Sequence

❖ Flowcharts are an excellent way to plan the sequence of operations for the program to run

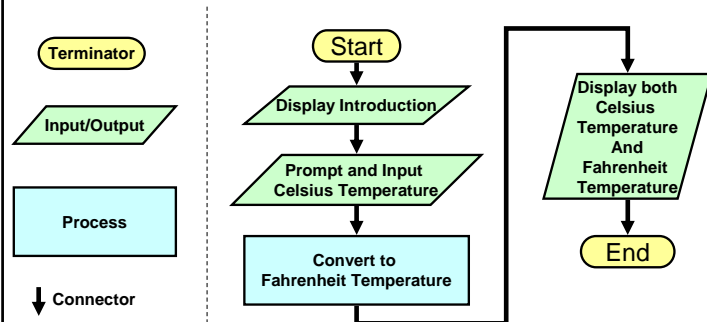

Copyright © 2009 R.M. Laurie 3

Verify Algorithm

❖ Testing with known data

◆ Boiling point

F = 212 C = 100

◆ Freezing point

F = 32 C = 0

◆ Collect Data

- ◆ Bank thermometer
- ◆ Radio weather report

❖ Solve manually by hand using calculator


Copyright © 2009 R.M. Laurie 4

Implementation Phase

- ❖ **Translate Algorithm into Code**
 - ◆ Create HTML source code file embedding JavaScript code
 - ◆ Run to detect *syntax errors*
- ❖ **Test Program**
 - ◆ Test with known data
 - ◆ Detects program *logic errors*
 - ◆ Often requires several iterations
 - ◆ May require re-evaluation of specifications and algorithms

Copyright © 2009 R.M. Laurie 5

Coding First Is No Shortcut?

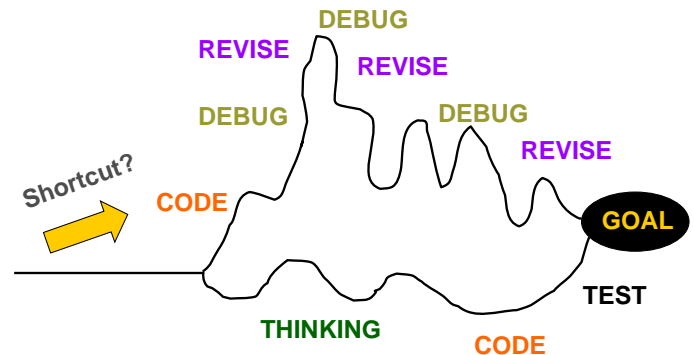

Copyright © 2009 R.M. Laurie 6

JavaScript Programming Language

- ❖ All Web browsers support the **JavaScript** client-side scripting language and contain the **JavaScript Interpreter**, which processes JavaScript commands.
- ❖ JavaScript code usually appears in the `<head>` section of the HTML document. The browser interprets the contents of the `<head>` section first, before the `<body>` of the HTML document is rendered.
- ❖ JavaScript is **Case Sensitive** and all **Keywords** must be lower case
- ❖ JavaScript is an **object based** language
- ❖ **Whitespace** is ignored = space, tabs, new lines

Copyright © 2009 R.M. Laurie 7

HTML `<script>` Element

- ❖ `<script>` element indicates to browser that text that follows is part of a script.
 - ◆ **type** attribute specifies type of file and scripting language
 - ◆ Both IE and Mozilla use JavaScript as the default scripting language.

```
<script type = "text/javascript">  
    script code statements;  
</script>
```

Copyright © 2009 R.M. Laurie 8

JavaScript Comments and Statements

- ❖ Text contained within a JavaScript comment is not executed by the JavaScript interpreter
 - ◆ Single-line comments `// This is a comment`
 - ◆ Multi-line comments `/* This is a comment */`
- ❖ Browser that does not support scripts, ignores the `<script>` element and the script code
- ❖ All JavaScript statements end with a semicolon `;`
- ❖ JavaScript can output HTML code to the browser which then displays the contents.
`document.write ("<h3>Hello World!</h3>");`

Copyright © 2009 R.M. Laurie 9

JavaScript Output

- ❖ `document.write()`
- ❖ Object is `document`
- ❖ Method is `write` = sends string to body

```
<html>
<head>
  <title>A First Program in JavaScript</title>
  <script type="text/javascript">
    document.write( "<h3>Hello World!</h3>" );
  </script>
</head>
<body> </body>
</html>
```

Copyright © 2009 R.M. Laurie 10



Strings and Escape Characters

- ❖ Character Strings are denoted by enclosing text in either `'single'` or `"double quotes"`
- ❖ **Escape Characters** must use a backslash preceding the specification

Text string escape character specifications:

<code>\n</code> = new line	<code>\\</code> = backslash
<code>\"</code> = double quote	<code>'</code> = single quote
<code>\t</code> = tab	<code>\r</code> = carriage return

Copyright © 2009 R.M. Laurie 11

String Concatenation and Escape Characters

- ❖ String Concatenation Operator `+`
 - ◆ Connects two strings together
- ❖ Special Character `\`

```
<html>
<head>
  <title>Using String Concatenation</title>
  <script type="text/javascript">
    document.write("<h2>" );
    document.write( "Welcome to string" +
      " \"concatenation\"! </h2>" );
  </script>
</head>
<body> </body>
</html>
```




JavaScript Output: Alert Window

❖ **window.alert()**

Object


Method

```
<html>
<head>
<title></title>
<script type="text/javascript">
window.alert( "Welcome to\nJavaScript\nProgramming!" );
</script>
</head>
<body>
<h2>Click Refresh (or Reload)<br>
to run this script again.</h2>
</body> </html>
```

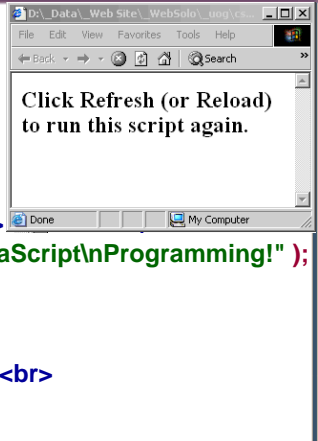


Click Refresh (or Reload) to run this script again.


Copyright © 2009 R.M. Laurie 13

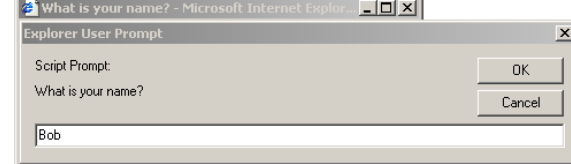

Input

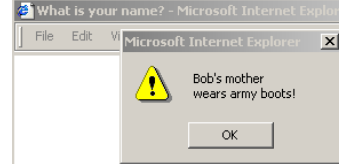

Output

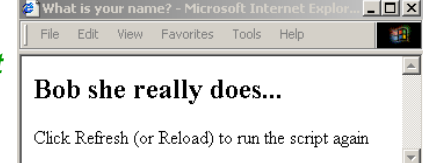

Output

Bob she really does...

Click Refresh (or Reload) to run the script again

JavaScript Variables

- ❖ A **Variable** is a container of data
- ❖ Variables **declared** with **var** statement
 - ◆ **var i;** // Single variable declaration
 - ◆ **var firstEntry, secondEntry, j, M;** // Multiple variables
 - ◆ **var i=0, j=0;** // Variables can be initialized to a value
- ❖ Declaration statements end with semicolon (;)
- ❖ Multiple variable declaration comma separated
- ❖ Variable name can be any valid **identifier**.
 - ◆ An identifier is a name for a variable of function
 - ◆ Consisting of letters, digits, "_" and "\$"
 - ◆ Can NOT begin with a digit
 - ◆ Can NOT have spaces or symbols other then _ and \$
 - ◆ Can NOT be a JavaScript keyword

Copyright © 2009 R.M. Laurie 15

JavaScript Keywords

- ❖ JavaScript has only 22 keywords that can NOT be used for an identifier name.

break	case	continue	delete	do
else	false	for	function	if
in	new	null	return	switch
this	true	typeof	var	void
while	with			
- ❖ Twelve other keywords also can not be used for identifiers

catch	class	const	debugger	default
enum	export	extends	finally	import
super				

Copyright © 2009 R.M. Laurie 16

JavaScript Prompt for Input Data

❖ `window.prompt(prompt, default)`

- ◆ Return the string entered to assigned variable

```
<head>
<title>What is your name?</title>
<script type="text/javascript">
  var FirstName; // String of characters input variable
  FirstName = window.prompt( "What is your name?", "" );
  window.alert(FirstName + "'s mother\nwears army boots!");
  document.writeln("<h2>" + FirstName + " she really does...</h2>");
</script>
</head>
<body>
  <p>Click Refresh (or Reload) to run the script again</p>
</body>
```

Copyright © 2009 R.M. Laurie 17

JavaScript Data Types and Values

❖ JavaScript is "loosely" typed language

❖ Simple Data Types

◆ String of text

- ◆ Symbolized using `"abc123"` or `'abc123'`
- ◆ Special Characters may be used `\n \t \b \' \'`

◆ Number

- ◆ 8 byte (64 bit) floating point format $\pm 1.8 \times 10^{\pm 308}$
- ◆ `int parseInt(string)`
 - ▶ Converts string to integer (whole number)
 - ▶ Drops all fractional part to right of decimal point
- ◆ `float parseFloat(string)`
 - ▶ Converts string to floating point (real number)
 - ▶ Keeps fractional part to right of decimal point

Copyright © 2009 R.M. Laurie 18

JavaScript Arithmetic Operators

- ❖ Used to perform arithmetic operations on numbers and data contained in variables, with the result usually assigned to variable
- ❖ Order of precedence determines which order the operations will be performed
- ❖ Note that the assignment operator `=` is defined last and precedence is last
- ❖ For readability insert parenthesis if order of operation not apparent in code

Copyright © 2009 R.M. Laurie 19

Arithmetic Operators Precedence


(Highest to Lowest)

()	Defines order of operation
-	Negative (unary)
* / %	Multiply, Division, Remainder
+ -	Addition (concatenation), Subtraction
=	Assignment

Copyright © 2009 R.M. Laurie 20

Operator Evaluation Examples

```
<head>
<title>Test Score</title>
<script type="text/javascript">
  var Remainder, AvgScore;
  var Score = 93, ScoreCount = 1, TotalScore;
  TotalScore = Score;
  Score = 78;
  TotalScore = TotalScore + Score;
  ScoreCount = ScoreCount + 1;
  AvgScore = TotalScore / ScoreCount;
  document.writeln("<p>" + (TotalScore - ScoreCount) + "</p>");
  document.writeln("<p>Average = " + AvgScore
    + "<br> F &lt;" + AvgScore / 2 + "</p>");
</script>
</head>
<body>
  &gt; > &
</body>
```

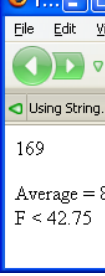

HTML < code
> > &

Copyright © 2009 R.M. Laurie 21

Exams Average Example

```
<head>
<title>Test Score</title>
<script type="text/javascript">
  var AvgScore, Score, TotalScore = 0;
  Entry = window.prompt( "Enter Exam 1 Score", "0" );
  Score = parseFloat(Entry);
  TotalScore = TotalScore + Score;
  Entry = window.prompt("Enter Exam 2 Score", "0" );
  Score = parseFloat(Entry);
  TotalScore = TotalScore + Score;
  Entry = window.prompt("Enter Exam 3 Score", "0" );
  Score = parseFloat(Entry );
  TotalScore = TotalScore + Score;
  document.writeln("Average Score = " + TotalScore / 3);
</script>
</head>
<body>
</body>
```

Copyright © 2009 R.M. Laurie 22

```
<head>
<title>Double Sum Program</title>
<script type="text/javascript">
  var firstEntry, secondEntry; // Strings entered by user
  var Number1, Number2,      // Converted number entries
  Sum, Double;              // sum of number1 and number2
  //Prompt and Receive numbers
  firstEntry = window.prompt( "Enter first number", "0" );
  secondEntry = window.prompt( "Enter second number", "0" );
  // Convert numbers from strings to integers
  Number1 = parseInt( firstEntry );
  Number2 = parseInt( secondEntry );
  // Add the numbers
  Sum = Number1 + Number2;
  Double = Sum * 2;
  // Display the results
  document.writeln( "<h2>The double sum is " + Double + "</h2>" );
</script>
</head>
<body>
  <p>Click Refresh (or Reload) to run the script again</p>
</body>
```

Assignment #2

- ❖ Create working JavaScript programs to solve the following textbook programming problems. Create a design document with algorithms and test data for each. Print the working code and browser display when run.
 - ◆ p.67 Problem 3: Input C temperature, convert to F temperature, and display both with units.
 - ◆ p.67 Problem 6 modified: Enter first name, middle Initial, and last name. Display lastName, firstName middleInitial.
 - ◆ P.109 Problem 3: Gross pay program.

Copyright © 2007 R.M. Laurie 24