





EEG/MEG Statistics – ROI Analysis and Cluster-Based Permutation TestingOlaf Hauk

olaf.hauk@mrc-cbu.cam.ac.uk

Regions-of-Interest (ROI) Analysis

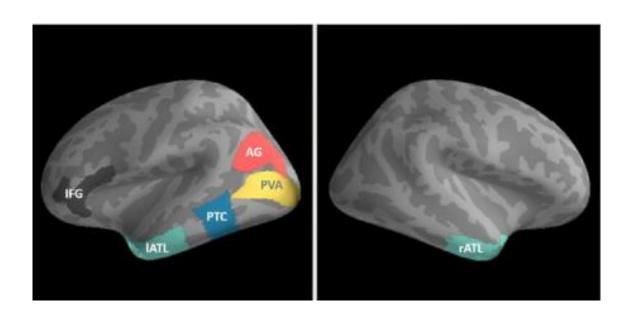

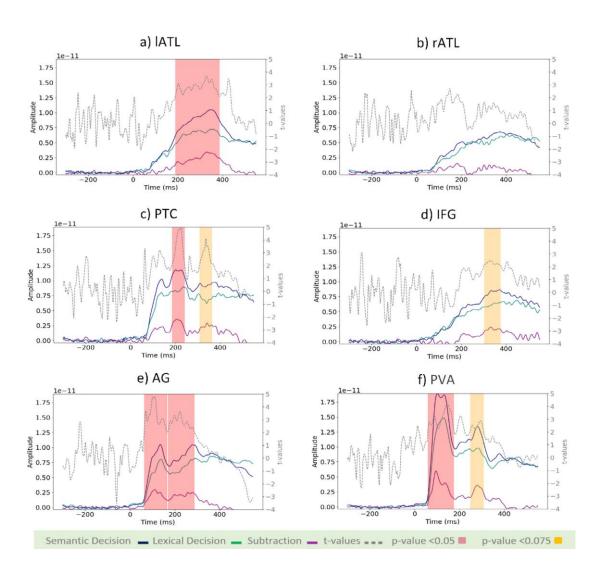



Defining Clusters:

- 1. For every sample (space/time/frequency) the experimental conditions are compared by means of a t-value (or similar). This t-value is *not* the cluster-based test statistic for which we will calculate the significance probability, it is just an ingredient in the calculation of this cluster-based test statistic.
- 2. All samples are selected whose t-value is larger than some threshold. This threshold does *not* affect the false alarm rate of the statistical test, it only sets a threshold for considering a sample as a candidate member of some cluster of samples.
- 3. Selected samples are clustered in connected sets on the basis of temporal, spatial and spectral adjacency.
- 4. Cluster-level statistics are calculated by taking the sum of the t-values within every cluster.

Significance Test:

- 1. Randomly draw trials from your data and assign them to subset 1 and subset 2, respectively. The result of this procedure is called a *random partition*.
- 2. Calculate the test statistic (the above maximum of the cluster-level summed t-values) on this random partition.
- 3. Repeat steps 1 and 2 many times and construct a histogram of the test statistics.
- 4. Calculate the proportion of random partitions that resulted in a larger test statistic than the observed one. This proportion is the Monte Carlo significance probability, which is also called a *p-value*.

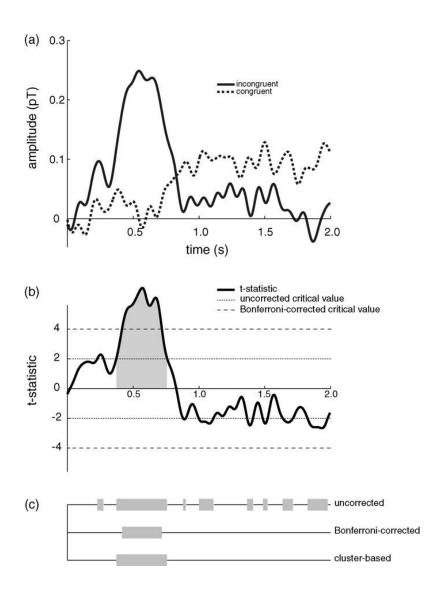

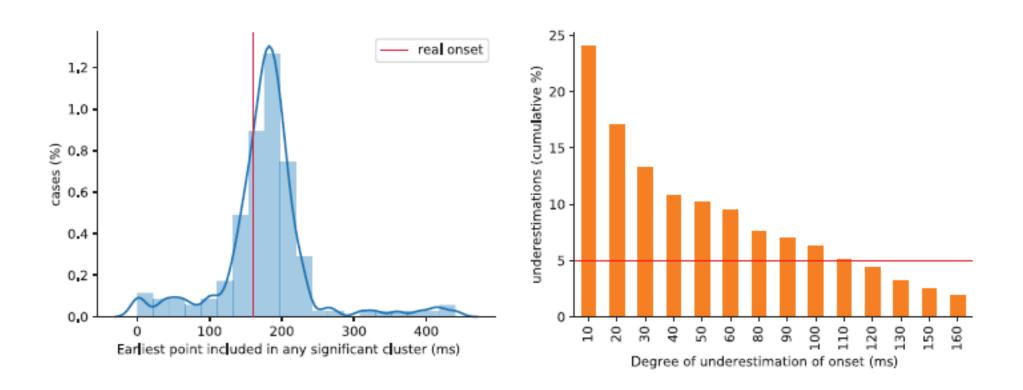


Cluster-based permutation tests of MEG/EEG data do not establish significance of effect latency or location


Sassenhagen & Draschkow, Psychophysiol 2018, https://pubmed.ncbi.nlm.nih.gov/28893608/

Sensor Space

Source Space

0.000 s

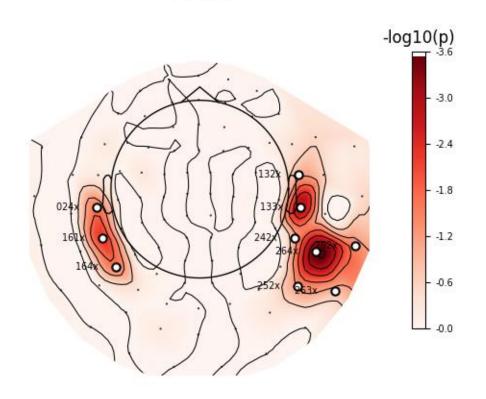

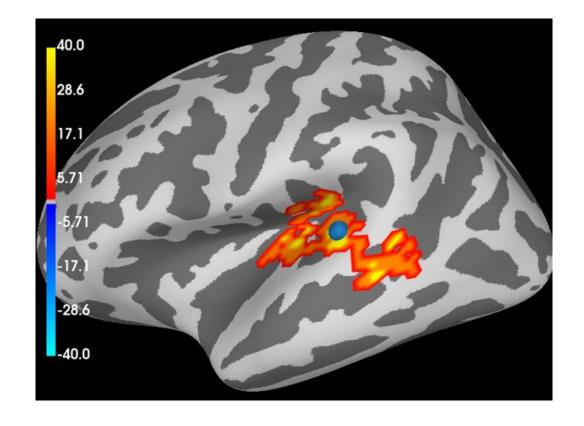





Thank you

