


Factory Run Flow

One ticket in, one verified draft PR out. scripts/run.sh <slug> runs one phase per fresh session, gates the phase that just closed, and stops whenever a human is needed. state.json is the only thing carried between sessions.

opus autonomous phase, claude -p needs you, interactive session sonnet leaf agents (Sonnet / Haiku) gate.py --phase terminal state

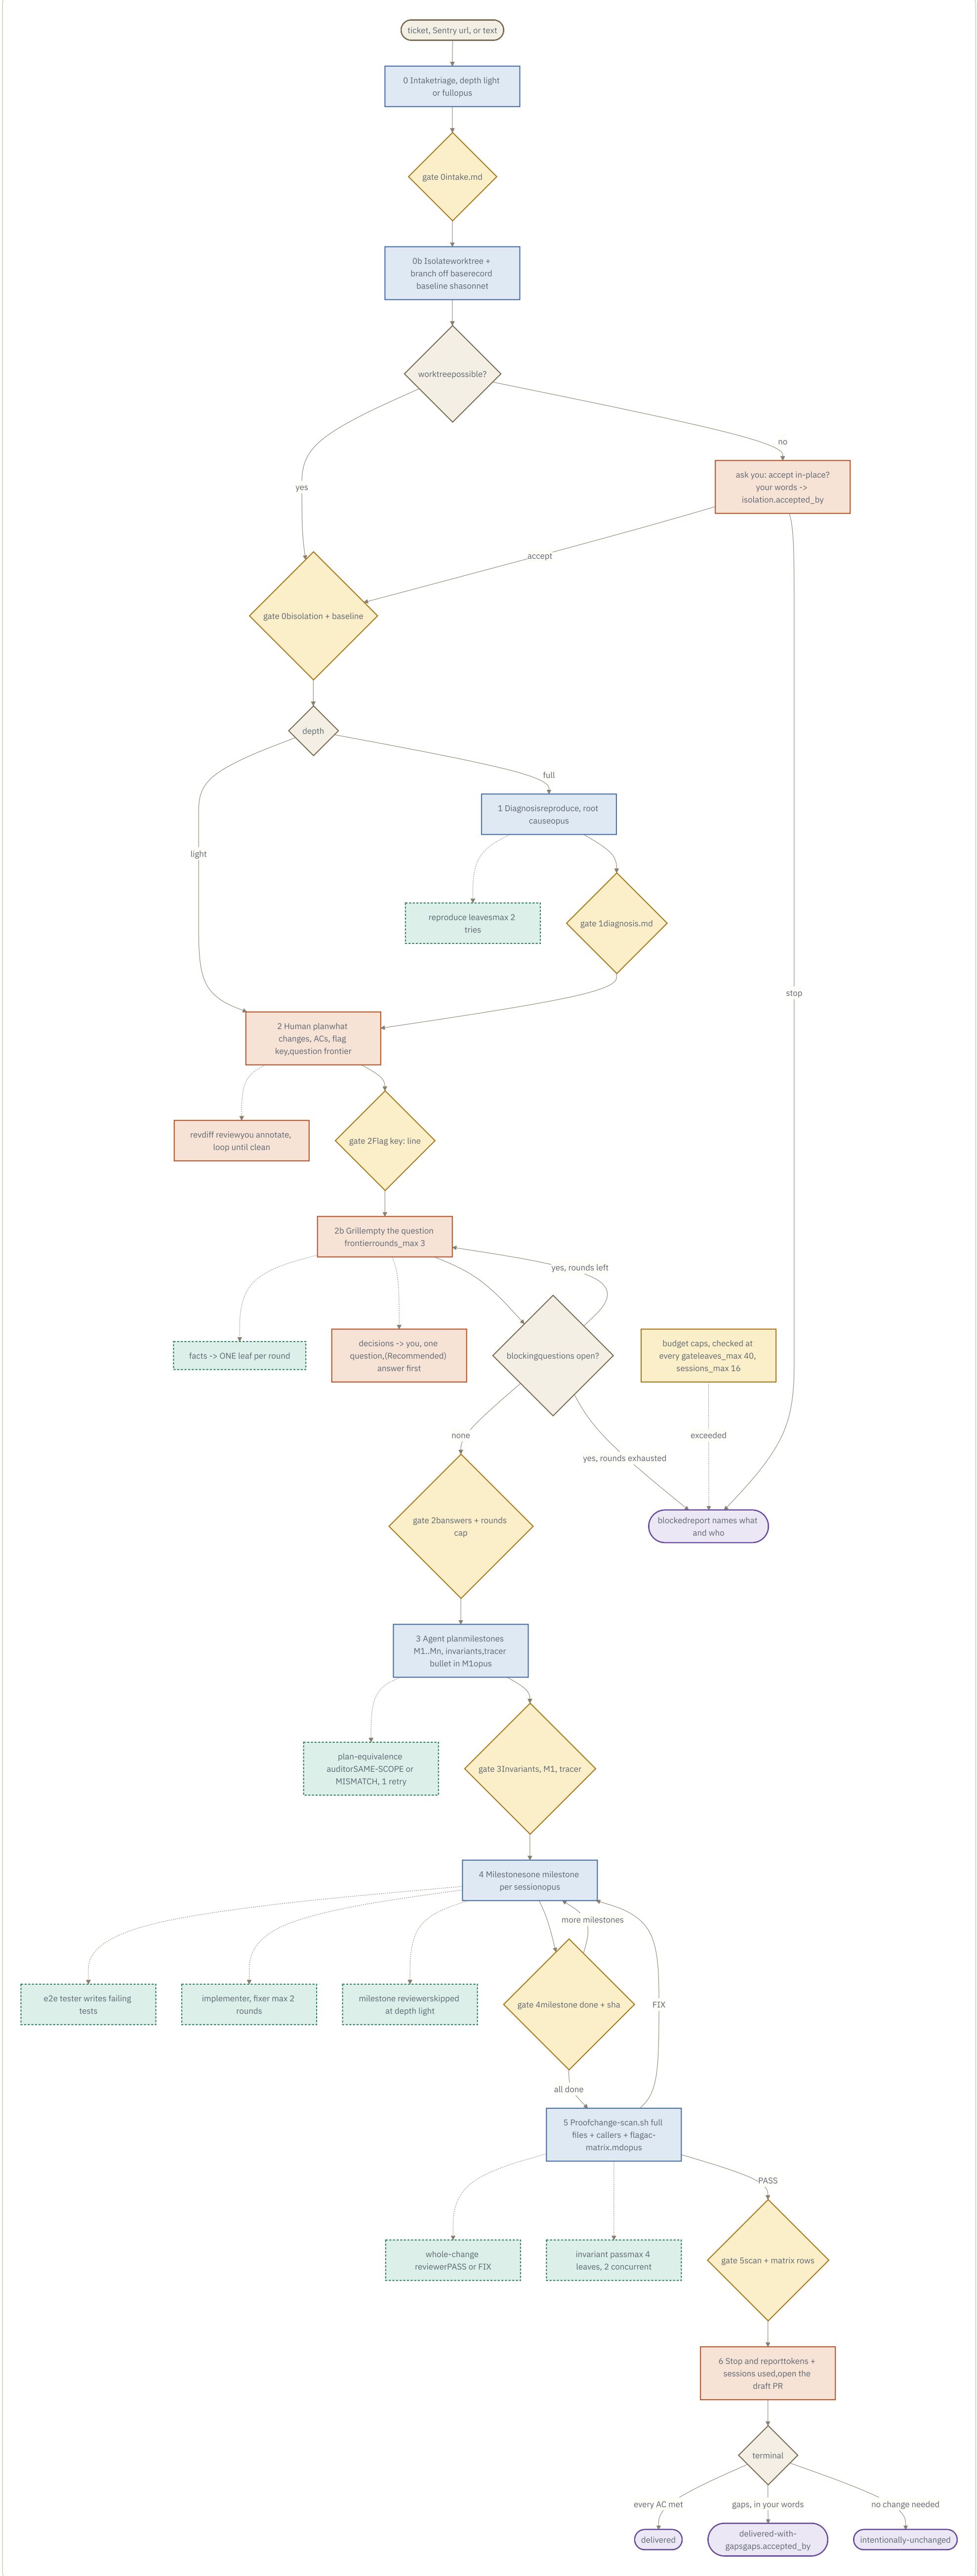

WHO DOES WHAT, PER PHASE

PHASE	RUNS AS	SPEAKS	CLOSES WHEN
0 intake	opus	triage verdict	intake.md written
0b isolate	sonnet	where the run writes	worktree + baseline sha, or your consent to in-place
1 diagnosis	opus	root cause synthesis	diagnosis.md; skipped at depth light
2 human plan	you	plan + revidiff	plan has a Flag key: line
2b grill	you + leaf	one summary per round	no blocking question unanswered
3 agent plan	opus	gate decision	invariants, M1 with tracer, SAME-SCOPE
4 milestones	opus + leaves	per milestone verdict	every milestone done with a sha
5 proof	opus + leaves	Phase 5 verdict	scan + AC matrix, reviewer PASS
6 stop	you	final report, PR url	terminal state set, gate quoted

WHAT STOPS THE LOOP

SIGNAL	RUN.SH DOES
next phase is 2, 2b or 6	prints NEEDS-YOU, exit 0. You run /factory resume <slug>, then rerun.
gate on the closed phase says BLOCKED	prints reasons, exit 1. Nothing starts on an unpassed predecessor.
state.terminal set	exit 0, run is over.
sessions used hits sessions_max	exit 0 with the cap named.
two sessions in a row change neither phase nor milestone	reruns the gate for the reasons, exit 1.
leaves_used > leaves_max	gate blocks; only blocked may still close.

Model per autonomous phase is overridable with FACTORY_MODEL_<PHASE>, for example FACTORY_MODEL_0B=haiku.