

Раздел 2:

Методологии вёрстки

План лайва

1. EditorConfig.
2. Правила именования.
3. БЭМ.
4. Практика: именование по БЭМ.
5. Практика: вёрстка по БЭМ.
6. Критерии.
7. Домашнее задание.

Поддержка кода

EditorConfig



Именование

1. Слова, часто используемые в CSS-классах, Юлия Бухвалова.
2. Не используем сокращенное именование:
 - Класс `button`, а не `btn`
 - Класс `header`, а не `hdr`



Нотация

БЭМ



Нотация

Блок Элемент Модификатор



Нотация

.block_element—modifier



Нотация: составные имена

.block-name
__element-name
--modifier-name




Нотация: составные имена

`.block-name__element-name--modifier-name`



Блок

Можно вкладывать блоки друг в друга

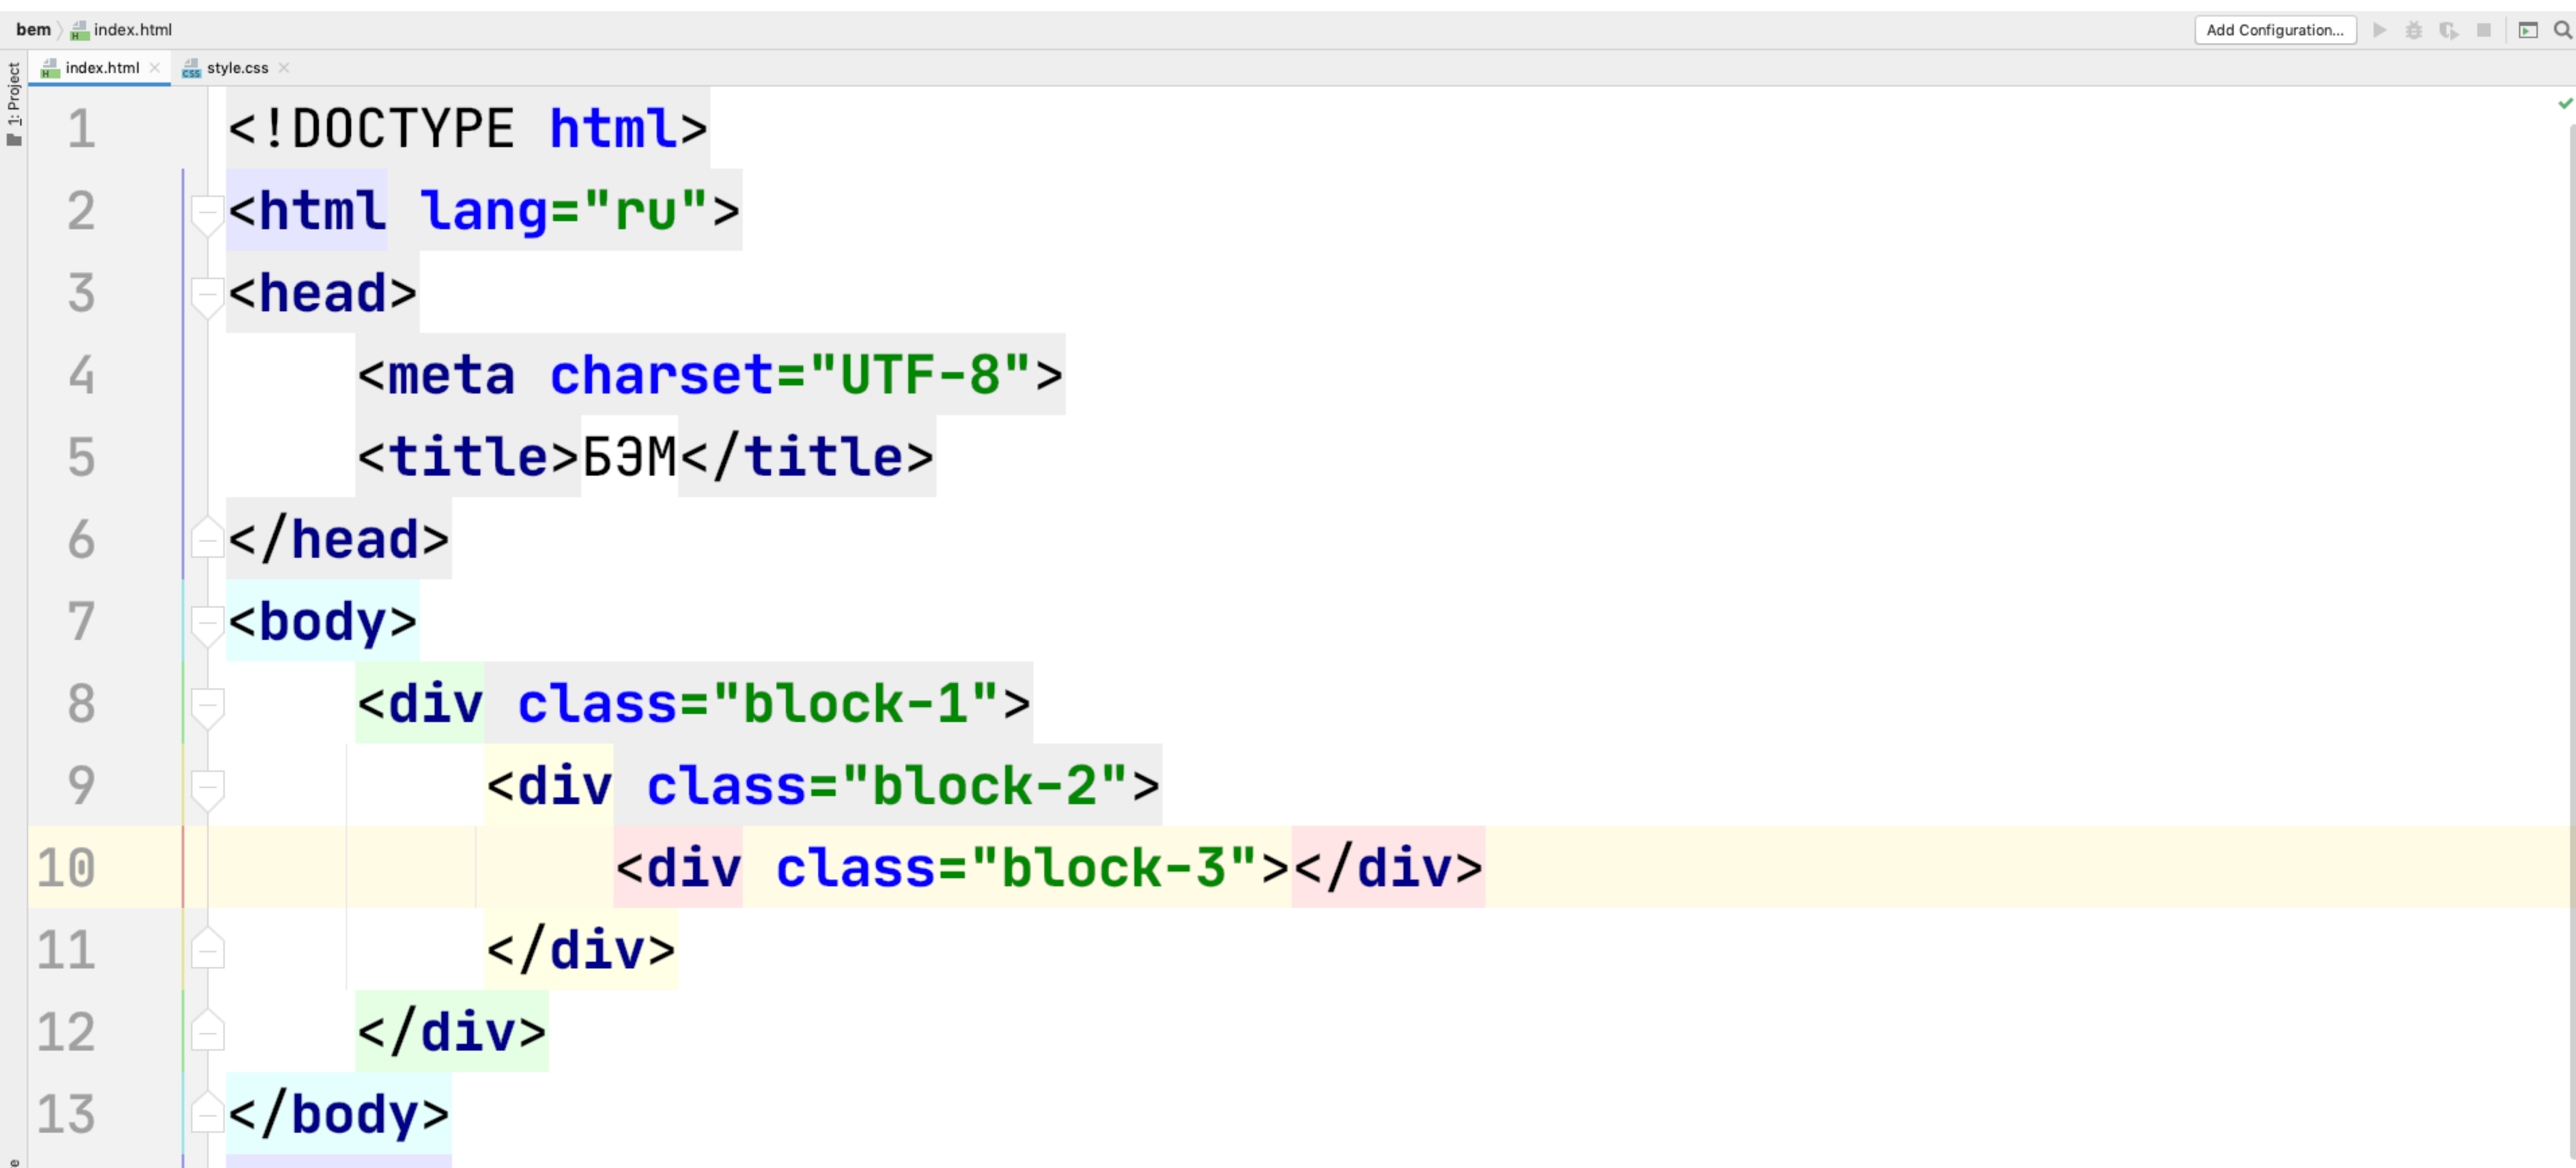

The screenshot shows a code editor with two tabs: 'index.html' and 'style.css'. The 'index.html' tab is active, displaying the following HTML code:

```
1 <!DOCTYPE html>
2 <html lang="ru">
3 <head>
4     <meta charset="UTF-8">
5     <title>БЭМ</title>
6 </head>
7 <body>
8     <div class="block-1">
9         <div class="block-2">
10            <div class="block-3"></div>
11        </div>
12    </div>
13 </body>
```

The code is color-coded: HTML tags are blue, attribute values are green, and text content is black. The code is structured to show nested blocks: 'block-1' contains 'block-2', which contains 'block-3'. The editor interface includes a sidebar on the left with a file explorer showing '1: Project' and a search bar at the top right with the text 'Add Configuration...'.


Элемент

Нет элементов без блока

```
1  <!DOCTYPE html>
2  <html lang="ru">
3  <head>
4      <meta charset="UTF-8">
5      <title>БЭМ</title>
6  </head>
7  <body>
8      <div class="block-1">
9          <div class="block-2__element"></div>
10     </div>
11 </body>
12 </html>
```


Элемент

Вложенные названия запрещены

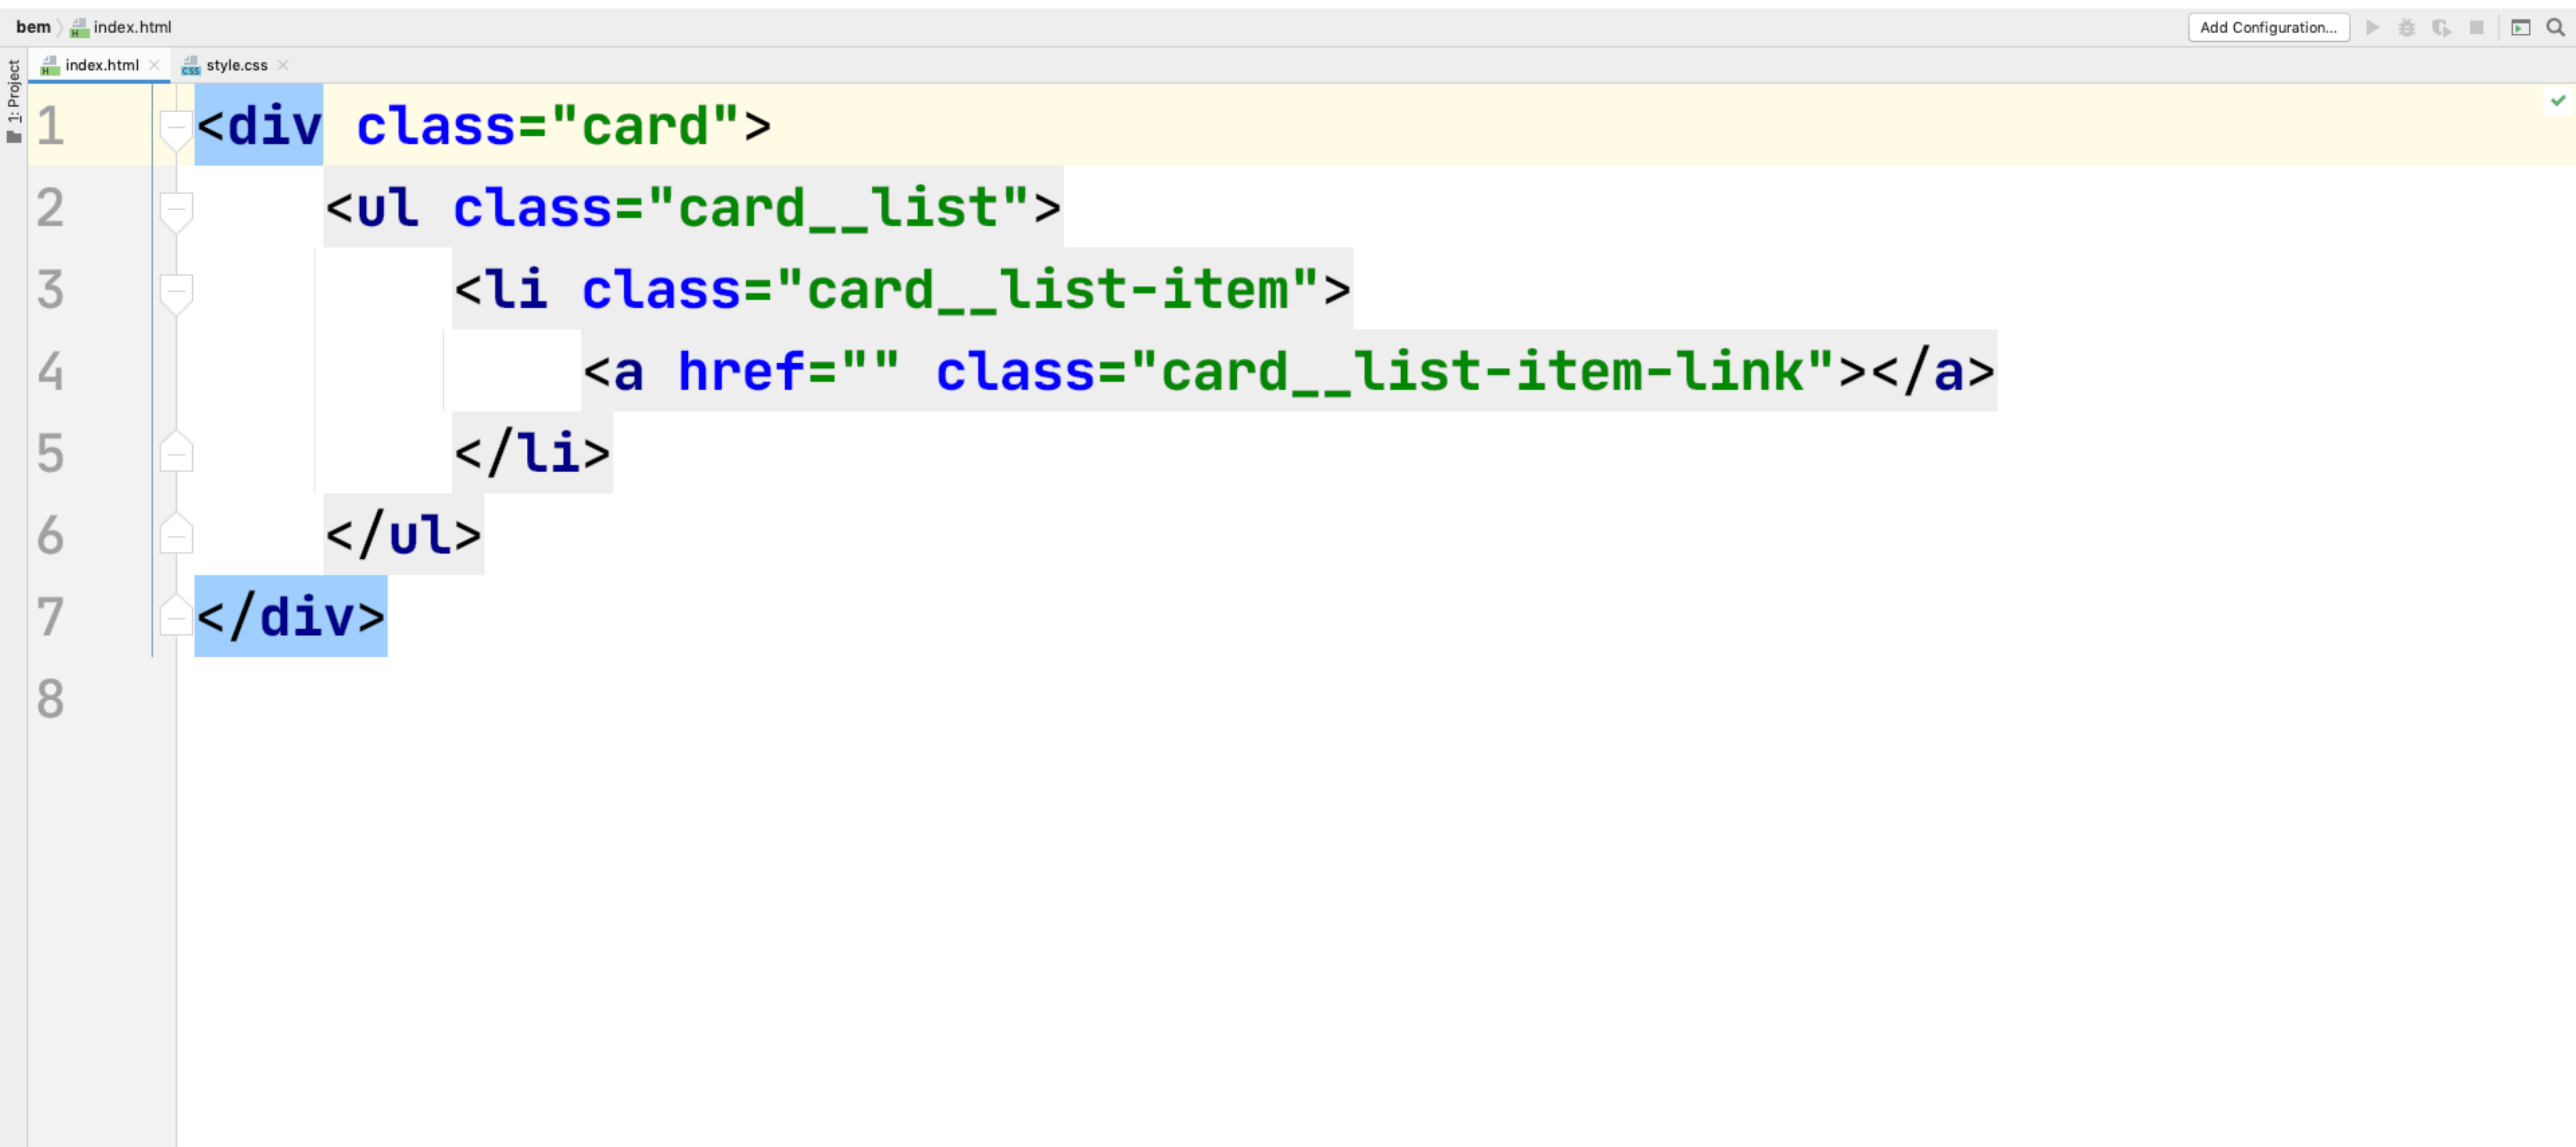


The screenshot shows a code editor with two tabs: 'index.html' and 'style.css'. The 'index.html' tab is active, displaying the following HTML code:

```
1 <div class="card">
2   <ul class="card__list">
3     <li class="card__list-item">
4       <a href="" class="card__list-item-link"></a>
5     </li>
6   </ul>
7 </div>
```

The code is formatted with indentation. The first line is highlighted in yellow. The second line is highlighted in light gray. The third line is highlighted in light gray. The fourth line is highlighted in light gray. The fifth line is highlighted in light gray. The sixth line is highlighted in light gray. The seventh line is highlighted in light blue. The code is written in a monospaced font with syntax highlighting: tags are blue, attributes are green, and values are black.

Элемент

Исправляем вложенные названия

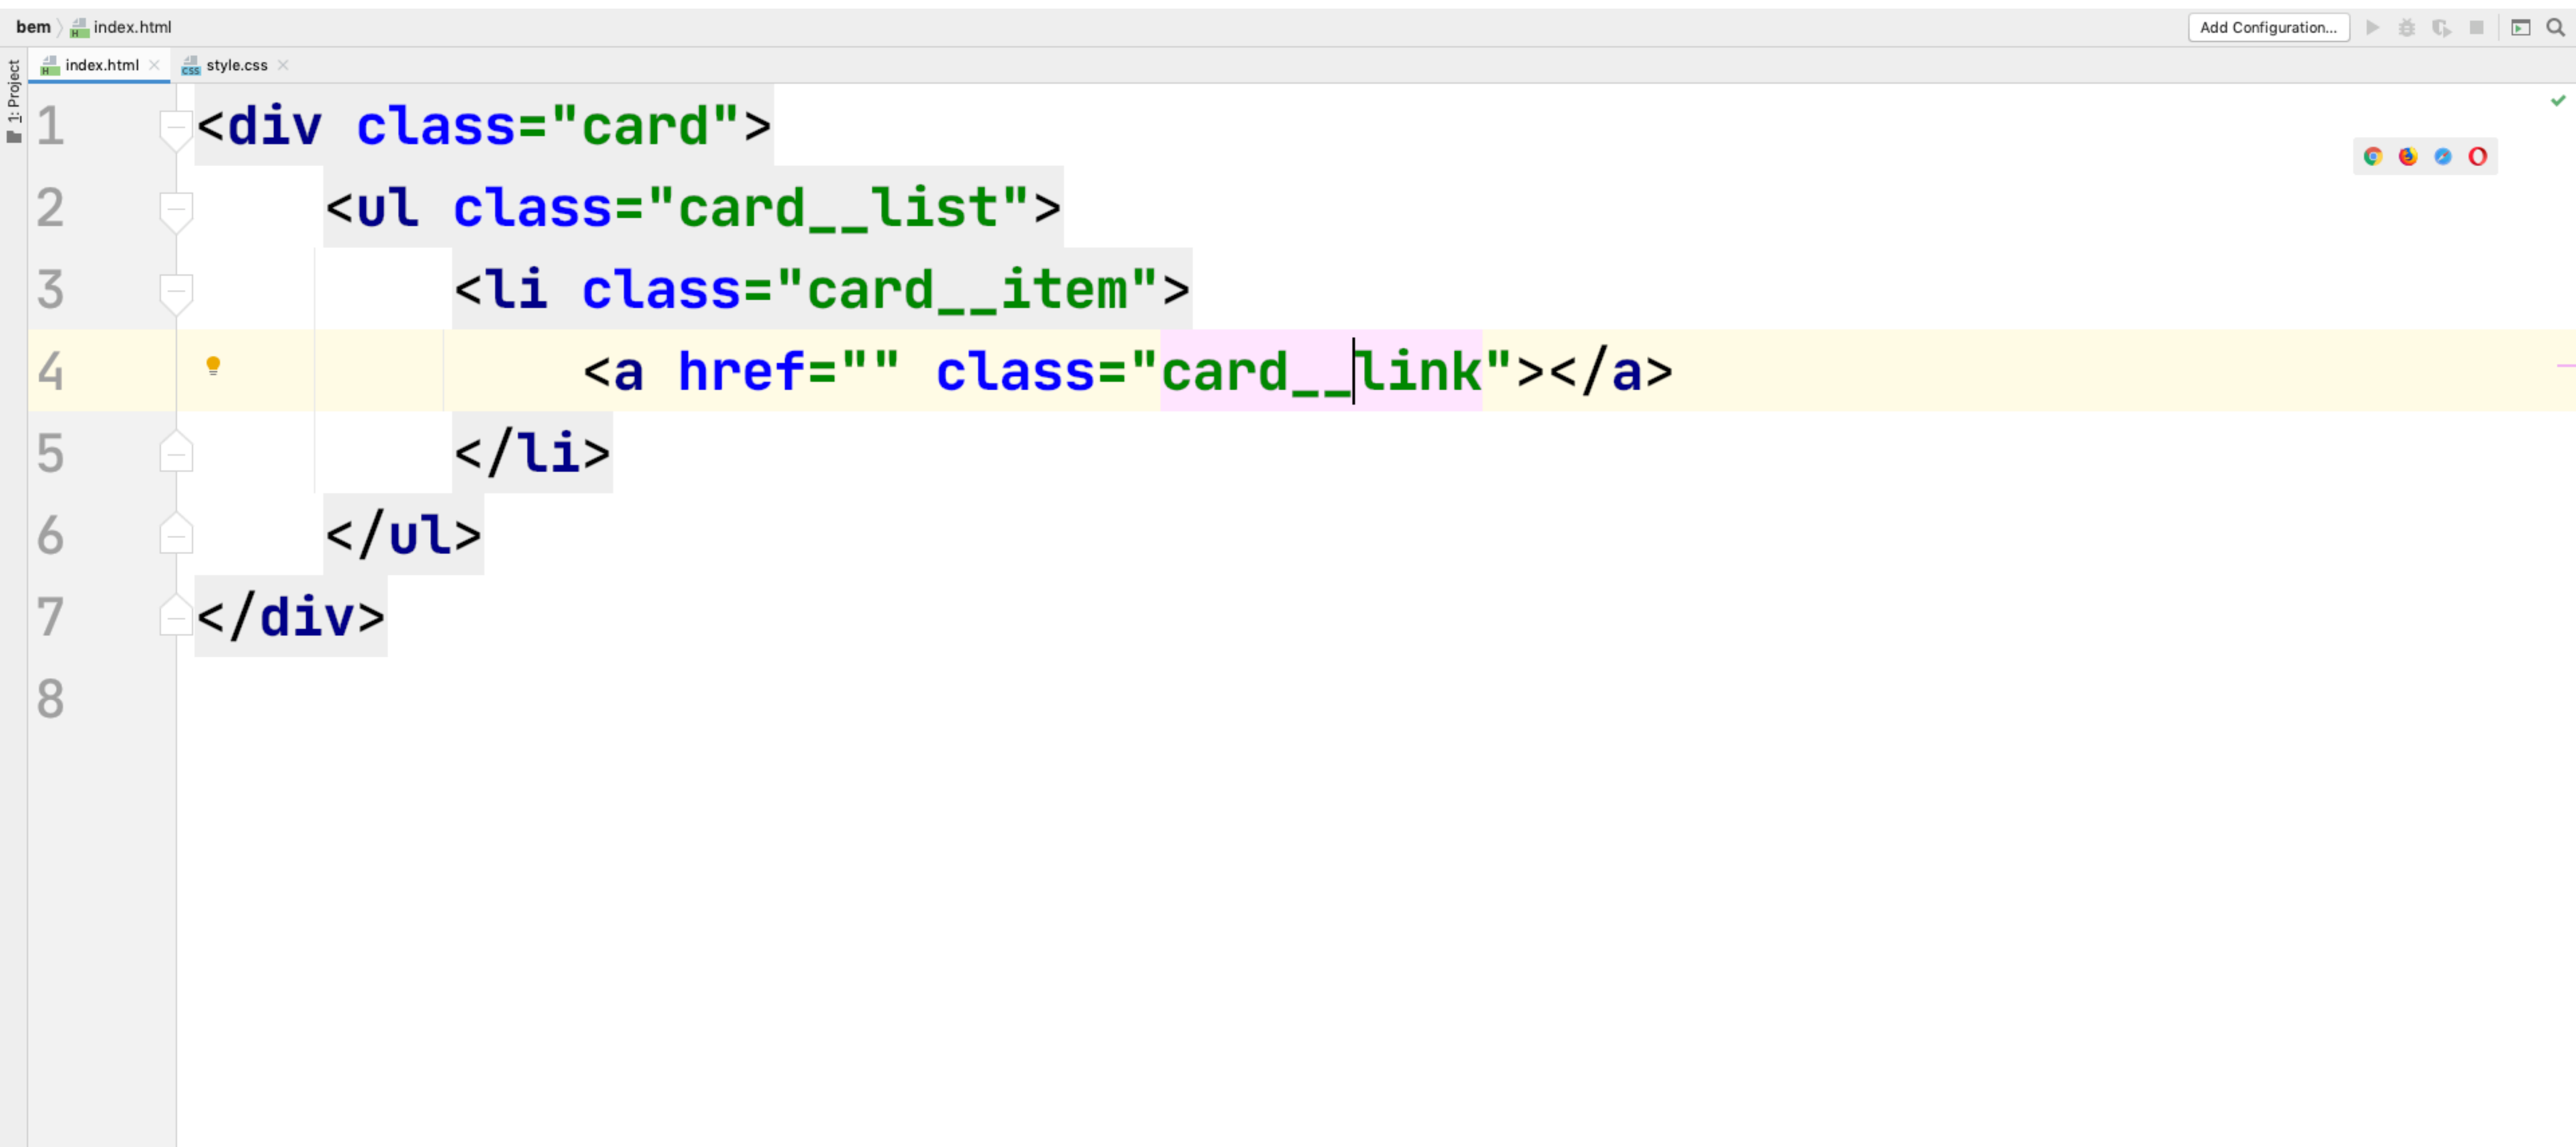


The screenshot shows a code editor with two tabs: 'index.html' and 'style.css'. The 'index.html' tab is active, displaying the following HTML code:

```
1 <div class="card">
2   <ul class="card_list">
3     <li class="card_item">
4       <a href="" class="card_link"></a>
5     </li>
6   </ul>
7 </div>
8
```

Line 4 is highlighted in yellow, and the class name 'card_link' is highlighted in pink. A lightbulb icon is visible to the left of the code on line 4, indicating a suggestion or warning. The editor interface includes a sidebar on the left with a 'Project' view, a top bar with 'Add Configuration...' and other icons, and a bottom bar with browser icons.

Элемент

Элемент может стать блоком

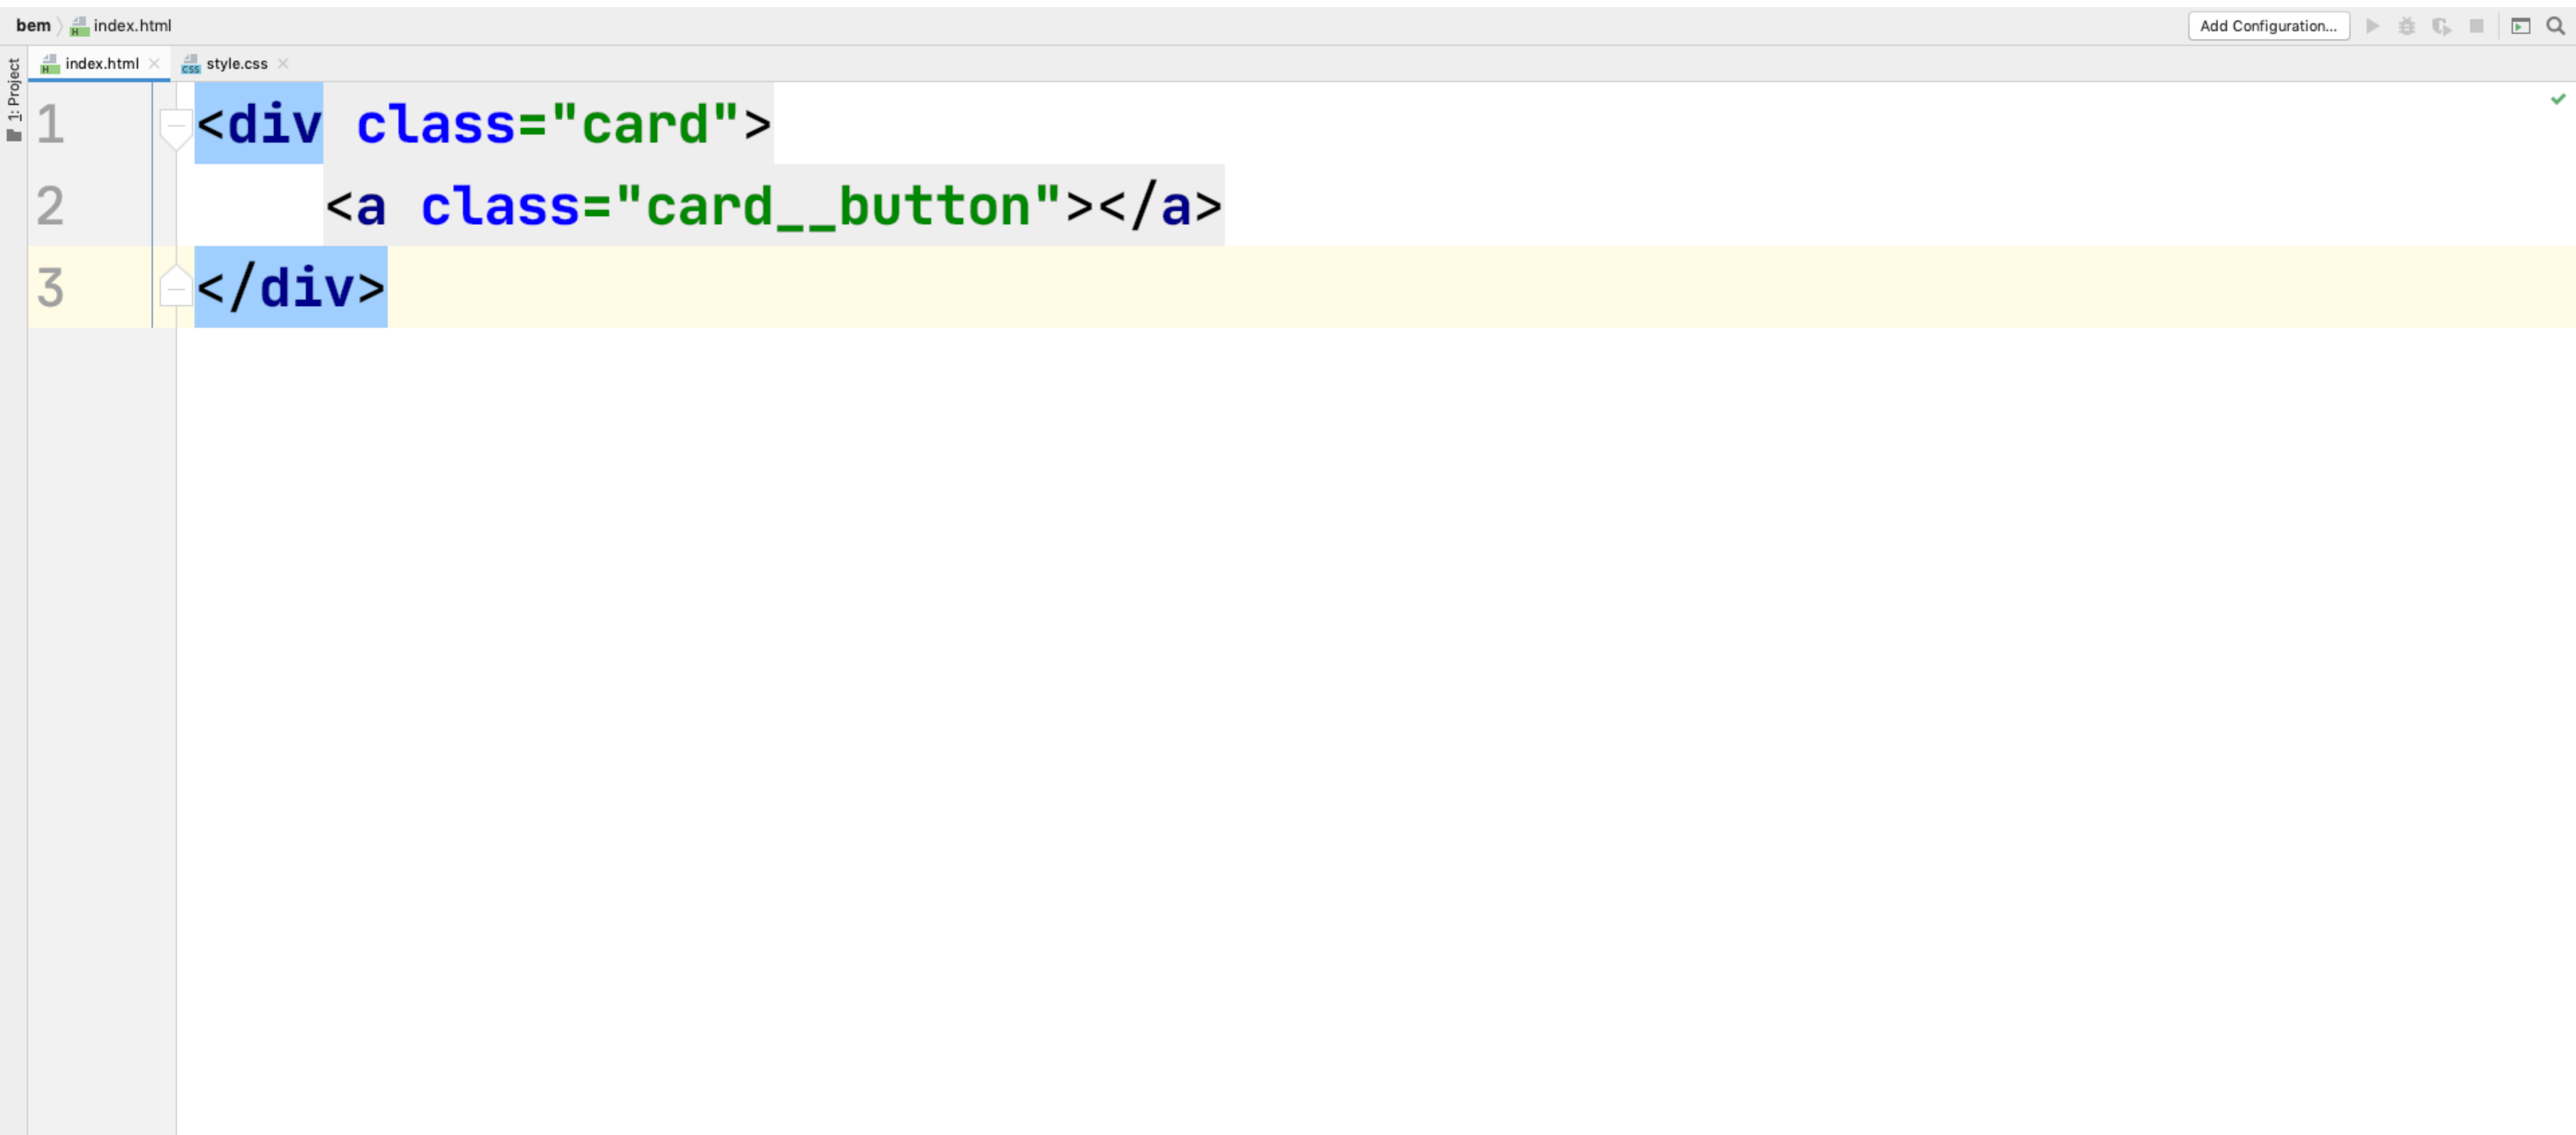

The screenshot shows a code editor with two tabs: 'index.html' and 'style.css'. The 'index.html' tab is active, displaying the following HTML code:

```
1 <div class="card">  
2     <a class="card_button"></a>  
3 </div>
```

The code is color-coded: the opening tag '<div class="card">' is highlighted in blue, the closing tag '</div>' is highlighted in blue, and the inner content '' is highlighted in grey. A yellow background highlights the entire third line of the code. The editor interface includes a sidebar on the left with a 'Project' view, a top bar with a search icon and a 'Add Configuration...' button, and a status bar at the bottom.


Элемент

Элемент может стать блоком




Модификатор

Не именуйте от цвета или других CSS-свойств

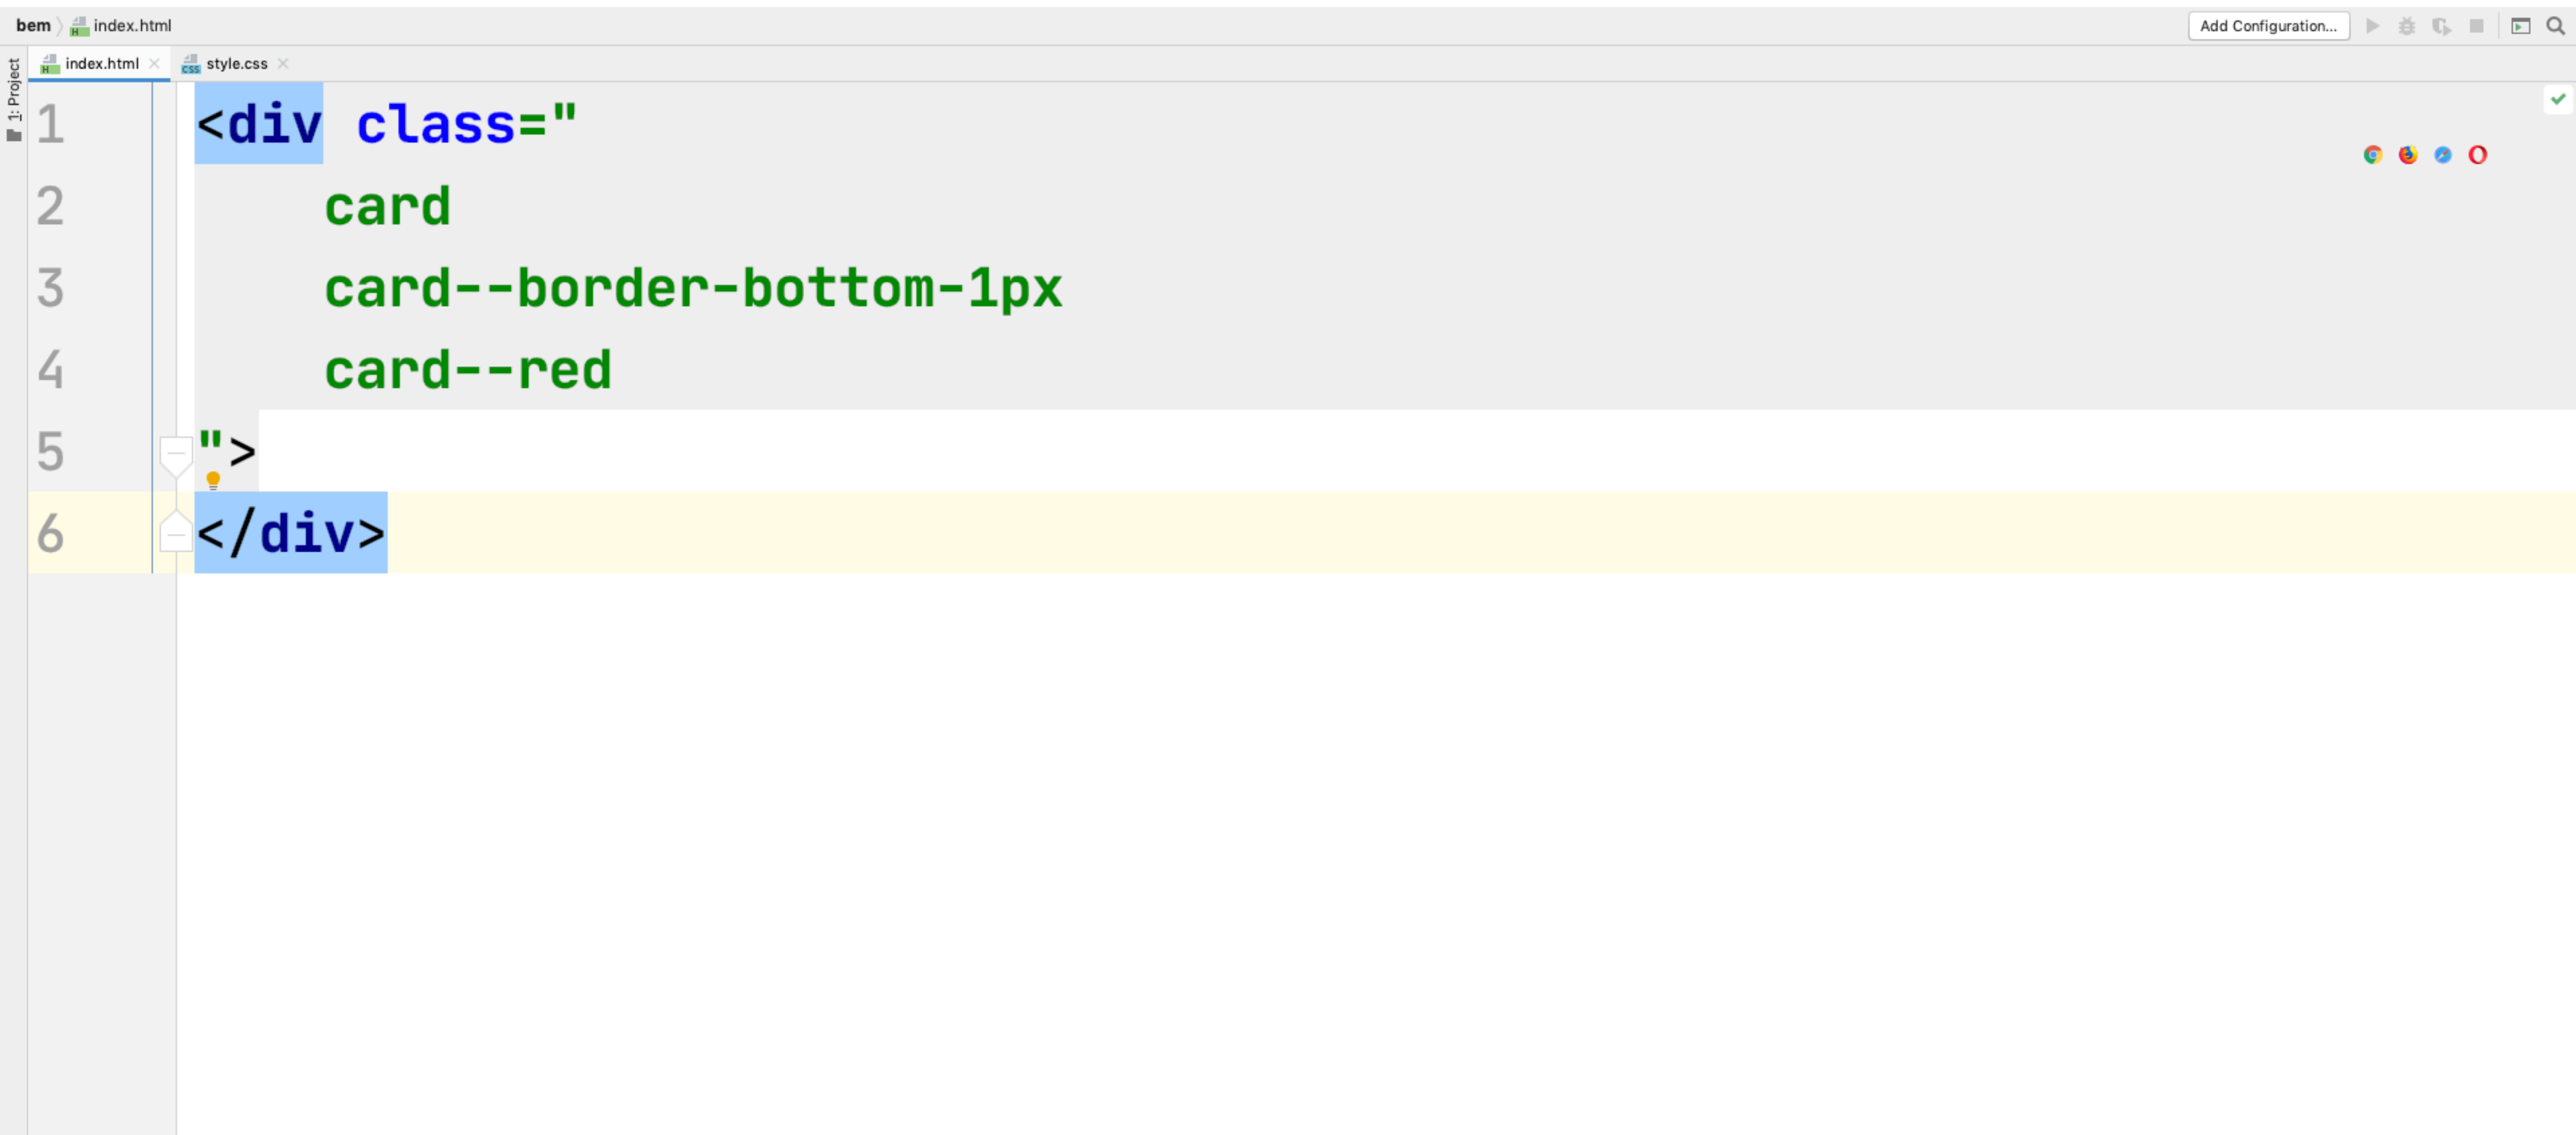

Модификатор

Именуйте от состояний

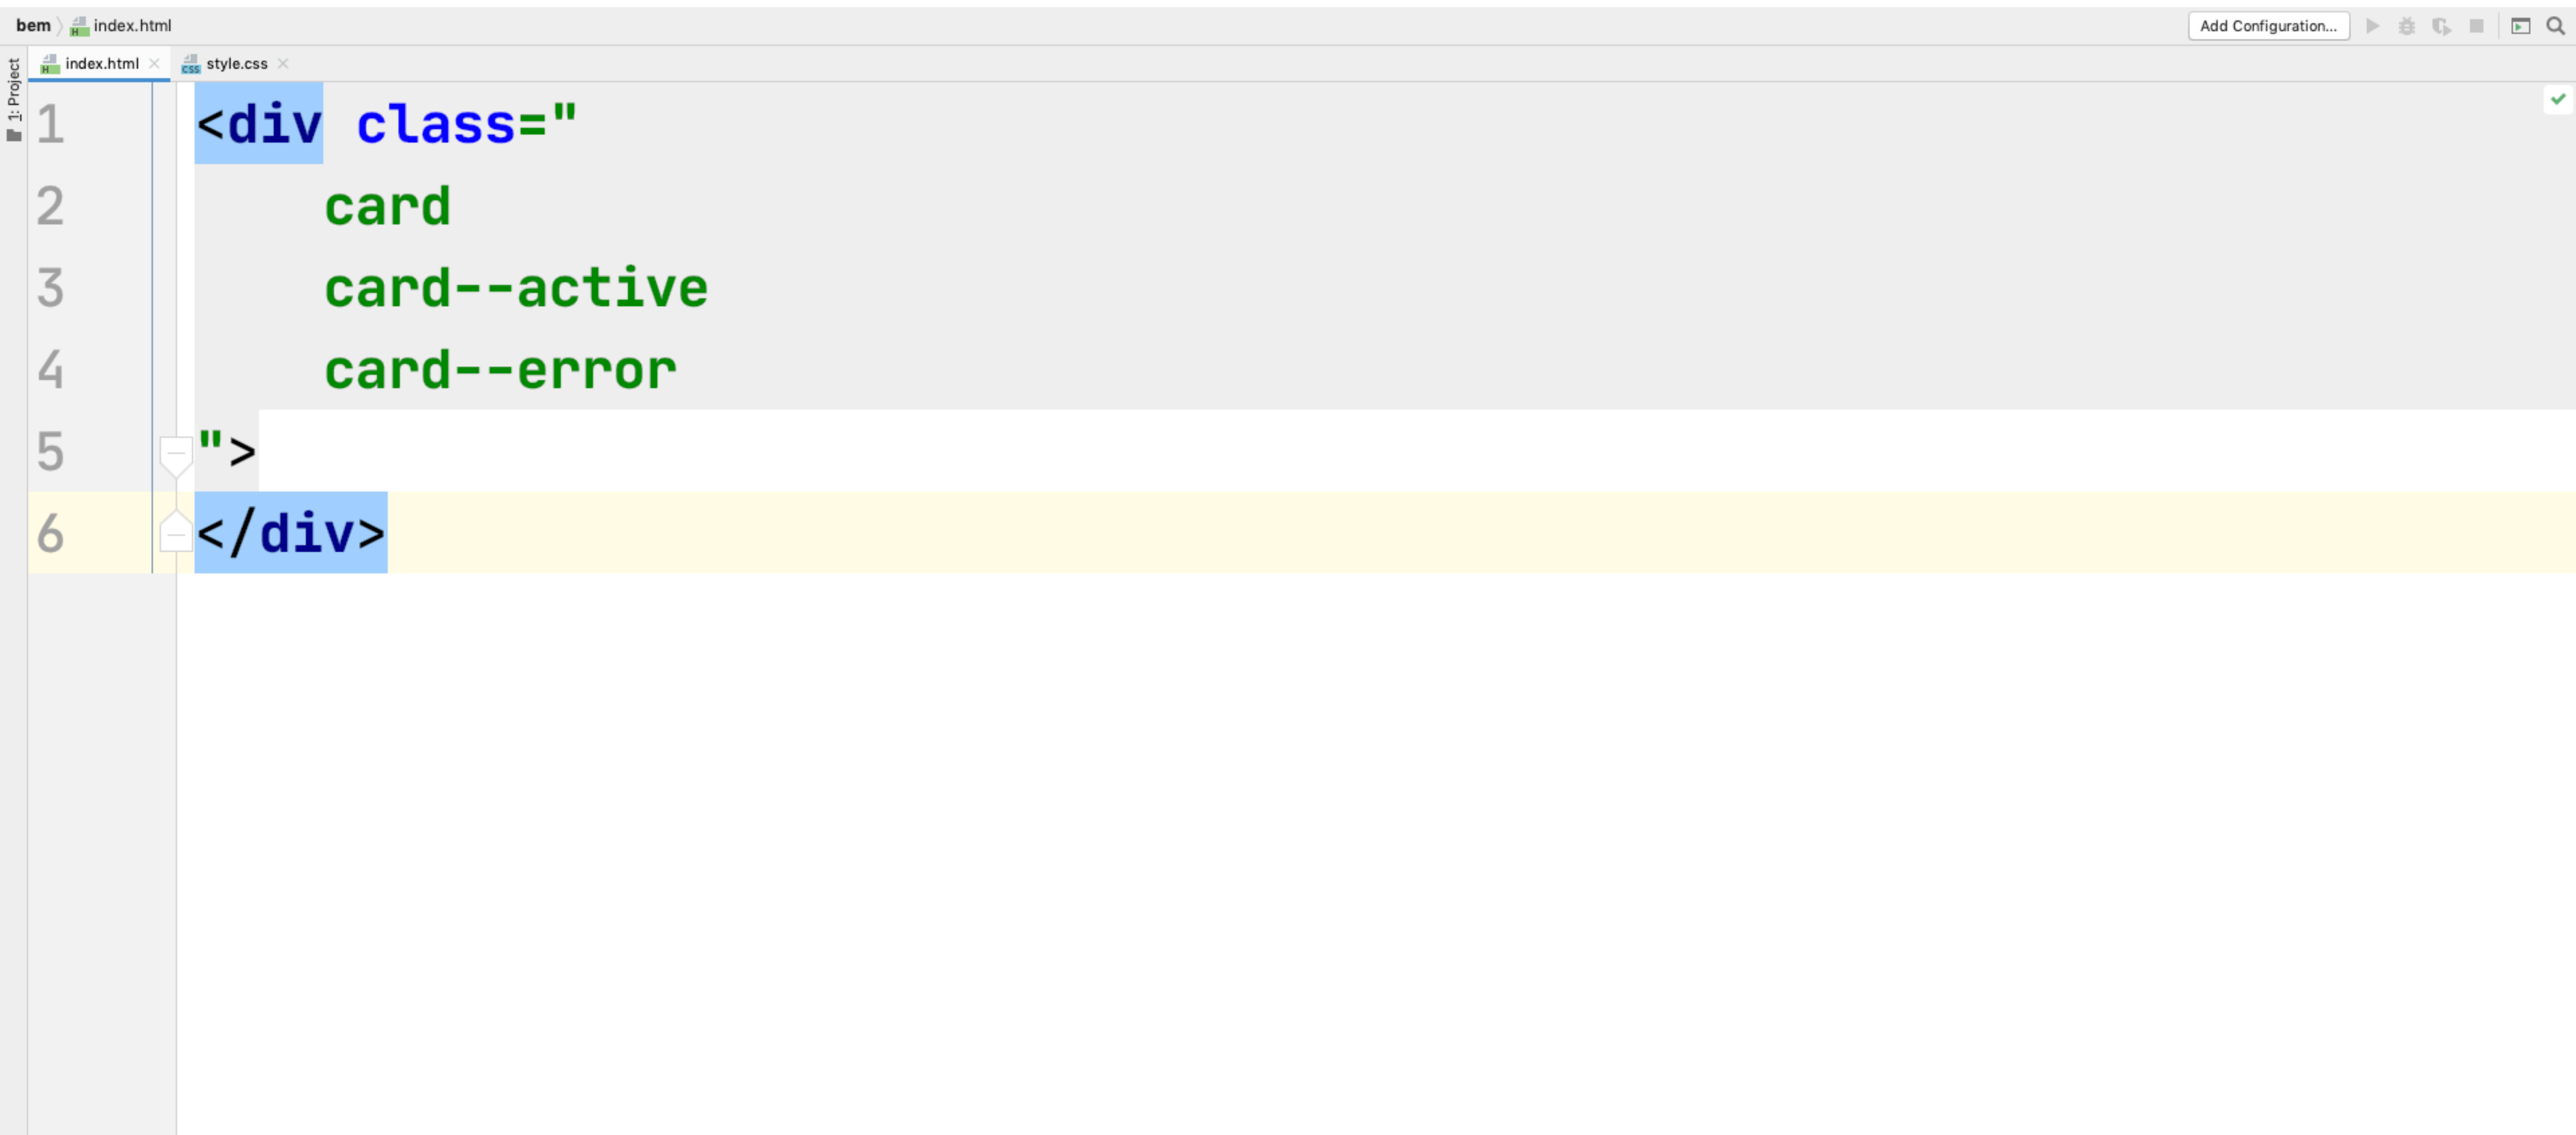

The screenshot shows a code editor with two tabs: 'index.html' and 'style.css'. The 'index.html' tab is active, displaying the following HTML code:

```
1 <div class="
2   card
3   card--active
4   card--error
5 ">
6 </div>
```

The code is formatted with syntax highlighting: the opening tag '<div class="' is highlighted in blue, the classes 'card', 'card--active', and 'card--error' are highlighted in green, and the closing tag '</div>' is highlighted in blue. The line numbers 1 through 6 are visible on the left side of the editor. The editor's interface includes a top bar with a search icon and a 'Add Configuration...' button, and a bottom bar with a '1: Project' label.

Селекторы

- Без #id
 - #error .card
- Без тегов
 - ul li a
 - img
- Только классы
 - .card
 - .card__content ul,
.card__content p



Вложенность

- Без вложенности

- `.card`

- `.card__content`

- Иногда можно 2


- `.card ul, card__content p`

- Больше 2 запрещено


- `.card ul li`



Файловая структура

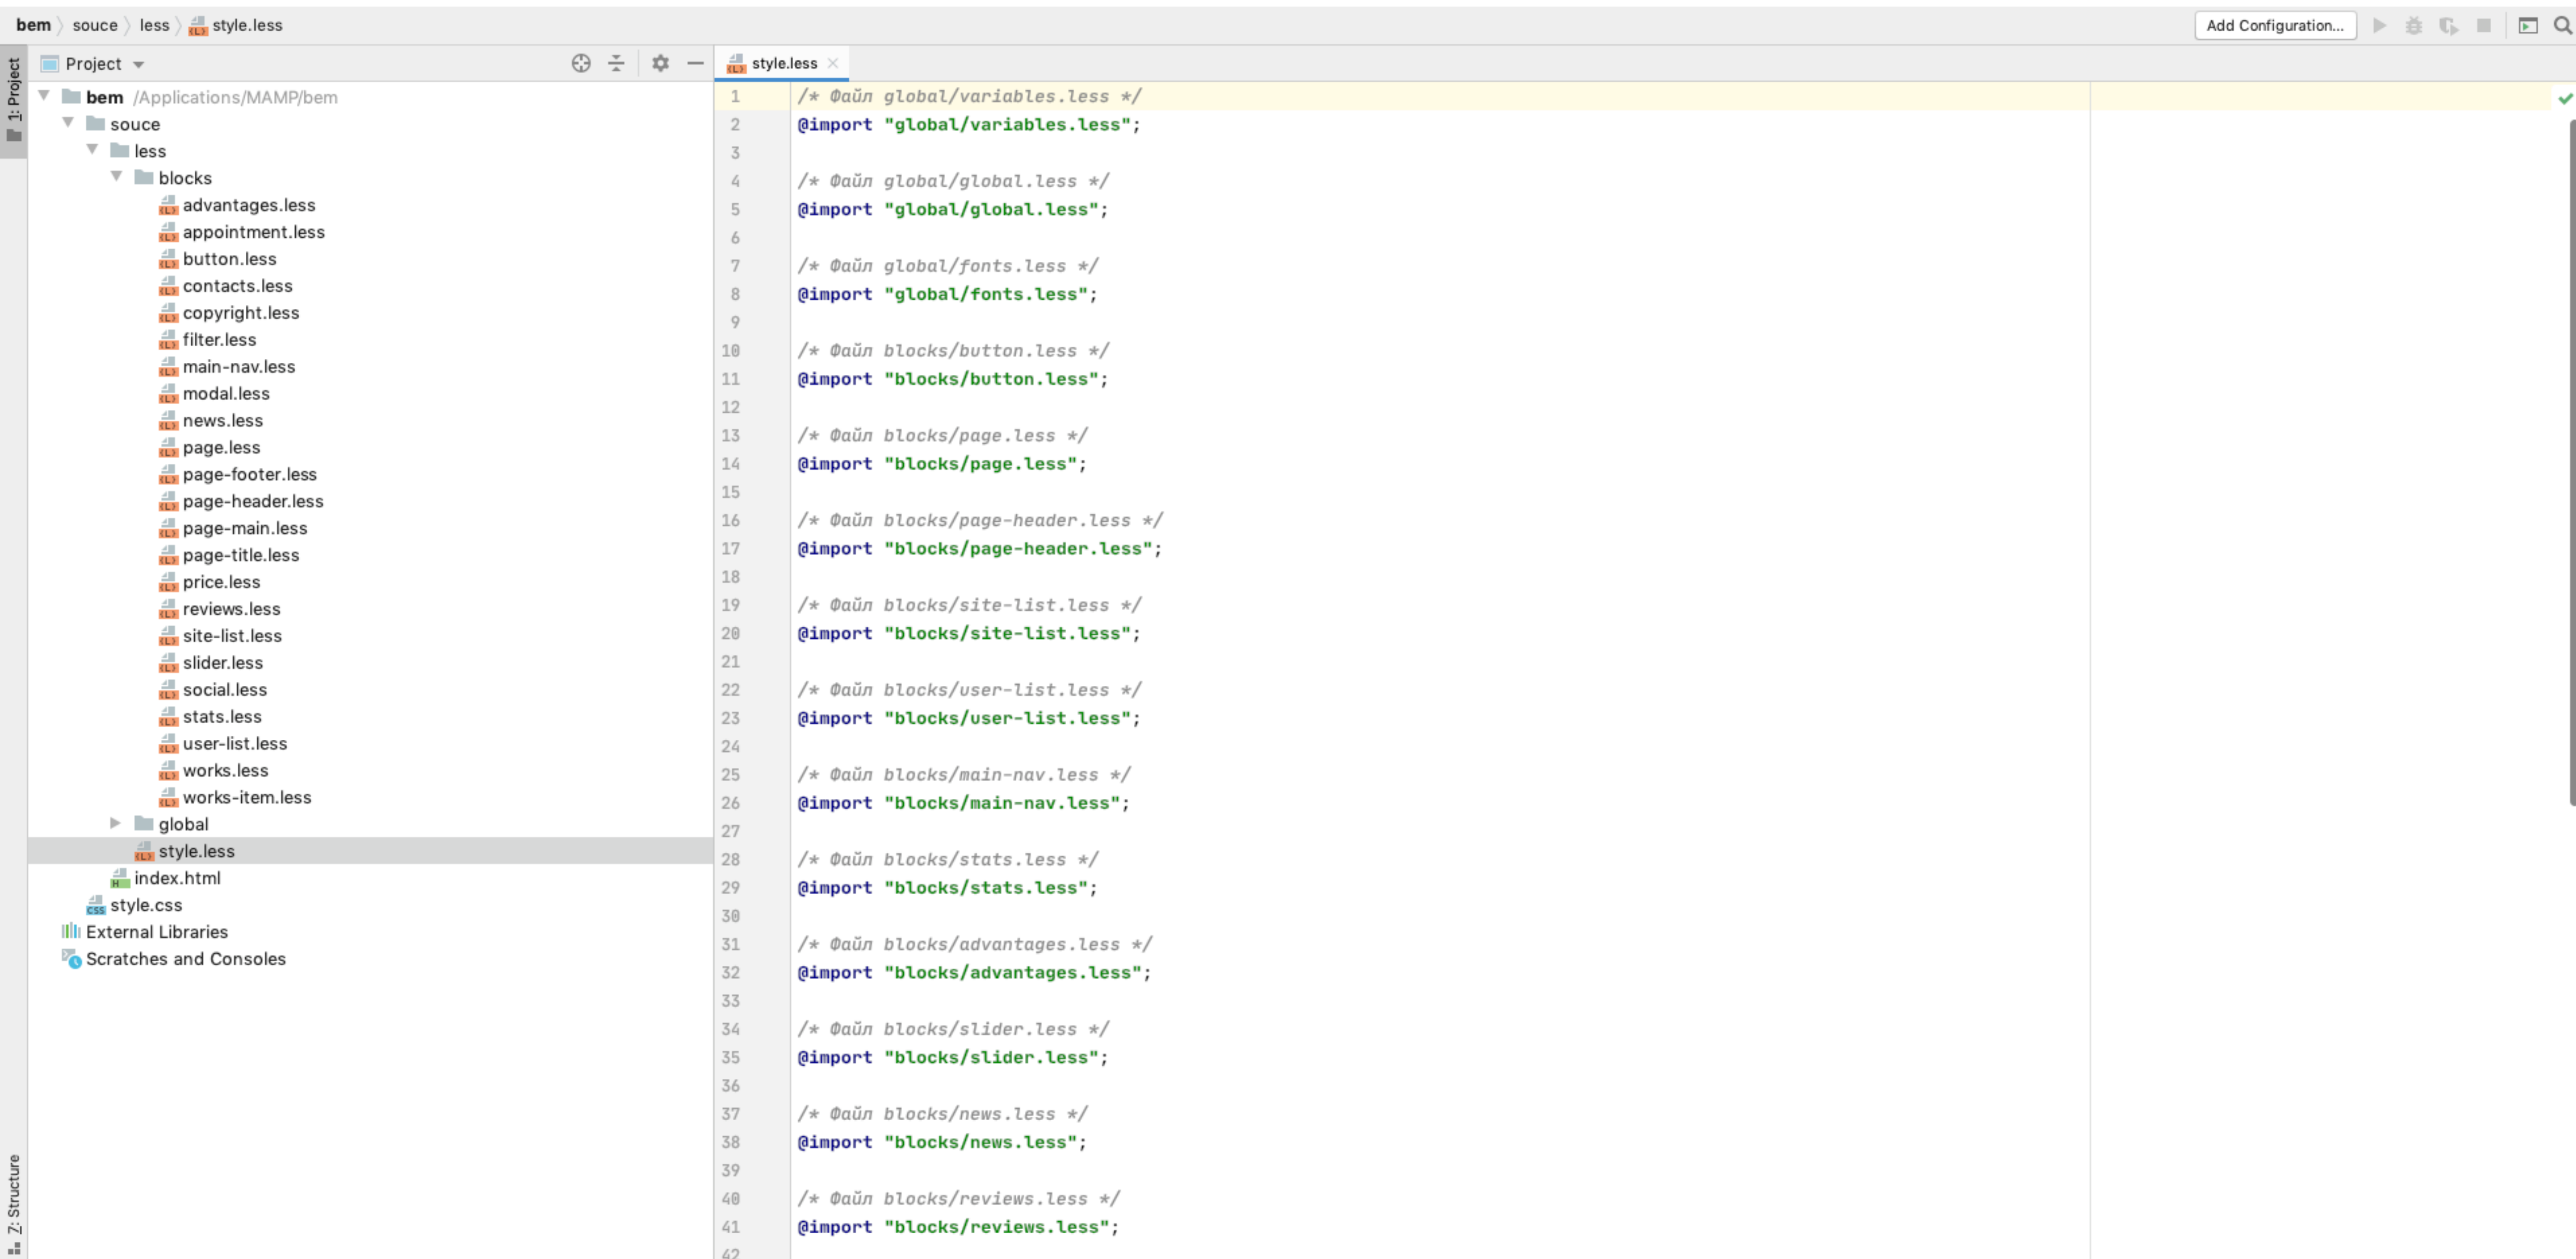

Сначала блок и его состояния

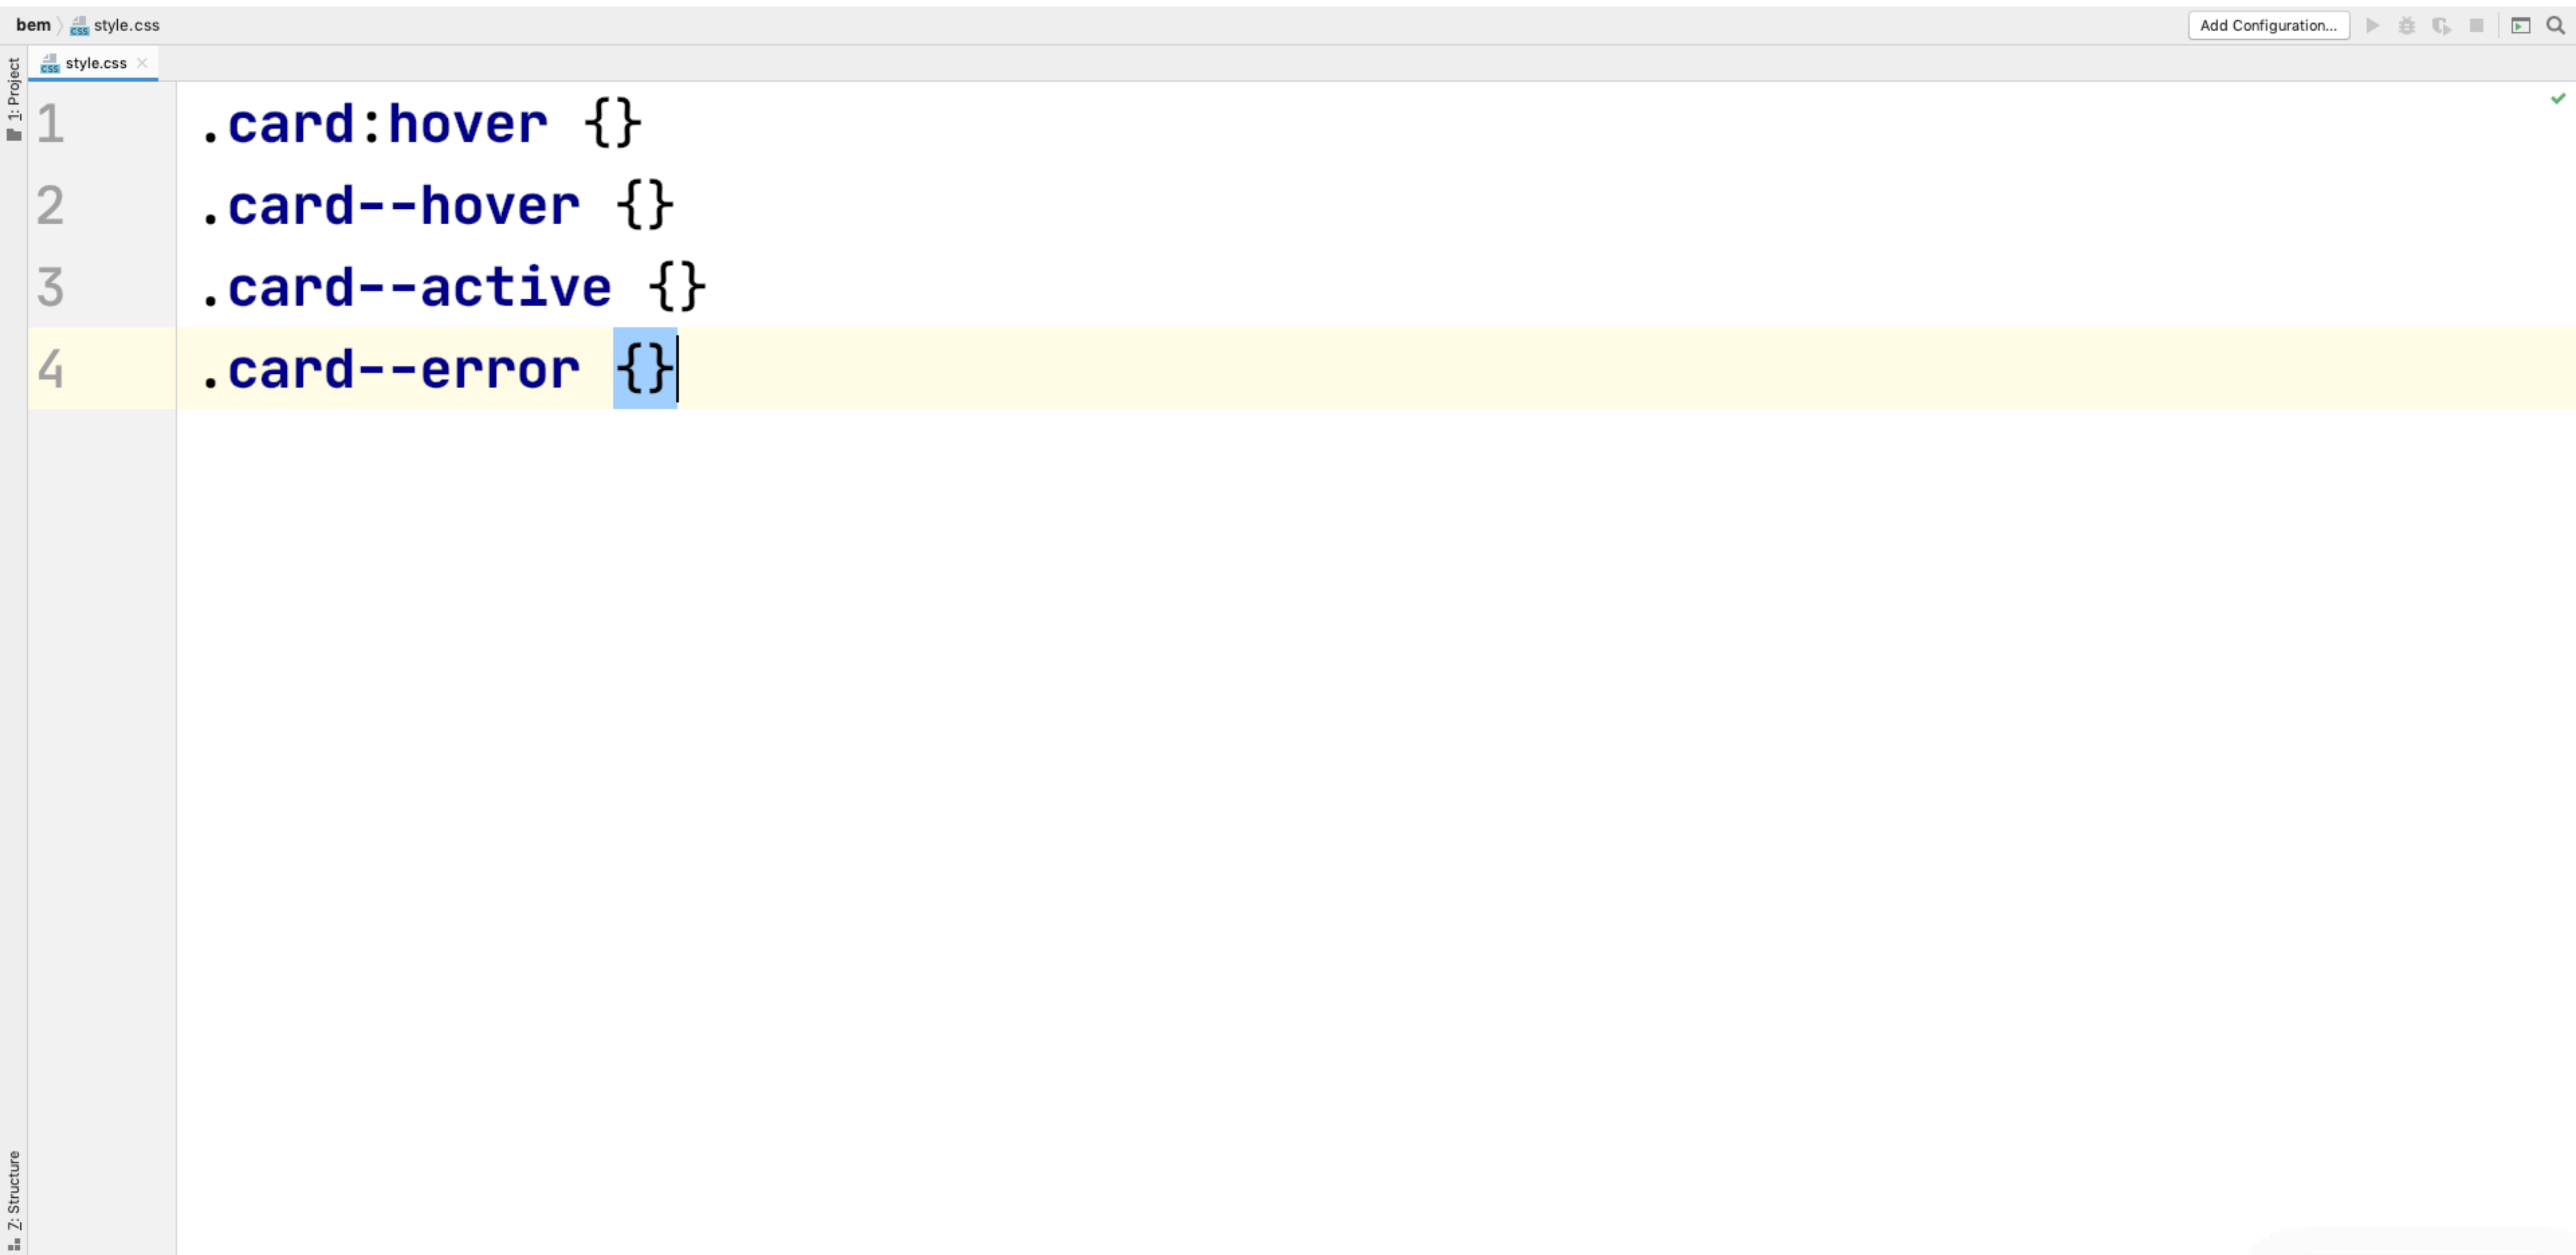


The image shows a code editor window with a tab labeled 'style.css'. The editor contains four lines of CSS code, each representing a state of a block named '.card'. The lines are numbered 1 through 4 on the left. The fourth line, '.card--error {}', is highlighted with a yellow background. The closing curly brace of the fourth line is currently selected with a blue mouse cursor. The top of the editor window has a toolbar with icons for adding configurations, running, and searching. The bottom left corner shows a sidebar with a 'Structure' panel.

```
1 .card:hover {}  
2 .card--hover {}  
3 .card--active {}  
4 .card--error {}
```


Потом элементы

```
1 .card:hover {}
2 .card--hover {}
3 .card--active {}
4 .card--error {}
5
6 .card__title {}
7 .card__date {}
8 .card__content {}
9 .card__content ul {}
```


Далее состояния элементов

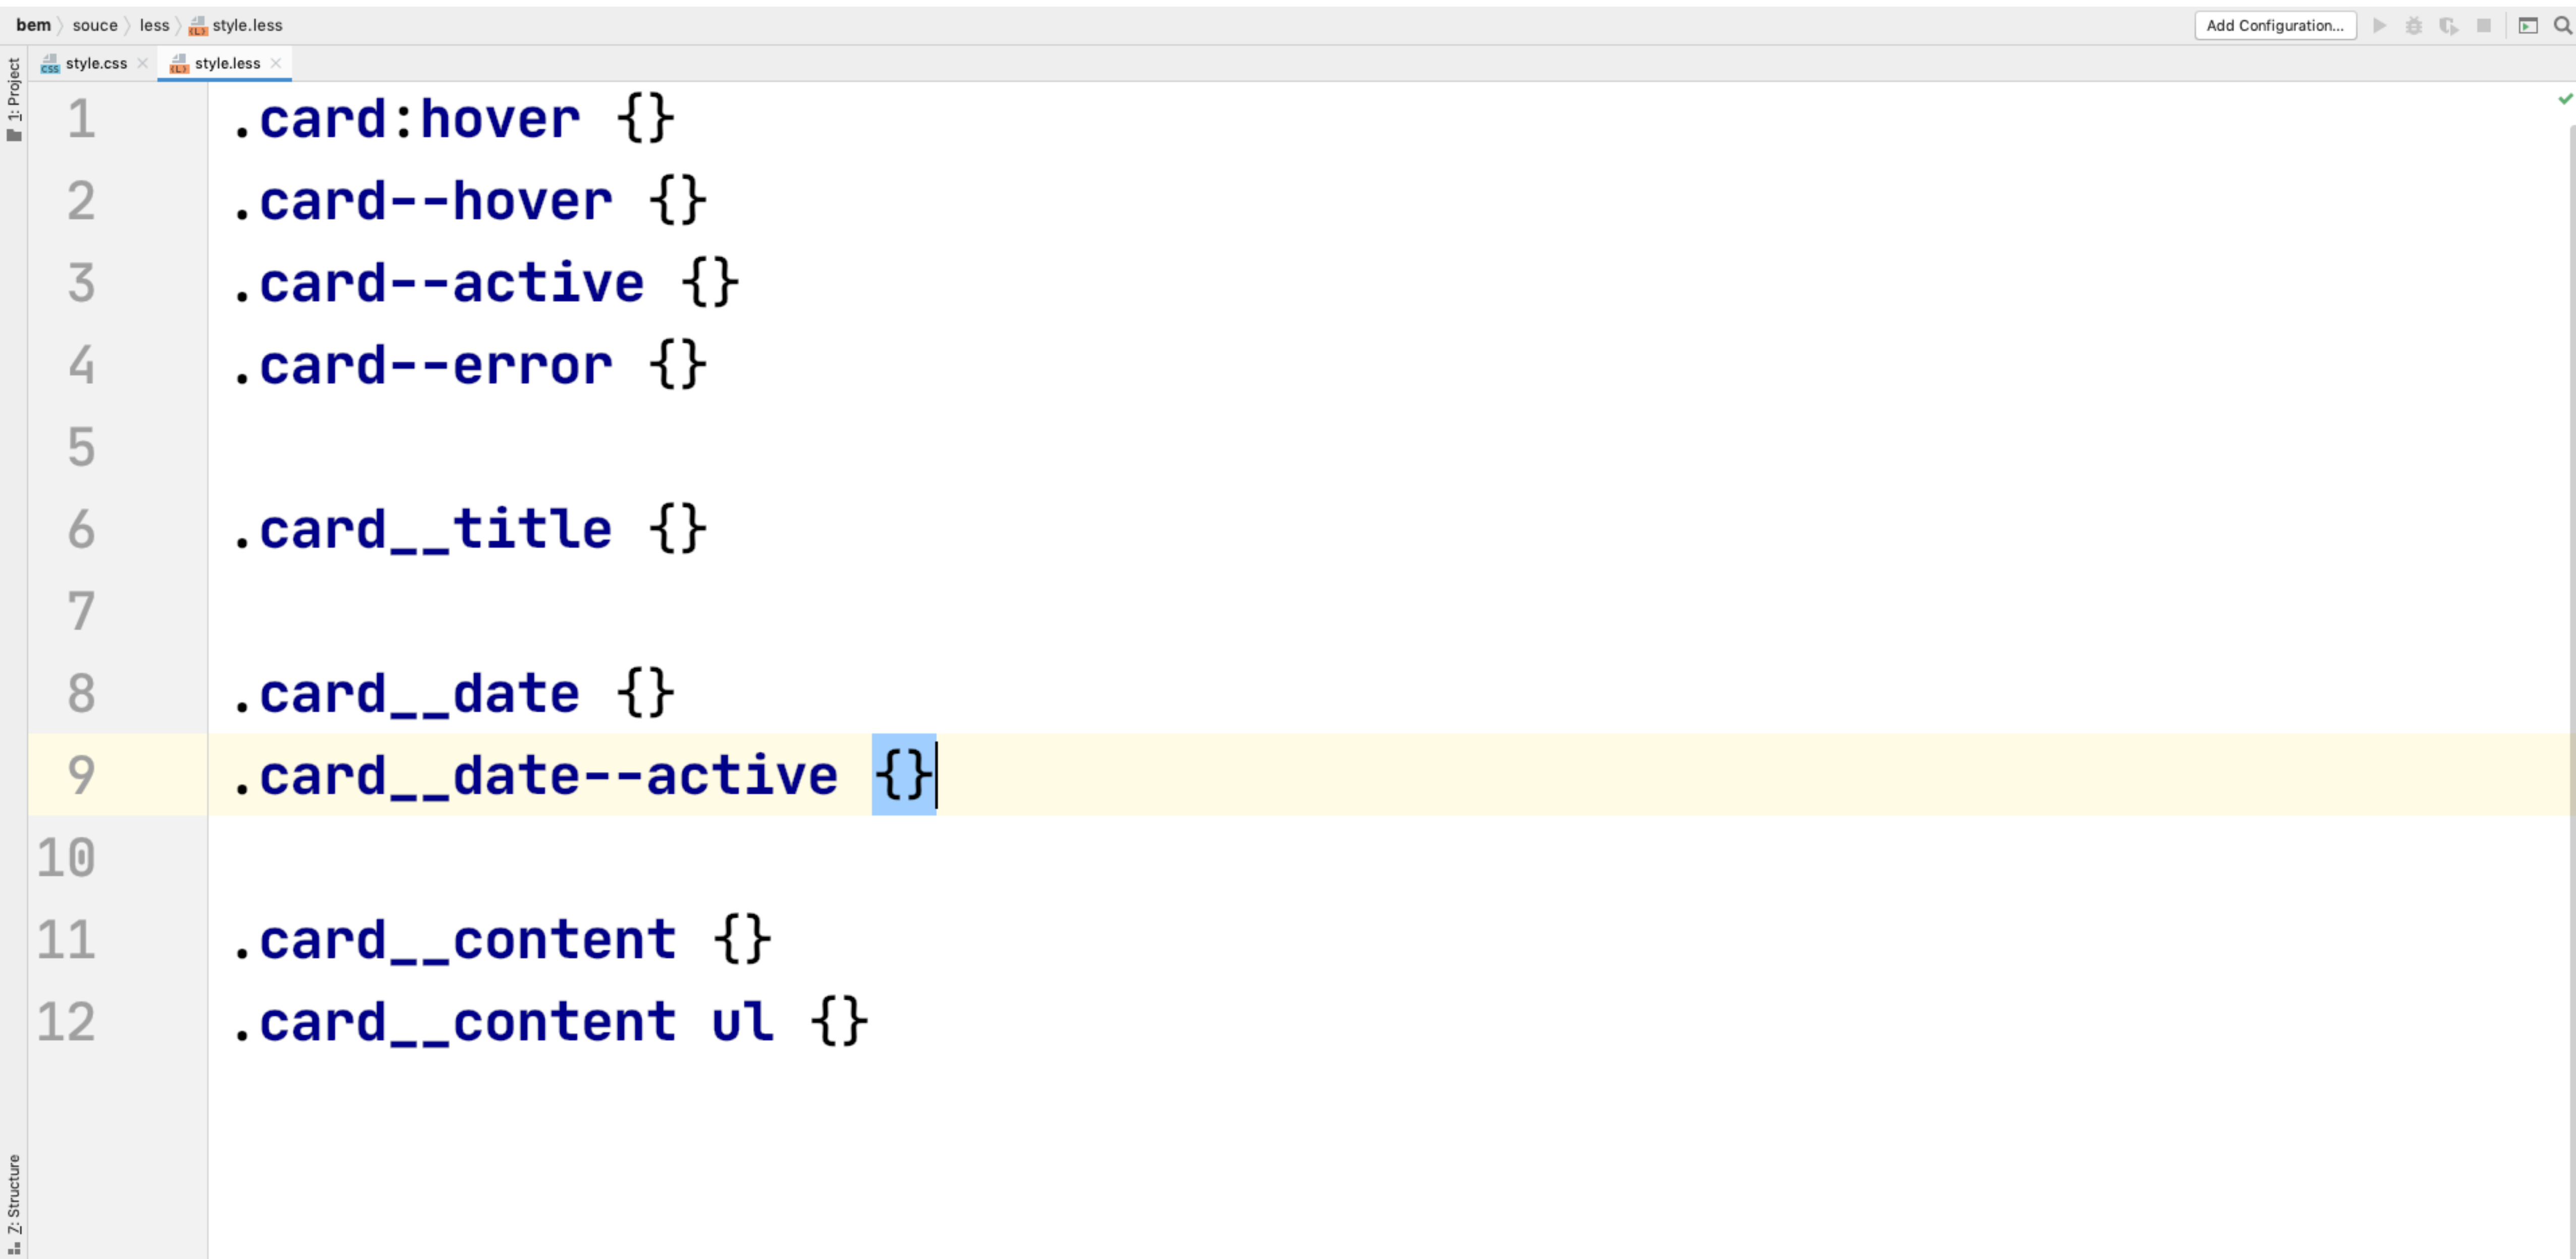

The screenshot shows a code editor with a project named 'bem' and a file named 'style.less'. The code defines several CSS classes for a card component, including hover, active, error, title, date, and content states. Line 9, '.card__date--active {}', is highlighted in yellow, and the closing curly brace is selected with a blue cursor.

```
1 .card:hover {}
2 .card--hover {}
3 .card--active {}
4 .card--error {}
5
6 .card__title {}
7
8 .card__date {}
9 .card__date--active {}
10
11 .card__content {}
12 .card__content ul {}
```


Медиавыражения — тоже состояние

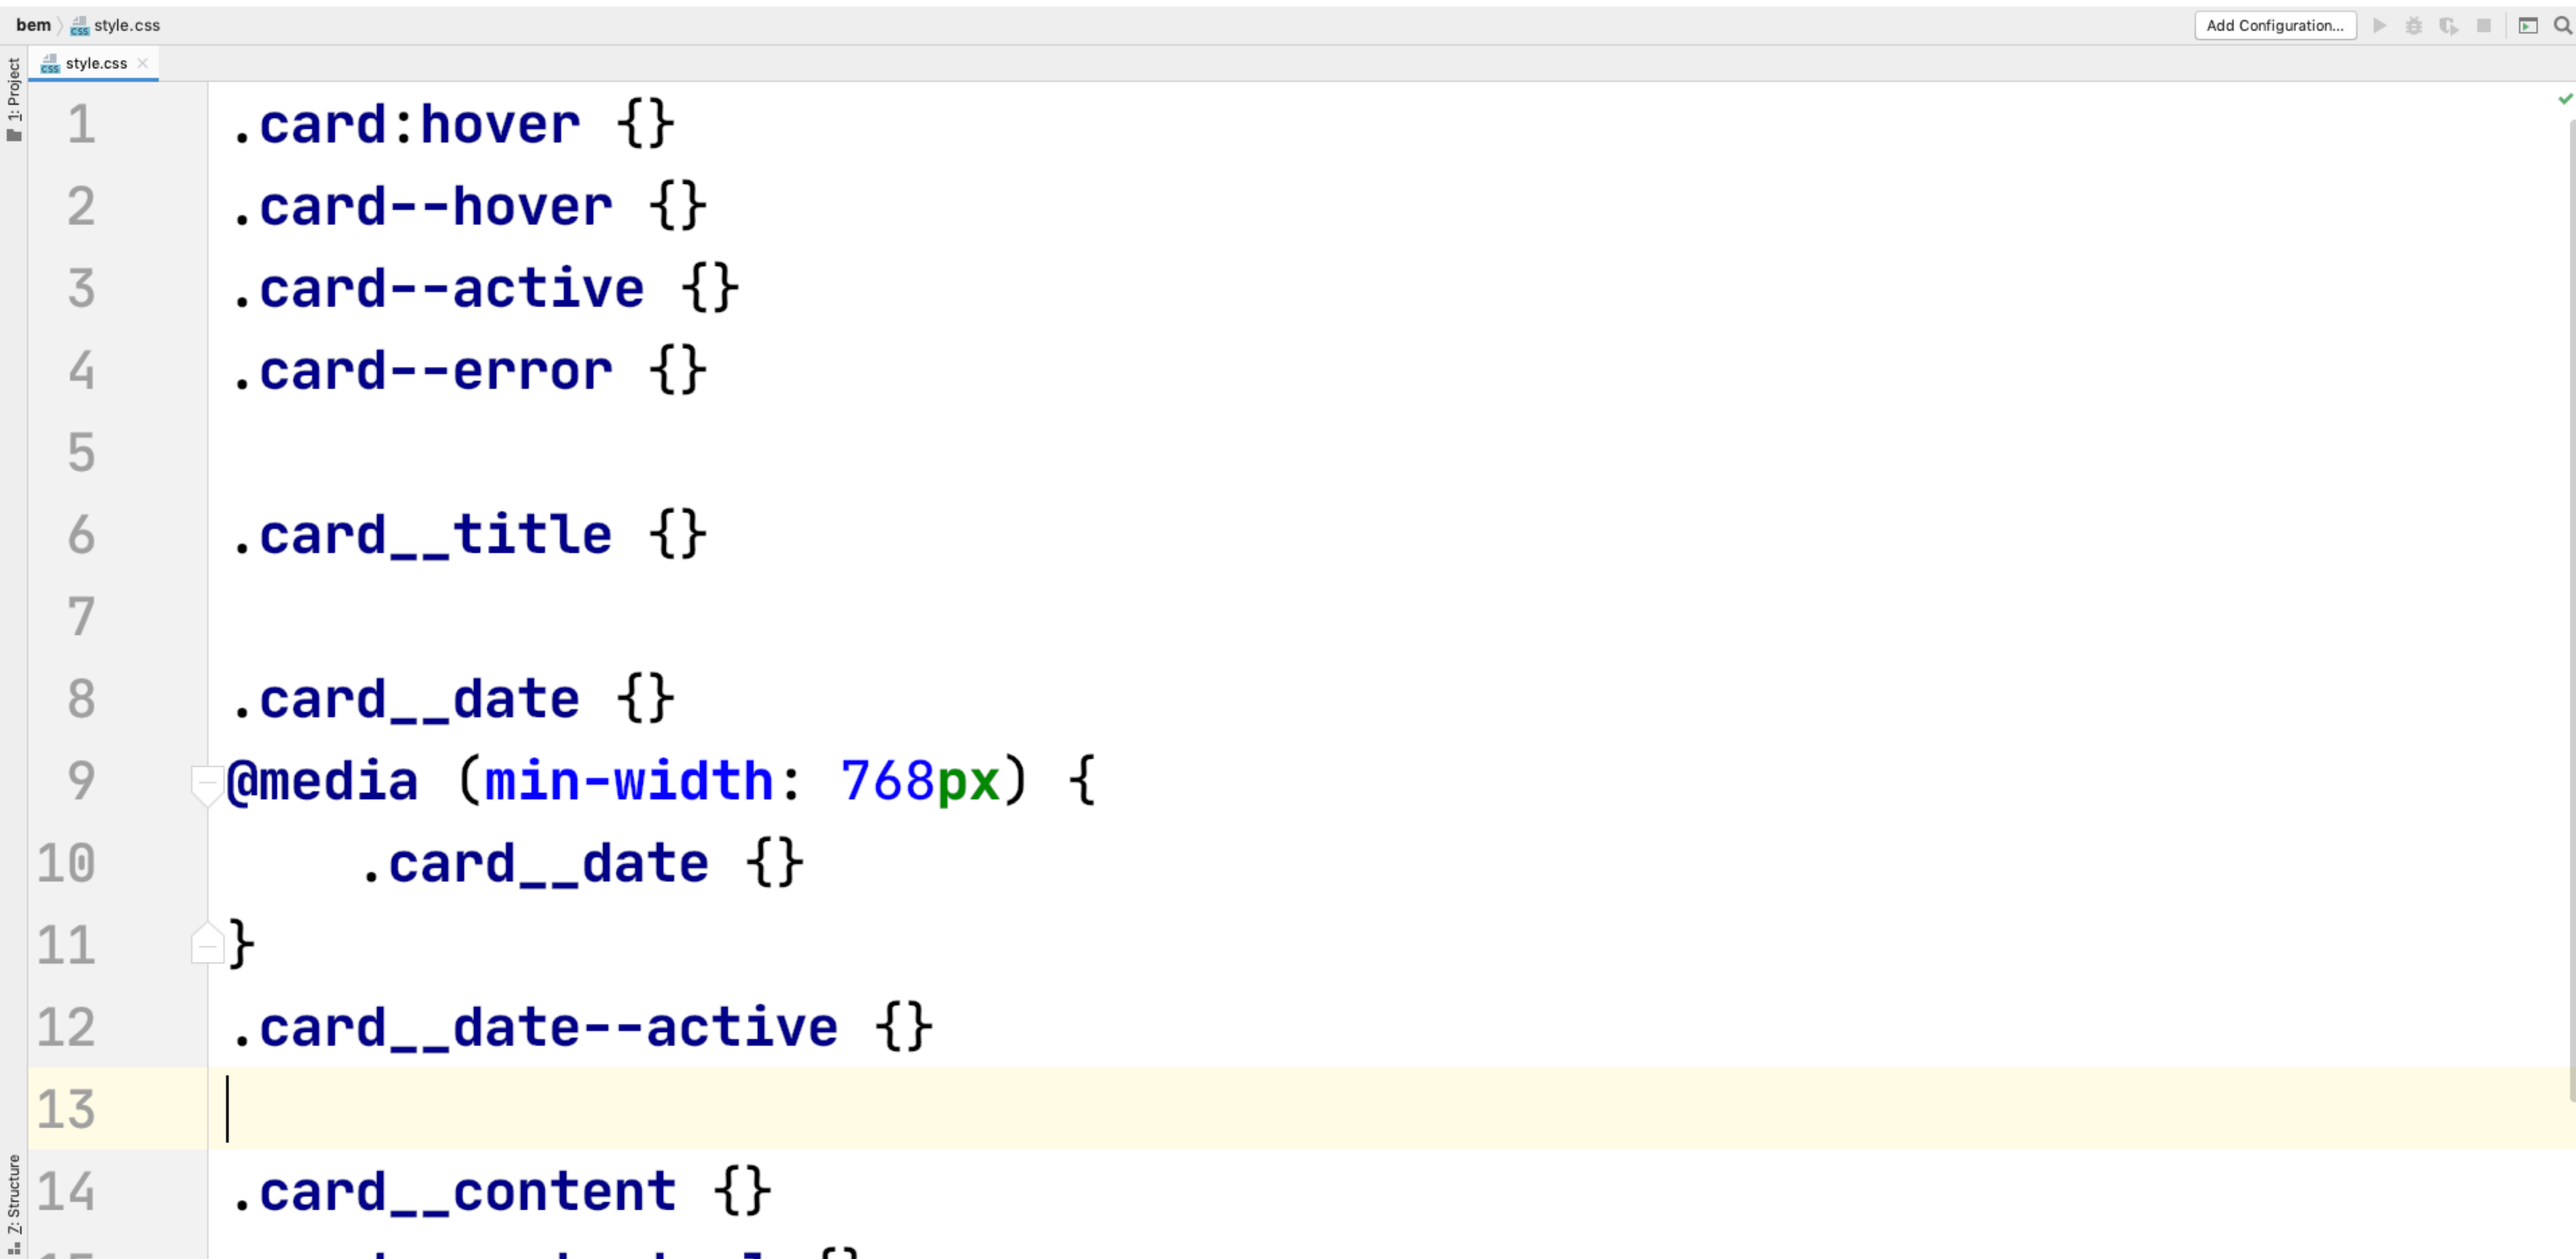

The image shows a code editor window with a tab labeled 'style.css'. The editor contains CSS code for a component named '.card'. The code includes several stateful classes: '.card:hover', '.card--hover', '.card--active', and '.card--error'. It also defines structural classes: '.card__title', '.card__date', and '.card__content'. A media query is used to define a state for the '.card__date' class based on screen width: '@media (min-width: 768px) { .card__date {} }'. The line number 13 is highlighted in yellow, and the cursor is positioned at the start of the line.

```
1 .card:hover {}
2 .card--hover {}
3 .card--active {}
4 .card--error {}
5
6 .card__title {}
7
8 .card__date {}
9 @media (min-width: 768px) {
10     .card__date {}
11 }
12 .card__date--active {}
13 |
14 .card__content {}
15
```


Медиавыражения — это состояния

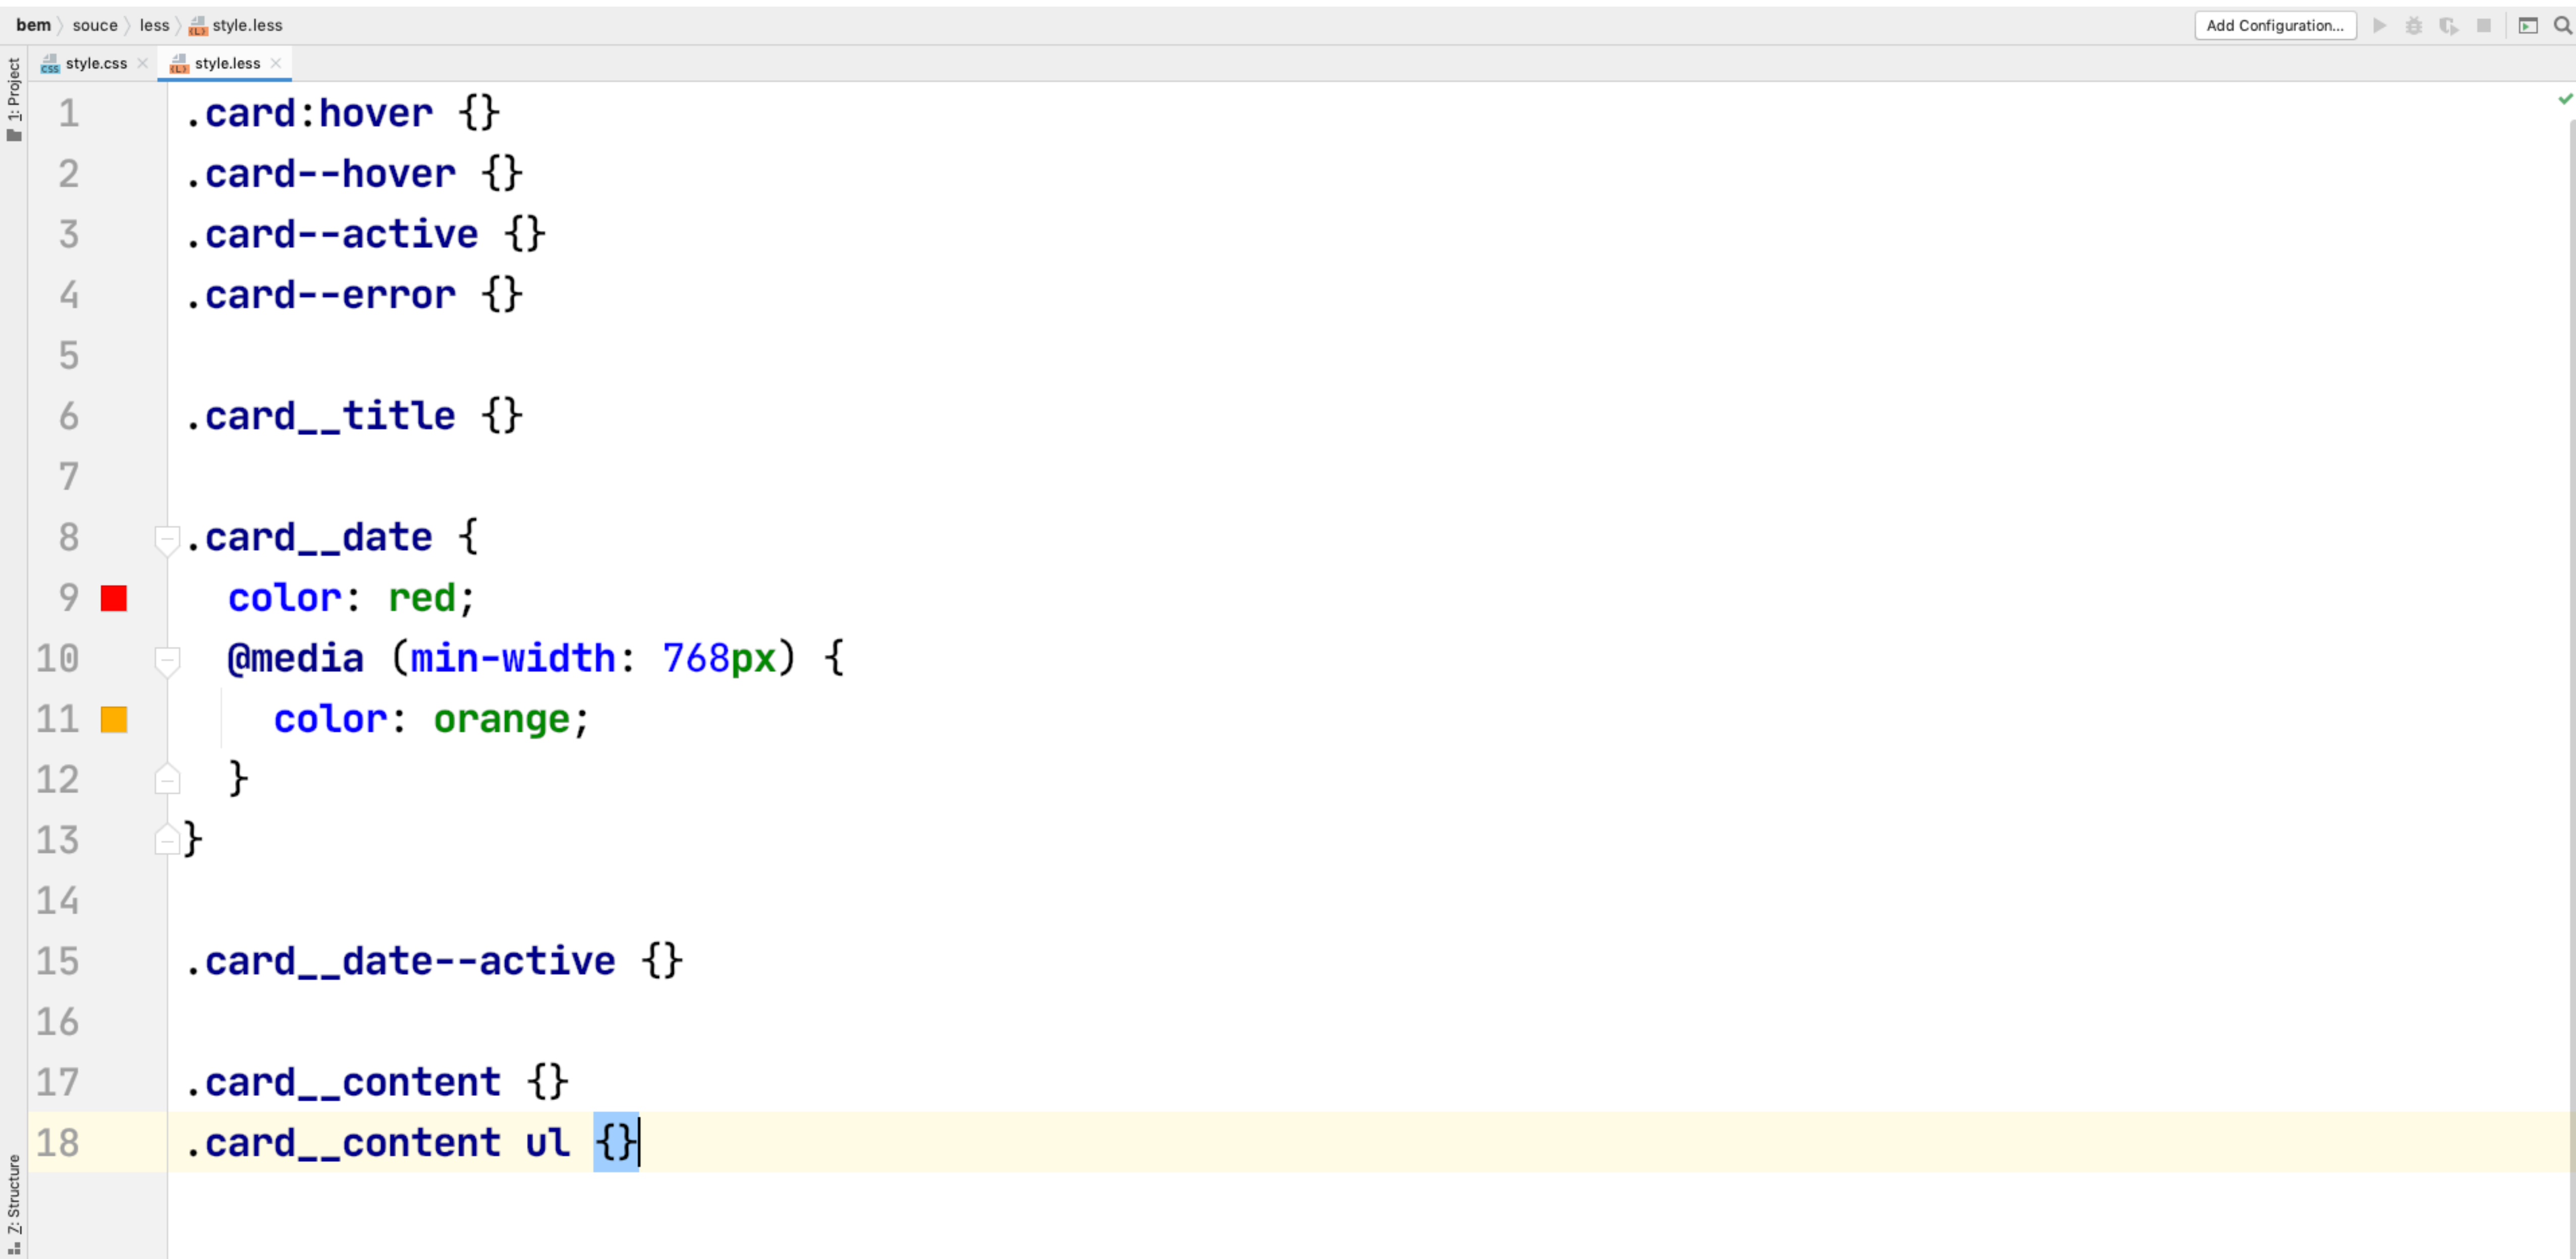

The image shows a code editor window with a sidebar on the left displaying a file structure. The main editor area contains Less CSS code. The sidebar shows a project named 'bem' with a subdirectory 'source' containing a 'less' folder. The 'less' folder contains 'style.less' (selected) and 'style.css'. The code in 'style.less' is as follows:

```
1 .card:hover {}
2 .card--hover {}
3 .card--active {}
4 .card--error {}
5
6 .card__title {}
7
8 .card__date {
9     color: red;
10    @media (min-width: 768px) {
11        color: orange;
12    }
13 }
14
15 .card__date--active {}
16
17 .card__content {}
18 .card__content ul {}
```

The code is color-coded: selectors are blue, property names are green, and values are red or orange. The last line, `.card__content ul {}`, is highlighted in yellow. The sidebar on the left shows the file structure: '1: Project' (expanded) -> 'bem' -> 'source' -> 'less' -> 'style.less' (selected). The top of the editor shows the file path 'bem > source > less > style.less' and a search bar.

Независимость недостижима

- Свойство `font-family` и другие наследуются
- `Normalize.css` не поправить
- Иногда глобальные теги упрощают вёрстку



Но её можно увеличивать

- Без position
- Без margin



Демонстрация



Разобранные критерии

Базовые

Б4. В разметке отсутствует дублирование кода для одного и того же элемента, с помощью которого элемент отображается в разных местах страницы на разных версиях: мобильной, десктопной, планшетной. Этот критерий не касается элементов, которые скрываются или показываются в разных версиях

Б5. Отсутствуют типовые ошибки в разметке по методологии.

Б28. Единообразное написание и форматирование кода в HTML, файлах CSS-препроцессора и JavaScript (включая файлы автоматизации).

Дополнительные

Д2. Использовано минимально возможное количество HTML-элементов (нет лишних элементов).



Задание на дом

1. Начать разметку по БЭМ.
2. Задать вопросы авторам, если появятся.
3. Подготовиться к следующему разделу.

По желанию читайте статьи в дополнительных материалах.

