

# Online TA

## Master Project

Datalogisk institut, Copenhagen University (DIKU)

Oleksandr Shturmov

`oleks@oleks.info`

March 1, 2014.

Oleksandr Shturmov  
oleks@oleks.info

Master Project  
Online TA

DIKU  
March 1, 2014.

# Contents

<b>1</b>	<b>Introduction</b>	<b>7</b>
1.1	Reader Expectations	7
1.2	Dictionary and Grammar	7
1.3	Legal Disclaimer	7
1.4	References	8
1.5	About the Author	8
<b>2</b>	<b>Analysis</b>	<b>9</b>
2.1	Assessment in Education	9
2.1.1	Categorising Assessment	9
2.1.2	Feedback	10
2.1.3	Computer-Assisted Assessment	10
2.1.4	Assignment	10
2.1.5	Submission	11
2.2	Assessment in Computer Science	11
2.3	Higher Education Organisation	12
2.3.1	Course	12
2.3.2	Programme	12
2.3.3	Institution	12
2.4	Roles in Educational Assessment	12
2.4.1	Teaching	13
2.4.2	Learning	13
2.4.3	Censure	14
2.4.4	General Public	14
<b>3</b>	<b>Feature Specification</b>	<b>15</b>
3.1	Influence	15
3.2	Overview	16
3.3	Assignments	16
3.4	Users	16
3.4.1	User Roles	16
3.4.2	User Data	17
3.4.3	System Administrators	17
3.4.4	Stakeholders	17
3.5	Courses	17
3.5.1	Course Data	17

3.6	Source Code and Documentation	18
3.6.1	OSS/FS	18
<b>4</b>	<b>The Data Model</b>	<b>19</b>
4.1	Assignment Groups	19
4.2	Assignments	19
<b>5</b>	<b>Infrastructure</b>	<b>21</b>
5.1	Motivation	22
5.1.1	Public Key Cryptography	22
5.1.2	OpenSSL	22
5.1.3	OpenPGP	22
5.2	Key Server	22
5.2.1	Student Key Registration	22
5.2.2	Staff Key Registration	23
5.2.3	Serving Public Keys	23
5.2.4	Discussion	23
5.3	Git Server	23
5.3.1	Why Git?	24
5.3.2	Course as a Repository	24
5.3.3	OpenSSH	24
5.3.4	Git Hooks	25
5.3.5	Users	25
5.3.6	Gitolite	26
5.3.7	Attack surface	27
5.3.8	Discussion	28
5.4	Encrypted and Signed Git Repositories	30
5.5	Test Server	31
<b>6</b>	<b>Sandboxing untrusted code</b>	<b>33</b>
6.1	Technology Overview	33
6.1.1	Dedicated Servers	34
6.1.2	Virtual Machines	34
6.1.3	Operating system-level virtualization	34
6.2	Control Groups	35
6.2.1	Managing cgroups	35
6.2.2	The Resource Counter	36
6.2.3	memory	37
6.2.4	cpuacct	38
6.2.5	cpu	38
6.2.6	cpuset	39
6.2.7	devices	39
6.2.8	blkio	40
6.3	Namespaces	40
6.3.1	UTS	40
6.3.2	IPC	40
6.3.3	PID	40
6.3.4	NET	40

6.3.5	USER	40
6.4	Resource Limits	40
6.5	Linux Security Modules	40
6.5.1	SELinux	41
6.5.2	AppArmor	41
6.5.3	Capabilities	41
6.6	Seccomp	41
<b>7</b>	<b>Feedback Processing</b>	<b>43</b>
<b>A</b>	<b>General Linux Concepts</b>	<b>55</b>
A.1	Tasks	55

Oleksandr Shturmov  
oleks@oleks.info

Master Project  
Online TA

DIKU  
March 1, 2014.

# Chapter 1

## Introduction

*In any teaching of the application of computers it is essential to have the students do practical programming problems and to grade their results. Such grading should consider both the formal correctness and the performance of the programs and tends to become difficult and time consuming as soon as the teaching is beyond the most elementary level. The possibility of using the computer to help in this task therefore soon suggests itself.*

— PETER NAUR, *BIT 4* (1964)

I have at times went into extraordinary detail on some low-level matters of the Linux kernel. These details are provided as reference to the reader, as I know I wish I had the details at hand during the project.

### 1.1 Reader Expectations

The reader is assumed to be familiar with the concept of a university, i.e. an institution of higher education and research, aimed at educating scholars and professionals, granting them degrees, signifying their accomplishments.

The reader is assumed to be familiar with Computer Science, i.e. the study of computable processes and structures, with the aid of computers. Preferably, the reader should hold a Computer Science degree, be, or have been enrolled in a Computer Science university programme.

### 1.2 Dictionary and Grammar

Unless otherwise stated, the reader

### 1.3 Legal Disclaimer

This report references certain legal documents, including Danish laws and university curricula. As the author is not trained in law, there is no claim as to the legal soundness of the claims and references made in this report.

A solid attempt has been made at retaining the formulation of the referenced material, and referencing the most current legal documents, unless this was hindered by other legal references.

For instance, the shared section of the BSc and MSc curricula for study programmes at the Faculty of Science, University of Copenhagen [[Curricula \(2013\)](#)] is based on Ministerial Order no. 819 as of June 29, 2010 [[BEK 814](#)]. This document is outdated and has been updated twice, most recently by Ministerial Order no. 1520 as of December 16, 2013 [[BEK 1520](#)]. In this particular case, it is the faculty curricula that was been deemed to mandate the relevant law to reference.

## 1.4 References

When looking for referenced material, material published in relevant scientific journals, yet accessible to the general public, was preferred. To ensure long-lasting access to publicly available, web-based resources, they were archived using WebCite<sup>®</sup>.

## 1.5 About the Author

This report is written in third person out of aesthetic considerations, with the exception of this section.

When referring to “in practice”, I refer to my own practice as a teaching assistant in various courses at DIKU, or the perceivable practice of teachers and teaching assistants around me.



# Chapter 2

## Analysis

### 2.1 Assessment in Education

Assessment, or evaluation, in education is the practice of obtaining information about students' knowledge, attitudes, and skills [Pishghadam et al. (2014)]. The purpose of assessment may be manifold: provide feedback or certification, perform selection or comparison, improve learning processes, combinations of the aforementioned, and so on [Bradfoot & Black (2004)].

Assessment in education is primarily of students and their learning, or of teachers and their teaching. The primary intent of the former is to improve learning — the latter — to improve teaching. In this work we will primarily concern ourselves with the former, so assessment for us will be getting to know our students and the quality of their learning [Ramsden (1992)].

#### 2.1.1 Categorising Assessment

There are two principal kinds of assessment: formative and summative. The definition of each kind varies somewhat in educational research [Bloom et al. (1971), Sadler (1989), Harlen & James (1997)], and their mutual compatibility is questionable [Butler (1988)]. The intent of this work is not to advise on the matter, but to aid in performing assessment, regardless of the flavour.

Let us therefore adopt a primitive distinction, which still supports the purposes of our further analysis:

**Formative** A student's strengths and weaknesses are documented in free-text form. Formative assessments are qualitative and non-standardised: they are aimed at measuring the quality of a student's learning, rather than whether they live up to some standard criteria.

**Summative** A student is ranked on some well-defined scale, at some well-defined intervals, based on some well-defined criteria. Summative assessments are often compoundable and comparable. They may allow to deduce holistic summative assessments of students, or student groups, quantitatively measure student progress, etc.

Formative assessment necessitates the ability to perform personalised assessments, whereas summative assessment demands the ability to specify standards and perform standardised assessments.

There are other forms of assessment: diagnostic assessment, self-assessment, peer-assessment, etc [Bull & McKenna (2004), Topping (1998)]. These forms of assessment vary in terms of the formative/summative dimensions, but primarily differ in terms of when, by whom, and of whom the assessment is made.

### 2.1.2 Feedback

Feedback is information about the difference between the reference level and the actual level of some parameter which is used to remedy the difference in some way [Ramaprasad (1989)].

Feedback is an important bi-product of assessment in education [Black & William (1998)]. Ideally, feedback informs the student of the quality of their work, outlines key errors, provides corrective guidance, and encourages further student learning. To be so, it is important that feedback is understandable, timely, and acted upon by students [Gibbs & Simpson (2004)].

These requirements are an active area of educational research, and one aiding approach is to use computer-assisted assessment.

### 2.1.3 Computer-Assisted Assessment

Computer-assisted assessment is the form of assessment performed with the assistance of computers [Conole & Warburton (2005)]. The benefit of using computers is ideally, fast, highly-available, consistent, and unbiased assessment [Ala-Mutka (2005)]. The requirement is that the perceived student performance can be encoded in some useful digital format.

This requirement however, has proven evasive. Free form performances, such as essays or oral presentations, are still hard to assess automatically [Valenti et al. (2003)]. On the other hand, it is questionable in how far easily assessable performances, such as, multiple-choice questionnaires, are appropriate for assessment in higher education [Conole & Warburton (2005)].

We hypothesise, without further proof, that in how far computers can assist in assessment, depends on how rigorous the student performance can be expected to be. We formalise this notion in the following sections.

### 2.1.4 Assignment

An assignment is a request for someone to perform a particular job. An assignment in education is a request for a student to make a particular performance, and often, to provide a record thereof. One purpose of an assignment is to provide basis for an assessment. The request therefore, often includes a specification of what the assessment will be based on, and in what time frame the assignment should be completed in order to be assessed.

### 2.1.5 Submission

A submission is a record of student performance, submitted for the purposes of assessment. A digital submission is a digital encoding of such a record. Digital submissions are amenable to assessment with the assistance of computers, and thus of most interest to us.

We say that a structure is *rigorous* if we can devise effective procedures to extract the individual elements of the structure, preferably within a finite number of steps. In how far computers can assist in assessment depends on how rigorously a submission can be expected to be structured.

With the advent of modern computer technology, submissions can also be expected to be structured with the assistance of computers. Such use of computers can give some rigor to the structure of submissions.

For instance, in a multiple-choice test, a computer may present the student with the questions and options. The student may then respond to the computer using toggles, and have the computer encode the options thereby chosen in a tableau of integers. An assessment then constitutes merely comparing against a reference tableau — something computers are notoriously good at.

If instead a student is asked to write an essay, modern computers can assist with little more than dictionaries, thesauri, and mark up. From the point of view of a computer, an essay is often little more than a stream of words and punctuation. Much of the structuring is conducted directly by the student.

An essay can of course be assumed to be written in a natural language. Natural languages however, often lack in rigor. Vagueness and ambiguity flourishes in natural languages. They are at best, somewhat rigorous. The extent of this “somewhat” is the subject matter of much research in natural language processing and automated essay assessment [[Valenti et al. \(2003\)](#)].

Beyond where computers can help, it is the question of how rigorous one can expect the students to be. In some disciplines, such as Computer Science, high rigor can often be expected in certain types of assignments, such as programming assignments. We explore this in the following sections.

## 2.2 Assessment in Computer Science

Computer Science is the study of computable structures and processes. Computer Science graduates are (among other things) expected to be eloquent in the theory and practice of computer programming [[CS Curricula 2013](#)].

To this end, practical work is a popular basis for assessment in Computer Science [[Carter et al. \(2003\)](#)]. Practical work is concerned with the composition of programs to be executed by a computer.

To be executable by computers, computer programs are often written in highly rigorous languages, and so are amenable to assessment with the assistance of computers. The assessment of computer programs is a wide area of research and industry, known as software verification or quality assurance.

With the advent of modern computer technology, computer programs can also be assumed to be structured with the assistance of computers. Indeed, assemblers, compilers, linkers, scripting engines, etc. have become ubiquitous.

Students can be, and often are, expected to acquire skills in using these tools on their own, or with some facilitation from their teachers.

## **2.3 Higher Education Organisation**

In the following sections we cover some other basic organisational aspects of higher education. These are of relatively little interest to us, but do provide some context for the assessments we wish to assist in.

### **2.3.1 Course**

A course is a unit of education imparted in a series of learning activities. The student performance in a course is always assessed, at least, on a pass/fail/neither basis. A student passes a course, if the student has shown to possess some predefined knowledge or skills by the end of the course, and fails otherwise. A student may neither pass nor fail in various extraordinary cases, such as the student dropping out of the course before a final assessment.

### **2.3.2 Programme**

A programme in higher education is a series of courses that a student has to pass. At the end of a programme the student is awarded a degree: a statement of accomplishment in the courses passed.

### **2.3.3 Institution**

A higher education institution is a legal entity that offers higher education programmes. Typically this is a university or a college. Students are enrolled for programmes at particular higher education institutions. Teaching staff are employed by the higher education institution and facilitate the education. Other roles in educational assessment have less definite relationships to institutions.

## **2.4 Roles in Educational Assessment**

There are two principal roles in assessment: the assessing and the assessed. It is the assessing that define the form of assessment and perform the assessment itself. It is a matter of ethical concern that the assessed are sufficiently informed of their assessment and concede to it.

In education, the assessing are often also involved in the role of teaching and the assessed are often also involved in the role of learning. Those involved in the role of assessing, but not in teaching, are involved in either censure, or are interested merely in the summative purposes of an assessment. The assessed, not involved in the role of learning, are of little interest to us.

### 2.4.1 Teaching

Teaching is the expediting of learning. Students learn on their own, but teachers facilitate learning [Skinner (1965)]. The means of facilitation however, vary greatly throughout the discipline [Ramsden (1992), Kember (1997)]. Most however, unite the role of teaching with information delivery and assessment.

A non-empty set of teachers is always held responsible for a course. Their job is to make sure that some predefined knowledge or skills is transferred to the student by the end of the course.

In hope of transferring this knowledge or skills to the student, a teacher devises means of delivering information about this knowledge or skills, and devises means of assessing in how far a student possesses this knowledge or skills. Various techniques in both information delivery and assessment are used to both facilitate and encourage this transfer.

Since teachers facilitate the education of students, including their assessment, teachers exert great authority over students. Teachers decide whether a student passes or fails a course, what grade they get, and how hard it is for them to get it.

#### Teaching assistants

Teaching assistants assist in teaching responsibilities. They are teaching subordinates of teachers. They exert some authority over students, but are often limited in their authority when it comes to important summative assessments. The result is that teaching assistants perform much of the formative assessment, and provide guiding remarks either for the purposes of feedback or to ease important summative assessments for the teachers.

Teaching assistants come about as a scaling mechanism. Once the number of students enrolled for a course exceeds certain numbers, certain means of information delivery and assessment are simply infeasible for the teachers responsible. Instead of hiring more teachers, the strategy is often to rely on some methods of information delivery and assessment that work in large numbers, and rely on teaching assistants for the rest. Teaching assistants are therefore cheaper, less qualified staff that assist in teaching responsibilities.

### 2.4.2 Learning

Learning is the gaining of knowledge or skills. Individuals engage in learning in hope of being somehow enlightened or trained for solving particular kinds of problems. It is a qualitative change of an individual's view of the world [Ramsden (1992)].

Those engaged in the activity of learning for the purposes of obtaining a degree are called students.

Learning requires a motivation to learn. Students are motivated by personal development, future employment opportunities, etc. In this context however, students may sometimes fail to see

### 2.4.3 Censure

Censure is a process of quality assurance of assessment. A censor's participation in an assessment varies from mere observation to avid participation. A censor therefore may need access to the individual elements of a course or of an assessment in such a way that the work of participants of a course is personally identifiable.

### 2.4.4 General Public

The general public includes those who are ultimately interested in the outcomes of education and the quality of assessment therein. This includes both perspective students, future employers, the politically conscious, etc.

The general public may be interested in open access to the elements of education and assessment for the purposes of assessing the quality of education. The intent may be to see if the education lives up to social expectations, demands of the labour market, political promises, etc.

Privacy and anonymity is a matter of grave public concern. If open access is given, it should only identify those who may reasonably be held responsible for an eventual lack of quality in education. Also, issues of copyright have to be taken into account.

As the general public would assess education, and not students, students should not be personally identifiable by the general public. In how far teachers and teaching assistants may reasonably be held responsible by the general public for the quality of education may be a matter of university policy (as their employer). It is important that the assessed are sufficiently informed of their assessment and have conceded to it.

As students typically own the content they produce, individual student work or commentary should not be made available to the general public. In how far teachers and teaching assistants own the content they produce may again be a matter of university policy (as their employer). It is important that the owners of content have command over its reproduction.

## Chapter 3

# Feature Specification

We are interested in an online system for assistance with teaching responsibilities. This involves the support and management of online assignments, submissions, and assessments. It should suit the needs of all the roles in educational assessment as outlined above.

### 3.1 Influence

Our specification has been highly influenced by [Sclater & Howie (2003)], entitled 'User requirement for the "ultimate" online assessment engine'. Sclater & Howie arrive at their requirements after extensive discussions with a focus group of academic and technical staff, involved in the development and deployment of online testing systems at the University of Strathclyde.

Their requirements generally represent the wishes of this focus group, and are influenced by their experiences with earlier products and students. It is also worth noting that the focus group does not include students — an important user group.

A common idiom in software development is that "ultimate" systems may fail to be useful for any one purpose. We have cut away some "ultimate" requirements when deemed not useful to us.

In the end, our wishes and goals depart only slightly from theirs. We summarise the major differences below:

- We are not interested in the construction of large question or "item" banks [Conole & Warburton (2005)]. These are collections of questions or tasks, ready for compilation into assignments. The benefit of such banks is ease of reuse and the development of high-quality questions or tasks.

We deem it as a useful anti-cheating technique not to allow easy reuse of questions or tasks in general. This forces teachers to stay sharp, and minimises the possibility of cheating.

- Given the above, neither are we interested in the abilities to sell questions or tasks constructed for assessment.

## 3.2 Overview

We are interested first and foremost in a system for the management of assignments in a course.

## 3.3 Assignments

A principal function of the online TA is to allow the management of assignments. This includes:

- Specifying assignment texts.
- Specifying

## 3.4 Users

The online TA is to be made available on the World Wide Web. The set of users therefore, includes a wide range of principals of which only a very small subset will ever access the system, and even fewer are likely to use it as intended.

The system should be safeguarded against malicious users, yet provide all the relevant capabilities to authentic users with sufficient permissions.

### 3.4.1 User Roles

For an online TA there are two principal user roles: *system administrators* and *stakeholders* (students, teachers, and the general public). (TODO: is the general public really a stakeholder?) (TODO: how limited is the general public?)

System administrators have complete control of the servers running the service, including the mechanisms that enforce the security policies of the service. (They can, in principle, change anything.) System administrators are also responsible for monitoring the service for abnormal or abusive behaviour.

Stakeholders access the system through a secure online interface. They set up, enroll participants, and participate in courses — where a course is a collection of programming assignments for the students to solve.

There are four principle course-specific stakeholder roles: *instructors*, *assistants*, *students*, and *non-participants*. That is, for each course, every stakeholder has exactly one of these four roles.

Instructors are the principle course administrators. They can enroll other participants as either instructors, assistants, or students. Their primary role is to define the elements of a course.

Assistants are second-level course administrators. They can enroll other participants as either assistants or students. Their primary role is to assist the instructors in defining the elements of a course, and to provide feedback to students.

Students are the basic users of a course. They cannot enroll other participants, or tamper with the elements of a course. Their primary role is to submit solutions to the programming assignments of a course. Student submissions



are individual or group-based, and so not visible to other students in general. Student submissions are visible to instructors and assistants for the sake of evaluation.

Non-participants can see the elements of a course, but they cannot participate in the course in any way. The reasoning here is that there is no implicit trust relationship among the participants of a course, that does not exist among all the stakeholders of an institution. Providing access to non-participants allows them to get a feel for the course, which is useful for both encouraging participation and course evaluation.

NOTES:

- Only instructors and assistants can define the elements of a course.
- Only students can make submissions to programming assignments.
- Course contents is open for everyone in the system to see.

### 3.4.2 User Data

The system must retain sufficient information to securely authenticate and authorise all the users of the system.

### 3.4.3 System Administrators

### 3.4.4 Stakeholders

Stakeholders have to be identified

- Name
- E-mail
- KU username

## 3.5 Courses

### 3.5.1 Course Data

#### Programming Assignments

- Assignment text. Everyone may see. Probably requires some pretty printing.
- Static submission analyses. Only instructors and assistants.
- Input data generator. Only instructors and assistants may see the actual program, everyone may see the resulting generated data. Resources limited to instructors and assistants.

## 3.6 Source Code and Documentation

### 3.6.1 OSS/FS

Open Source Software / Free Software (OSS/FS) programs are programs whose licenses give users freedom to run the program for any purpose, to study and modify the program, and to redistribute copies of either the original or modified program [[Wheeler, 2007](#)].

To fully reap the benefits of OSS/FS, it is necessary to ensure that there is an active community around it, devoted to bug tracking and fixing, as well as developing new features (unless the product can be deemed feature-complete).

If such a community is absent, the worst fears of the sceptics of OSS/FS may well be true: vulnerabilities may be known to adversaries.

Developing software that later

## Chapter 4

# The Data Model

### 4.1 Assignment Groups

An assignment group is a set of assignments and a set of overarching properties for those assignments. A course may be composed of one or more assignment groups.

Principal to an assignment group is the listing of enrolled users and their roles as either teacher, teaching assistant, student, or observer.

### 4.2 Assignments

- Assignment group
- Assignment text
- Time limits
- Try limits
- Summative assessment kinds for every attempt.

Oleksandr Shturmov  
oleks@oleks.info

Master Project  
Online TA

DIKU  
March 1, 2014.

# Chapter 5


## Infrastructure

*Тяжело в учении, легко в бою; легко в учении, тяжело в бою.  
(Tough in training, easy in battle; easy in training, tough in battle.)*

— ALEXANDER SUVOROV, Generalissimo of the Russian Empire (1729–1800)

This chapter provides a high level overview of the chosen system architecture. We justify our choices, as well as discusses some of their benefits and downsides.

Overall, there are three types of servers involved: a key server, a Git server, and a test server. The communications between them and the students and teaching staff are roughly illustrated by Figure 5.1/21. Each type of server may in reality be a set of interconnected servers balancing loads among each other, but fulfilling together the role of a single server type.

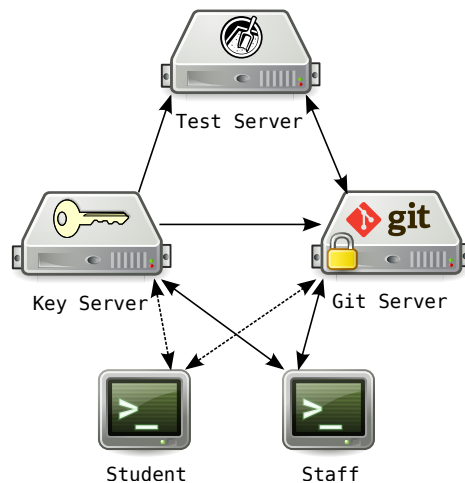

**Figure 5.1:** Illustration of some of the system architecture. All communication happens over secure channels. Both students and staff interact with the key server and Git server, but students have considerably less permissive rights on each of the servers

## 5.1 Motivation

Our current approach keeps students and staff close to the command line (as opposed to e.g. using a web-based interface). The reason is part ideological and part practical. We believe that students become better programmers when kept close to the command line. At the same time, it is easier to implement a comprehensive information security policy in a command line bound system. A myriad of free and open source command line tools exist for assuring integral and authentic data interchange.

In particular, as an extra security precaution, we choose to encrypt student data, and have students digitally sign their data. This way, even if unauthorised users do gain access to the data, they still have to break the encryption to see the data, or fake a digital signature to tamper with it. For now, it is hard to imagine, let alone implement, such precautions in a web-based interface.

In the following subsections we briefly justify our choice of public key cryptography, and discuss various technologies that we can use to implement our cryptographic scheme.

### 5.1.1 Public Key Cryptography

### 5.1.2 OpenSSL

OpenSSL is an open source implementation of the SSL and TLS protocols, providing at the same time a comprehensive general purpose cryptography library [[openssl.org](https://www.openssl.org) (2014)]. Despite popular belief, the `openssl(1)` command-line utility can be used to encrypt and sign regular files.

### 5.1.3 OpenPGP

## 5.2 Key Server

The purpose of the key server is to provide a centralized registry of the public keys of students and staff. The key server is not intended to be a general-purpose public key server. Instead, it's intended to serve as a certificate authority in a formal or semi-formal sense (see also § 5.3.8/29).

### 5.2.1 Student Key Registration

An important role of the key server is to provide the means of registering student public keys, and validating that the keys belong to the said students.

In a campus-based teaching environment, the teaching institution can serve as a validating authority. It is however, important that the registration and validation procedures do not inhibit teaching. A registration bot may be set up to aid in the matter. Let the bot be an agent with some designated private/public key pair.

A teaching institution typically designates every student with a unique identifier. In an introductory lecture, the students may be presented with a

fresh secret key, and asked to cite this secret key in an email to the bot, together with their unique identifier and public key.

The message may be additionally encrypted with bot's public key, and signed by the student's private key. This ensures that other students (and outsiders) cannot peek at a student's identity, and that a student provides a valid public key. A script can be provided to assist students in the matter.

The bot may first check the student identifier against a list of course participants, provided by the teaching staff. If authorised, the bot associates the student identifier with the email address and public key on the key server. We can now engage in secure communication with the student.

In the unlikely event of impersonification, a member of the teaching staff can go in and override this association with proper student credentials, or delete the record entirely. We trust that a campus-based teaching institution is capable of validating student identities on site. After all, if students are not technically able to participate in a course, they can be expected to eventually contact the teaching staff.

The key server can retain the students' public keys across courses, and throughout their education. It would be a great contribution to the overall web of trust on the Internet, if the bot also signed the public keys and published them to a general-purpose public key server. Having obtained appropriate permission from the students, of course.

### **5.2.2 Staff Key Registration**

Staff key registration can be left to more manual means. It is important that staff public keys are validated in person.

To be continued..

### **5.2.3 Serving Public Keys**

The public key registry can serve as a basis for secure communication between the students and staff in general. The public key registry should therefore be made available on the teaching institution intranet, or even to the general public.

To be continued..

### **5.2.4 Discussion**

To be continued..

## **5.3 Git Server**

The purpose of the Git server is to serve as a general purpose data store for both course content, assignments, and student submissions. It serves as a gateway between students and teaching staff, allowing for teaching staff to publish course content and assignments, and for students to make submissions.

In the following we refer to student and staff collectively simply as clients, connecting to our host, the Git server. In § 5.3.8/30 we will discuss why we have just one Git server.

### 5.3.1 Why Git?

Git is a popular [Ohloh (2014)], free, and open source distributed version control and source code management system [Git (2014)]. Although perhaps not the ideal system for all intents and purposes, it is an excellent example that has cemented itself in both the open source community, academia and industry [GitProjects (2014)].

Version control and code review are some of the Core- Tier1 and Tier2 elements in [CS Curricula 2013]. They are highly suggested topics for any undergraduate Computer Science programme.

We hypothesize that using Git for programming assignments can spur the learning of some of the workflow of modern software development. Ideally, students collaborate on assignments, while teaching staff offer code reviews, all as if it were a real software development project.

Git with authentication over SSH is an easy way to provide a scalable, on-line general purpose data store and gateway, having fine-grained and reliable authentication and authorisation procedures.

### 5.3.2 Course as a Repository

A Git server manages Git repositories. We choose to let a course be represented by a Git repository.

A Git repository has one or more branches. We choose to let one branch - the master branch - be used for the distribution of course content and assignments by teaching staff. To make submissions, students create branches in their name and push their changes to these branches onto the server.

Assessment of a student submission is provided in a special subdirectory on their private branch. All assessment is bound to particular commit by the student to a student branch.

In such an infrastructure it is important that students are not allowed to push to the master branch, or to other student branches. At the same time, teaching staff should be allowed to push to both the master (to provide content and assignments) and student branches (to provide feedback). Last but not least, we would like to let everyone see course content and assignments, but prohibit them in seeing student submissions, or pushing to any of the branches.

Such fine-grained authentication and authorisation can be achieved through OpenSSH and Git hooks.

### 5.3.3 OpenSSH

OpenSSH is a free (as in free speech) version of the SSH connectivity tools [openssh.com (2014)]. The tools provide for secure encrypted communication between untrusted hosts over an insecure network [ssh(1)]. They include tools for user authentication, remote command execution, file management, etc.



An OpenSSH host maintains a private/public key pair used to identify the host. Upon connection, the host offers its public key to the client, in hope that the client will accept it and (securely) proceed with authentication with the host. If authenticated, the client is mapped to a particular user on the host. After some session preparation, the client, as that user, can start a session, i.e. request a shell or the execution of a command.

One of the authentication methods supported by OpenSSH is using public key cryptography. The idea is that each client creates a private/public key pair, and informs the host of the public key over some otherwise secure channel, e.g. using a trusted keyserver.

For any user on the host, a file can be created, e.g. `~/.ssh/authorized_keys`, listing the public keys of those private/public key pairs that may be used to authenticate as that user. The format of this file [[sshd\(8\)](#)], allows to specify additional options for each key. The options can be used to e.g. set a session-specific environment variable, or replace the command executed once the user is authenticated. The original command is then saved as the environment variable `SSH_ORIGINAL_COMMAND`.

When using a Git server with OpenSSH, Git operations on the client, will attempt execute Git operations on the host. Per-key options can be used to make their execution dependent on the key used for authentication, e.g. performing authorisation.

### 5.3.4 Git Hooks

Git hooks is a Git mechanism for executing custom scripts when important events happen [[git-hooks\(5\)](#)]. The scripts can control in how far certain Git operations succeed. A Git hook is an adequately named executables placed in a special subdirectory in the local Git repository. Git hooks are not part of the version-controlled code base.

For instance, the update hook is executed whenever the client attempts to push something to a branch. The client has already been authenticated, but no changes have yet been made. The hook is passed adequate arguments to identify the branch or tag being updated and the update taking place. If this hook exits with a non-zero exit value, the update will duly fail.

### 5.3.5 Users

When using a Git server with OpenSSH, clients must be mapped to users on the host. There are at least two options for the mapping: each client gets their own user, or all clients map to the same user. The first option has a higher administration costs, but gives perhaps more fine grained access control.

The second option is generally more popular because of less cluttering of the UTS namespace. Additional tools, like gitolite, are instead used to provide a fine-grained access control layer. We too, have chosen this option.

### 5.3.6 Gitolite

Gitolite is an access control layer on top of Git [gitolite.com (2014a)]. Gitolite leverages the features of OpenSSH and Git hooks, as discussed above, to provide fine-grained authentication and authorisation [gitolite.com (2014b)].

Gitolite is used in multiple communities with high-stakes projects, such as Fedora, KDE, Gentoo, and kernel.org [gitolite.com (2014c)]. Among the reasons for choosing gitolite, kernel.org lists [kernel.org (2014)] “well maintained and supported code base”, “responsive development”, “broad and diverse install base”, and “had undergone an external code review” [gitolite Google Group (2011)].

There are also other tools out there, such as Gerrit<sup>1</sup> and Stash<sup>2</sup>. Both of these provide a lot more than a simple access control layer.

In conclusion, we chose to use gitolite ahead of both using other tools, and implementing our own solution.

#### Installation

Gitolite is installed on a per-user basis. Meaning that we should create and log in as some designated Git user to set up gitolite, or change ownership accordingly after install. As an extra security assurance, the gitolite installation does not require a privileged user, so long as Git, OpenSSH, and Perl are already installed.

The code is distributed under a GNU General Public License, and is available at [git://github.com/sitaramc/gitolite](https://github.com/sitaramc/gitolite). We may wish to check out the latest tag (version), after verifying that it indeed was signed by Sitaram Chamarty (the original developer of Gitolite)<sup>3</sup>. To the best of our knowledge, his public GPG key is:

```
pub 4096R/088237A5 2011-10-25
    Key fingerprint =
        560A DA64 7542 816F 412E 5891 A442 9085 0882 37A5
uid Sitaram Chamarty (work email) <sitaram@atc.tcs.com>
uid Sitaram Chamarty <sitaramc@gmail.com>
sub 4096R/8AC76EFB 2011-10-25
```

Once cloned and compiled, gitolite setup requires the administrator’s public SSH key to be provided in some accessible file:

```
$ ./gitolite setup -pk admin.pub
```

This initializes a git repository `gitolite-admin.git`, which admin has complete control over. This repository serves as the primary administrative interface for the gitolite access control layer.

<sup>1</sup>See also <https://code.google.com/p/gerrit/>.

<sup>2</sup>See also <https://www.atlassian.com/software/stash>.

<sup>3</sup>See also <http://git-scm.com/book/en/Git-Basics-Tagging>, if you are unfamiliar with Git’s tagging mechanism.

## Administration

Administration of the gitolite happens through a special Git repository. There are three important elements to this repository:

1. The `./keys` subdirectory which contains the public keys of all users of the system, thereby defining the users. The names of the key files designate the user names [[gitolite.com \(2014d\)](#)].
2. The `./conf/gitolite.conf` configuration file. This file defines the repositories, and the users' permissions wrt. those repositories.
3. The post-update Git hook on the server side, parsing the above keys subdirectory and config file, making adequate changes to the server repositories.

It is important that access to this repository is safely guarded as it gives complete control over the users and repositories on the Git server.

## Permissions

Permissions in gitolite are granted on a per repository basis. Every time a user attempts to perform a read or write operation on a repository, the user's action is matched against a series of rules. If none of the rules match, the user operation is denied.

Permissions may be granted to the entire repository or just to a particular branch, tag, or even subfolder. Users may be granted, read, write, read-write, and even forced write permissions (more on this in the next section). There are some even more fine grained permissions [[gitolite.com \(2014e\)](#)], but we will not be concerned with them here.

### 5.3.7 Attack surface

#### Login shell

It is often important with Git servers to disallow clients' shell requests. This is typically achieved by setting the user's login shell to something non-permissive, e.g. a [[git-shell\(1\)](#)].

This set up is perhaps a bit superfluous, as gitolite disables interactive shell login via the authorized keys file. Never-the-less it is a good extra level of security, as the login shell of any user can only be modified by a privileged user, which the `git` user is not.

#### Session preparation dialog

When a client is authenticated with OpenSSH, but before a user session starts, the client and the host enter into a session preparation dialog.

The client can request a pseudo-tty (e.g. interactive shell), forwarding X11 connections (e.g. remote desktop), forwarding TCP connections (e.g. virtual private networking), or forwarding the authentication agent connection over

the secure channel (e.g. using the secure connection to establish other secure connections).

All these options open up the attack surface of our Git server. Fortunately, all of these session dialog options can be disabled for any key in the authorized keys file [[sshd\(8\)](#)]. By default, gitolite disables all of these options for all keys.

### Forced push and rewriting history

Git has a, somewhat controversial [[Torvalds \(2007\)](#),[Hamano \(2009\)](#),[Rego \(2013\)](#)], forced push feature. This bypasses the check that the remote ref being updated should be an ancestor of the local ref used to overwrite it [[git-push\(1\)](#)]. Meaning that the branch being updated should be the strict base of the update.

Forced push is dangerous because it incautiously overwrites history and can thereby inhibit assessment or even modify student records.

This is mitigated for by gitolite permissions. Students are simply not allowed to perform a forced push<sup>4</sup>. This means that students cannot e.g. amend to a commit that they have already pushed to the server. The students are encouraged to use [[git-revert\(1\)](#)] instead.

### Git, OpenSSH, and Perl

Despite its popularity, relatively few vulnerabilities have ever been found outside of the Git development team [[cvedetails.com \(2014a\)](#)].

The security of Git (out of the box) however, depends on the sensibility of the developers involved. Impersonification and private key leaks are not always well guarded against [[Gerwitz \(2013\)](#)], especially with the advent of modern Git hosting services [[Homakov \(2012\)](#),[Huang \(2013\)](#),[Homakov \(2014\)](#)]. It is the purpose of our Git server to serve as a guard against impersonification. Private key leaks are to be guarded against by the students themselves.

OpenSSH has also had relatively few vulnerabilities discovered outside of the OpenSSH development team [[cvedetails.com \(2014b\)](#)]. However, the underlying OpenSSL has been a lot less fortunate [[cvedetails.com \(2014c\)](#)].

Perl has only been a bit less fortunate [[cvedetails.com \(2014d\)](#)].

The referenced material does not cover all of the underlying libraries of the software. However, all of the above are popular pieces of software on public facing web servers. Their security therefore, is a matter of grave public concern.

## 5.3.8 Discussion

### Pull requests

Our model of a student submission being a Git push to a student branch is not an accurate model of modern software development. In modern software development, a developer may work on their own branch (as our students would), and then make a “pull request” to merge their changes into the master branch. (Alternatively, a developer might work on in their own repository, and

---

<sup>4</sup>As an experimental bug, teaching staff are still allowed to perform a forced push.

then make a pull request for their changes to be merged into the main project repository [Bird et al. (2009).]

Such pull requests make little sense in education where all students are working on the same problem — a scenario you’d often go to great lengths to avoid in industry. Instead, students are always allowed to submit what they have to their own branch. Code reviews are then done of snapshots of the student branch, e.g. automatically every time they push, or by a human at a nominal point in time.

Alternatively, we could have chosen to have students make a pull request to a special “submission branch”, with the other branch being a “draft branch”. This would demand a more complicated set up of the Git server, perhaps using Gerrit or Stash, as mentioned above. The pull request could then be accepted if the code passed automatic code review.

Unfortunately, it is sometimes instructional to give credit for an attempt at solving the problem. There may even come a situation where the student has made it to submit some basic working code in the submission branch but has a more comprehensive (non-working) solution in their draft branch. It would seem that this would gravely complicate matters for the subsequent human code review. In our model, the commit and test history of a branch is sufficient to reveal when the code had last worked.

## Responding to students

Responding to students via a subdirectory in their private branch means that the students have to pull from their branch before they can make a subsequent submission (the race condition aside). This is good because it encourages students to read feedback and not to push in the blind. This is bad because it might inhibit quick (re)submissions (made within minutes): as practice shows, this is frequent close to a deadline.

An alternative could be to distribute feedback in a separate private student branch, which is not writable by students. This is easy to set up in gitolite, but is more permissive of students pushing in the blind, ignoring all feedback. It also adds to the complexity of the student’s view of the system: some students may fail to realise that feedback is being given at all.

As another alternative, feedback could be provided interactively, as part of a Git push operation. For instance, in a post-receive or a post-update Git hook. These hooks lets us run custom scripts after the real work of a Git push is done. The benefit is that the connection to the client is not closed until these scripts end, and standard output and error are redirected to the client [git-hooks(5)]. Although this allows to present the test results immediately, it is unclear where the test results should be persisted.

## SSH Certificate Authority

Our choice of gitolite as the access control layer for our Git server, seemingly prohibits the use of an SSH certificate authority.

An SSH certificate authority is a separate server that certifies client public keys. This relinquishes a Git server of the need to keep public keys in an autho-

rized keys file, and allows to keep a centralized (hiearchical) registry of client keys. Gitolite relies on the use of an authorized keys file.

Certificate authorities however, still have to forward client certificates to the Git server. If forwarded on-demand, the certificate authority is a single point of failure. If forwarded on occasion, certificate authorities are functionally equivalent to using a Git repository over SSH, as with gitolite. We therefore do not find this to be an inconvenience.

## Scalability

We dedicate a Git branch to every student. To our knowledge, there is no practical limit on the number of branches in a Git repository. If there is a limit, it has to do with underlying file system limits, as every branch requires a separate file in a particular subdirectory. This limit should be in the manner of millions, and so not applicable in a course, or department context.

Each time a client performs a Git operation, a connection to the Git server is established. The server performs one of a limited set of (presumably, finite) operations in a separate user session.

To our knowledge, there are no practical limits on the number of simultaneous connections to a Linux server. The number of user sessions however, is bound by the maximum number of processes per user. (Later, we will use this feature to guard against fork bombs.) This limit can be found using:

```
$ ulimit -u
```

Although this limit can be lifted, there is a more fundamental limit on the total number of processes for a Linux system. This limit is typically 32768. It should be increased with caution, and only if there are sufficient system resources. The limit can be found using:

```
$ cat /proc/sys/kernel/pid_max
```

A dedicated Git server should safely scale to a course, or a department, provided sufficient memory, CPU, and disk resources and speeds. On a university scale, it is advisable to use a Git server per department. OpenSSH operations are fairly CPU intensive, and many simultaneous submissions may lead us to hit the process number limits.

## 5.4 Encrypted and Signed Git Repositories

Although unrelated to server infrastructure, this section is included in this chapter as it is an important matter of the overall system infrastructure: this section argues for a method of securely storing, digitally signed client data.

Git has built-in a method of signing tags (versions) or commits. Both require a GPG signature.

To be continued..

## 5.5 Test Server

The purpose of the of the test server is to test student submissions.  
To be continued..

Oleksandr Shturmov  
oleks@oleks.info

Master Project  
Online TA

DIKU  
March 1, 2014.



## Chapter 6

# Sandboxing untrusted code

*Going all the way back to early time-sharing systems, we systems people regarded the users, and any code they wrote, as the mortal enemies of us and each other. We were like the police force in a violent slum.*

— ROGER NEEDHAM, IEEE Symposium on Security and Privacy (1999)

Students submit digital files in response to assignments. Some of these files may specify executable computer programs. The automatic evaluation of student submissions constitutes the static and dynamic evaluation of such files. Static evaluation constitutes executing computer programs specified by the teaching staff, which read and analyze student files. In addition, dynamic evaluation includes executing the programs submitted by students.

The student programs may misbehave in a myriad of different ways. The programs of the teaching staff, although more trustworthy, may also misbehave. If nothing else, they may undermine the misbehaviour of students. The intent of this chapter is to discuss the means in which we can mitigate for such misbehaviour for all parties, and ensure fair service.

In the first section we provide a high-level overview of the technologies that can be used sandboxing. Here we come to the conclusion that operating-system level virtualization is a best candidate option. The remainder of the chapter deals with basic principles of virtualizing and limiting system resources in [[Linux kernel \(v3.14.2\)](#)], henceforth the Linux kernel.

### 6.1 Technology Overview

A program is executed within a program execution environment. A sandboxed execution environment ensures the non-interference of the program with other programs being executed on the host.

There are two general approaches to providing sandboxed program execution environments: sandboxing the operating system, or sandboxing within an operating system. The first two subsections discuss the former, the last subsection discusses the latter.

### 6.1.1 Dedicated Servers

We can provide an off-the-shelf operating system sandbox using a dedicated server for every program. This however, relinquishes remote control of the execution environment, and may demand physical access to the machine in case of failure. This is impractical. Also, this is expensive since most computer systems today are intended as time-sharing systems.

### 6.1.2 Virtual Machines

The next option is to provide an operating system by means of hardware or software virtualization. This retains remote control of the execution environment. However, it imposes huge costs on every execution. An entire operating system has to boot up before testing can commence.

Alternatively a pool of virtual machines could be kept online, pulling tasks from a task queue. Such a set up does not always fail fast, again because an entire operating system may have to be rebooted in case of failure. Combined with empirical evidence that student programs fail often, this is impractical.

Such high-level virtualization also makes the execution environment hard to monitor. The overhead of the operating system may dilute the true costs inherent in executing various programs. For similar reasons, fine-grained resource limits are often hard to enforce. All this is desirable for the purposes of evaluating our programs and tuning our sandboxes.

### 6.1.3 Operating system-level virtualization

Operating system-level virtualization alleviates the need for a separate kernel for sandboxing program execution environments.

Time-sharing systems have for a long time provided for multiple simultaneous user space instances on top of a single kernel. Combined with file-system user permissions and user groups, these provided for the very first sandboxing capabilities.

Recent developments in modern operating systems have facilitated more fine-grained sandboxing by virtualizing underlying system resources. Such a virtualized user space instance is typically called a “jail” or a “container”.

The pitfall of operating system-level virtualization in general, is that we become more vulnerable to vulnerabilities in the kernel. If a contained program can utilize a kernel vulnerability, the whole system is under threat.

#### FreeBSD Jails

#### Linux Kernel Containment

- LXC
- libvirt-lxc
- Docker

## 6.2 Control Groups

Control groups (cgroups) provide a mechanism of hierarchically grouping/-partitioning tasks (see also Appendix A.1/55) and their future children [cgroups.txt]. On their own, cgroups are perhaps only useful for simple job tracking. The idea, is to have other subsystems hook into the cgroups functionality and provide for management of system resources.

The standard cgroup subsystems include subsystems to monitor and limit memory, CPU time, I/O, and device activity. Most modern Linux distributions come with cgroups and many of these standard subsystems enabled. The system's `/proc/config.gz` can reveal the setup on your system [proc(5)]. If `CONFIG_CGROUPS` is enabled, you have cgroups support.

The variables related to various subsystems are explored further in the following subsections. First however, we discuss how cgroups can be accessed and manipulated from user space in general.

### 6.2.1 Managing cgroups

Cgroups are managed via a pseudo-filesystem: cgroups reside in memory, but can be manipulated through the virtual file system. cgroup is therefore an inherent file system type on systems that have the cgroups functionality enabled.

#### Cgroups, subsystems, and hierarchies

A cgroup is an association of a set of tasks with a set of preferences for one or more subsystems. A hierarchy is a set of cgroups arranged in a tree; every task in the system is contained in exactly one cgroup of a hierarchy; all cgroups in a hierarchy, associate their tasks with the same set of preferences.

We say that a hierarchy is “associated” with a set of subsystems, and that a task is “attached” to a cgroup.

(picture!!)

#### Mounting

When mounting a cgroup file system, we create a new hierarchy. The set of subsystems to associate with the hierarchy is listed as mount options:

```
$ mount -t cgroup -o cpu,cpuacct cgroup ./cgroup/cpu,cpuacct
```

This associates the `cpu` and `cpuacct` subsystems with a new hierarchy, and mounts the hierarchy under the target `./cgroup/cpu,cpuacct`, unless one of the subsystems is busy.

A subsystem is busy e.g. if it is associated with a hierarchy having tasks attached. Since a hierarchy is automatically attached to all tasks in the system, this effectively means that a subsystem may be associated with at most one hierarchy. If a hierarchy associated with the exact same set of subsystems already exists however, it will be reused for the new mount.

What hierarchies already exist, and what subsystems they are associated with, depends on the system at hand. The system's `/proc/mounts` can reveal how this is setup on your system [proc(5)].

## Control files and child groups

After a hierarchy is successfully mounted, we see a range of files, and perhaps folders, below our target. We refer to these as control files and child groups, respectively.

We monitor/modify the preferences of a cgroup by monitoring/modifying the control files. We create/remove child groups by creating/removing subdirectories below our target.

With a few exceptions at the root of the hierarchy, all cgroups contain the same files, created when the cgroup is created. Some files are common to all hierarchies, others are due to the associated subsystems. Two common files are of particular interest:

### `cgroup.procs`

Lists the set of thread group IDs in the current cgroup. Appending a thread group ID to this file moves all the threads in the thread group into this cgroup.

### `tasks`

Lists the set of thread IDs in the current cgroup. Appending a thread ID to this file moves the thread into this cgroup.

## Hierarchical accounting

Hierarchical accounting is when resource accounting is child group aware. All resource usage is summed up for all tasks in the cgroup, and recursively for all child groups. Limits are then imposed on the entire hierarchy. A subsystem does not necessarily perform hierarchical accounting.

### 6.2.2 The Resource Counter

The resource counter is a framework for managing a resource when using control groups [[resource\\_counter.txt](#)]. The internal data structures aside, the framework makes recommendations wrt. the control files. A couple of the recommended control files are of interest to us:

#### `<resource>.max_usage_in_<unit_of_measurement>`

Reading this file, we get the maximal usage of the resource over time, in the given units. Writing to this file, resets the value to the current usage of the resource. (The data written is ignored.)

#### `<resource>.limit_in_<unit_of_measurement>`

Reading this file, we get the maximal allowed usage of the resource, in the given units. Writing to this file resets the limit to the given value. A special value may indicate no limit.

These files are of interest to us as they allow us to probe the usage of a resource in a test instance and set up resource limits for students or staff.

### 6.2.3 memory

The memory subsystem allows us to monitor and limit the memory usage of the tasks in a cgroup [\[memory.txt\]](#). This includes both user and kernel memory and swap usage. The subsystem optionally performs hierarchical accounting.

Due to the considerable overhead of memory and swap accounting, some distributions do not enable this cgroup, or merely do not enable swap accounting by default. The latter is especially misleading. If swapping is enabled, a memory limit with no swap limit has at best a hapless effect.

You can check the setup on your system by checking the options prefixed with `CONFIG_MEMCG_` in your `/proc/config.gz`. Swap accounting can be enabled using the standard kernel parameter `swapaccount=1` [\[kernel-parameters.txt\]](#). Enabling the memory cgroup can be a little more distribution-specific. In a Debian kernel, this can be done using the kernel parameter `cgroup_enable=memory` [\[Hutchings \(2011\)\]](#).

The memory subsystem uses a resource counter for a couple different memory resources. The resource counter control files (see also § 6.2.2/36) are prefixed as follows:

`memory`

The main memory counter. This includes both user and kernel memory.

`memory.memsw`

The main memory, plus swap. Limiting this value to the same value as the main memory controller, disables swap.

`memory.kmem`

Kernel memory. All kernel memory is also accounted for by the main memory counter. It is not necessary to limit this value if swapping is disabled and there is a limit on the main memory counter (since kernel memory cannot be swapped out).

`memory.kmem.tcp`

Kernel TCP buffer memory. Although we will disallow networking in general, it might be a good idea to 0-limit this resource as an extra precaution.

The limits and usage are always measured in bytes. Setting the limit to `-1`, removes the limit on the resource.

The memory subsystem does not necessarily perform hierarchical accounting. This can be enabled by writing `1` to the `memory.use_hierarchy` control file in the root cgroup.

### 6.2.4 `cpuacct`

The CPU accounting (`cpuacct`) subsystem allows us to monitor the CPU time usage of the tasks in a cgroup [[cpuacct.txt](#)]. The `cpuacct` subsystem always performs hierarchical accounting.

The `cpuacct` subsystem provides a couple control files of interest:

`cpuacct.usage`

Shows the total CPU time spent by the cgroup, in nanoseconds.

`cpuacct.usage_percpu`

Shows the total CPU time spent by the cgroup, for each CPU core, in nanoseconds.

`cpuacct.stat`

Shows a further division of the CPU time spent. For now, showing how much of the CPU time was spent running in user mode, and how much in kernel mode, in the `USER_HZ` time unit.

### 6.2.5 `cpu`

The `cpu` subsystem facilitates CPU scheduling parameters for a cgroup [[sched-design-CFS.txt](#), [sched-bwc.txt](#), [sched-rt-group.txt](#)]. The parameters currently facilitate control over two different schedulers in the Linux kernel:

*Completely Fair Scheduler (CFS)*

A proportional share CPU scheduler. The CPU time is divided fairly among tasks depending on their priority and the share assigned to their cgroup.

*Real-Time Scheduler (RT)*

A real-time scheduler for real-time tasks, i.e. tasks for which it is important to meet deadlines. For real-time tasks, a particular amount of CPU time must be guaranteed over a particular period of time.

For the RT scheduler, the subsystem parameters facilitate limiting how much CPU time the real-time tasks in a cgroup may spend in total over a period of time. Enforcing such limits and meeting real-time deadlines seems like a heedful task. For simplicity, we'll disallow students from spawning real-time tasks. In a default setup, spawning real-time tasks requires privileged access, which we already do not grant to our sandboxed programs.

The CFS parameters facilitate first-and-foremost the enforcing of a lower bound on the amount of CPU time allocated to a cgroup. This is done by assigning a relative share (weight) to a cgroup. The shares are enforced, only if tasks from different cgroups are competing for CPU time. This means that if a cgroup gets no competition, it gets all the CPU time it wants.

With the advent of "cloud computing" however, it has also become relevant to facilitate enforcing upper bounds on the CPU time over a period of time [[Turner et al. \(2010\)](#)]. This is facilitated similarly to the RT scheduler.

We choose to let the students spend all the CPU time they want, as long as fair service is ensured for all students and staff. There is therefore only one control file in this subsystem of interest to us:

#### `cpu.shares`

Show/set the relative CPU time share of a cgroup. Two cgroups having share 100, will be given equal service. If one of the groups has share 200, it gets twice as much CPU time under a fully-loaded system. This control file in the root cgroup, provides for a yard-stick for all other cgroups.

All these options do not allow us to hard limit the amount of CPU time used by a cgroup in total. To our knowledge there is no “natural” way of doing this in the Linux kernel. We must make due with limiting the wall-clock running time of an untrusted program.

### 6.2.6 `cpuset`

The cpusets subsystem allows us to assign a set of CPU cores and a set of memory nodes to a cgroup. This can be used to further partition system resources from a fairly high level.

We choose to let the system be runnable on commodity hardware. With few processor cores, and few memory nodes, this subsystem is of little use to us.

### 6.2.7 `devices`

The devices subsystem allows us to mandate access to device nodes (files) using cgroups [[devices.txt](#)]. The limits are enforced hierarchically using whitelists — a cgroup further down in the hierarchy cannot access devices to which access has not been granted further up in the hierarchy.

A whitelist entry consists of four fields: the device node type, the major and minor device node identifiers (2 fields), and an access specifier. The access specifier is a sequence of characters, where `r` signifies read access, `w` write access, and `m` device node creation.

The device node type is either `c` for character, `b` for block, or `a` for all devices. `a` is a wildcard. Using it, discards all other options, and implies full access to all devices of all types. This is useful if you want to mandate universal access. The major and minor device identifiers is what Linux uses to uniquely identify devices. The device node type, its major and minor identifiers of can be found using `stat`.

```
$ stat --format "type:%F, major:%t, minor:%T" /dev/urandom
type:character special file, major:1, minor:9
```

The following control files facilitate device whitelist management:

#### `devices.allow`

Writing an entry to this file adds an entry to the device whitelist. Reading is prohibited.

#### `devices.deny`

Writing an entry to this file removes an entry from the device whitelist. Reading is prohibited.

#### `devices.list`

Shows the device whitelist. Writing is prohibited.

The format of a whitelist entry is `<type> <major>:<minor> <spec>`, where `<major>` and `<minor>` can be `*` indicating all versions. Writing `a` to `devices.allow` or `devices.deny` is the same as writing `a *: * rwm` to the same file.

### 6.2.8 blkio

The Block IO subsystem allows us to monitor and mandate access to I/O operations on block devices using cgroups [[blkio-controller.txt](#)]. The monitoring parameters provide for insight into the I/O performance of a cgroup. The access mandating parameters provide for proportional and absolute limits on the number of I/O operations by a cgroup.

We choose to not provide access to block devices to students in general. This is done due to the ease of implementation of a particular security policy. Giving unmandated access to a block device, in theory, gives unmandated access to all data on that device. Protecting data on such a device is a complicated matter. Although SELinux, with its per-inode restrictions, could presumably be used to this end, it is easier to just not give access to block devices in general.

As will be discussed later, this does not inhibit us in providing students with a general purpose read/write file system.

## 6.3 Namespaces

### 6.3.1 UTS

### 6.3.2 IPC

### 6.3.3 PID

### 6.3.4 NET

### 6.3.5 USER

## 6.4 Resource Limits

## 6.5 Linux Security Modules

Linux Security Modules (LSM) is a framework that provides a mechanism for various security checks to be hooked (responded to) by new kernel extensions [[Wright et al. \(2002\)](#), [LSM.txt](#)]. The main use of LSM is the implementation of mandatory access control, providing a comprehensive security policy.



### **6.5.1 SELinux**

### **6.5.2 AppArmor**

### **6.5.3 Capabilities**

## **6.6 Seccomp**

Oleksandr Shturmov  
oleks@oleks.info

Master Project  
Online TA

DIKU  
March 1, 2014.

## Chapter 7

# Feedback Processing

*/\* War is peace. Verbosity is silence. MS\_VERBOSE is deprecated. \*/*  
— DAVID HOWELLS, Linux Source Code (2012)

Oleksandr Shturmov  
oleks@oleks.info

Master Project  
Online TA

DIKU  
March 1, 2014.

# Bibliography

[Wheeler, 2007] David A. Wheeler. *Why Open Source Software / Free Software (OSS/FS, FLOSS, or FOSS)? Look at the Numbers!*. Revised as of April 16, 2007. Retrieved from [http://www.dwheeler.com/oss\\_fs\\_why.html](http://www.dwheeler.com/oss_fs_why.html) on March 7, 2014.

Archived by WebCite® at <http://www.webcitation.org/6NtSnvALX>.

[CS2013] ACM/IEEE-CS Joint Task Force on Computing Curricula. *Computer Science Curricula 2013*. December 2013. ACM Press and IEEE Computer Society Press. Retrieved from <http://ai.stanford.edu/users/sahami/CS2013/final-draft/CS2013-final-report.pdf> on March 7, 2014.

Archived by WebCite® at <http://www.webcitation.org/6NtTXPH2s>.

[EHEA (1999)] Joint declaration of the European Ministers of Education. *The Bologna Declaration*. June 19, 1999. The European Higher Education Area. Retrieved from [http://www.ehea.info/Uploads/Declarations/BOLOGNA\\_DECLARATION1.pdf](http://www.ehea.info/Uploads/Declarations/BOLOGNA_DECLARATION1.pdf) on March 9, 2014.

Archived by WebCite® at <http://www.webcitation.org/6Nwr8h817>.

[CND (2004)] Sebastian Horst and Carl Winsløw. *Undervisning i blokstruktur - potentialer og risici*. April 1, 2004. DidakTips 5. Center for Natufagenes Didaktik. University of Copenhagen. Retrieved from <http://www.ind.ku.dk/publikationer/didaktips/didaktips5/5.undervisningiblokstruktur-potentialerogrisicimedomsdrag.pdf> on March 9, 2014.

Archived by WebCite® at <http://www.webcitation.org/6NwjYw1Bi>.

[BEK 814] Ministeriet for Forskning, Innovation og Videregående Uddannelser. *Bekendtgørelse om bachelor- og kandidatuddannelser ved universiteterne (uddannelsesbekendtgørelsen)*. Ministerial Order no. 814 of December 19, 2013. Retrieved from <https://www.retsinformation.dk/Forms/R0710.aspx?id=160853> on March 9, 2014.

Archived by WebCite® at <http://www.webcitation.org/6NyGHXc4N>.

[BEK 1520] Ministeriet for Forskning, Innovation og Videregående Uddannelser. *Bekendtgørelse om bachelor- og kandidatuddannelser ved universiteterne (uddannelsesbekendtgørelsen)*. Ministerial Order no. 1520 of December 19,

2013. Retrieved from <https://www.retsinformation.dk/Forms/R0710.aspx?id=160853> on March 9, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/6Nx4DxLGL>.

[BEK 666] Ministeriet for Forskning, Innovation og Videregående Uddannelser. *Bekendtgørelse om eksamen og censur ved universitetsuddannelser (eksamensbekendtgørelsen)*. Ministerial Order no. 666 of June 24, 2012. Retrieved from <https://www.retsinformation.dk/Forms/R0710.aspx?id=142560> on March 10, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/6NyIODlqJ>.

[BEK 250] Ministeriet for Forskning, Innovation og Videregående Uddannelser. *Bekendtgørelse om karakterskala og anden bedømmelse ved universitetsuddannelser (karakterbekendtgørelsen)*. Ministerial Order no. 250 of March 15, 2007. Retrieved from <https://www.retsinformation.dk/Forms/R0710.aspx?id=29307> on March 11, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/6NzV0dWtv>.

[Curricula (2013)] *The shared section of the BSc and MSc curricula for study programmes at the Faculty of Science, University of Copenhagen*. September 2013. Retrieved from [http://www.science.ku.dk/studerende/studieordninger/faelles\\_sto/Faelles-del-ENG-2013-web.pdf/](http://www.science.ku.dk/studerende/studieordninger/faelles_sto/Faelles-del-ENG-2013-web.pdf/) on March 10, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/6NyEpPK67>.

[Bradfoot & Black (2004)] Patricia Broadfoot and Paul Black. *Redefining assessment? The first ten years of assessment in education*. 2004. Assessment in Education: Principles, Policy & Practice, Vol. 11, No. 1, pp. 7–26. DOI: 10.1080/0969594042000208976. Retrieved from <https://cmap.helsinki.fi/rid=1G5ND18R4-1QLJN7R-1SB> on March 16, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/6070hF8LW>.

[Pishghadam et al. (2014)] Reza Pishghadam, Bob Adamson, Shaghayegh Shayesteh Sadafian, and Flora L. F. Kan. *Conceptions of assessment and teacher burnout*. 2014. Assessment in Education: Principles, Policy & Practice, Vol. 21, No. 1, pp. 34–51. DOI: 10.1080/0969594X.2013.817382.

[Harlen & James (1997)] Wynne Harlen and Mary James. *Assessment and Learning: differences and relationships between formative and summative assessment*. 1997. Assessment in Education: Principles, Policy & Practice, Vol. 4, No. 3, pp. 365–379. DOI: 10.1080/0969594970040304.

[Butler (1988)] Ruth Butler. *Enhancing and understanding intrinsic motivation: the effects of task-involving and ego-involving evaluation on interest and performance*. February 1988. British Journal of Educational Psychology, Vol. 58, No. 1, pp. 1–14.

[Sadler (1989)] D.Royce Sadler. *Formative assessment and the design of instructional systems*. June 1989. Instructional Science, Vol. 18, No. 2, pp. 119–144. Kluwer Academic Publishers. DOI: 10.1007/BF00117714

- [Bloom et al. (1971)] Benjamin S. Bloom, J. Thomas Hastings, and George F. Madaus. *Handbook on Formative and Summative Evaluation of Student Learning*. 1971. McGraw-Hill, Inc. United States. Library of Congress Catalog Card Number 75129488. ISBN 0070061149.
- [Ramaprasad (1989)] Arkalgud Rapaprasad. *On the definition of feedback*. January 1989. Behavioural Science, Vol. 28, No. 1, pp. 8–13.
- [Black & William (1998)] Paul Black and Dylan William. *Assessment and Classroom Learning*. 1998. Assessment in Education: Principles, Policy & Practice, Vol. 5, No. 1, pp. 7–74. DOI: 10.1080/0969595980050102.
- [Gibbs & Simpson (2004)] Graham Gibbs and Claire Simpson. *Conditions Under Which Assessment Supports Students' Learning*. May 2004. Learning and Teaching in Higher Education, Issue 1. Retrieved from <http://www2.glos.ac.uk/offload/tli/lets/lathe/issue1/issue1.pdf> on March 22, 2014. Archived by WebCite® at <http://www.webcitation.org/60GkhvGyE>.
- [Ramsden (1992)] Paul Ramsden. *Learning to Teach in Higher Education*. 1992. Routledge. ISBN 0-415-06415-5.
- [Conole & Warburton (2005)] Gráinne Conole and Bill Warburton. *A review of computer-assisted assessment*. March 2005. The Journal of the Association for Learning Technology (ALT-J), Research in Learning Technology, Vol. 14, No. 1, pp. 17–31. Retrieved from <http://www.researchinlearningtechnology.net/index.php/rlt/article/download/10970/12674> on March 23, 2014. Archived by WebCite® at <http://www.webcitation.org/60IAQzo2d>.
- [Valenti et al. (2003)] Salvatore Valenti, Francesca Neri, and Alessandro Cucchiarelli. *An Overview of Current Research on Automated Essay Grading*. January 2003. Journal of Information Technology Education, Vol. 2, No. 1, pp. 319–330.
- [Ala-Mutka (2005)] Kirsti M. Ala-Mutka. *A Survey of Automated Assessment Approaches for Programming Assignments*. June 2005. Computer Science Education, Vol. 15, No. 2, pp. 83–102.
- [Bull & McKenna (2004)] Joanna Bull and Colleen McKenna. *Blueprint for Computer-Assisted Assessment*. 2004. Taylor & Francis e-Library. Master e-book ISBN: 0-203-46468-0.
- [Topping (1998)] Keith Topping. *Peer Assessment between Students in Colleges and Universities*. Autumn 1998. Review of Educational Research, Vol. 68, No. 3, pp. 249–276.
- [Carter et al. (2003)] Janet Carter, John English, Kirsti Ala-Mutka, Martin Dick, William Fone, Ursula Fuller, Judy Sheard. *How Shall We Assess This?* December 2003. Working group reports from ITiCSE on Innovation and technology in computer science education (ITiCSE-WGR '03), David Finkel (Ed.), pp. 107–123. DOI: 10.1145/960492.960539.

- [CS Curricula 2013] The Joint Task Force on Computing Curricula. Association for Computing Machinery (ACM). IEEE Computer Society. *Computer Science Curricula 2013: Curriculum Guidelines for Undergraduate Degree Programs in Computer Science*. December 20, 2013. Retrieved from <http://www.acm.org/education/CS2013-final-report.pdf> on March 29, 2014.  
Archived by WebCite® at <http://www.webcitation.org/6ORGeUYy5>.
- [Skinner (1965)] Burrhus Frederic Skinner. Harvard University. *Reflections on a Decade of Teaching Machines*. 1965. In *Teaching Machines and Programmed Learning*, Vol. 2, Robert Glaser (Ed.), pp. 5–20. National Education Association of the United States. LCCN: 60-15721.
- [Kember (1997)] David Kember. Hong Kong Polytechnic University. *A Reconceptualisation of the Research into University Academics' Conceptions of Teaching*. 1997. *Learning and Instruction*, Vol. 7, No. 3, pp. 225–275.
- [Sclater & Howie (2003)] Niall Sclater and Karen Howie. Center for Educational Systems, University of Strathclyde, Scotland, UK. *User requirements of the "ultimate" online assessment engine*. April 2003. *Computers & Education*, Vol. 40, No. 3, pp. 285–306. DOI: 10.1016/S0360-1315(02)00132-X.
- [Ohloh (2014)] Ohloh. Black Duck Software, Inc. Tools. Compare Repositories. Retrieved from <http://www.ohloh.net/repositories/compare> on April 12, 2014.
- [Git (2014)] Git. *Git and Software Freedom Conservancy*. Retrieved from <http://git-scm.com/sfc> on April 12, 2014.  
Archived by WebCite® at <http://www.webcitation.org/60mayfnSi>.
- [GitProjects (2014)] GitProjects. *Projects that use Git for their source code management*. Git Wiki. Last updated on April 5, 2014. Retrieved from [https://git.wiki.kernel.org/index.php/Main\\_Page](https://git.wiki.kernel.org/index.php/Main_Page) on April 12, 2014.  
Archived by WebCite® at <http://www.webcitation.org/60mbdAIQF>.
- [gitolite.com (2014a)] *Hosting git repositories*. Retrieved from <http://gitolite.com/gitolite/index.html> on April 13, 2014.  
Archived by WebCite® at <http://www.webcitation.org/60nsR9f7R>.
- [gitolite.com (2014b)] *authentication and authorization in gitolite*. Retrieved from <http://gitolite.com/gitolite/how.html> on April 13, 2014.  
Archived by WebCite® at <http://www.webcitation.org/60oAvdLeK>.
- [gitolite.com (2014c)] *who uses gitolite*. Retrieved from <http://gitolite.com/gitolite/who.html> on April 13, 2014.  
Archived by WebCite® at <http://www.webcitation.org/60oB1QVpA>.
- [gitolite.com (2014d)] *adding and removing users*. Retrieved from <http://gitolite.com/gitolite/users.html> on April 18, 2014.  
Archived by WebCite® at <http://www.webcitation.org/60vHM2Z2h>.



[gitolite.com (2014e)] *different types of write operations*. Retrieved from <http://gitolite.com/gitolite/write-types.html> on April 18, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60vIKAXXm>.

[kernel.org (2014)] *How does kernel.org provide its users access to the git trees?* Frequently asked questions. The Linux Kernel Archives. Retrieved from <https://www.kernel.org/faq.html#whygitolite> on April 13, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60oBgEPwG>.

[gitolite Google Group (2011)] Dan Carpenter and Sitaram Chamarty. *security audit of Gitolite*. Discussion on the gitolite Google Group. First post made on September 30, 2011. Last post made on October 2, 2011. Retrieved from <https://groups.google.com/d/topic/gitolite/jcUkIFKxbQ8/discussion> on April 13, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60oCHMGop>.

[openssh.com (2014)] OpenBSD. OpenSSH. Retrieved from <http://www.openssh.com/> on April 16, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60sQXs51M>.

[openssl.org (2014)] OpenSSL. Cryptography and SSL/TLS Toolkit. Retrieved from <https://www.openssl.org/> on April 20, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60yQjYQnz>.

[ssh(1)] BSD. *SSH(1)*. ssh — OpenSSH SSH client (remote login program). BSD General Commands Manual. Published April 6, 2014. Retrieved from <http://man7.org/linux/man-pages/man1/ssh.1.html> on April 16, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60sTPwEgi>.

[sshd(8)] BSD. *SSHD(8)*. sshd — OpenSSH SSH daemon. BSD System Manager's Manual. Published on April 6, 2014. Retrieved from <http://man7.org/linux/man-pages/man8/sshd.8.html> on April 16, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60sTL04Ce>.

[git-shell(1)] Git 1.9.rc1. *GIT-SHELL(1)*. git-shell - Restricted login shell for Git-only SSH access. Git Manual. Published January 30, 2014. Retrieved from <http://man7.org/linux/man-pages/man1/git-shell.1.html> on April 16, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60sZP6SgC>.

[git-push(1)] Git 1.9.rc1. *GIT-PUSH(1)*. git-push - Update remote refs along with associated objects. Git Manual. Published January 30, 2014. Retrieved from <http://man7.org/linux/man-pages/man1/git-push.1.html> on April 16, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60t2V2qp1>.

[git-revert(1)] Git 1.9.rc1. *GIT-REVERT(1). git-revert - Revert some existing commits.* Git Manual. Published January 30, 2014. Retrieved from <http://man7.org/linux/man-pages/man1/git-revert.1.html> on April 17, 2014.  
Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60t6LflKS>.

[git-hooks(5)] Git 1.9.rc1. *GITHOOKS(15). githooks - Hooks used by Git.* Git Manual. Published January 30, 2014. Retrieved from <http://man7.org/linux/man-pages/man5/githooks.5.html> on April 17, 2014.  
Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60tvjunoB>.

[clone(2)] Linux. *CLONE(2). clone, \_\_clone2 - create a child process.* Linux Programmer's Manual. Published February 27, 2014. Retrieved from <http://man7.org/linux/man-pages/man2/clone.2.html> on April 21, 2014.  
Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/6P04xS6aU>.

[fork(2)] Linux. *FORK(2). fork - create a child process.* Linux Programmer's Manual. Published March 12, 2014. Retrieved from <http://man7.org/linux/man-pages/man2/fork.2.html> on April 21, 2014.  
Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/6P065nmSn>.

[proc(5)] Linux. *PROC(2). proc - process information pseudo-filesystem.* Linux Programmer's Manual. Published April 12, 2014. Retrieved from <http://man7.org/linux/man-pages/man5/proc.5.html> on April 21, 2014.  
Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/6P0AnUqsS>.

[Bird et al. (2009)] Christian Bird, Peter C. Rigby, Earl T. Barr, David J. Hamilton, Daniel M. German, and Prem Devanbu. *The promises and perils of mining git.* Proceedings of the 2009 6th IEEE International Working Conference on Mining Software Repositories, pp. 1–10. IEEE Computer Society Washington, DC, USA. ISBN 978-1-4244-3493-0.

[Torvalds (2007)] Linus Torvalds. *Re: Modify/edit old commit messages.* Retrieved from <http://www.gelato.unsw.edu.au/archives/git/0702/38650.html> on April 17, 2014.  
Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60t2yqQYR>.

[Hamano (2009)] Junio C Hamano. In response to "How do I push amended commit to the remote git repo?" StackOverflow. Posted on January 11, 2009, under the username "gitster". Edited by Gottlieb Notschnabel on September 3, 2013. Retrieved from <http://stackoverflow.com/a/432518/108100> on April 17, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60t4dU85N>.  
Revision history retrieved from <http://stackoverflow.com/posts/432518/revisions> on April 17, 2014.  
Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60t4hGKpY>.

[Rego (2013)] Cauê C. M. Rego. In response to “*How to properly force a Git Push?*” StackOverflow. Posted on May 22, 2013, under the username “Cawas”. Retrieved from <http://stackoverflow.com/a/16702355/108100> on April 17, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60t4qY1Y2>.

[cvedetails.com (2014a)] CVE Details. The ultimate security vulnerability datasource. *GIT: Security Vulnerabilities*. Retrieved from [http://www.cvedetails.com/vulnerability-list/vendor\\_id-4008/GIT.html](http://www.cvedetails.com/vulnerability-list/vendor_id-4008/GIT.html) on April 18, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60vKd3HTW>.

[cvedetails.com (2014b)] CVE Details. The ultimate security vulnerability datasource. *Openssh: Security Vulnerabilities*. Retrieved from [http://www.cvedetails.com/vulnerability-list/vendor\\_id-7161/Openssh.html](http://www.cvedetails.com/vulnerability-list/vendor_id-7161/Openssh.html), on April 18, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60vM6eL7m>.

[cvedetails.com (2014c)] CVE Details. The ultimate security vulnerability datasource. *Openssl: Security Vulnerabilities*. Retrieved from [http://www.cvedetails.com/vulnerability-list/vendor\\_id-217/Openssl.html](http://www.cvedetails.com/vulnerability-list/vendor_id-217/Openssl.html), on April 18, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60vM1Tlsh>.

[cvedetails.com (2014d)] CVE Details. The ultimate security vulnerability datasource. *Perl: Security Vulnerabilities*. Retrieved from [http://www.cvedetails.com/vulnerability-list/vendor\\_id-1885/Perl.html](http://www.cvedetails.com/vulnerability-list/vendor_id-1885/Perl.html), on April 18, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60vMGTWjE>.

[Huang (2013)] Jay Huang. *Pushing code to GitHub as Linus Torvalds*. Posted on December 16, 2013. Retrieved from <http://www.jayhuang.org/blog/pushing-code-to-github-as-linus-torvalds/> on April 18, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60vK7dQBu>.

[Gerwitz (2013)] Mike Gerwitz. *A Git Horror Story: Repository Integrity With Signed Commits*. Last edited on November 10, 2013. Retrieved from <http://mikegerwitz.com/papers/git-horror-story> on April 18, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60vKR8Hzi>.

[Homakov (2012)] Egor Homakov. *Hacking rails/rails repo*. Published on March 4, 2012. Retrieved from <http://homakov.blogspot.dk/2012/03/how-to.html> on April 18, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60vLP3zYf>.

[Homakov (2014)] Egor Homakov. *How I hacked GitHub again*. Published on February 7, 2014. Retrieved from <http://homakov.blogspot.dk/2014/02/how-i-hacked-github-again.html> on April 18, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60vKurm25>.

[Hutchings (2011)] Ben Hutchings. *Accepted linux-2.6 3.0.0-rc1-1~experimental.1 (source all amd64)*. Email sent to the Debian Mailing Lists on June 1, 2011. Retrieved from <http://packages.qa.debian.org/1/linux-2.6/news/20110601T223515Z.html> on April 25, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/6P7kSQe9C>.

[Wright et al. (2002)] Chris Wright, Crispin Cowan, Stephen Smalley, James Morris, and Greg Kroah-Hartman. *Linux Security Modules: General Security Support for the Linux Kernel*. August 2002. In Proceedings of the 11th USENIX Security Symposium. USENIX Association. San Francisco, California, United States. Retrieved from [https://www.usenix.org/legacy/event/sec02/full\\_papers/wright/wright.pdf](https://www.usenix.org/legacy/event/sec02/full_papers/wright/wright.pdf) on April 19, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/60xFtc1KV>.

[Turner et al. (2010)] Paul Turner, Bharata B Rao, and Nikhil Rao. *CPU bandwidth control for CFS*. July 2010. In Linux Symposium, Vol 10, pp. 245–254. Ottawa, Ontario, Canada. Retrieved from <https://www.kernel.org/doc/ols/2010/ols2010-pages-245-254.pdf> on April 28, 2014.

Archived by WebCite<sup>®</sup> at <http://www.webcitation.org/6P9ouxLJJ>.

[Linux kernel (v3.14.2)] The Linux kernel v3.14.2.

Retrieved from <https://www.kernel.org/pub/linux/kernel/v3.x/linux-3.14.2.tar.xz> on April 28, 2014.

Signed by Greg Kroah-Hartman, using the GPG key:

```
pub 4096R/6092693E 2011-09-23
uid Greg Kroah-Hartman
(Linux kernel stable release signing key) <greg@kroah.com>
sub 4096R/76D54749 2011-09-23
```

Yielding the signature:

```
-----BEGIN PGP SIGNATURE-----
Version: GnuPG v2.0.22 (GNU/Linux)

iQIcBAABAgAGBQJTXE0zAAoJEDjbvchgkkmk+0AUQAKrfkqerXpwePAEHFCBqTqvN
R2fZa6tAY1w5psN8grWh2seu2W1KAtEk53oht/6uZITqs3i2pYmRAJyEzVTBggs9
4BI0rClqebei03wkD1biRAIMPQWt6UAB/pvjBeMmMiw4G7FFZHSvBSct91Dsnb87
4A7083ZT/A421C20tH3vR0ehyQDyfHp+oL22SKMCoXKCCMCDZp5K07AMVggrzDoZ
KGDEeBpowCSCtoUEEB1rVGz/syyaWZzzcMy+UYeZ12JxpfgnX5oq14w1HIPfAhJn
/P6x70vmN75oIrxrt4rRs+aUY97iuiEzPpn9F2K4rNruTZUXN7906h/WWCJ/K/b0
D80wC1msaJqMYIEhQICu5kwezVswKVHz3QM9B01ak3RgObw3j70KKVxJQ95I6jYn
I3uz8RDGXWvp+6aso8v1/HwbQ6dCCA/9p1YALJZmRcy2Yg0A0nH3w6+ckC1x/r4l
ZyR6NEcVYg27HQswjmWxbqUhapFMLQGj5oGZ9svbsdwet3ckQTcqAtS5N/YHZZaQ
SznvY4dZ/MoRwdCGz0hC99RofIgMPgY8ypkc2GGvyGv9uDLsK4koB65ZX1zW/oRw
43eatEoY/Q1QyGWrwbqEWFY91XbZne1KJNwdXYkmTDawMI2F2zApIjsAHPMseJiN
XZPAJqjjAF6nhxRzsrl8
=HZrL
-----END PGP SIGNATURE-----
```

- [resource\_counter.txt] Li Zefan, et al. *The Resource Counter*. Found in [[Linux kernel \(v3.14.2\)](#)], under `./Documentation/cgroups/`.
- [cpuacct.txt] Bharata B Rao, et al. *CPU Accounting Controller*. Found in [[Linux kernel \(v3.14.2\)](#)], under `./Documentation/cgroups/`.
- [memory.txt] Li Zefan, et al. *Memory Resource Controller*. Found in [[Linux kernel \(v3.14.2\)](#)], under `./Documentation/cgroups/`.
- [cgroups.txt] Paul Menage, Paul Jackson, Christoph Lameter, et al. *CGROUPS*. Found in [[Linux kernel \(v3.14.2\)](#)], under `./Documentation/cgroups/`.
- [devices.txt] Li Zefan, Aristeu Rozanski, et al. *Device Whitelist Controller*. Found in [[Linux kernel \(v3.14.2\)](#)], under `./Documentation/cgroups/`.
- [blkio-controller.txt] Li Zefan, Aristeu Rozanski, et al. *Block IO Controller*. Found in [[Linux kernel \(v3.14.2\)](#)], under `./Documentation/cgroups/`.
- [sched-design-CFS.txt] J. Bruce Fields, et al. *CFS Scheduler*. Found in [[Linux kernel \(v3.14.2\)](#)], under `./Documentation/scheduler/`.
- [sched-bwc.txt] Bharata B Rao. *CFS Bandwidth Control*. Found in [[Linux kernel \(v3.14.2\)](#)], under `./Documentation/scheduler/`.
- [sched-rt-group.txt] J. Bruce Fields. *Real-Time group scheduling*. Found in [[Linux kernel \(v3.14.2\)](#)], under `./Documentation/scheduler/`.
- [kernel-parameters.txt] Linus Torvalds, et al. *Kernel Parameters*. Found in [[Linux kernel \(v3.14.2\)](#)], under `./Documentation/`.
- [LSM.txt] Kees Cook. *Linux Security Module Framework*. Found in [[Linux kernel \(v3.14.2\)](#)], under `./Documentation/security/`.

Oleksandr Shturmov  
oleks@oleks.info

Master Project  
Online TA

DIKU  
March 1, 2014.

## Appendix A

# General Linux Concepts

This chapter covers some general Linux concepts which are not necessarily to known to the casual Linux user.

### A.1 Tasks

The distinction between a thread and a process in the Linux kernel is somewhat more subtle than in textbook operating systems practice.

In the Linux kernel, a thread of execution has a thread ID (also called a PID), a thread group ID, and a parent thread group ID. New threads of execution can be created using the `[clone(2)]` system call<sup>1</sup>. Depending on the parameters passed, the child can share various parts of its execution context with its parent. For instance, we may choose to stay under the same thread group ID, or parent thread group ID, share open files, memory, etc.

A process is a nonempty set of threads that share the same thread group ID. A process is identified by its thread group ID. This is what is usually referred to as the PID in user space. The system calls `getpid()` and `getppid()` return the thread group ID and the parent thread group ID, respectively.

A thread of execution is also called a task.

---

<sup>1</sup>The more canonical `[fork(2)]` system call is seldom used. Its behaviour can be mimicked by `[clone(2)]`. This is indeed what the standard glibc `fork()` function does.