

RGS Integration

Introduction

This document describes integration between *RGS (Remote Game Server)* and an *Adapter* via *seamless API*.

The key words **MUST**, **MUST NOT**, **REQUIRED**, **SHALL**, **SHALL NOT**, **SHOULD**, **SHOULD NOT**, **RECOMMENDED**, **MAY**, and **OPTIONAL** in this document are to be interpreted as described in [RFC 2119](#).

Set up information

The RGS **SHOULD** provide:

- URLs to Game Client in normal and replay mode for staging and production environments.

The RGS **SHOULD** be provided with:

- Endpoints for staging and production environments.
- IP addresses of production environment to whitelist.
- **HMAC** secret key.

Integration

Prerequisites:

- Communication **SHOULD** be done via **HTTP/1.1** and encrypted with **SSL/TLS**.
- All API requests **MUST** be passed with **Content-Type: application/json**.
- All API responses **MUST** be passed with **Content-Type: application/json**.
- Any additional response or request data, parameters, fields or codes not described in documentation **SHOULD NOT** be used.
- Character encoding utf-8 **SHOULD** be set to **UTF-8**
- All time and date fields **SHOULD** be in **UTC** timezone

Authorization

Authorization **MUST** be done using the following headers:

- **X-Server-Authorization**: Server's authorization with **HMAC** scheme using **sha256** algorithm and request payload.
Example of generating header: `crypto.createHmac("sha256", SECRET_KEY).update(BODY).digest("hex");` If body is empty then use empty object `{}` to hash.

The *Integration Module* **MUST** check and validate headers and return error in case of incorrect authorization data.

Response codes

All responses **MUST** return appropriate response's codes.

Code	Status
2XX	Successful
4XX	Application Error

Code	Status
5XX	Server Error

Errors

All errors **MUST** follow unified structure. Field `message` should contain reason of the error, and it is logged by the *Server* only internally and not passed to the *Game Client*, so it can be more descriptive than error messages from the next section.

Example

```
{
  "error": {
    "message": "Token expired",
    "code": "PLAYER_UNAUTHORIZED"
  }
}
```

Error codes


Field `code` **SHOULD** be mapped into the following message before passing to the *Game Client*

Code	Description
PLAYER_UNAUTHORIZED	Couldn't authorize the player (Authorization header mismatch)
SERVER_UNAUTHORIZED	Couldn't authorize the server
INSUFFICIENT_FUNDS	Not enough money to make withdrawal
TRANSACTION_NOT_FOUND	Transaction you are trying to cancel doesn't exist
LOSS_LIMIT	Loss limit has been exceeded
TRANSACTION_FAILED	Transaction was not processed
UNKNOWN	Unknown error

Idempotence

In case of error, network failure or other reasons selected requests **MAY** be repeated therefore selected requests **MUST** be [idempotent](#) and return the same outcome.

Flow

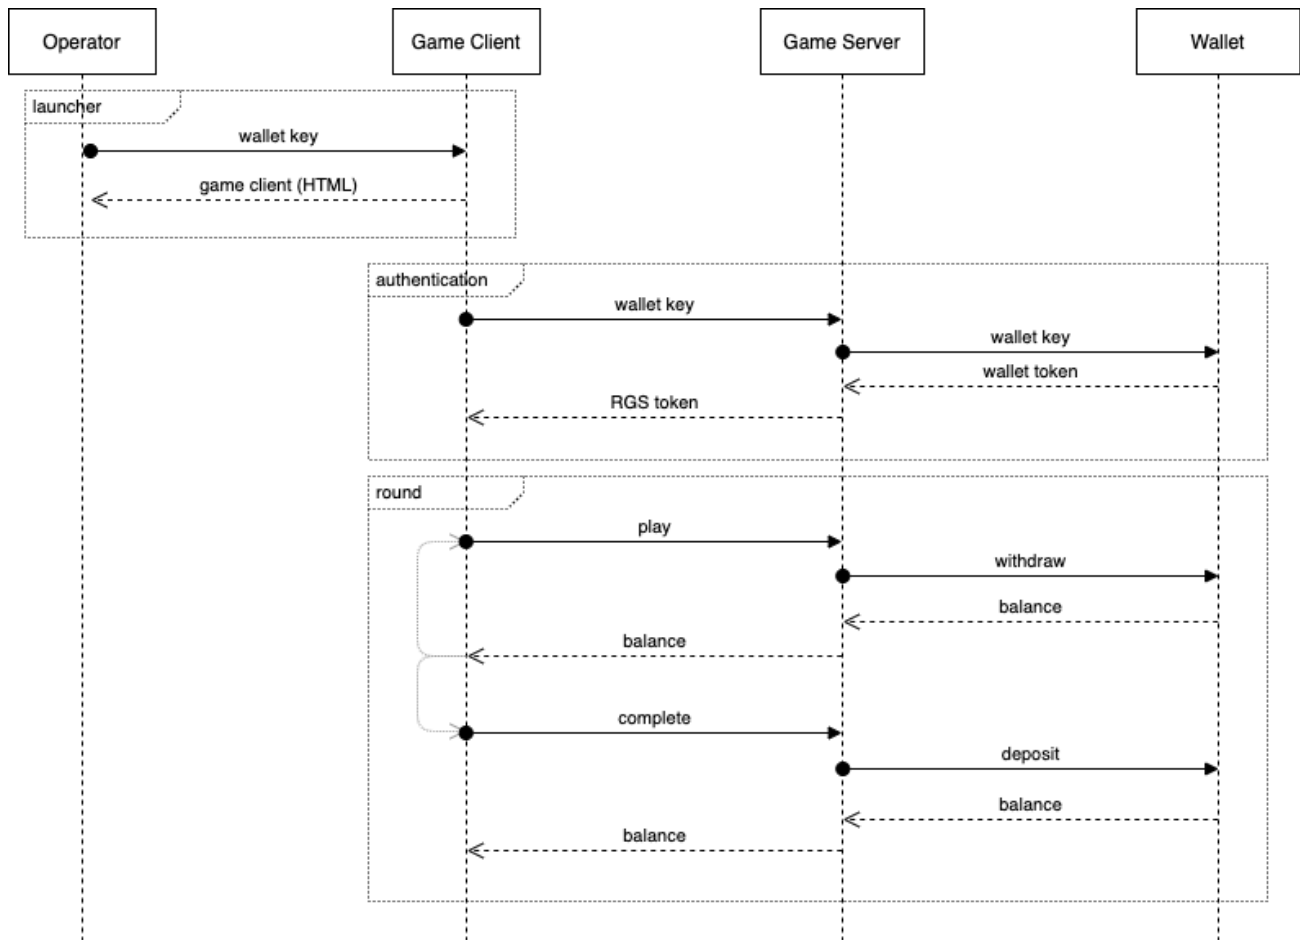

Retries

Our platform handles immediate retries so preferably *RGS* doesn't have to retry unless there's a network/communication error. *RGS* should support periodic retries of failed deposits and cancels (i.e. every hour).

Launcher

RGS needs to deliver three URLs:

- `realUrl` - launches game in real money mode redirected from `{serverUrl}/launch/real/?...`
- `funUrl` - launches game in fun mode redirected from `{serverUrl}/launch/fun/?...`
- `replayUrl` - launches replay in the Back Office redirected from `{serverUrl}/launch/replay/?...`

Sample configuration:

```
{
  "realUrl": "https://example.com/real?gameID=${game}",
  "funUrl": "https://example.com/fun?gameID=${game}",
  "replayUrl": "https://example.com/replay?gameID=${game}&roundID=${roundId}"
}
```

Depending on the mode we redirect to configured URL and replace `${x}` parameters with corresponding values so you can potentially fit your own launcher format.

If a variable is not defined explicitly with `{x}`, it is appended as querystring (so `https://example.com/real?game={game}` and `https://example.com/real"` would both redirect to the same URL). For multi-domain support provided url templates might contain `{hostname}` so player gets redirected to the same hostname as `launch` request. E.g. `https://cdn-{hostname}/real?game={game}&server=https://{hostname}` will allow the operator to redirect players to environments with different domains depending on availability (e.g. `example.com`, `example2.com`).

Parameters

real and fun modes

Name	Required	Example	Description
wallet	REQUIRED	myWallet	Wallet Id.
operator	REQUIRED	myOperator	Operator Id
game	REQUIRED	myGame	Game Id
key	OPTIONAL in fun mode, REQUIRED in real mode	dnsa89me329jdos	Operator's session initialisation key which SHOULD be active only once after generation and expire after 4 hour
language	OPTIONAL	en	Player's language code in ISO 639-1 format
lobbyUrl	OPTIONAL	http://lobby.url	URL to Operator's lobby
depositUrl	OPTIONAL	http://deposit.url	URL to Operator's in-game deposit web page

replay mode

Name	Required	Example	Description
game	REQUIRED	myGame	Game Id
roundId	REQUIRED	123e4567-e89b-12d3-a456-426614174000	Round Id, one round can have multiple transactions

API

Path: `{serverUrl}/rgs/{rgs}/authenticate` **Method:** POST **Authorization:** X-Server-Authorization **Idempotent:** NO

Authenticates a *Player* and starts a new session.

Body

Name	Type	Required	Example	Description
provider	string	REQUIRED	MyProvider	Provider Id
wallet	string	REQUIRED	MyWallet	Wallet Id
operator	string	REQUIRED	MyOperator	Operator Id
key	string	REQUIRED	dnsa89me329jdos	Wallet's session initialisation key which SHOULD be active only one time after generation
game	string	OPTIONAL	myGame	Game

Name	Type	Required	Example	Description
ip	string	OPTIONAL	1.2.3.4	Player IP address
channel	string	OPTIONAL	desktop	Player's device (desktop , mobile)

Response

Name	Type		Example	Description
sessionId	string	REQUIRED	xxx	Adapter's Session Id
playerId	string	REQUIRED	user123432	Adapter's Player Id
nativeId	string	REQUIRED	user123432	Wallet's Player Id
balance	number	REQUIRED	100.85	Player's current balance
currency	string	REQUIRED	eur	Player's currency (lowercase), cannot change once set!
brand	string	REQUIRED	YellowCasino	Operator's brand
nickname	string	OPTIONAL	JohnnyBravo	Player's nickname
gender	string	OPTIONAL	m	Player's gender (m or f)
country	string	OPTIONAL	uk	Player's country code in ISO 3166-1 Alpha-2 format
jurisdiction	string	OPTIONAL	mt	Player's jurisdiction in case of specific market requirements i.e. MT , UK , DK

Path: {serverUrl}/rgs/{rgs}/balance **Method:** GET **Authorization:** X-Server-Authorization **Idempotent:** YES

Returns *Player's* current balance in *Player's* currency.

Query Parameters

Name	Type	Required	Example	Description
playerId	string	REQUIRED	user123432	Player Id
provider	string	REQUIRED	MyProvider	Provider Id
game	string	REQUIRED	superSlot	Name of the game

Response

Name	Type		Example	Description
balance	number	REQUIRED	100.85	Player's current balance

Path: {serverUrl}/rgs/{rgs}/transaction **Method:** PUT **Authorization:** X-Server-Authorization **Idempotent:** YES

Withdraws or deposits money from *Player's* account.

Body

Name	Type		Example	Description
playerId	string	REQUIRED	user123432	<i>Adapter's</i> <i>Player</i> Id
rgsTransactionId	string	REQUIRED	321e4567-e89b-45d3-b594-41234174249	Provider <i>Transaction</i> Id. MUST be unique identifier within provider
type	string	REQUIRED	withdraw	withdraw reduces <i>Player's</i> balance. deposit increases <i>Player's</i> balance.
amount	number	REQUIRED	10.56	Amount in <i>Player's</i> currency to withdraw from the account. Withdrawal of 0 (zero) amount MUST be supported.
jackpotAmount	number	OPTIONAL	0.0017	Part of amount which goes to jackpot contribution (in case of withdrawals) or jackpot win (in case of deposits). It is only for information purpose, this value should not affect <i>Player's</i> balance on top of 'amount'. Please note contribution can have more then usual 2- decimal places
provider	string	REQUIRED	MyProvider	<i>Provider</i> Id

Name	Type		Example	Description
game	string	REQUIRED	superSlot	Name of the game
variant	string	OPTIONAL	superSlot	Variant of the game
roundId	string	REQUIRED	123e4567-e89b-12d3-a456-426614174000	Round Id, one round can have multiple transactions
roundFinished	boolean	OPTIONAL	true	Indicates whether round has finished
category	string	REQUIRED	normal	Category of transaction: normal, side, tip, promo, jackpot
name	string	OPTIONAL	Royal Match	Name of the transaction
channel	string	OPTIONAL	mobile	Channel of the device: mobile or desktop
campaignType	string	OPTIONAL	freeBets	Type of promotional tool freeBets, prizeDrop, mystery (can be more)
walletCampaignId	string	OPTIONAL	wallet-campaign-2025	Wallet Id of promotional campaign - REQUIRED if campaign was registered by the Free Bets API See Free Bets Transaction
campaignData	object	OPTIONAL	{total: 10, used: 3, amount: 2.00, totalWin: 123.23}	Campaign data See Free Bets Transaction
winRatio	number	OPTIONAL	123.45	Win divided by base game bet (only for deposit)
ip	string	OPTIONAL	1.2.3.4	Player IP address

Name	Type		Example	Description
regulatory	IRegulatory	OPTIONAL	<pre>{ pt: { "sm_result": "0:1;3;1;1;1#5;0;7;2;1#5;0;5;2;2#", "descr_ap": "60GoldenCoinsPro" } }</pre>	Regulatory information required only in deposit transactions, currently required for games to go live in Portugal See IRegulatory

IRegulatory

Name	Type		Example	Description
pt["sm_result"]	string	OPTIONAL	0:1;3;1;1;1#5;0;7;2;1#5;0;5;2;2#	sm_result AJOG file entry
pt["descr_ap"]	string	OPTIONAL	60GoldenCoinsPro	descr_ap AJOG file entry
pt	[key: string]: string	OPTIONAL		Dictrony with other optional AJOG file entries

Response

Name	Type		Example	Description
balance	number	OPTIONAL	100.85	Player's current balance

Path: {serverUrl}/rgs/{rgs}/cancel **Method:** DELETE **Authorization:** X-Server-Authorization **Idempotent:** YES

Returns once withdrew money to original account. Cancels SHOULD NOT be triggered after receiving the following error codes from transaction: INSUFFICIENT_FUNDS , LOSS_LIMIT , TRANSACTION_FAILED , TRANSACTION_REJECTED . You need to specify either rgsTransactionId to cancel individual transaction or roundId to cancel all withdrawals from given round.s

Body

Name	Type		Example	Description
rgsTransactionId	string	OPTIONAL	321e4567-e89b-45d3-b594-41234174249	Providers <i>Transaction</i> Id
roundId	string	OPTIONAL	321e4567-e89b-45d3-b594-41234174249	Providers <i>Round</i> Id

Response

Name	Type		Example	Description
balance	number	REQUIRED	100.85	Player's current balance

Free Bets API

Free Bets API allows the *Adapter* to manage promotional **Free Bets** campaigns for players on the external *RGS*. In this case, it's the *Adapter* who performs HTTP POST calls to the *RGS*. All requests **MUST** be authorized with the `secretKey` symmetrically to how *RGS* secures it's requests (see [Authorization](#)).

Configuration

In order for *Adapter* to forward Free Bets API requests to the external *RGS* the configuration needs to provide `freeBetsUrl`. If it's present in Standard RGS Adapter configuration, *Adapter* will attempt to forward the requests.

Example Free Bets API configuration:

```
{
  "realUrl": "https://example.com/real?gameID=${game}",
  "funUrl": "https://example.com/fun?gameID=${game}",
  "replayUrl": "https://example.com/replay?gameID=${game}&roundID=${roundId}",
  "secretKey": "example-external-rgs-secret",
  "freeBetsUrl": "https://example.com"
}
```

Add Free Bets

Path: `/freeBets/add`

Method: POST

Authorization: X-Server-Authorization

Idempotent: NO

Assigns a number of free bets to one or multiple Players for one or multiple games.

Body

Name	Type	Required	Example	Description
walletCampaignId	string	REQUIRED	wallet-campaign-2025	Wallet's identifier of the Free Bets campaign within the <i>Wallet</i> .
games	string[]	REQUIRED	["superSlot", "megaSpin"]	List of game identifiers to which free bets apply.
nativeIds	string[]	REQUIRED	["user123", "user456"]	List of <i>Wallet</i> 's Player Ids to receive the free bets.
start	integer	OPTIONAL	1730400000	Start time of campaign in Unix timestamp (milliseconds) .
end	integer	OPTIONAL	1733000000	End time of campaign in Unix timestamp (milliseconds) .

Name	Type	Required	Example	Description
bets	integer	REQUIRED	10	Number of free bets granted to each player.
amount	number	REQUIRED	1.00	Amount per single free bet in player's currency.
currency	string	REQUIRED	eur	Currency code (lowercase).
operator	string	REQUIRED	my-operator	Players' operator.
brand	string	REQUIRED	my-brand	Players' brand.

Response

Returns confirmation object from RGS Adapter indicating successful creation.

```
{
  "success": true
}
```

Remove Free Bets

Path: /freeBets/remove

Method: POST

Authorization: X-Server-Authorization

Idempotent: NO

Removes or deactivates Free Bets campaign for given walletCampaignId.

Body

Name	Type	Required	Example	Description
walletCampaignId	string	REQUIRED	wallet-campaign-2025	Wallet's identifier of the Free Bets campaign to remove.
games	string[]	REQUIRED	["superSlot", "megaSpin"]	List of games that the campaign was added for (required to locate the campaign in Rgss).
operator	string	REQUIRED	my-operator	Players' operator.
brand	string	REQUIRED	my-brand	Players' brand.

Response

```
{
  "success": true
}
```

Available Bets

Path: /freeBets/availableBets

Method: POST

Authorization: X-Server-Authorization

Idempotent: NO

Retrieves available Free Bets for given games and currencies.

Body

Name	Type	Required	Example	Description
games	string[]	REQUIRED	["superSlot", "megaSpin"]	List of game identifiers.
currencies	string[]	REQUIRED	["eur"]	List of currency codes (lowercase).
operator	string	REQUIRED	my-operator	Players' operator.
brand	string	REQUIRED	my-brand	Players' brand.

Response

```
{
  "superSlot": {
    "eur": [
      0.1,
      1,
      10
    ]
  },
  "megaSpin": {
    "eur": [
      0.2,
      2,
      20
    ]
  }
}
```

Free Bets Transaction

If campaign is registered via Free Bets API, it is **REQUIRED** that transactions include `walletCampaignId`, `campaignType=freeBets` and `campaignData` in the following format:

Name	Type		Example	Description
total	number	REQUIRED	10	Total amount of bets registered in this campaign (equal to Free Bets campaign config <code>bets</code>)
used	string	REQUIRED	3	Amount of Free Bets used by the player - decrements during the Withdraw transaction
amount	string	REQUIRED	2	Bet amount configured for the given campaign (it has to be equal to Withdraw transaction <code>amount</code> and to configured campaign <code>amount</code>)
totalWin	string	REQUIRED	123.23	Free Bets campaign accumulated win - increases on Deposit transactions