

Wallet Integration

Introduction

This document describes integration between *Adapter* and an *Wallet* via *seamless API*.

The key words `MUST`, `MUST NOT`, `REQUIRED`, `SHALL`, `SHALL NOT`, `SHOULD`, `SHOULD NOT`, `RECOMMENDED`, `MAY`, and `OPTIONAL` in this document are to be interpreted as described in [RFC 2119](#).

Set up information

Wallet owner `SHOULD` provide:

- Endpoints for staging and production environments of the *Wallet*.
- *Wallet* name.
- Minimum and maximum bet, maximum exposure (all values in `eur`).

Wallet owner `SHOULD` be provided with:

- Endpoints for staging and production environments.
- `HMAC` secret keys for staging and production environments.
- IP of production environment to whitelist.

Integration

Prerequisites:

- Communication `SHOULD` be done via `HTTP/1.1` and encrypted with `SSL/TLS`.
- All API requests `MUST` be passed with `Content-Type: application/json`.
- All API responses `MUST` be passed with `Content-Type: application/json`.
- Any additional response or request data, parameters, fields or codes not described in documentation `SHOULD NOT` be used.
- Character encoding `utf-8` `SHOULD` be set to `UTF-8`.
- All time and date fields `SHOULD` be in `UTC` timezone.

Authorization

Authorization `MUST` be done using the following headers:

- `Authorization`: *Player's* authorization with `Bearer <token>` where `<token>` comes from `/authentication` request. It `MUST` be used to identify a *Player*.
- `X-Server-Authorization`: *Server's* authorization with `HMAC` scheme using `sha256` algorithm and request payload as `hex dump`. Example of generating the hash: `echo -n $BODY | openssl dgst -sha256 -hmac $SECRET_KEY -hex`

The *Operator* `MUST` check and validate headers and return error in case of incorrect authorization data.

Response codes

All responses `MUST` return appropriate response's codes.

Code	Status
2XX	Successful
4XX	Application Error
5XX	Server Error

Errors

All errors **MUST** follow unified structure.

```
{
  "error": {
    "message": "Not enough money to make a withdrawal",
    "code": "INSUFFICIENT_FUNDS"
  }
}
```

Field `code` **SHOULD** contain one of the following codes:

Code	Description
PLAYER_UNAUTHORIZED	Couldn't authorize the player (Authorization header mismatch)
SERVER_UNAUTHORIZED	Couldn't authorize the server
SESSION_EXPIRED	Player's session expired
INSUFFICIENT_FUNDS	Not enough money to make withdrawal
TRANSACTION_NOT_FOUND	Transaction you are trying to cancel doesn't exist
LOSS_LIMIT	Loss limit has been exceeded
TRANSACTION_FAILED	Transaction was not processed
BLOCKED_TERRITORY	Blocked territory
UNKNOWN	Unknown error

Field `message` **SHOULD** contain reason of the error to help troubleshooting. It is not passed to the *Game Client* on production environment, so it can be more descriptive.


Idempotence

In case of error, network failure or other reasons selected requests **MAY** be repeated therefore selected requests **MUST** be [idempotent](#) and return the same outcome.

Automated Wallet Verifier


Automated Wallet Verifier offers running automatic test to check integration correctness.

Flow

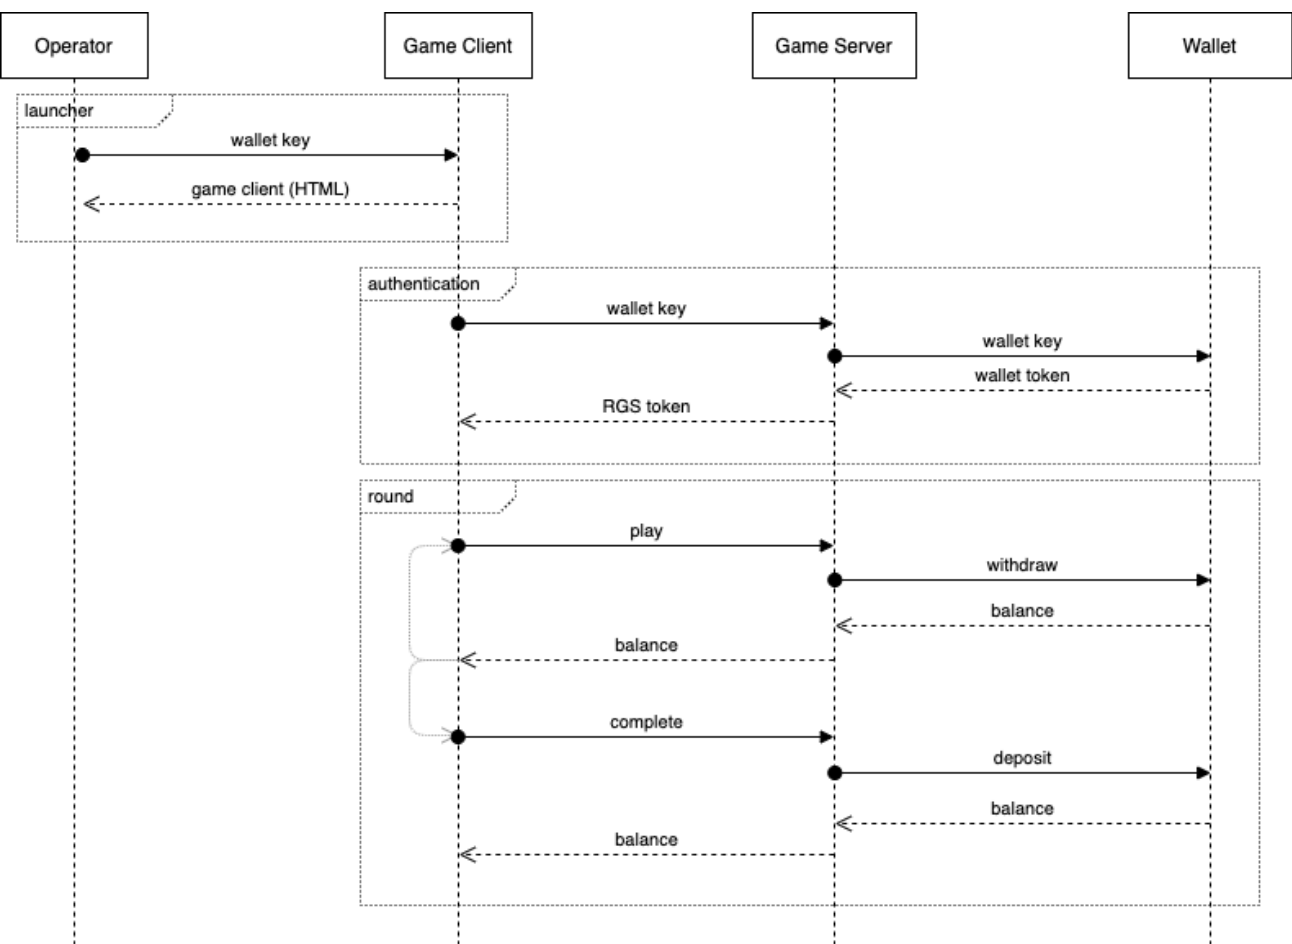


Deposit flow

In case of failure deposit transactions are repeated indefinitely for errors with a code `UNKNOWN` and network errors. First `n` repeats `MAY` come right after the failure and then it still no success then it continues with some time interval until it is successful.

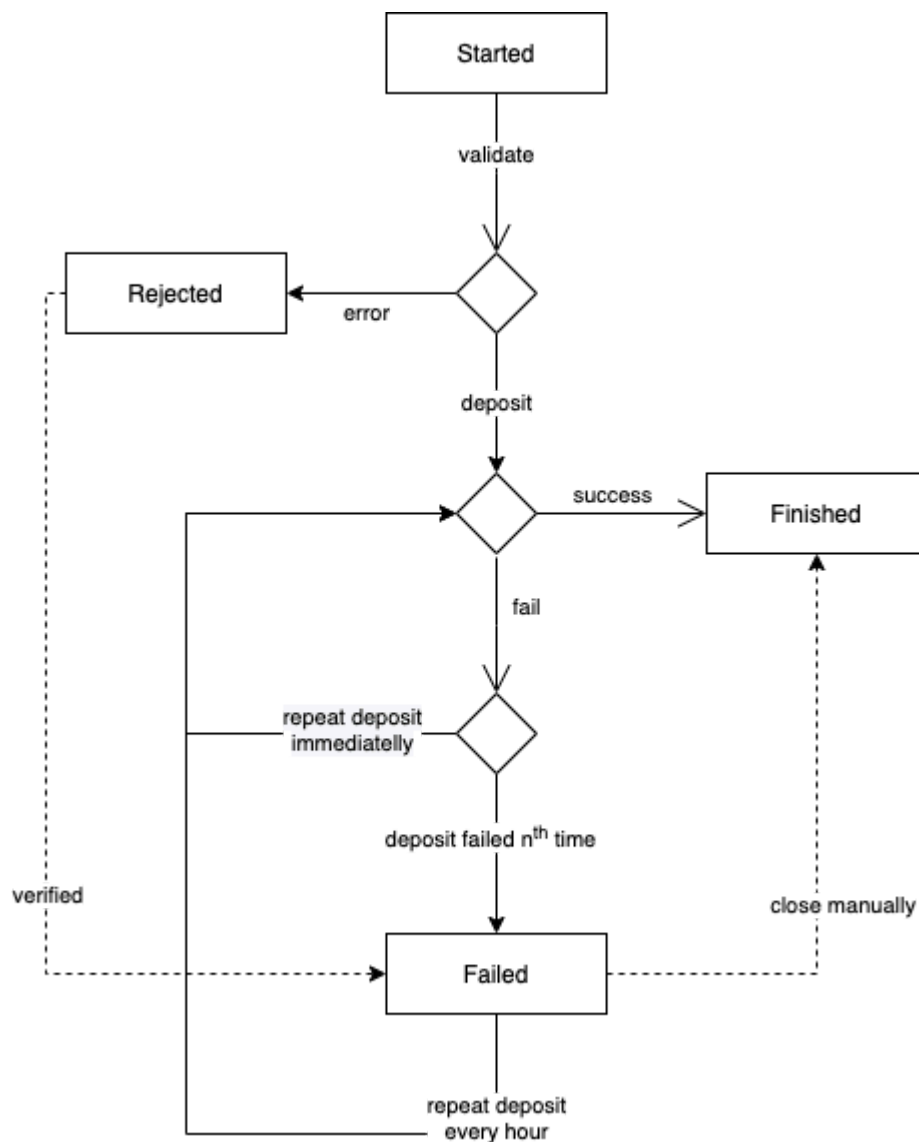

Withdraw flow

For withdrawals, it MAY be repeated n times right after the original transaction and if still didn't go through than cancel is initiated. Cancel is repeated with time interval until success. Errors with a code `TRANSACTION_FAILED`, `INSUFFICIENT_FUNDS` and `LOSS_LIMIT` will not trigger cancels. Cancels are repeated until balance is successfully returned or until error code `TRANSACTION_NOT_FOUND`.

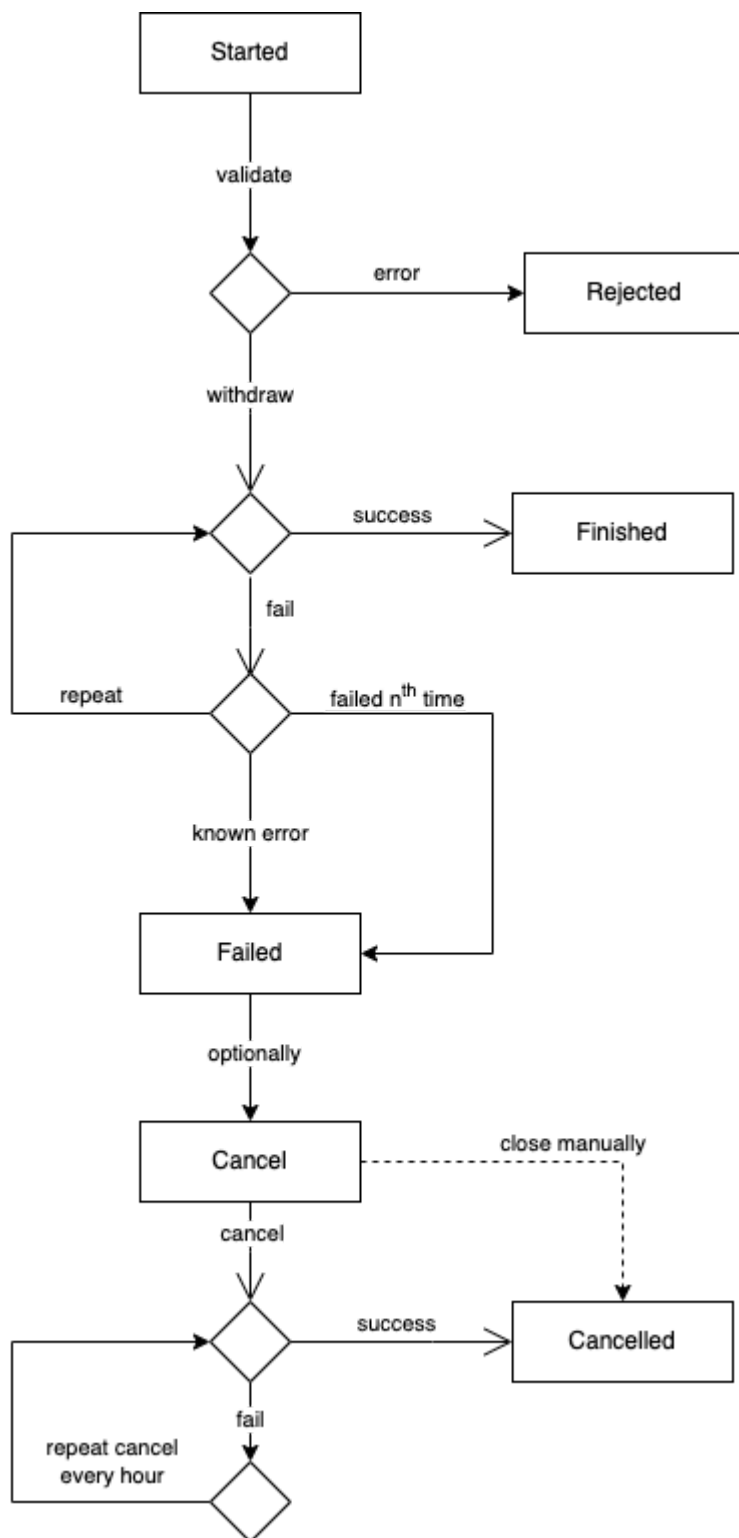

Launcher

Path: `/launch/{fun|real}` (to redirect to HTML page) or `/wallet/${wallet}/launch/{fun|real}` (to return data with url)

Method: GET or POST **Authorization:** NO **Idempotent:** NO

To launch the game the *Operator* should embed `<iframe>` pointing to `<URL>/launch/...` or use REST call to return data with url.

Body or Query Parameters

Name	Type	Required	Example	Description
wallet	string	REQUIRED	myWallet	Wallet Id.
operator	string	REQUIRED	myOperator	Operator Id
game	string	REQUIRED	myGame	Game Id
key	string	OPTIONAL in fun mode, REQUIRED in real mode	dnsa89me329jdos	Operator's session initialisation key which SHOULD be active only once after generation and expire after 4 hour
currency	string	OPTIONAL	eur	Player's currency (lowercase)
language	string	OPTIONAL	en	Player's language code in ISO 639-1 format
depositUrl	string	OPTIONAL	http://deposit.url	URL to Operator's in-game deposit web page
refreshUrl	string	OPTIONAL	http://refresh.url	URL used after refreshing the game
lobbyUrl	string	OPTIONAL	http://lobby.url	URL to Operator's lobby
exitTarget	string	OPTIONAL	self or parent	If self than lobbyUrl will be used on window, otherwise it will redirect window.parent
theme	string	OPTIONAL	myTheme	Additional parameter expected by some games to change its theme

Response

Returns HTML web page containing the game or {"url": "http://example.com/launch"}

Path: /launch/replay (to redirect to HTML page) or /wallet/\${wallet}/launch/{fun|real} (to return data with url)

Method: GET or POST **Authorization:** NO **Idempotent:** NO

To launch the game's replay (round summary) the Operator should embed <iframe> pointing to <URL>/launch/replay or use REST call to return data with url.

Body or Query Parameters

Name	Type	Required	Example	Description
game	string	REQUIRED	myGame	Game Id
roundId	string	OPTIONAL	123e4567-e89b-12d3-a456-426614174000	Round Id, one round can have multiple transactions

Response

Returns HTML web page containing the game or {"url": "https://example.com/replay"}

API

Path: /authenticate **Method:** POST **Authorization:** X-Server-Authorization **Idempotent:** NO

Authenticates a *Player* and starts a new session.

Body

Name	Type	Required	Example	Description
operator	string	REQUIRED	MyOperator	Operator Id
key	string	REQUIRED	dnsa89me329jdos	Wallet's session initialisation key which SHOULD be active only one time after generation
wallet	string	OPTIONAL	MyWallet	Wallet's name
provider	string	OPTIONAL	MyProvider	Provider's name
game	string	OPTIONAL	MyGame	Game's name
ip	string	OPTIONAL	123.45.67.89	Player's IP
channel	string	OPTIONAL	desktop	Player's device (desktop , mobile). It is not available in case of automated transactions like autocomplete

Response

Name	Type		Example	Description
nativeId	string	REQUIRED	user123432	Wallet's Player Id. MUST be unique across entire all operators and brands
token	string	REQUIRED	db76b22745bca2cd	Authorization token which will be sent in Authorization header in order to verify <i>Player</i>
balance	number	REQUIRED	100.85	Player's current balance in <i>player's</i> currency
currency	string	REQUIRED	eur	Player's currency (lowercase), MUST NOT change once set!
brand	string	REQUIRED	YellowCasino	Operator's brand
nickname	string	OPTIONAL	JohnnyBravo	Player's nickname
gender	string	OPTIONAL	m	Player's gender (m or f)
country	string	OPTIONAL	uk	Player's country code in ISO 3166-1 Alpha-2 format but lowercase
jurisdiction	string	OPTIONAL	mt	Player's jurisdiction in case of specific market requirements i.e. mt , uk , dk
sessionData	SessionData	OPTIONAL	{betConfig: {maxBet: 100}}	Typically provides extra data or overwrites system configuration.

Name	Type		Example	Description
				Applied only to current session. See SessionData
campaignTypes	string[]	OPTIONAL	["freeBets"]	Promo tools available for given player. If not specified it will apply all tools, if [] it will apply none, otherwise it will apply only specified tools. Available tools are: freeBets , tournament , prizeDrop .

Path: /balance **Method:** POST **Authorization:** X-Server-Authorization and Authorization **Idempotent:** YES

Fetches *Player's* current balance in *Player's* currency.

Body

Name	Type		Example	Description
nativeId	string	REQUIRED	user123432	Wallet's Player Id
playerId	string	OPTIONAL	user123432	Adapter's Player Id
game	string	REQUIRED	superSlot	Name of the game
provider	string	REQUIRED	superProvider	Provider's name

Response

Name	Type		Example	Description
balance	number	REQUIRED	100.85	Player's current balance in <i>player's</i> currency

Path: /transaction **Method:** PUT (recommended) or POST **Authorization:** X-Server-Authorization and Authorization **Idempotent:** YES

Withdraws from or deposits money to *Player's* account. If transaction with given `transactionId` was already processed then don't modify the account and return current balance.

Body

Name	Type		Example	Description
nativeId	string	REQUIRED	user123432	Wallet's Player Id
playerId	string	OPTIONAL	user123432	Adapter's Player Id
transactionId	string	REQUIRED	321e4567-e89b-45d3-b594-41234174249	Transaction Id

Name	Type		Example	Description
type	string	REQUIRED	withdraw	withdraw reduces <i>Player's</i> balance. deposit increases <i>Player's</i> balance.
provider	string	OPTIONAL	superProvider	<i>Provider's</i> name - field can be undefined when transaction doesn't relate to any game (e.g. tournament promo payout, tip)
amount	number	REQUIRED	10.56	Amount in <i>Player's</i> currency to withdraw from the account. Withdrawal of 0 (zero) amount MUST be supported.
jackpotAmount	number	OPTIONAL	0.001745	Part of amount which goes to jackpot contribution (in case of withdrawals) or jackpot win (in case of deposits). Please note contribution can have more then usual 2-decimal places
game	string	OPTIONAL	superSlot	Name of the game field can be undefined when transaction doesn't relate to any game (e.g. tournament promo payout, tip)
roundId	string	OPTIONAL	123e4567-e89b-12d3-a456-426614174000	Round Id, one round can have multiple transactions
roundFinished	boolean	OPTIONAL	true	Indicates whether round has finished. No

Name	Type		Example	Description
				further transactions with the same <code>roundId</code> should be accepted once the round is finished
<code>category</code>	<code>string</code>	OPTIONAL	<code>promo</code>	Category of transaction: <code>normal</code> , <code>side</code> , <code>tip</code> , <code>promo</code> , <code>jackpot</code>
<code>name</code>	<code>string</code>	OPTIONAL	<code>Royal Match</code>	Name of the transaction
<code>campaignType</code>	<code>string</code>	OPTIONAL	<code>freeBets</code>	Type of promotional tool <code>freeBets</code> , <code>tournament</code> , <code>prizeDrop</code> (can be more)
<code>campaignId</code>	<code>string</code>	OPTIONAL	<code>myCampaign123</code>	Id of promotional campaign
<code>campaignData</code>	<code>object</code>	OPTIONAL	<code>{ total: 10, used: 2, amount: 1, totalWin: 17.4 }</code>	Additional data for the promotional campaign
<code>regulatory</code>	<code>IRegulatory</code>	OPTIONAL	<code>{ pt: { "sm_result": "0:1;3;1;1;1#5;0;7;2;1#5;0;5;2;2#", "descr_ap": "60GoldenCoinsPro" } }</code>	Regulatory information present only in deposit transactions, currently includes Portuguese regulatory information See IRegulatory
<code>ip</code>	<code>string</code>	OPTIONAL	<code>123.45.67.89</code>	<i>Player's</i> IP
<code>currency</code>	<code>string</code>	REQUIRED	<code>eur</code>	<i>Player's</i> currency

Response

Name	Type		Example	Description
<code>balance</code>	<code>number</code>	REQUIRED	<code>100.85</code>	<i>Player's</i> current balance

Path: /cancel **Method:** DELETE (recommended) or POST **Authorization:** X-Server-Authorization and Authorization **Idempotent:** YES

Returns once withdrew money to an original account (deposits **MUST NOT** be cancelled). If transaction with given **transactionId** was already cancelled then don't modify the account and return current balance. If transaction with given **transactionId** doesn't exist in your system return current balance like if it was successfully cancelled. It **MUST NOT** be possible to create new transactions with **transactionId** which was once cancelled.

Please note it should cancel a transaction, not a round.

Body

Name	Type		Example	Description
nativeId	string	REQUIRED	user123432	Wallet's Player Id
playerId	string	OPTIONAL	user123432	Adapter's Player Id
transactionId	string	REQUIRED	321e4567-e89b-45d3-b594-41234174249	Transaction Id
roundId	string	REQUIRED	321e4567-e89b-45d3-b594-41234174249	Round Id

Response

Name	Type		Example	Description
balance	number	REQUIRED	100.85	Player's current balance

SessionData

Name	Type		Example	Description
italy.sessionId	string	OPTIONAL	db76b227-0582-45bc-a2cd-fbf38449f28e	Session Id (for Italy regulation)
italy.ticketId	string	OPTIONAL	db76b227-0582-45bc-a2cd-fbf38449f28e	Ticket Id (for Italy regulation)
betConfig.minBet	number	OPTIONAL	0.5	Min bet in player's currency
betConfig.maxBet	number	OPTIONAL	100	Max bet in player's currency
betConfig.maxBonusBet	number	OPTIONAL	1000	Max bet in player's currency (for non-main bets i.e. buy bonus). If not specified then maxBet will be applied to all bets including non-main
betConfig.maxExposure	number	OPTIONAL	1000000	Max exposure in player's currency
betConfig.defaultBet	number	OPTIONAL	2	Default bet in player's currency
settings.lobbyUrl	string	OPTIONAL	http://example.com	Alternative to passing it via launch URL

Name	Type		Example	Description
<code>settings.historyUrl</code>	<code>string</code>	OPTIONAL	<code>http://example.com</code>	Alternative to passing it via launch URL
<code>settings.depositUrl</code>	<code>string</code>	OPTIONAL	<code>http://example.com</code>	Alternative to passing it via launch URL
<code>currencyRate</code>	<code>number</code>	OPTIONAL	<code>10</code>	Overwrites conversion rate specified by our system

IRegulatory

Name	Type		Example	Description
<code>pt["sm_result"]</code>	<code>string</code>	OPTIONAL	<code>0:1;3;1;1;1#5;0;7;2;1#5;0;5;2;2#</code>	sm_result AJOG file entry
<code>pt["descr_ap"]</code>	<code>string</code>	OPTIONAL	<code>60GoldenCoinsPro</code>	descr_ap AJOG file entry
<code>pt</code>	<code>[key: string]: string</code>	OPTIONAL		Dictionary with other optional AJOG file entries

Extra API

The platform exposes set of additional endpoints. In this case, it's the *Wallet* who performs HTTP POST calls to the Platform. All requests **MUST** be authorized with the `secretKey` symmetrically to how the Platform secures it's requests (see [Authorization](#)).

Add Free Bets

Path: `/wallet/${wallet}/freeBets/add`

Method: POST

Authorization: X-Server-Authorization

Idempotent: NO

Assigns a number of free bets to one or multiple Players for one or multiple games.

Body

Name	Type	Required	Example	Description
<code>walletCampaignId</code>	<code>string</code>	REQUIRED	<code>wallet-campaign-2025</code>	Wallet's identifier of the Free Bets campaign within the <i>Wallet</i> .
<code>games</code>	<code>string[]</code>	REQUIRED	<code>["superSlot", "megaSpin"]</code>	List of game identifiers to which free bets apply.
<code>nativeIds</code>	<code>string[]</code>	REQUIRED	<code>["user123", "user456"]</code>	List of <i>Wallet</i> 's Player Ids to receive the free bets.
<code>start</code>	<code>integer</code>	OPTIONAL	<code>1730400000</code>	Start time of campaign in Unix timestamp (milliseconds) .

Name	Type	Required	Example	Description
end	integer	OPTIONAL	1733000000	End time of campaign in Unix timestamp (milliseconds) .
bets	integer	REQUIRED	10	Number of free bets granted to each player.
amount	number	REQUIRED	1.00	Amount per single free bet in player's currency.
currency	string	REQUIRED	eur	Currency code (lowercase).
operator	string	REQUIRED	my-operator	Players' operator.
brand	string	REQUIRED	my-brand	Players' brand.

Response

Returns confirmation object from RGS Adapter indicating successful creation.

```
{
  "success": true
}
```

Remove Free Bets

Path: /wallet/\${wallet}/freeBets/remove

Method: POST

Authorization: X-Server-Authorization

Idempotent: NO

Removes or deactivates Free Bets campaign for given walletCampaignId.

Body

Name	Type	Required	Example	Description
walletCampaignId	string	REQUIRED	fb-campaign-2025	Wallet's identifier of the Free Bets campaign to remove.
games	string[]	REQUIRED	["superSlot", "megaSpin"]	List of games that the campaign was added for (required to locate the campaign in Rgss).

| operator | string | REQUIRED | my-operator | Players' operator. || brand | string | REQUIRED | my-brand | Players' brand. |

Response

```
{
  "success": true
}
```

Available Bets

Path: /wallet/\${wallet}/freeBets/availableBets

Method: POST

Authorization: X-Server-Authorization

Idempotent: NO

Retrieves available Free Bets for given games and currencies.

Body

Name	Type	Required	Example	Description
games	string[]	REQUIRED	["superSlot", "megaSpin"]	List of game identifiers.
currencies	string[]	REQUIRED	["eur"]	List of currency codes (lowercase).
operator	string	REQUIRED	my-operator	Players' operator.
brand	string	REQUIRED	my-brand	Players' brand.

Response

```
{
  "superSlot": {
    "eur": [
      0.1,
      1,
      10
    ]
  },
  "megaSpin": {
    "eur": [
      0.2,
      2,
      20
    ]
  }
}
```

Available Games

Path: /wallet/\${wallet}/availableGames

Method: POST

Authorization: X-Server-Authorization

Idempotent: NO

Retrieves list of available games.

Body

Name	Type	Required	Example	Description
operator	string	OPTIONAL	myOperator	Operator's id.
operator	string	REQUIRED	my-operator	Players' operator.
brand	string	OPTIONAL	myBrand	Brand's id.

Response

```
[
  {
    "provider": "myProvider",
    "game": "superSlot",
    "type": "slot",
    "title": "My super slot"
  },
  {
    "provider": "myProvider",
    "game": "anotherSlot",
    "type": "slot",
    "title": "My another super slot"
  }
]
```