

Ve 280

Programming and Introductory Data Structures

Standard Template Library: Sequential Containers

Outline

- STL Sequential Container: `vector`
 - Some Basic Operations
 - Iterator
 - Operations with Iterator

Standard Template Library (STL)

Overview

- We have talked about containers
 - C++ has a **standard template library (STL)** that provides us with an easy way to define containers
- STL defines powerful, **template**-based, reusable components that implements common data structures and algorithms
- Divided into three components:
 - Containers: data structures that hold a collection of objects of a specified type
 - Iterators: used to examine and navigate container elements
 - Algorithms: searching, sorting and many others

Containers in STL

- The STL provides three kinds of containers:
 - **Sequential Containers**: let the programmer control the order in which the elements are stored and accessed. The order does not depend on the values of the elements
 - **Associative Containers**: store elements based on their values. The order depends on the value of the elements
 - **Container Adapters**: take an existing container type and make it act like a different type

Sequential Containers

- There are three sequential containers:
 - `vector`: based on arrays.
 - Supports fast random access.
 - Fast insert/delete at the back. Inserting or deleting at other position is slow.
 - `deque` (double-ended queue): based on arrays.
 - Supports fast random access.
 - Fast insert/delete at front or back.
 - `list`: based on a doubly-linked lists
 - Supports only bidirectional **sequential** access.
 - Fast insert/delete at any point in the list.

Vector

- `vector` is a widely used STL container
 - A collection of objects of a **single** type, each of which has an associated integer index.
 - We can create a vector of ints, a vector of strings, etc.
- To use a vector, include the appropriate header and namespace.

```
#include <vector>  
using namespace std;
```

Vector

- vector is a template. We need to specify the type of objects the vector contains.

```
vector<int> ivec; // holds ints
```

```
vector<IntSet> isvec; // holds IntSets
```

Initializing Vector

- `vector<T> v1;`
 - Construct an **empty** vector `v1` that holds objects of type `T`
 - E.g., `vector<int> v1;`
- `vector<T> v2 (v1) ;`
 - Copy constructor.
 - E.g., `vector<int> v2 (v1) ;`
- `vector<T> v3 (n, t) ;`
 - Construct `v3` that has `n` elements with value `t`.
 - E.g., `vector<int> v3 (10, -1) ;`
 - `vector<string> v4 (2, "abc") ;`

Size of Vector

- `v.size()` // number of elements in `v`
- `size()` return a value of `size_type` corresponding to the vector type.
- `vector<int>::size_type`
 - A **companion type** of vector
 - Essentially an unsigned type (unsigned int or unsigned long)
 - **Note**: not `vector::size_type`
- Why companion types?
 - To make the type machine-independent

Size of Vector

- Generally, you can convert `size_type` into `unsigned int`

```
unsigned int s = v.size();
```

- However, using `int` is not recommended

```
int s = v.size(); // not good
```

- If you only want to know whether the vector is empty or not, you can use

- `v.empty()` // true if v is empty

Add/Remove Element to/from Vector

- Add: `v.push_back(t)`
 - Add element with value `t` to **end** of `v`

- Example

```
vector<int> v;  
for(int i = 0; i <5; i++)  
    v.push_back(i);  
// v is 0,1,2,3,4
```

- Remove: `v.pop_back()`
 - Remove the last element in `v`. No argument. Returns void. `v` must be non-empty

Container Elements Are Copies

- There is no relationship between the element in the container and the value from which it was copied.
- What is the value of `v[0]`?

```
vector<int> v;  
int a = 3;  
v.push_back(a); // v[0] is 3 now  
a = 5; // What is v[0] now?
```

- Subsequent changes to the value that was copied have no effect on the element in the container, and vice versa.

Subscripting Vector

- `v[n]` : returns element at position `n` in `v`

```
vector<int>::size_type ix;  
for(ix=0; ix!=ivec.size(); ++ix)  
    ivec[ix]=0;
```

- Subscripting does not add elements.

```
vector<int> ivec; // empty vector  
for(vector<int>::size_type ix=0; ix!=10; ++ix)  
    ivec[ix] = ix; // Error!
```

- An element must exist in order to subscript it.

Good Practice

```
vector<int>::size_type ix;  
for (ix=0; ix!=ivec.size(); ++ix)  
    ivec[ix]=0;
```

- **Note:** we call the `size` member in the `for` rather than calling it once before the loop and remembering its value.
- Why?
 - Because vector can grow dynamically by adding new elements
 - By putting `size` in `for`, we test on the most current size. It is safer.
- Will it be slow?
 - No! `size()` is an inline function
 - Inline function: expanded “in line”. Avoid function call overhead.

Other Basic Operations on Vector

- `v1 = v2` //replace elements in v1 by a copy of
// elements in v2
- `v.clear()` // makes vector v empty
- `v.front()` // Returns a reference to the first element
// in v. v must be non-empty!
- `v.back()` // Returns a reference to the last element in v.
// v must be non-empty!

Outline


- STL Sequential Container: `vector`
 - Some Basic Operations
 - Iterator
 - Operations with Iterator

Iterators

- Each container type has a companion **iterator** type.
 - It lets us examine elements and navigate in the container.
- Iterators are more general than subscripts: All of the library containers define iterator types, but only a few of them support subscripting.
- Declare an iterator for vector:
 - E.g., `vector<int>::iterator it;`
- An iterator is a generalization of pointer.
 - They are pointers to the elements of containers.

How to Link Iterator to Vector?

- Use two member functions `begin()` and `end()` of vector
- `v.begin()` returns an iterator pointing to the first element of vector
 - `vector<int>::iterator it = v.begin();`
- `v.end()` returns an iterator positioned **one-past-the-end** of the vector
 - It does not denote an actual element in vector

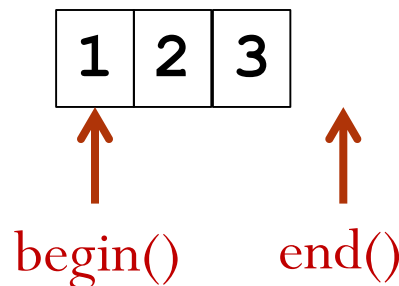

end()

- `v.end()` is used to indicate when we have processed all the elements in vector
- If the vector is empty, the iterator returned by `begin` is the same as the iterator returned by `end`

Operations on Iterator

- Dereference operator
 - `*iter`: let us access the element to which the iterator refers
 - You can **read**/**write** through `*iter`
- Increment/decrement operator
 - `++iter`, `iter++`: advance to the next item in vector
 - `--iter`, `iter--`: go back to the previous item

Note: you cannot dereference or increment iterator returned by `end()`

- `iter == iter2` and `iter != iter2`: test whether two iterators point to the same data item

Example

- Sum all the elements of the `vector<int> ivec`.

```
int sum = 0;
vector<int>::iterator it;
for(it=ivec.begin(); it != ivec.end(); ++it)
    sum += *it;
```

- **Question**: what happens when `ivec` is empty? what is the sum?
- Why using iterator instead of subscripting?
 - All container types have associated iterator types, but not all of them have subscripting.

const_iterator

- Using iterator could change the values in the vector.
- `const_iterator` is another iterator type. However, **cannot** use it to change the value.
 - It can only be used for reading, but not writing to, the container elements ...
 - ... because dereferencing a `const_iterator` is a `const` object.
 - Note: its own value can be changed, e.g., we can increment it.

```
vector<string>::const_iterator it;
for(it=text.begin(); it!=text.end(); ++it) {
    cout << *it << endl; // fine
    *it = " "; // error: *it is const
}
```

Iterator Arithmetic

- vector supports iterator arithmetic
 - Not all containers support iterator arithmetic
- `iter+n, iter-n`
 - `n` is an integral value
 - adding (subtracting) a value `n` to (from) an iterator yields an iterator that is `n` positions forward (backward)
- We can use iterator arithmetic to move an iterator to an element directly
 - Example: go to the middle

```
vector<int>::iterator mid;  
mid = vi.begin() + vi.size() / 2;
```

Relational Operation on Iterator

- $>$, \geq , $<$, \leq
 - E.g., `while (iter1 < iter2)`
- vector supports relational operation on iterator
 - Not all containers support relational operation on iterator
- One iterator is less than ($<$) another if it refers to an element whose position in the container is **ahead** of the one referred to by the other iterator.
- To compare, iterators must refer to elements in the **same** container or one past the end of the container (i.e., `c.end()`).

Outline

- STL Sequential Container: `vector`
 - Some Basic Operations
 - Iterator
 - Operations with Iterator

Initializing with a Range of Elements

- `vector<T> v (b, e) ;`
 - Create vector `v` with a copy of the elements from the range denoted by iterators `b` and `e`
- **Note**: **iterator range** is denoted by a pair of iterators `b` and `e` that refer to two elements, or to one past the last element, in the same container.
 - **Note**: the range includes `b` and each element **up to but not including** `e`.
 - It is denoted as `[b, e)`
 - If `b = e`, the range is empty
 - If `b=x.begin()`, `e=x.end()`, the range includes all the elements in `x`

Initializing with a Range of Elements

- We can use this form of initialization to copy just a subsequence of the other container
- Example

```
// assume v is a vector<int>
vector<int>::iterator mid;
mid = v.begin() + v.size() / 2;
```

```
// front includes the 1st half of v, from begin
// up to but not including mid
vector<int> front(v.begin(), mid);
```

```
// back includes the 2nd half of v from mid
// to end
vector<int> back(mid, v.end());
```

Initializing with a Range of Elements

- `vector<T> v(b, e);`
- We can even use another container type to initialize
`deque<string> ds(10, "abc");`
`vector<string> vs(ds.begin(), ds.end());`

Initializing with a Range of Elements

- Since pointers are iterators, the iterator range can also be a pair of pointers into a built-in array

```
int a[] = {1, 2, 3, 4};  
unsigned int sz = sizeof(a)/sizeof(int);  
vector<int> vi(a, a+sz);
```

- Note
 - **sizeof(obj), sizeof(type name)**: return the size in bytes of an object or type name
 - If **obj** is an array name, **sizeof(obj)** is the total size in byte in that array
- Question: what is the value of **sz**?

Initializing with a Range of Elements

```
int a[] = {1, 2, 3, 4};  
unsigned int sz = sizeof(a)/sizeof(int);  
vector<int> vi(a, a+sz);
```

- `a` points to the first element in array `a`
- `a+sz` points to the location one past the end of array `a`
- Thus, the entire array `a` is copied

Another Way to Add Value: insert()

- `v.insert(p, t)`
 - Inserts element with value `t` **right before** the element referred to by iterator `p`.
 - Returns an iterator referring to the element that was added.
- We can use `insert` to insert at the beginning of vector

```
vector<int> iv(2, 1);
iv.insert(iv.begin(), -1);
```
- We can also insert at the end

```
iv.insert(iv.end(), 3);
```

Erase Element: `erase()`

- `v.erase(p)`
 - Removes element referred to by iterator `p`
 - Returns an iterator referring to the element **after** the one deleted, or an **off-the-end** iterator if `p` referred to the last element
 - `p` cannot be an **off-the-end** iterator
 - Example use: find an element and erase it

Reference

- **C++ Primer (4th Edition)**, by *Stanley Lippman, Josee Lajoie, and Barbara Moo*, Addison Wesley Publishing (2005)
 - Chapter 3.3 **Library vector Type**
 - Chapter 9 **Sequential Containers**