

AI and Omics Research Internship

Session 1: Getting Started with R

R Program Installation

R is a free open-source programming language, widely used in statistical, machine learning & bioinformatics analysis.

R provides a wide range of built-in functions for data manipulation, statistical analysis, machine learning modelling and visualization.

It has a large community and thousands of packages that are available through [CRAN \(Comprehensive R Archive Network\)](#) and [Bioconductor](#) (especially useful for bioinformatics, genomics and transcriptomic analysis).

RStudio an Integrated Development Environment (IDE) that provides a user-friendly interface to interact with R

Note: R is required for RStudio to work, so install R first. But you can work with R without RStudio.

RTools is needed to for installation of R packages from source, those that need compilation of C/C++ or Fortran code. This helps you to install dependencies that are built out of CRAN sources or packages from GitHub (for Windows users only).

How to Download and Install?

Open your browser and search for “**RStudio Download**”. Click on “**RStudio Desktop**” link, that should be from posit.co.

<https://posit.co/download/rstudio-desktop/>

(If you don't see it at the top, scroll down and search for “**RStudio Download**” from the same posit.co domain. You can download it from there as well.

This link will take you to the official RStudio download page. If you scroll down to the page, you'll see two steps:

- **Step 1 is “Install R”**
- **Step 2 is Install RStudio.**

1

2

1: Install R

RStudio requires R 3.6.0+. Choose a version of R that matches your computer's operating system.

R is not a Posit product. By clicking on the link below to download and install R, you are leaving the Posit website. Posit disclaims any obligations and all liability with respect to R and the R website.

2: Install RStudio

DOWNLOAD RSTUDIO DESKTOP FOR WINDOWS

Size: 281.27 MB | SHA256: 9E6F68CA | Version: 2025.05.0+496 | Released: 2025-05-05

DOWNLOAD AND INSTALL R

Download RStudio

- To download RStudio, click on **“Download RStudio Desktop for Windows”** download will start automatically
- To Download R; click on **“Download and Install R”**. This will take you official CRAN page. Here you'll see different download options for Linux, macOS and Windows. Since we are installing it for Windows, click on **“Download R for Windows”**.
On the next page, click **“base”** or **“Install R for the first time”**. This will show you the latest version of R on another page. Click on it; the download will start right away.

Download R

3

4

5

Download and Install R

Precompiled binary distributions of the base system and contributed packages, **Windows and Mac** users most likely want one of these versions of R:

- Download R for Linux (Debian, Fedora/Redhat, Ubuntu)
- Download R for macOS
- Download R for Windows

R is part of many Linux distributions, you should check with your Linux package management system in addition to the link above.

Source Code for all R packages

Windows and Mac users may want to download the R for Windows installer.

R for Windows

Subdirectories:

- base: Binaries for base distribution. This is what you want to **install R for the first time**.
- contrib: Binaries of contributed CRAN packages (for R ≥ 4.0.x).
- old contrib: Binaries of contributed CRAN packages for outdated versions of R (for R < 4.0.x).
- Rtools: Tools to build R and R packages. This is what you want to build your own packages on Windows, or to build R itself.

Please do not submit binaries to CRAN. Package developers might want to contact Uwe Ligges directly in case of questions / suggestions related to Windows.

You may also want to read the [R FAQ](#) and [R for Windows FAQ](#).

Note: CRAN does some checks on these binaries for viruses, but cannot give guarantees. Use the normal precautions with downloaded executables.

Download R-4.5.0 for Windows (86 megabytes, 64 bit)

README on the Windows binary distribution


New features in this version

This build requires UCRT, which is part of Windows since Windows 10 and Windows Server 2016. On older systems, UCRT is not included. If you want to double-check that the package you have downloaded matches the package distributed by CRAN, you can compare the file fingerprint on the master server.

Frequently asked questions

• Does R run under any version of Windows?

- To download RTools, go back to the previous page where you selected “base”; at this time select **“RTools”**. You’ll see a different RTools version on a new page. Make sure to select the one that matches your R version. At this time, we’re installing R version 4.5.1, so download RTools 4.5. Click on the correct version; it will take you to another page. On this page, look for **“Rtools45 installer”**; click on it the download will begin.

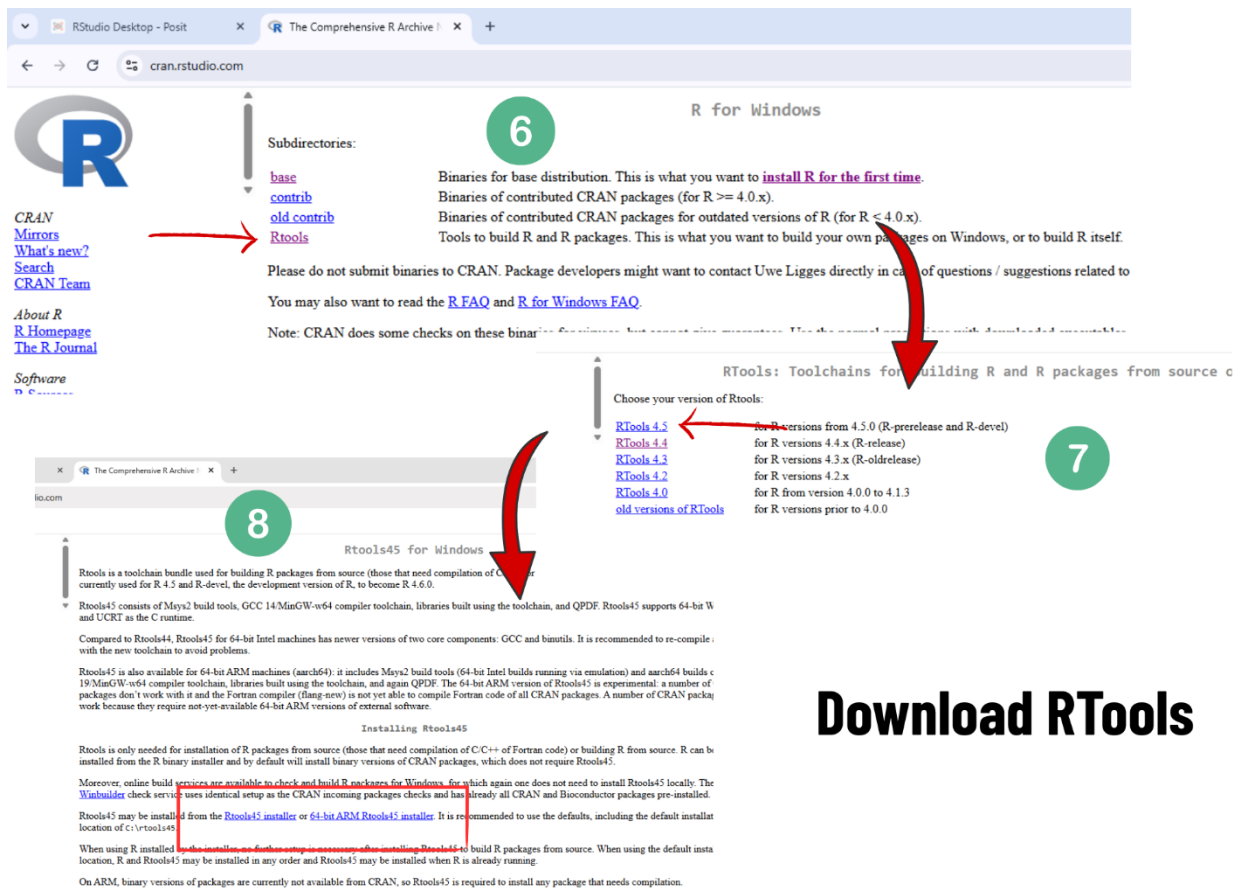

Download RTools

Once all the downloads are finished, install R, RStudio and RTools one by one, keep everything on default and follow the installation steps.

RStudio Interface


After installation, find RStudio in the Start menu and open it.

You'll see 4 panels there:

- **Top Left (Source Editor):** Where you can write and save your scripts (codes)
- **Bottom Left (Console):** Where codes actually run and output appears. You can also write codes in the console, but it will disappear on a new session, so it's a good practice to write your code in the source editor.
- **Top Right (Environment/History):** This section stores R objects (variables, functions, output) and command history.

- **Bottom Right (Files/Plots/packages...):** This pane is for file management, plot visualizations and documentation.

RStudio Interface

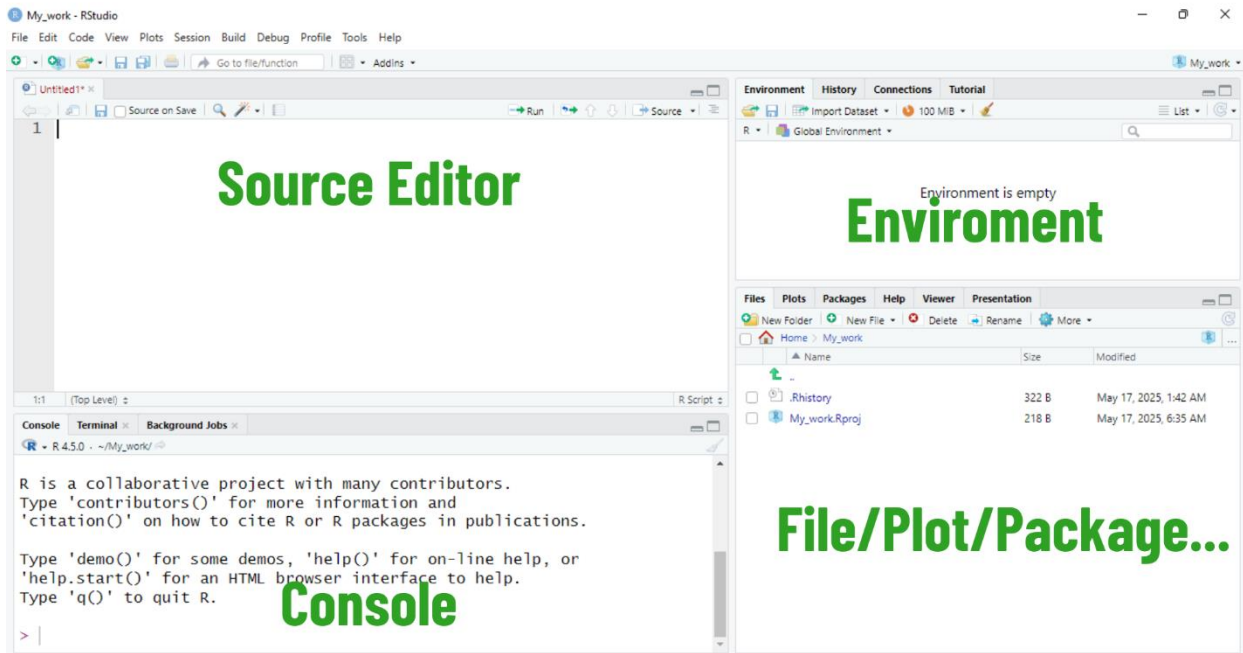

Set Up a Working Directory

The working directory is basically a folder on your local system where R looks for files and saves output (results, files, and R scripts).

To check what your current working directory is, run the command.

`getwd()`

To set up a new working directory, use a command.


`setwd(folder path)`

e.g., `setwd("c:/Users/Documents")`

OR

Session > Set Working Directory > Choose Directory > Select Directory (folder) > Ok

Set Working Directory

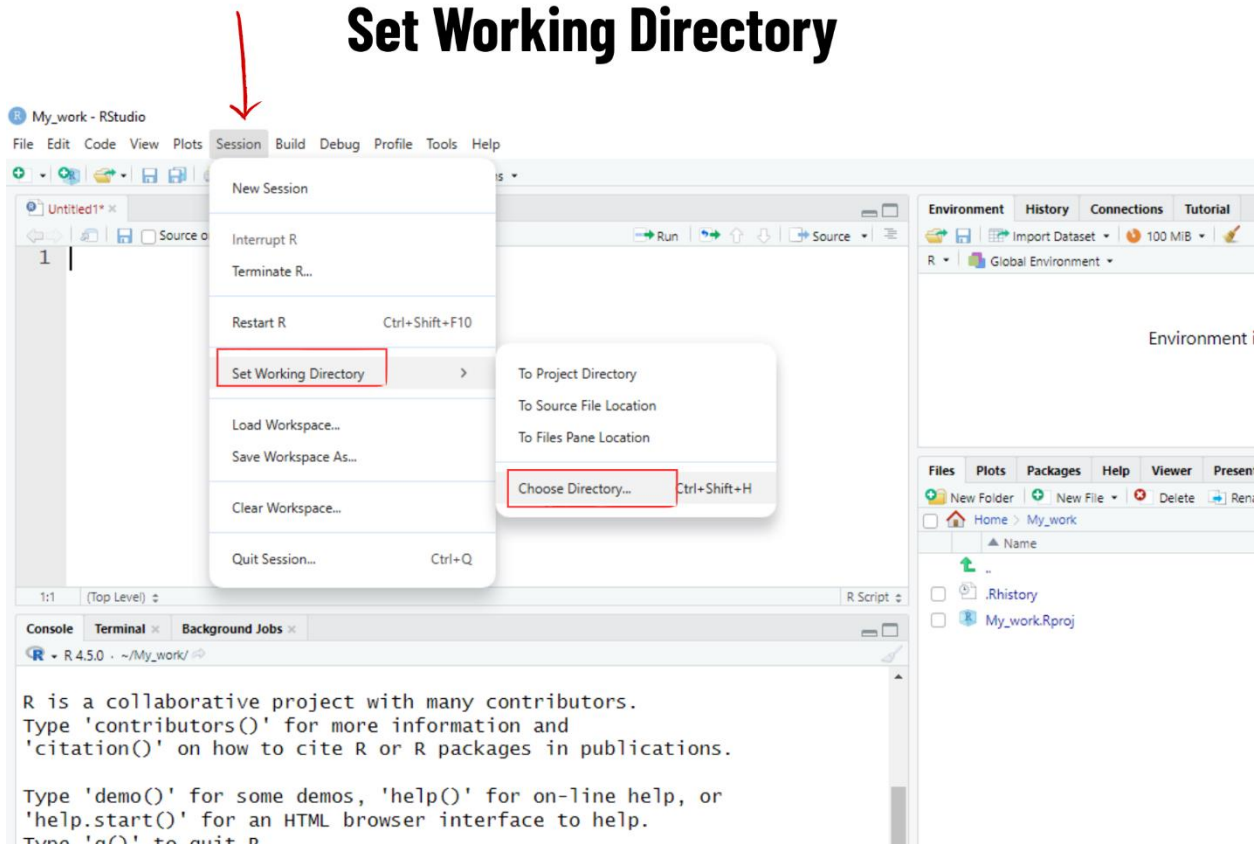


Working without setting up a directory is the same as working in a lab without a designated bench. Everything scattered, and it becomes hard to keep track of your data, scripts and results. But when you set a working directory, all stays in one place, and you can work effortlessly.

Create Project

Instead of setting up a working directory every time, it's better to create a project. It helps keep everything organized and makes it easy to switch between different tasks or datasets.

To create a project

- Go to project > New Project
- New Directory > New Project
- Enter the name and select the location.
- Click Create Project.

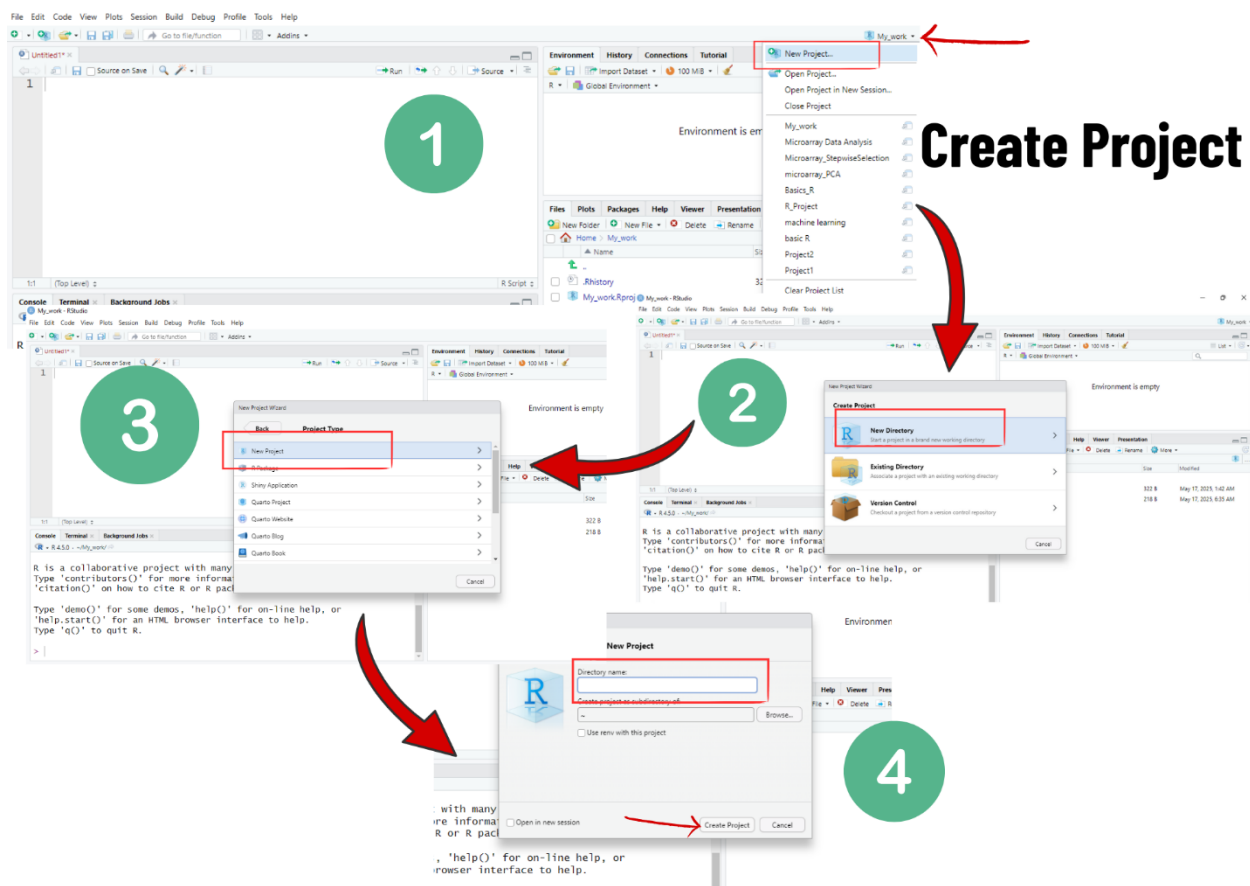

In your project you can manage your scripts, datasets and outputs within that folder and can locate any time you need.

That's all for today you:

- ✚ Installed R, RStudio and RTools.
- ✚ Set your working directory.
- ✚ Created your first project.

Now you're ready to work with R.