Installation of environment for lab with ROS2 + display of laser data

Olivier Aycard
Professor
Grenoble INP - PHELMA
GIPSA Lab
https://www.gipsa-lab.grenoble-inp.fr/user/olivier.aycard
olivier.aycard@grenoble-inp.fr






Install the environment for your lab

- To install the environment for your lab:
  1. `cd ~/ros2_ws`
  2. `git clone git@gricad-gitlab.univ-grenoble-alpes.fr:tp_ros2/scripts.git`
  3. `cd ~/ros2_ws/scripts`
  4. `./clone_lab_repositories.sh`

- To launch the environment for your lab:
  1. `cd ~/ros2_ws/scripts`
  2. *./launch_lab_environment.sh*

Environment lab

- Your screen should be split in 2 windows:
    1. A terminal on the left side
    2. Rviz, the graphical interface of ROS2, on the right side

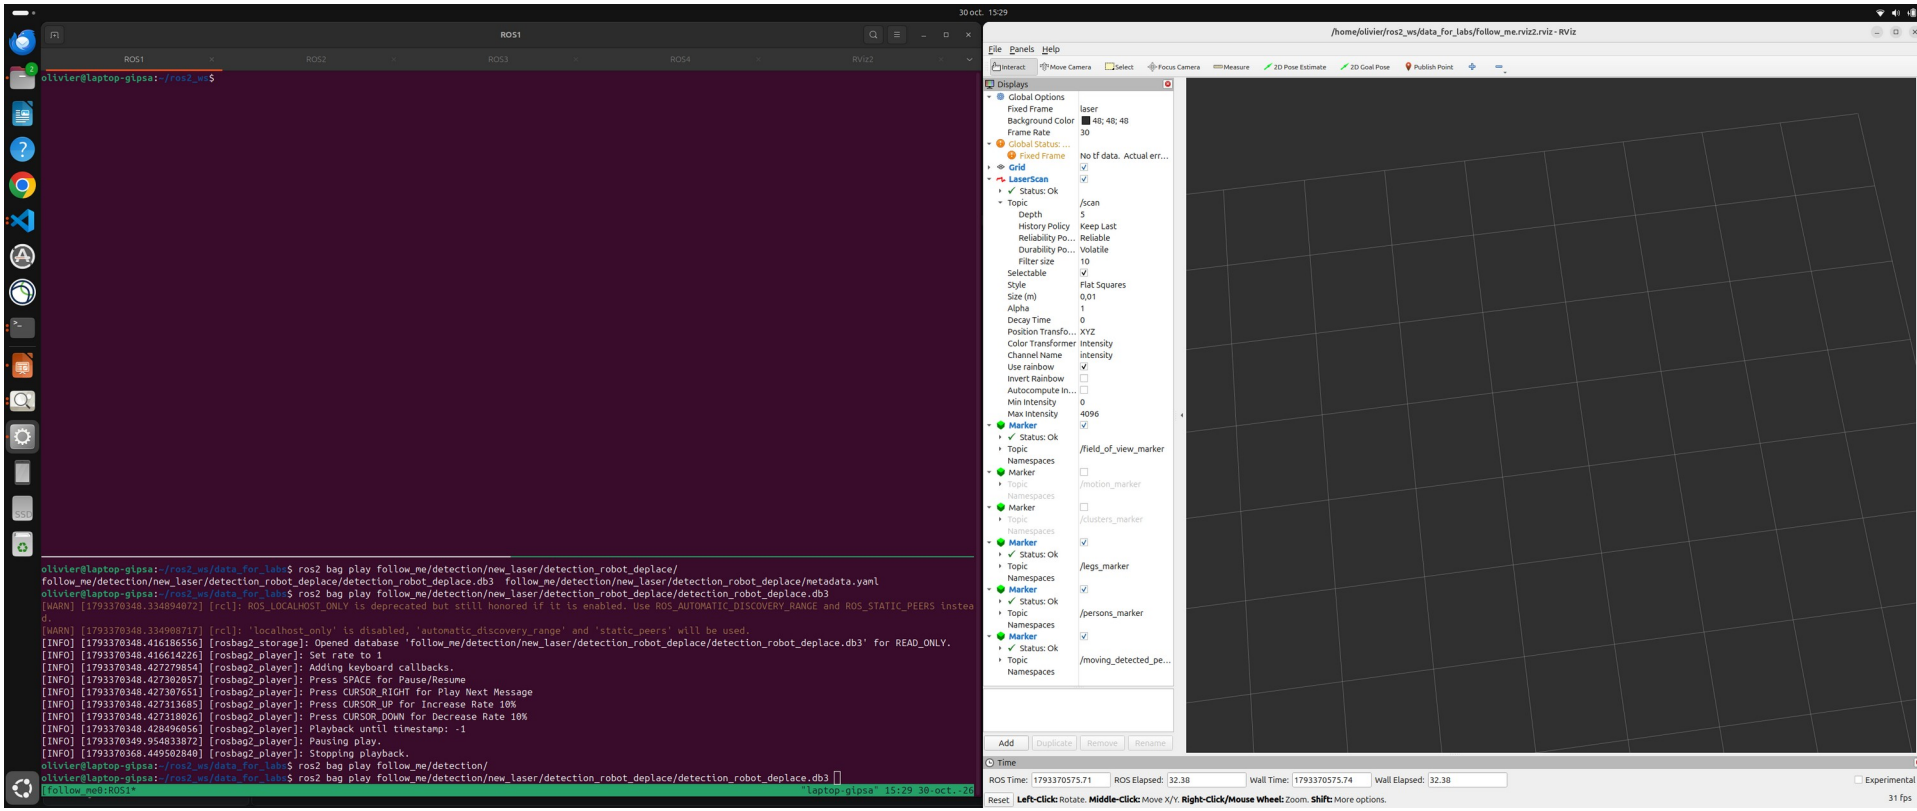


The terminal

The terminal is composed with 5 tabs


You change switch from one tab to an other one to run several nodes at the same time

The bottom part is dedicated to run bag composed of recorded laser data

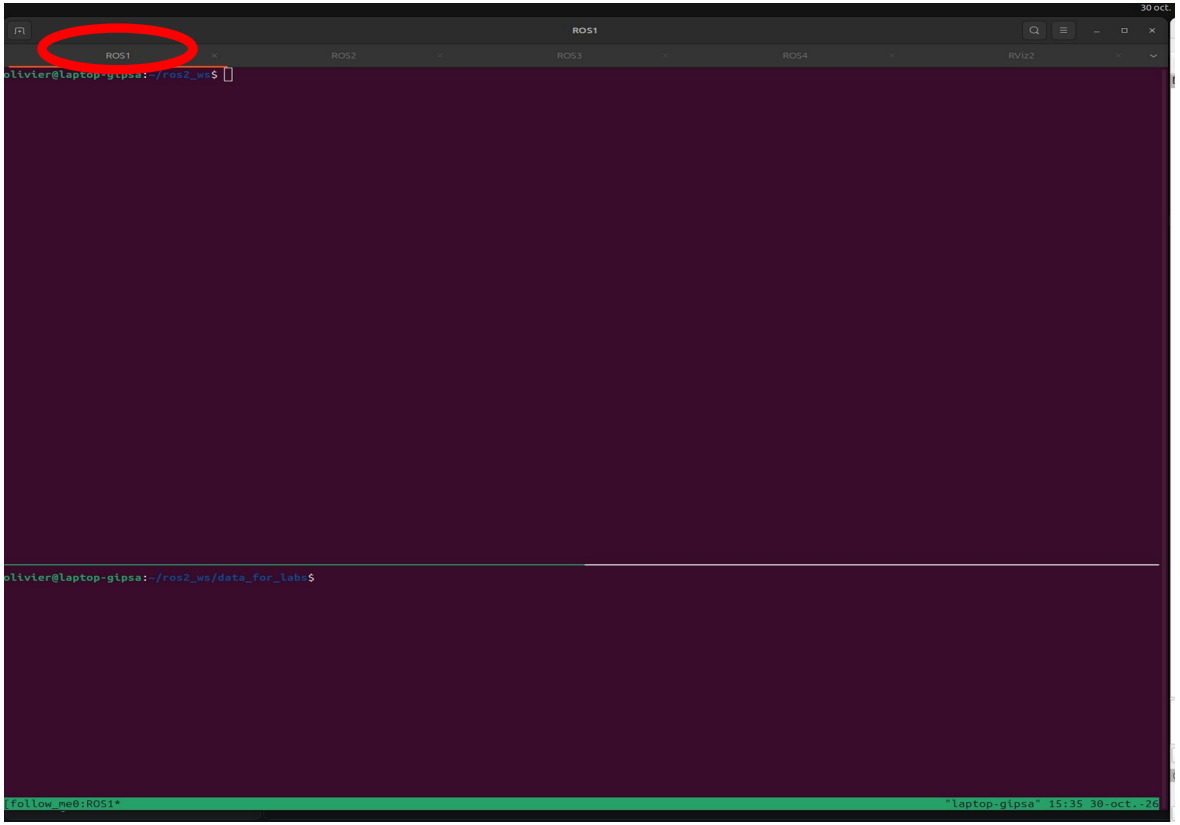

Display laser data with ROS2

To display laser data in rivz2, run a bag in the bottom left terminal:
For instance : ros2 bag play follow_me/detection/new_laser/detection_robot_deplace/detection_robot_deplace.db3

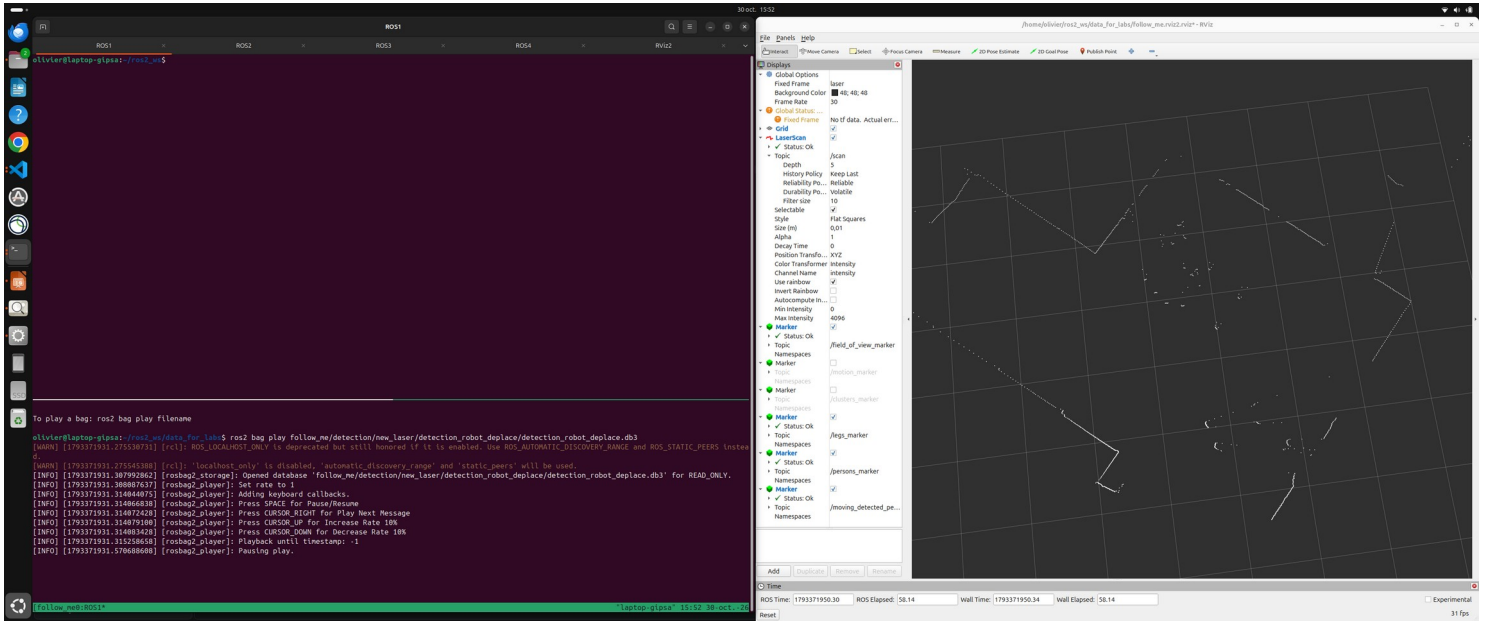

- You can control the data playback by clicking in the `ros2 bag play` terminal and pressing keys :
  - To pause a rosbag, press space
  - To run a rosbag step by step, press right arrow =>