ERRORS

1. In file e2e/tests/login.test.ts test «login with wrong email format credentials read data from fixture» fails because actual result «Invalid email address.» doesn't match expected result «Invalid email addresssss.» in test.

```
1) Login Functionality
    login with wrong email format credentials read data from fixture:
    Timed out retrying after 5000ms
    + expected - actual
    -'Invalid email address.'
    +'Invalid email addressssss.'
```

- 2. In file fixtures/users.json in the block "invalid_crededentials", "wrong_email_format", for test data uses not only incorrect email, but also incorrect password, so testcase with this credentials doesn't indicate exactly what the system reacts to.
- 3. In file package.json script "report" doesn't work correct and generates empty allure report.

```
"scripts": {
    "cy:e2e:run": "npm run clear && npm run cy:run && npm run report",
    "cy:e2e:run": "cypress open --config-file config/config.config.ts --env allure=true",
    "cy:run": "cypress run --config-file config/config.ts --env allure=true",
    "report": "npx allure generate reports/ui/allure-results --clean -o reports/ui/allure-report && allure open reports/ui/allure-report",
    "allure:generate": "npx allure generate allure-results --clean",
    "clear": "rm -r reports/** || true"
},
```

If it change to this, it will work correct.


```
"report": "npx allure generate allure-results --clean -o allure-report && allure
open allure-report"
```

COMMENTS

- 1. File e2e/tests/myAccount.test.ts doesn't have any test, so it should be removed
- 2. In README at "Steps to run" doesn't clearly describe what means by "Change "Username" and "Password""
- 3. In test files should be empty rows between "it" blocks, so it would be more readable
- 4. Pages folder should be on the same level with e2e folder
- 5. All assertions should be in the test files, not in page object methods

```
■ loginPage.ts ×
cypress > e2e > pages > 15 loginPage.ts > ...
                                                                                     cypress > e2e > pages > 15 myAccountPage.ts > ..
                                                                                        1 /// <reference types="cypress" />
                                                                                             import { loginPage } from "./loginPage"
           public login(emailId: string, password: string) {
                                                                                             class MyAccountPage {
                this.signinLink.click(
                                                                                                 get signoutLink() { return cy.get('.logout') }
                this.emailAddressTxt.type(emailId)
                                                                                                 get pageHeading() { return cy.get('.page-heading') }
                this.passwordTxt.type(password)
                this.signinBtn.click()
                                                                                                 public validateSuccessfulLogin() {
    this.pageHeading.should('have.text', 'My account')
           public validateLoginError(errorMessage: string) {
                this.alertBox.should('be.visible')
this.alertMessage.should('have.text', errorMessage)
                                                                                                 public logout() {
                                                                                                      this.signoutLink.click()
                                                                                                 public validateSuccessfulLogout() {
       export const loginPage: LoginPage = new LoginPage()
                                                                                                     loginPage.signinLink.should('be.visible')
                                                                                             export const myAccountPage: MyAccountPage = new MyAccountPage()
```

6. In README screen from Allure report doesn't represent actual allure report result, also no information about how we can open allure report in README.

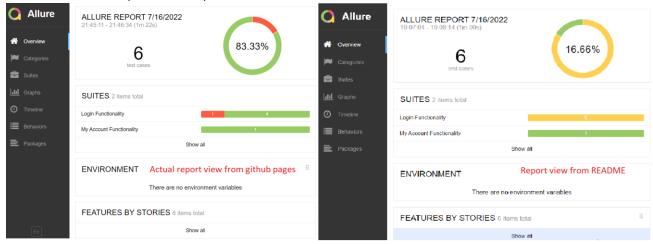

- 7. In test files should be empty rows between "it" blocks, so it would be more readable
- 8. Pages folder should be on the same level with e2e folder