

Lab – NETCONF w/Python: List Capabilities

Objectives

Part 1: Install the ncclient Python module

Part 2: Connect to IOS XE's NETCONF service using ncclient

Part 3: List the IOS XE's capabilities – supported YANG models

Background / Scenario

Working with NETCONF does not require working with raw NETCONF RPC messages and XML. In this lab you will learn how to use the ncclient Python module to easily interact with network devices using NETCONF. You will learn how to identify which YANG models are supported by the device. This information is helpful when building a production network automation system, that requires specific YANG models to be supported by the given network device.

Required Resources

- Access to a router with the IOS XE operating system version 16.6 or higher
- Python 3.x environment

Instructions

Part 1: Install the ncclient Python module


In this part, you will install ncclient module into your Python environment. ncclient is a python module that simplifies NETCONF operations with built in functions that deal with the XML messages and RPC calls.

Explore the ncclient module on the project GitHub repository: <https://github.com/ncclient/ncclient>

Step 1: Use pip to install ncclient.

- a. Start a new Windows command prompt (`cmd`).
- b. Install ncclient using pip in the Windows command prompt:

```
pip install ncclient
```

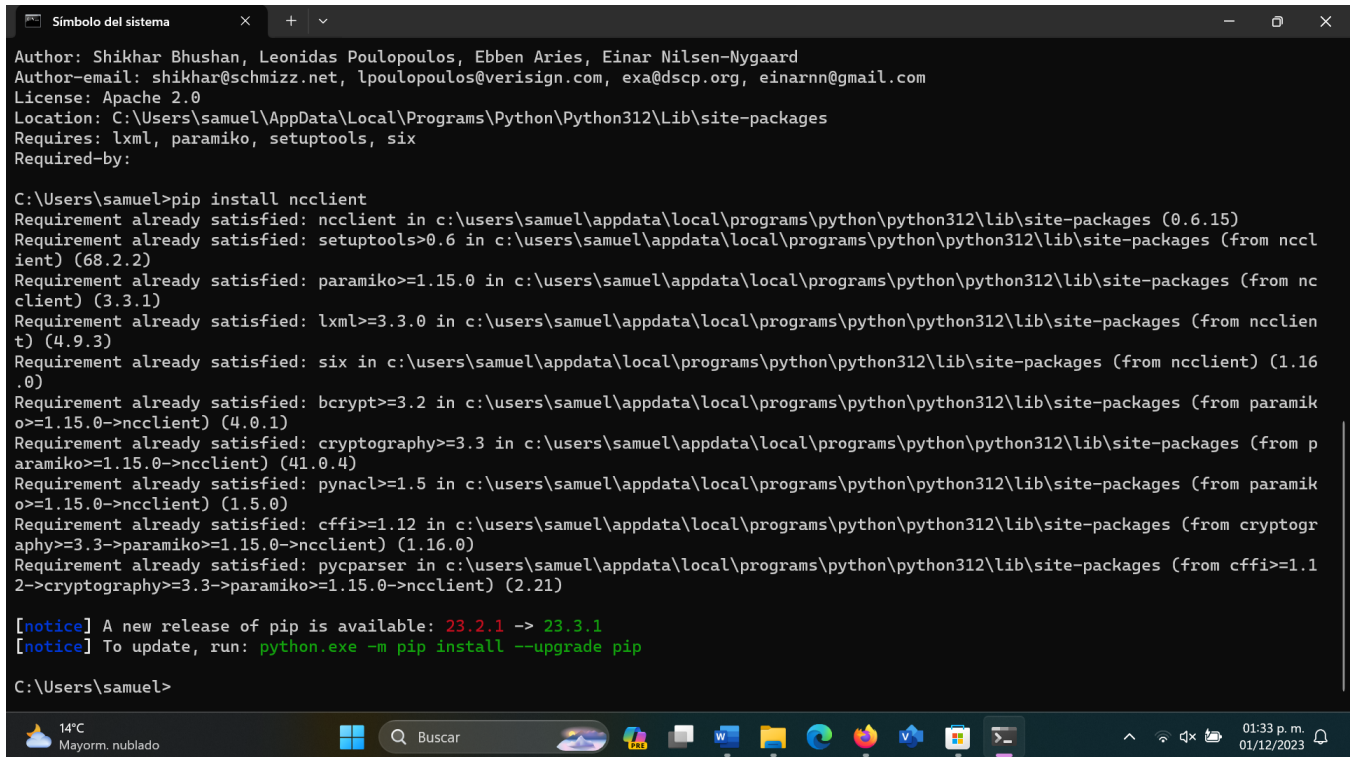

```
Símbolo del sistema
Author: Shikhar Bhushan, Leonidas Pouloupoulos, Ebben Aries, Einar Nilsen-Nygaard
Author-email: shikhar@schmizz.net, lpouloupoulos@verisign.com, exa@dscp.org, einarnn@gmail.com
License: Apache 2.0
Location: C:\Users\samuel\AppData\Local\Programs\Python\Python312\Lib\site-packages
Requires: lxml, paramiko, setuptools, six
Required-by:

C:\Users\samuel>pip install ncclient
Requirement already satisfied: ncclient in c:\users\samuel\appdata\local\programs\python\python312\lib\site-packages (0.6.15)
Requirement already satisfied: setuptools>0.6 in c:\users\samuel\appdata\local\programs\python\python312\lib\site-packages (from ncclient) (68.2.2)
Requirement already satisfied: paramiko>=1.15.0 in c:\users\samuel\appdata\local\programs\python\python312\lib\site-packages (from ncclient) (3.3.1)
Requirement already satisfied: lxml>=3.3.0 in c:\users\samuel\appdata\local\programs\python\python312\lib\site-packages (from ncclient) (4.9.3)
Requirement already satisfied: six in c:\users\samuel\appdata\local\programs\python\python312\lib\site-packages (from ncclient) (1.16.0)
Requirement already satisfied: bcrypt>=3.2 in c:\users\samuel\appdata\local\programs\python\python312\lib\site-packages (from paramiko>=1.15.0->ncclient) (4.0.1)
Requirement already satisfied: cryptography>=3.3 in c:\users\samuel\appdata\local\programs\python\python312\lib\site-packages (from paramiko>=1.15.0->ncclient) (41.0.4)
Requirement already satisfied: pynacl>=1.5 in c:\users\samuel\appdata\local\programs\python\python312\lib\site-packages (from paramiko>=1.15.0->ncclient) (1.5.0)
Requirement already satisfied: cffi>=1.12 in c:\users\samuel\appdata\local\programs\python\python312\lib\site-packages (from cryptography>=3.3->paramiko>=1.15.0->ncclient) (1.16.0)
Requirement already satisfied: pycparser in c:\users\samuel\appdata\local\programs\python\python312\lib\site-packages (from cffi>=1.12->cryptography>=3.3->paramiko>=1.15.0->ncclient) (2.21)

[notice] A new release of pip is available: 23.2.1 -> 23.3.1
[notice] To update, run: python.exe -m pip install --upgrade pip

C:\Users\samuel>
```

- c. Verify that ncclient has been successfully installed. Start Python IDLE and in the interactive shell try to import the ncclient module:

```
import ncclient
```

Part 2: Connect to IOS XE's NETCONF service using ncclient

Step 1: Connect to IOS XE's NETCONF service using ncclient.

The ncclient module provides a “manager” class with “connect ()” function to setup the remote NETCONF connection. After a successful connection, the returned object represents the NETCONF connection to the remote device.

- a. In Python IDLE, create a new Python script file:
b. In the new Python script file editor, import the “manager” class from the ncclient module:


```
from ncclient import manager
```

- c. Setup an m connection object using the manager.connect () function to the IOS XE device.

```
m = manager.connect(
    host="192.168.56.101",
    port=830,
    username="cisco",
    password="cisco123!",
    hostkey_verify=False
)
```

The parameters of the manager.connect () function are:

- `host` – the address (host or IP) of the remote device (adjust the IP address to match the router's current address)
- `port` – the remote port of the NETCONF service
- `username` – remote ssh username (in this lab “cisco” for that was setup in the IOS XE VM)
- `password` – remote ssh password (in this lab “cisco123!” for that was setup in the IOS XE VM)
- `hostkey_verify` – whether to verify the ssh fingerprint (in lab it is safe to set to False, in production environments you should always verify the ssh fingerprints)

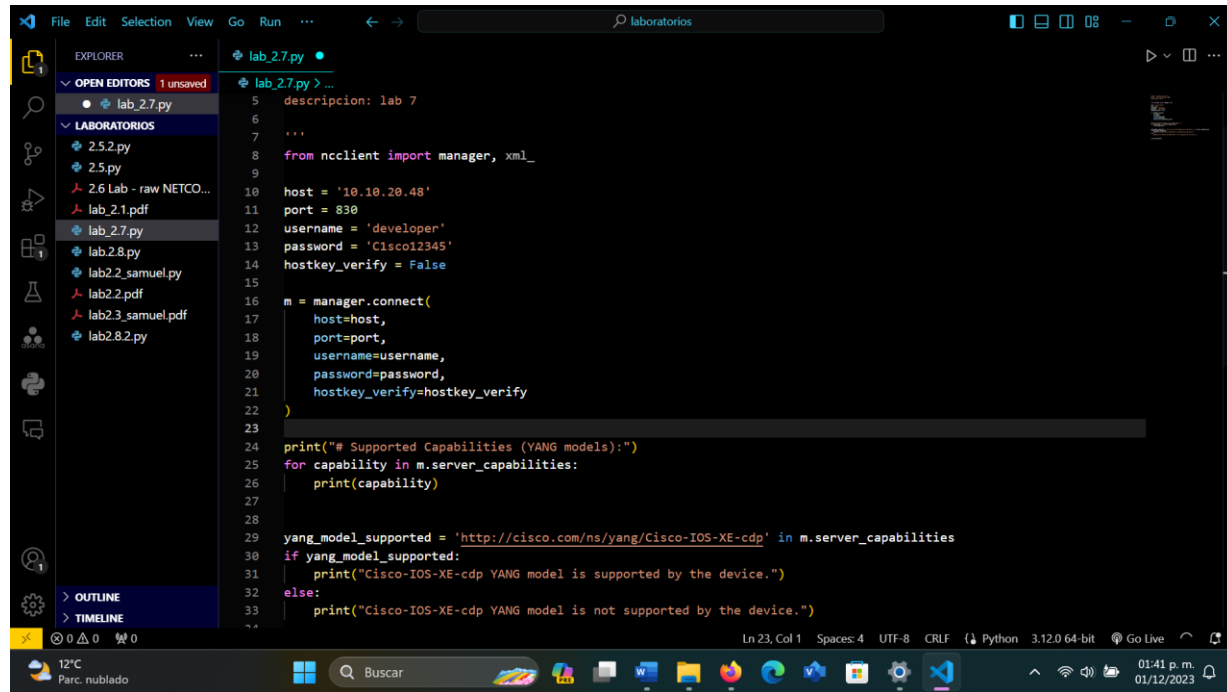

```
5  description: lab 7
6
7  ...
8  from ncclient import manager, xml_
9
10 host = '10.10.20.48'
11 port = 830
12 username = 'developer'
13 password = 'Cisco12345'
14 hostkey_verify = False
15
16 m = manager.connect(
17     host=host,
18     port=port,
19     username=username,
20     password=password,
21     hostkey_verify=hostkey_verify
22 )
23
24 print("# Supported Capabilities (YANG models):")
25 for capability in m.server_capabilities:
26     print(capability)
27
28
29 yang_model_supported = 'http://cisco.com/ns/yang/Cisco-IOS-XE-cdp' in m.server_capabilities
30 if yang_model_supported:
31     print("Cisco-IOS-XE-cdp YANG model is supported by the device.")
32 else:
33     print("Cisco-IOS-XE-cdp YANG model is not supported by the device.")
34
```


Part 3: List the IOS XE’s capabilities – supported YANG models

Step 1: Send show commands and display the output

- The `m` object, returned by the `manager.connect()` function that represents the NETCONF remote session. In every NETCONF session, the server first sends its list of capabilities – supported YANG models. With the `ncclient` module, the received list of capabilities is stored in the `m.server_capabilities` list.
- Use a for loop and a print function to print the device capabilities:

```
print("#Supported Capabilities (YANG models):")
for capability in m.server_capabilities:
    print(capability)
```
- Execute the Python script file to see the results.

Lab – NETCONF w/Python: List Capabilities

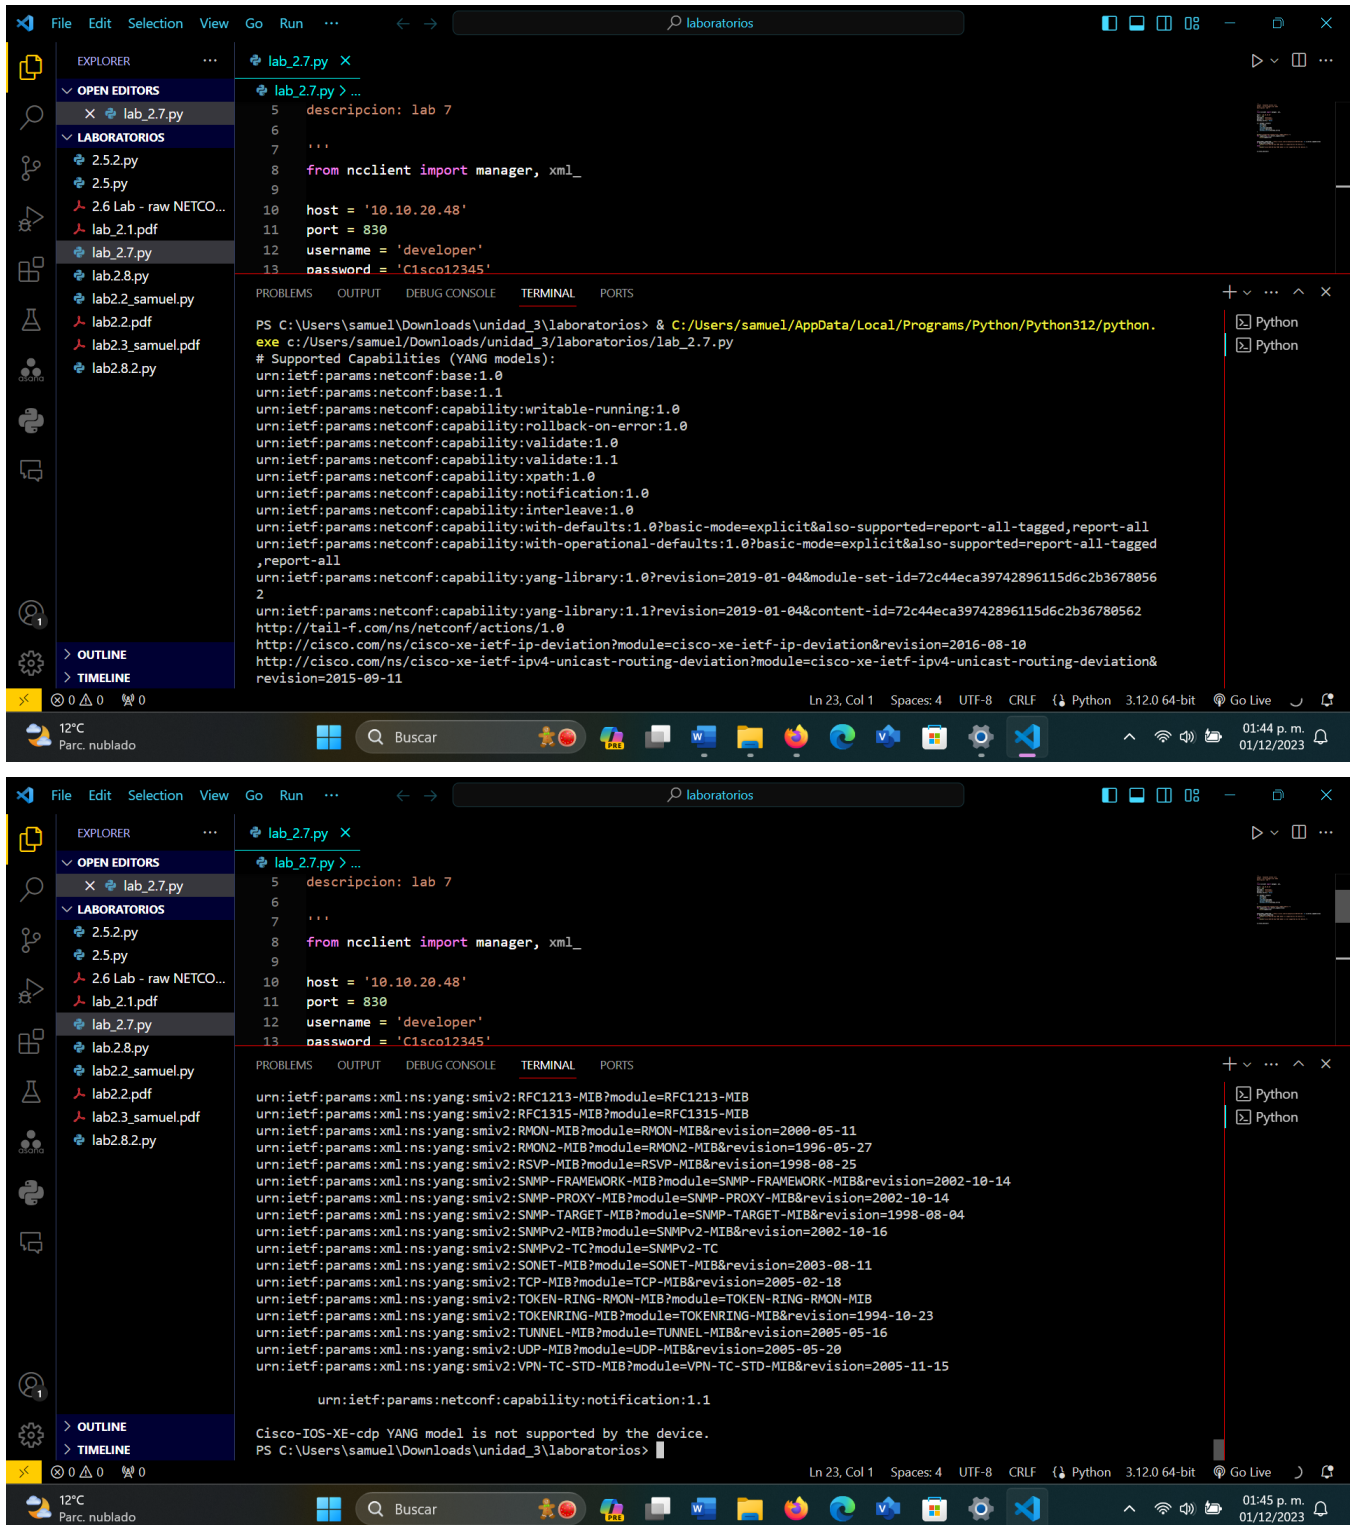

```
lab_2.7.py > ...
5  description: lab 7
6
7  ...
8  from ncclient import manager, xml_
9
10 host = '10.10.20.48'
11 port = 830
12 username = 'developer'
13 password = 'Cisco12345'

PS C:\Users\samuel\Downloads\unidad_3\laboratorios> & C:\Users\samuel\AppData\Local\Programs\Python\Python312\python.
exe c:/Users/samuel/Downloads/unidad_3/laboratorios/lab_2.7.py
# Supported Capabilities (YANG models):
urn:ietf:params:netconf:base:1.0
urn:ietf:params:netconf:base:1.1
urn:ietf:params:netconf:capability:writable-running:1.0
urn:ietf:params:netconf:capability:rollback-on-error:1.0
urn:ietf:params:netconf:capability:validate:1.0
urn:ietf:params:netconf:capability:validate:1.1
urn:ietf:params:netconf:capability:xpath:1.0
urn:ietf:params:netconf:capability:notification:1.0
urn:ietf:params:netconf:capability:interleave:1.0
urn:ietf:params:netconf:capability:with-defaults:1.0?basic-mode=explicit&also-supported=report-all-tagged,report-all
urn:ietf:params:netconf:capability:with-operational-defaults:1.0?basic-mode=explicit&also-supported=report-all-tagged
,report-all
urn:ietf:params:netconf:capability:yang-library:1.0?revision=2019-01-04&module-set-id=72c44eca39742896115d6c2b3678056
2
urn:ietf:params:netconf:capability:yang-library:1.1?revision=2019-01-04&content-id=72c44eca39742896115d6c2b36780562
http://tail-f.com/ns/netconf/actions/1.0
http://cisco.com/ns/cisco-xe-ietf-ip-deviation?module=cisco-xe-ietf-ip-deviation&revision=2016-08-10
http://cisco.com/ns/cisco-xe-ietf-ipv4-unicast-routing-deviation?module=cisco-xe-ietf-ipv4-unicast-routing-deviation&
revision=2015-09-11

urn:ietf:params:xml:ns:yang:smiv2:RFC1213-MIB?module=RFC1213-MIB
urn:ietf:params:xml:ns:yang:smiv2:RFC1315-MIB?module=RFC1315-MIB
urn:ietf:params:xml:ns:yang:smiv2:RMON-MIB?module=RMON-MIB&revision=2000-05-11
urn:ietf:params:xml:ns:yang:smiv2:RMON2-MIB?module=RMON2-MIB&revision=1996-05-27
urn:ietf:params:xml:ns:yang:smiv2:RSVP-MIB?module=RSVP-MIB&revision=1998-08-25
urn:ietf:params:xml:ns:yang:smiv2:SNMP-FRAMEWORK-MIB?module=SNMP-FRAMEWORK-MIB&revision=2002-10-14
urn:ietf:params:xml:ns:yang:smiv2:SNMP-PROXY-MIB?module=SNMP-PROXY-MIB&revision=2002-10-14
urn:ietf:params:xml:ns:yang:smiv2:SNMP-TARGET-MIB?module=SNMP-TARGET-MIB&revision=1998-08-04
urn:ietf:params:xml:ns:yang:smiv2:SNMPv2-MIB?module=SNMPv2-MIB&revision=2002-10-16
urn:ietf:params:xml:ns:yang:smiv2:SNMPv2-TC?module=SNMPv2-TC
urn:ietf:params:xml:ns:yang:smiv2:SONET-MIB?module=SONET-MIB&revision=2003-08-11
urn:ietf:params:xml:ns:yang:smiv2:TCP-MIB?module=TCP-MIB&revision=2005-02-18
urn:ietf:params:xml:ns:yang:smiv2:TOKEN-RING-RMON-MIB?module=TOKEN-RING-RMON-MIB
urn:ietf:params:xml:ns:yang:smiv2:TOKENRING-MIB?module=TOKENRING-MIB&revision=1994-10-23
urn:ietf:params:xml:ns:yang:smiv2:TUNNEL-MIB?module=TUNNEL-MIB&revision=2005-05-16
urn:ietf:params:xml:ns:yang:smiv2:UDP-MIB?module=UDP-MIB&revision=2005-05-20
urn:ietf:params:xml:ns:yang:smiv2:VPN-TC-STD-MIB?module=VPN-TC-STD-MIB&revision=2005-11-15

urn:ietf:params:netconf:capability:notification:1.1

Cisco-IOS-XE-cdp YANG model is not supported by the device.
PS C:\Users\samuel\Downloads\unidad_3\laboratorios>
```

d. Is the Cisco-IOS-XE-cdp YANG model supported by the device?

Si es compatible con el dispositivo porque imprimio el modelo