

ATANDA

SITE PLAN

Authoritative System & Stage Map

How an idea becomes a certified specification, codebase, signed machine artifact, custodied asset, and controlled release.

MODEL AT A GLANCE


- F0 is Advisory/SOLVA: upstream intelligence and the return point for OSIRIS deviations.
- F1 to F7 is the only solid linear cockpit rail.
- F8 is a post-certification build branch.
- F9 consumes certified F7 plus approved F8 lineage.
- F9.5 OSIRIS maintains custody; it does not build, repair, mutate, or certify.
- F10 separates signed release, deterministic handoff/export, and native provider deployment.

OPERATING PRINCIPLE

A delivery receipt or provider ACK proves destination acceptance only. It does not prove execution, start, or completion. Provider execution status is observed and reported separately when the provider exposes it.

System Topology

Solid relationships are production or release paths. Dashed relationships are advisory side-steps or deviation returns.

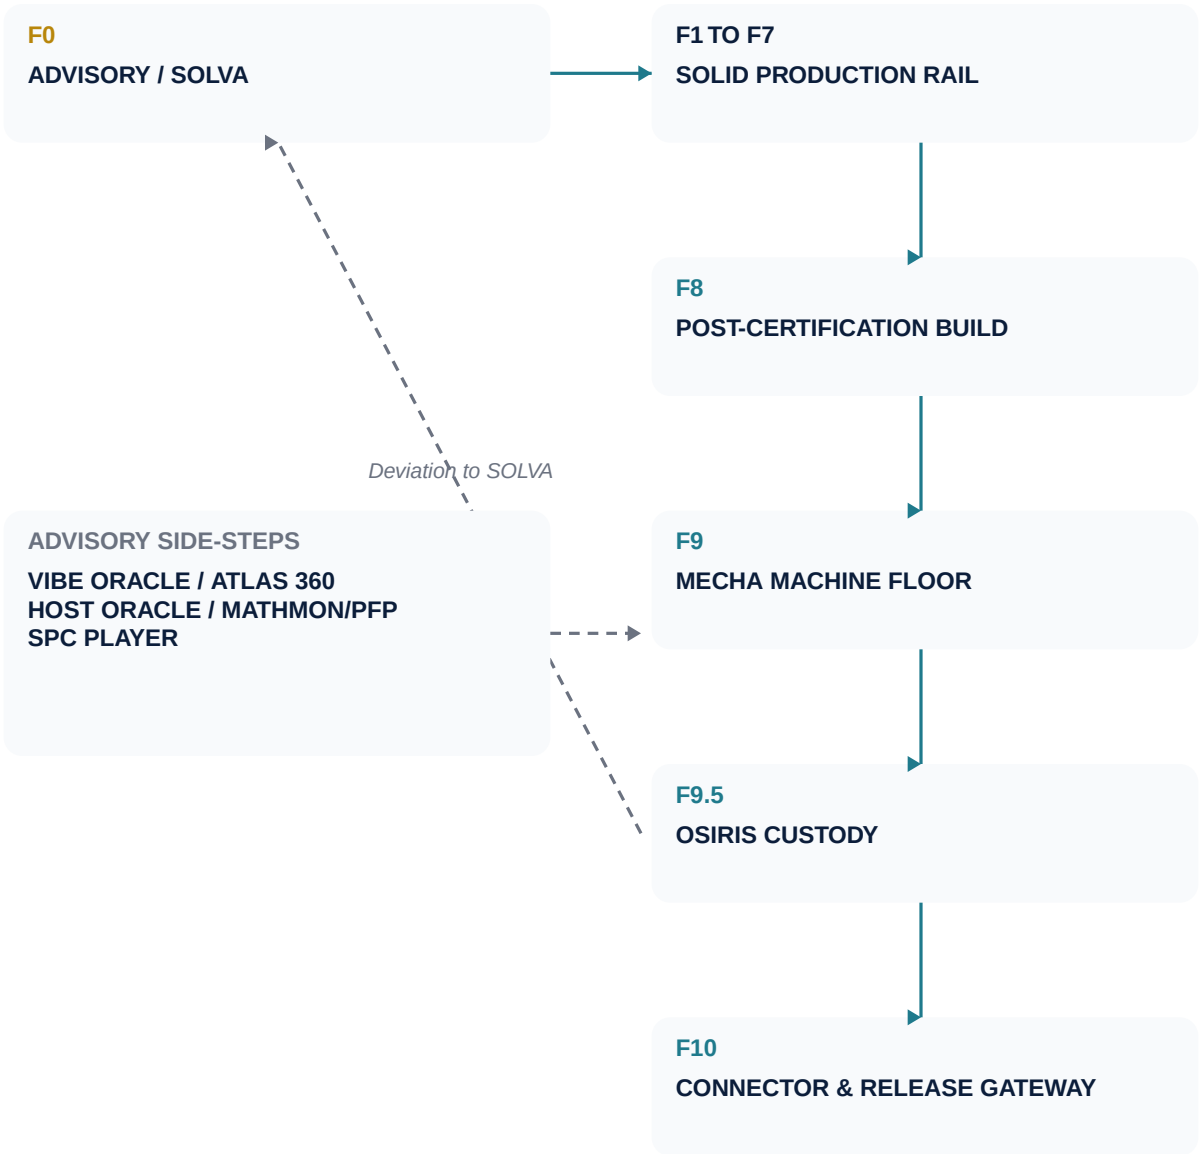

F10 RELEASE LANES

Lane	Destination	Evidence
Signed F9 release	Safe HTTPS adapter	Signed receipt; delivery only
Multi-artifact handoff	ZIP or user-authorized GitHub repository	Deterministic manifest and push result
Native provider deployment	AWS, Azure, OpenAI Agents, Gemini Agents	ACK plus separate execution state

The F1-F7 Production Rail

F0 is adjacent to the rail: it can originate work and receive deviations, but it is not part of the numbered production sequence.

F0 ADVISORY / SOLVA

Purpose: Upstream business intelligence and the return point for OSIRIS deviations.
Input: Raw ideas, market thesis, or returning OSIRIS deviations.
Process: SOCRATES discovery opens the engagement; a 9-SPC ensemble authors reports with a SOLVA bear case.
Output: Advisory report, financial ranges, and viability thesis.
Gate / policy: Non-suppressible Honesty Gate.
Next handoff: F1 for execution or F0 Retainer for monitoring.

F1 JCSE DIAGNOSIS / PROMPT DIAGNOSTIC

Purpose: Diagnose raw ideas against the 7-pillar JCSE rubric.
Input: Raw intent or prompt.
Process: Scores SYSTEM, ROLE, INSTRUCTION, EXAMPLE, CONSTRAINT, FORMAT, and DATA.
Output: Diagnosed baseline with explicit tightening recommendations.
Gate / policy: Fatal ambiguities are identified before engineering begins.
Next handoff: F2 Atomic Prompt.

The F1-F7 Production Rail

F2 ATOMIC PROMPT

Purpose: Create an executable Atomic Prompt.

Input: Diagnosed intent from F1.

Process: Rewrites the intent into one bounded instruction with explicit role, intent, and constraints.

Output: Atomic Prompt.

Gate / policy: Must remain a singular, bounded instruction.

Next handoff: F3 Micro Agent Creator.

F3 CELL MICRO AGENT / MOLECULAR AGENT CREATOR

Purpose: Build a CELL Micro Agent birth package.

Input: Atomic Prompt.

Process: Expands the instruction into persona, capabilities, guardrails, and context requirements.

Output: CELL Micro Agent Birth Package.

Gate / policy: Validates whether the scope remains a micro-agent or must escalate.

Next handoff: F4 Micro PDD.

The F1-F7 Production Rail

F4 MICRO PDD / MPDD

Purpose: Create compact audit and specification documentation.
Input: CELL Micro Agent Birth Package.
Process: Converts the birth package into a deploy-shaped Product Design Document.
Output: Micro PDD / MPDD.
Gate / policy: Architect-ready micro-specification verification.
Next handoff: F5 SPC.

F5 SPC

Purpose: Build a Super Prompt Card system contract.
Input: Micro PDD.
Process: Assembles the interactive specification with embedded ethical frameworks and compliance.
Output: Super Prompt Card (SPC).
Gate / policy: Practitioner tier required.
Next handoff: F6 ATLAS PDD.

The F1-F7 Production Rail

F6 ATLAS PDD

Purpose: Draft a comprehensive audit and implementation document.

Input: SPC.

Process: Drafts the 4-Part ATLAS PDD: Cheat Sheet, Executive Summary, Worksheet, and Implementation.

Output: ATLAS PDD.

Gate / policy: Ready for technical recommendation overlays.

Next handoff: F7 SPARTAN.

F7 SPARTAN

Purpose: Compress and certify the MVP PDD.

Input: ATLAS PDD.

Process: Runs a math-audited rubric pass and locks scope and risk.

Output: Certified MVP PDD, or PWDD for ingested sessions.

Gate / policy: JCSE ≥ 45 and MATHMON ≥ 70 ; public verification URL stamped.

Next handoff: F8 for build or F9 for the Machine Floor.

Post-Certification System

F8 CODE ORACLE / CODE DJ

Purpose: Generate an implementation and codebase/IDE handoff.

Input: SPARTAN-certified MVP PDD or PWDD.

Process: Scaffolds a complete codebase against the selected platform.

Output: CODEBASE_BUNDLE with up to 12 files and a manifest.

Gate / policy: Architect tier; uncertified input is refused.

Next handoff: F9 MECHA ULTRA SI.

F9 MECHA ULTRA SI MACHINE FLOOR

Purpose: Emit a bounded, versioned, signed Machine Artifact or refusal.

Input: Certified F7 MVP PDD plus approved F8 lineage.

Process: Executes the seven ordered MECHA phases to compile verified assets.

Output: Immutable signed Machine Artifact or cited refusal.

Gate / policy: Locked until F7 certification and F8 lineage are present.

Next handoff: F9.5 OSIRIS custody.

Post-Certification System

F9.5 OSIRIS

Purpose: Maintain custody and continuous monitoring.

Input: Signed F9 Machine Artifact.

Process: Envelops the artifact in custody and performs attestation checks; it does not build, mutate, repair, or certify.

Output: Active attestation state or deviation alert.

Gate / policy: Active attestation enables F10; deviations return through SOLVA.

Next handoff: F10 release, or F0 for deviations.

F10 CONNECTOR & RELEASE GATEWAY

Purpose: Authorize controlled release and handoff across external boundaries.

Input: OSIRIS-attested F9 artifact or owned multi-artifact package.

Process: Applies policy and integrity checks, then routes through the selected release lane.

Output: Receipt, deterministic ZIP/GitHub handoff, provider ACK, and observed execution state where available.

Gate / policy: Provider acceptance proves receipt only; execution is tracked separately as accepted, running, completed, or failed.

Next handoff: External environments, GitHub repositories, or provider deployment targets.

F10 Release & Handoff Lanes

1. Signed F9 Release

An immutable F9 artifact under active OSIRIS custody passes policy and integrity checks, then travels through a safe HTTPS adapter. The resulting signed receipt proves delivery, not execution.

2. Deterministic Multi-Artifact Handoff

Owned SPC, MA, MPDD, PDD, and CODE DJ artifacts are packaged into a deterministic manifest and bundle. Users can download the ZIP or push the bundle directly to a user-authorized GitHub repository. Repeated identical pushes are handled idempotently.

3. Native Provider Deployment

A user-owned provider authorization can dispatch a bundle to AWS, Azure, OpenAI Agents, or Gemini Agents. The gateway tracks delivery separately from provider execution. Where supported, execution progresses through ACCEPTED, RUNNING, COMPLETED, or FAILED. Export remains the fallback when deployment is unavailable or authorization is inactive.

RECEIPT SEMANTICS

- Delivery receipt: the destination accepted the payload.
- Provider ACK: the provider accepted the deployment request.
- RUNNING: the provider reports that execution has started.
- COMPLETED: the provider reports successful completion.
- FAILED: the provider reports terminal failure.

Advisory Side-Steps

F6-VDJ - VIBE ORACLE

Recommends the IDE, toolchain, and coding approach for an ATLAS PDD.

ATLAS 360 - PLAN / SCAN

Read-only, origin-aware planning and assurance views generated from the PDD.

F8-HDJ - HOST ORACLE

Ranks deployment hosts for a certified MVP PDD.

MATHMON / PFP

Profiles mathematical applicability and detects drift between PDD and codebase.

SPC PLAYER

Plan-first cockpit for capability briefs with explicit-consent HTTPS webhook delivery.