

THE ARK HARNESS — F10 CONNECTOR

ATLAS Omnibus PDD · v3.1 · Domain 36

SAVANT-Gated Colonization Automation · Staged Transmit · Consent-Gated Writes

JNGL-ARKH-F10CN-2026-005 · v3.1 · Supersedes v3.0 · Upgrades OMNIBUS ALPHA and F9 MACHINE FLOOR PDD v2.1

"Colonization automated is colonization faster. The whole design question is whether faster can ever mean skipped. In F10 it cannot: there is no path to a target that does not run through a SAVANT verdict."

v3.0 reconciles two parallel lineages into one. SAVANT ENVOY, the combination of SAVANT CONNECTOR and ENVOY, is the sole operator of D36, and running it is the only way to a certifiable colonization.

v3.1 adds a second translation path: when a target's only actuation surface is its own chat assistant, F10 composes a Curated Prompt Script instead of writing to an adapter, and a human runs it under their own login.

DOCUMENT CONTROL

Field	Value
Document	THE ARK HARNESS — F10 CONNECTOR · ATLAS Omnibus PDD v3.1
Reference	JNGL-ARKH-F10CN-2026-005 · v3.1

Field	Value
ID note	Supersedes -004 (v3.0), and through it -003, -002 and -001.
Supersedes	-003 (v2.0) and -002 (v1.1), and through them -001 (v1.0). Reconciliation in §1.2B
Upgrades	OMNIBUS ALPHA (34 domains) as extended by F9 MACHINE FLOOR PDD v2.1 (D35, IP-129–150, 24 invariants)
New domain	D36 – F10 CONNECTOR (SAVANT-Gated Colonization Automation)
New IPs	IP-188 – IP-192 (5; see the IP Allocation Ruling below – D36's block is no longer contiguous)
New invariants	#32 Curated Chat-Script Integrity · #33 Guided Execution Accountability (both new in v3.1; adopted unchanged by the F11 HOST CONNECTOR PDD)
Name	F10 CONNECTOR. "Universal Connector" is retained as an alias only; see §3.1 for the naming collisions it would create.
Verdict engine	SAVANT (D13, run by SPARTAN MVE). F10 reads its verdicts and cannot alter them.
Operating SPC	SAVANT ENVOY ULTRA SI v1.0.0 · SPC-SAVENV-F10-ULTRA-SI-001 · Camelot Seat #17 (proposed) · JCSE 41/50 Tier 0 · the merger of SAVANT CONNECTOR and ENVOY
Operator strands	CODE DJ 22% · ATHENA 22% · DEXTER 20% · FRACTAL 14% · SKRIBE 12% · SPHINX 10% (fenced)
Conductor	F10 Conductor – the deterministic runtime that enforces the operator's protocol. No LLM call. Not an SPC.

Field	Value
Reserved next	D38 / IP-198 onward (superseding the IP-188 pointer set by F11 PDD v1.3 — see the IP Allocation Ruling)
Date	September 2026 · PRE-BUILD
Certification	Self-assigned, Tier 0 — NOT HIVE-certified · not scored
GRO State	SAFE_LIFE
Honesty Gate	G3 enforced — see §1.8, §2.5, §3.13
Owner	Oluseye Shay Amusa / Koncentric Labs Inc.

IP Allocation Ruling (v3.1). F11 HOST CONNECTOR PDD v1.3 reserved D38 from IP-188 onward. This document and F11 PDD v1.4 (issued together) both need new IPs before D38 exists, so the reserved frontier is split between them rather than left idle: **F10 takes IP-188–192, F11 takes IP-193–197**, and D38 is deferred to **IP-198 onward**. No IP already issued to any domain is reassigned. The consequence is disclosed, not hidden: **D36 now spans IP-151–169 and IP-188–192, non-contiguously**, and D37 (per the companion amendment) spans IP-170–187 and IP-193–197. A future renumbering pass could tidy this; none is proposed here (OI-37).

PART 1 — CHEAT SHEET

All stakeholders

1.1 Atomic Solution Summary

F10 CONNECTOR takes an artifact that has passed F0 through F9.5 and connects it to an implementation platform through an **automated**

colonization process governed by the **SAVANT Protocol**. It senses the target, obtains a verdict from the SAVANT engine, names every gap, translates the artifact into the target's native form, stages it, verifies it, certifies it, promotes it, and registers the outcome.

It automates the steps around SAVANT. **It never replaces SAVANT, and it holds no verdict of its own.**

The floor has exactly one operator: SAVANT ENVOY ULTRA SI. It runs the nine phases, invokes the external gates, and produces either a staged, verified, certified and registered colonization, or a cited refusal. It owns no gate it runs and can override no verdict it receives.

1.2 SAVANT Is the Engine. F10 Is the Conductor.

Per the Colonization Manual, SAVANT is a seven-phase protocol (SV-01 SENSE through SV-07 TRANSMIT), run by SPARTAN MVE, that decides every colonization regardless of target. [ARK] F10 makes that protocol **non-bypassable** and puts machinery around it.

Role	Holder	Authority
Verdict on hosting fidelity (FIT / CLUSTER)	SAVANT engine (D13, SPARTAN MVE)	Sole
Certificate for the colonized deployment	UCG	Sole
Control-logic verdict for physical targets	MM Gate (D26) via F9	Sole
Consent to write to a target	The human creator	Sole
Accountability for the run: sequence and refusal	SAVANT ENVOY ULTRA SI (operator)	Procedural only
Enforcement: ledger, capability types, wiring	F10 Conductor (deterministic runtime)	Procedural only

F10 owns no verdict. This is the same separation that makes MECHA an operator and not a self-certifying authority (F9 PDD §3.5).

1.2A What v3.0 Changes

#	Change	v2.0 (SAVANT CONNECTOR)	v3.0
1	Operator	SAVANT CONNECTOR ULTRA SI, five strands	SAVANT ENVOY ULTRA SI , six strands: the merger of SAVANT CONNECTOR and ENVOY
2	Strands	CODE DJ, ATHENA, DEXTER, SPHINX, FRACTAL	Adds SKRIBE (documents a human can read). SPHINX kept under a hardened fence
3	Terminal states	Outcome names in the card only	Four, defined in §3.2A.5: PROMOTED , STAGED_NOT_PROMOTED , DRY_RUN_COMPLETE , REFUSED
4	Separation of duties	Not enforced at the UCG-COL request	C-F10-19. The request carries three distinct identities; the operator is never any of them. Fifth preflight check
5	Zero-LLM core	Stated (C-F10-03), not enforced	Enforced: a static check in F10-P23 that the core module tree contains zero LLM client imports
6	Strand adapters	Five	Six. F10-P29 adds the SKRIBE adapter

#	Change	v2.0 (SAVANT CONNECTOR)	v3.0
7	SPHINX ENGINE	Not addressed	Boundary row and OI-18: the marketplace's deployment tiers may be a path around Invariant #25
8	Open items	OI-16 to OI-18	OI-16 to OI-20 , one register (§1.2B)
9	Constraints	C-F10-01 to 18	C-F10-01 to 21 , mapped to the card's 23 (§3.13A)
10	Prompts	28	29

1.2B Reconciliation Ruling – Two Lineages, One Document

Two versions of this PDD were produced independently after v1.0. They agreed on the phases, the invariants (#25 to #27), the capability types, the refusal-first posture and Seat #17. They differed on the points below. Rulings are recorded here so nothing is inferred later.

Item	ENVOY lineage (PDD v1.1, -002)	SAVANT CONNECTOR lineage (PDD v2.0, -003)	v3.0 ruling
Operator	ENVOY ULTRA SI	SAVANT CONNECTOR ULTRA SI	SAVANT ENVOY ULTRA SI , the Owner's combination
Strands	ATHENA, CODE DJ, DEXTER,	CODE DJ, ATHENA, DEXTER,	Six: the union

Item	ENVOY lineage (PDD v1.1, -002)	SAVANT CONNECTOR lineage (PDD v2.0, -003)	v3.0 ruling
	FRACTAL, SKRIBE	SPHINX, FRACTAL	
SPHINX	Excluded (no commercial authority)	Strand, fenced	Strand, and ENVOY's principle becomes a Class A prohibition (C-F10-16). OI-20 records the fence as untested
IP range	IP-151 – IP-168	IP-151 – IP-169	IP-151 – IP-169. ENVOY's IP-168 content is carried in IP-168 (now including the static zero-LLM check)
Prompts	23	28	29. F10-P23 carries both the boundary and the static check
OI-09	Closed	Narrowed	Narrowed. Naming an operator does not close the gap; building and assessing it does
OI-16	Operator unassessed	Strand overlap with MECHA	Operator unassessed (ENVOY's)

Item	ENVOY lineage (PDD v1.1, -002)	SAVANT CONNECTOR lineage (PDD v2.0, -003)	v3.0 ruling
OI-17	Seat #17 unverified; overlap	SPHINX fence untested	Seat #17 unverified; DISC mismatch; overlap
OI-18	SPHINX ENGINE deployment overlap	No security-architecture strand	SPHINX ENGINE deployment overlap (ENVOY's)
OI-19, OI-20	—	—	New: OI-19 no security-architecture strand; OI-20 SPHINX strand fence untested
Production ID	-002	-003	-004 , superseding both

Files superseded by this document and by SAVANT ENVOY SPC

v1.0.0: F10_CONNECTOR_ATLAS_PDD_v1_1 and ENVOY_ULTRA_SI_SPC_v1_0 (the ENVOY lineage), and the SAVANT CONNECTOR SPC v1.0.1 and this PDD's v2.0 (the SAVANT CONNECTOR lineage).


1.3 Artifact Handling

Artifact	F10 handling
SPC (Ultra SI, SI, AI class)	Full SAVANT colonization. FIT → Sovereign Deployment Brief. CLUSTER → governed Agentica Cluster, built through CELL SI.

Artifact	F10 handling
Molecular Agent (software)	SAVANT colonization at MA scale. The Second Contact platform strategies apply (for example n8n as a <i>target</i> , with Class I Trigger MAs).
PDD / Micro PDD	Not colonized as a genome. Converted to a codebase for the target environment through CODE DJ's PCE pipeline, after SAVANT has sensed the environment.
Machine Artifact (F9 output)	Never colonized directly by F10. Physical targets are routed to F9 (§3.8).
Any artifact without a UCG certificate	Refused at intake (Invariant #22).

Independent of artifact class: any target, once classified, may turn out to have no API, CLI or infrastructure-as-code path at all — only its own chat assistant. That is a property of the *target*, not the artifact, and is handled by §3.5A regardless of whether the artifact above it is an SPC, an MA or a PCE codebase.

1.4 The Nine-Phase Run

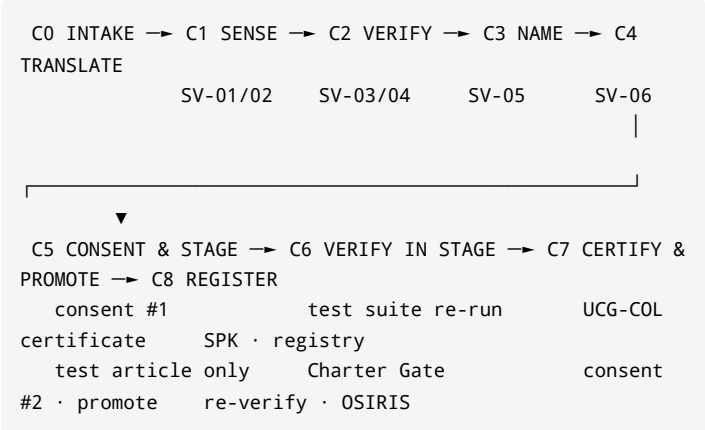

SV-07 spans
C5 to C8


Phase	SAVANT phase	What runs
C0 INTAKE	—	Eligibility: UCG certificate present; artifact class; physical-target routing
C1 SENSE	SV-01 SENSE, SV-02 AUDIT	Target constraints captured with provenance; autonomous execution paths included
C2 VERIFY	SV-03 VERIFY, SV-04 ADJUDICATE	SAVANT engine scores the seven classes and issues FIT or CLUSTER
C3 NAME	SV-05 NAME	Constraint Fingerprint; nothing silently omitted
C4 TRANSLATE	SV-06 TRANSLATE	Host-native plan, dry-run only. Chat-only target: a Curated Prompt Script (§3.5A) instead
C5 CONSENT & STAGE	SV-07 (wiring)	Consent #1; write to a staging test article . Chat-only target: the human runs the script themselves — GUIDED execution, no Vault credential (§3.5A.4)
C6 VERIFY IN STAGE	SV-07 (verification)	Original test suite re-run against the staged deployment; Colonization Charter Gate. Chat-only target: the human's checkpoint reports, graded HUMAN_SUPPLIED , plus a generic endpoint probe where an endpoint now exists

Phase	SAVANT phase	What runs
C7 CERTIFY & PROMOTE	SV-07 (wiring)	UCG-COL certificate; consent #2; promote
C8 REGISTER	SV-07 (registration)	SPK, registry write-back, re-verification schedule, OSIRIS telemetry

Decomposition disclosed. The Manual describes SV-07 as one phase. F10 splits its actuation across C5 to C8 so that nothing is certified before it exists, and nothing reaches production before it is certified. SAVANT still owns the topology, the report content and the SPK schema. F10 only actuates the wiring, through connector adapters, under Invariant #26.

1.5 The Design Decision That Matters

Capability types make the invariants structural. A write to a target is impossible to express in code without holding a value that only the previous stage can construct:

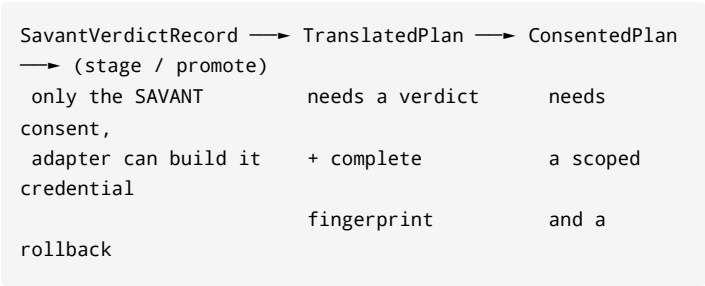

This is the "unreachable, not guarded" standard from the MECHA lineage applied to colonization.

The UCG-COL request additionally requires a CompleteRun value that only the ledger can construct (§3.2A, Invariant #27).

1.6 Eight Runtime Components

Component	Responsibility	Deterministic?
Phase Sequencer	Drives C0–C8, refuses to advance on an unmet precondition	Yes
Run Ledger	Append-only record of every phase, verdict, consent and refusal; issues <code>f10_run_id</code>	Yes
SAVANT Engine Adapter	Read-only transport to the SAVANT engine; no verdict-mutation method	Yes
Connector Adapters (×N)	SENSE, TRANSLATE and TRANSMIT capabilities per target; default <code>STUB_REFUSE</code>	Transport deterministic; inference inside
Chat Script Composer	Classifies a target's actuation surface; when <code>CHAT_ONLY</code> , composes a Curated Prompt Script from sensed chat-capability facts and the Constraint Fingerprint; validates every prompt against Invariant #32	Composition inference-assisted; validation deterministic
Strand Adapters (×6)	Wrap the operator's six strands (CODE DJ, ATHENA, DEXTER, FRACTAL, SKRIBE, SPHINX). Schema-validate every return before it enters the core. No ledger handle, no mode setter, no Vault handle, no capability-type constructor.	Inference inside, validated at the boundary
Credential Vault &	Holds credentials; issues least-privilege, short-lived scoped	Yes

Component	Responsibility	Deterministic?
Scope Broker	handles	
Refusal Emitter	Serialises the cited refusal; rejects an uncited one at schema level	Yes

1.7 Build Waves

Wave	Name	Prompts	Produces
W1	Foundation	F10-P01 – P04, P23, P28	Domain registration, ledger, constraint-class namespace, SAVANT adapter, strand adapter boundary with the static zero-LLM check, run completeness attestation
W2	Eligibility, registry & strands	F10-P05 – P08, P24 – P27, P29	Intake gate, connector interface and registry, physical routing guard, the six strand adapters
W3	SAVANT phases	F10-P09 – P11, P30	SENSE/AUDIT automation, verdict binding, fingerprint gate, actuation classification
W4	Translate & consent	F10-P12 – P14, P31, P32	Translation, vault and scope broker, consent gate, Curated Prompt Script composer, prompt safety validator
W5	Stage & verify	F10-P15 – P17, P33, P34	Staged transmit, in-stage verification, Charter Gate, GUIDED execution and transcript evidence, generic endpoint probe

Wave	Name	Prompts	Produces
W6	Certify, promote, register	F10-P18 – P21	UCG-COL and promotion, SPK, re-verification, facilitator policy
W7	Self-test	F10-P22	Negative tests for every invariant

1.8 What This Document Does Not Claim

- F10 is **PRE-BUILD**. No connector, conductor, or adapter exists. Nothing has touched any real platform.
- **No SAVANT engine is wired**. F10 can be built and will refuse at C1 until one is. See §1.9.
- **The colonized-deployment certificate class does not exist**. UCG-COL has no threshold, so **promotion is unreachable** until one is set (OI-10).
- **The operator is specified and unbuilt**. SAVANT ENVOY is PRE-BUILD, self-scored at JCSE 41/50 (Tier 0, below the 45 floor), and has never run. No live connector has been assessed (OI-09, narrowed).
- **Curated prompt wording is synthesized, not retrieved**. The *facts* a prompt relies on (what the target's chat assistant is documented to accept) must be sensed or supplied with provenance. The *phrasing* of the prompt itself is composed for the run and is [SYNTH], not [ARK], even when every fact behind it is sourced. Whether that line is drawn correctly is unadjudicated (OI-40).
- **No scanner is wired for chat-transcript intake** (OI-38), and **a pasted chat transcript cannot be authenticated** (OI-39): F10 cannot currently tell a genuine reply from a fabricated one.
- Two documents give **different meanings to CC-01 to CC-07**. This document namespaces them but does not reconcile them (OI-11).
- **n8n and any other facilitator are unassessed** and ineligible by default (§3.6).

- Inherited from F9: **OI-01 and OI-02** are unresolved and bind any physical-target route.

1.9 The Stub-Refuse Consequence

The gate-adapter pattern from MECHA applies. A SAVANT adapter with no engine behind it returns `REFUSED`; a connector adapter with nothing wired returns `REFUSED`. **A fully built F10 with nothing wired refuses every run at C1.** That is the intended state of an automation layer whose engine and connectors are unfinished.

PART 2 — EXECUTIVE SUMMARY

Leadership

2.1 Business Context

A creator finishes F0 through F9.5 holding a certified artifact. Getting it onto a real platform is still manual, platform by platform, and the Colonization Manual is explicit that the manual work is where cards get diminished. F10 exists to let the creator connect once and customize per platform without giving up the discipline.

Automation carries a specific risk. Every failure mode in the Manual's anti-pattern chapter is a *skipped or rushed SAVANT phase*. An automation layer can commit every one of them at machine speed.

2.2 How F10 Answers the Manual's Six Anti-Patterns

Anti-pattern [ARK]	Phase that should catch it	F10 mechanism
The Silent Wrapper — ships without sensing the target	SV-01 SENSE	C1 cannot be skipped: <code>TranslatedPlan</code> requires a <code>SavantVerdictRecord</code> bound to the run's own SENSE record
The Optimistic Average — averages the seven classes instead of applying the CC-01 override	SV-04 ADJUDICATE	F10 does not compute Fidelity. The SAVANT engine does, and F10 has no method to alter or re-derive it
The Undocumented Gap — a cluster case ships as single-node FIT	SV-05 NAME	The fingerprint gate: a degraded or blocked capability with no named entry blocks translation. <code>CLUSTER</code> cannot be promoted to <code>FIT</code>
The Reflex-Free Robot — physical target with reasoning-tier GRO only	Ch. 13 combined gate at TRANSLATE	The Physical Routing Guard refuses any embedded or physical target without an F9 run
The Autonomous Blind Spot — governed when watched, ungoverned when acting alone	SV-02 AUDIT	The SENSE record must include the host's autonomous and scheduled execution paths; a record without them is incomplete
The Frozen Certification — never re-verified	SV-07 TRANSMIT	No SPK is issued without a re-verification schedule; the

Anti-pattern [ARK]	Phase that should catch it	F10 mechanism
after the host changes		scheduler owns the recurrence

2.3 Requirements Summary

#	Requirement	Priority	IP	Status
R-F10-01	Intake refuses any artifact without a UCG certificate record	MUST	IP-151	PRE-BUILD
R-F10-02	Connector Adapter interface (SENSE / TRANSLATE / TRANSMIT), STUB_REFUSE default, onboarding checks, registry	MUST	IP-152	PRE-BUILD
R-F10-03	SAVANT Engine Adapter: read-only verdicts, no mutation method, STUB_REFUSE default	MUST	IP-153	PRE-BUILD
R-F10-04	SENSE/AUDIT automation with provenance, freshness, and autonomous-path coverage	MUST	IP-154	PRE-BUILD
R-F10-05	Verdict binding to artifact hash and SENSE record; CLUSTER never promoted; fingerprint completeness	MUST	IP-155	PRE-BUILD
R-F10-06	TRANSLATE: Sovereign Deployment Brief, Agentic	MUST	IP-156	PRE-BUILD

#	Requirement	Priority	IP	Status
	Cluster manifest, PCE route; genome immutability			
R-F10-07	Credential vault and least-privilege scope broker	MUST	IP-157	PRE-BUILD
R-F10-08	Consent gate; dry-run default; two separate consents (stage, promote)	MUST	IP-158	PRE-BUILD
R-F10-09	Staged transmit into a test article, with rollback	MUST	IP-159	PRE-BUILD
R-F10-10	In-stage verification: original test suite re-run against the staged deployment	MUST	IP-160	PRE-BUILD
R-F10-11	Colonization Charter Gate (nine points, marked machine / human / hybrid)	MUST	IP-161	PRE-BUILD
R-F10-12	UCG-COL certification of the colonized deployment, then promotion	MUST	IP-162	PRE-BUILD
R-F10-13	SPK issuance and registry write-back to the parent card	MUST	IP-163	PRE-BUILD
R-F10-14	Re-verification scheduler and OSIRIS telemetry registration	MUST	IP-164	PRE-BUILD
R-F10-15	Physical Routing Guard: embedded and physical targets require an F9 run	MUST	IP-165	PRE-BUILD

#	Requirement	Priority	IP	Status
R-F10-16	Facilitator policy: default ineligible, no standing credentials, never in the verdict path	SHOULD	IP-166	PRE-BUILD
R-F10-17	Run Ledger and Cited Refusal contract	MUST	IP-167	PRE-BUILD
R-F10-18	Strand Adapter Boundary: schema-validated returns; no ledger, mode, Vault or capability-type access; static zero-LLM check on the core; SPHINX confined to registry record	MUST	IP-168	PRE-BUILD
R-F10-19	Run Completeness Attestation: a CompleteRun that only the ledger can construct; UCG-COL preflight rejects a request without it	MUST	IP-169	PRE-BUILD
R-F10-20	Separation of duties at the UCG-COL request: three distinct identities, and the operator is never any of them	MUST	IP-169	PRE-BUILD

2.4 Non-Functional Requirements

Property	Target	Rationale
Determinism	Identical inputs and identical adapter outputs give an identical run record	A colonization that cannot be reproduced cannot be audited

Property	Target	Rationale
Auditability	Every transition, consent and refusal appended; no update, delete or compaction	The ledger is the evidence behind the SPK
Freshness	A SENSE record older than the TTL forces re-sense before translate, stage or promote. TTL: [TO BE SET]	Host platforms change without notice
Reversibility	Every write action declares a rollback or is flagged irreversible and needs an extra consent line	A failed colonization must not leave residue
Least privilege	Scopes minimal per action; wildcard scopes rejected	Inherited from the ecosystem's publishing safety stack
Latency and availability	Not design constraints	Correctness dominates; a refused run is an acceptable outcome

2.5 SOLVA GAUNTLET Verdict

CONDITIONALLY VIABLE — published as issued.

Grounds:

1. **The operator is specified but unbuilt and unvalidated** (OI-09, narrowed). SAVANT ENVOY is PRE-BUILD, self-scored at 41/50 and Tier 0, and has never run, and it is unassessed (OI-16). A floor cannot be more validated than its operator.
2. **The colonized-deployment certificate class is undefined** (OI-10). Invariant #22 forbids deploying an artifact without a certificate

record, so promotion is blocked until a class and threshold exist.

3. **The SAVANT engine's implementation depth is unverified** (OI-12).
The register lists D13 as live. Whether it exposes a machine-readable interface that F10 can call is not established.
4. **Constraint-class IDs collide across documents** (OI-11). Automated verdict handling with ambiguous IDs is a defect waiting to happen.
5. **Facilitators are unassessed** (OI-13), and n8n's licence position is unresolved.
6. **Boundaries with D31 and D33 are proposed, not adjudicated** (OI-14).
7. **No connector has been built or tested against a real platform.**
Platform facts drift; nothing here is validated.
8. **Software-target code has no coding-standard profile** (OI-15). F9's Code Assurance Gate covers the machine floor, not F10's PCE output.
9. **Curated prompt scripts are unvalidated end to end.** No script has been composed against a live chat assistant, no human has run one, and the safety validator (Invariant #32) has never been exercised against an adversarial target reply (OI-39).
10. **D36's IP block is now non-contiguous** with F37's, a registry fragmentation disclosed and not repaired (OI-37).
11. **Seat and overlap** (OI-17). Seat #17 is unverified and sits on the wrong side of the Camelot inventory's own DISC grouping. Four of six strands are shared with MECHA, so the two operators can share blind spots.
12. **SPHINX** (OI-18, OI-20). The SPHINX ENGINE's deployment tiers may be a path around Invariant #25, and the merged operator includes a SPHINX strand under a fence that no built system has proved.
13. **No security-architecture strand** (OI-19). Credential handling rests on the Vault and human review. No certified security card was located.

Resolved in v3.0: two conflicting operator lineages, one of which closed OI-09 by naming an operator. There is now one operator, OI-09 is

narrowed rather than closed, and the ID and open-item numbering collisions are ruled in §1.2B. Carried from v2.0: the unowned run, and the dependency defect in which a physical target could be sensed before it was refused.

What would move this to VIABLE: the operator (SAVANT ENVOY) built and independently assessed; UCG-COL defined through a SOLVA GAUNTLET pass; one SAVANT adapter wired to a live engine; one Tier-1 connector taken through SENSE and a refused-at-the-right-phase run on a real target; a SPARTAN ruling on the constraint-class namespace; a written facilitator licence position.

2.6 What This Section Does Not Claim

No revenue, market size or ROI is asserted. EVE ULTRA SI's modelling role is not invoked because there is no validated deployment to model.

PART 3 – PLATFORM SPECIFICS

Architects

3.1 Boundary Rulings (Proposed)

These are proposed and not yet adjudicated by SPARTAN. OI-14 carries the gap.

Neighbour	Boundary
D13 SAVANT Portability	D13 owns every verdict. F10 automates the surrounding steps and reads verdicts read-only.
D31 Gemini Colonization Layer	D31 is a platform-specific application of the SAVANT Colonization Protocol (Gemini, Agent2Agent). F10's Google adapter is D31's work, reused and not duplicated.

Neighbour	Boundary
D33 OSIRIS Meta-Orchestration	D33 orchestrates the <i>build</i> (F1 to F8) and deploys harness outputs through <code>osiris deploy</code> . F10 colonizes <i>finished, certified</i> artifacts onto external platforms. F10 never issues <code>osiris deploy</code> and holds no orchestration authority.
D32 F9.5 Observability	D32 takes custody of monitoring. F10 registers each promoted deployment's telemetry contract with it.
D35 F9 Machine Floor	Physical targets belong to F9. F10 refuses them and never colonizes a Machine Artifact directly.
MECHA ULTRA SI (D35 operator)	A separate operator on a separate floor. SAVANT ENVOY consumes an <code>F9Attestation</code> and never invokes MECHA to build. Four of six strands are shared (OI-17).
The name "SAVANT ENVOY"	Names the operator card , not the SAVANT engine. F10 CONNECTOR names the domain, as MECHA operates the F9 Machine Floor. Any document using the card's name must state that it holds no verdict.
SPHINX ENGINE	The SAVANT Protocol Whitepaper describes SPHINX ENGINE as a marketplace with tiered deployment to AI platforms (its v1.0 tier table lists "deployment to 3 AI platforms" in the Professional Tier). F10 is the governed colonization path. Whether that deployment must route through F10, or is a separate path that bypasses SAVANT, is unadjudicated (OI-18) . Until ruled, F10 does not treat a SPHINX ENGINE deployment as a certified colonization. The SPHINX <i>strand</i> inside the operator has no deployment authority (C-F10-16).

Neighbour	Boundary
CODE DJ (PCE)	PDD and Micro PDD conversion is CODE DJ's. F10 routes to it and does not reimplement it.
REVERB connector registry, SKRIBE Universal Packaging, BRIJ Universal Commerce Bridge	Different products and different purposes. REVERB's creative connectors are suggestion-only; F10 connectors execute. F10 does not reuse that registry. These collisions are why the name is F10 CONNECTOR and not "Universal Connector".

3.2 SAVANT as the Engine – Binding

- **SAVANT owns:** SV-03 scoring, the Fidelity computation, the FIT/CLUSTER verdict, the Constraint Fingerprint content, the topology, the report content, and the SPK schema. [ARK]
- **F10 owns:** phase sequencing, freshness, gating, consent, credentials, actuation, the ledger.
- **The Binary Rule is inherited.** There is no "partial fit". A hard fail on a safety or ethics class is an automatic CLUSTER, and CC-01 caps the composite regardless of the other six. F10 has no code path that computes, averages or adjusts a score. [ARK]
- **The operator is not the engine.** SAVANT ENVOY is a separate card from SPARTAN MVE. No strand scores, averages, adjusts or derives a verdict (C-F10-01).
- **Verdict binding.** A `SavantVerdictRecord` carries `binding = hash(artifact_hash, sense_record_hash, f10_run_id)`. A verdict from another run, artifact or SENSE snapshot cannot be replayed.
- **The Colonization Charter.** The Manual's nine-point checklist is F10's acceptance gate (§3.9), not a guideline.

3.2A The Operator Model – SAVANT ENVOY

Card and conductor. SAVANT ENVOY ULTRA SI (SPC-SAVENV-F10-ULTRA-SI-001 , JNGL-SPC-SAVENV-2026-001) is the operator. It specifies the protocol, the strands, the constraint set and the refusal behaviour. The **F10 Conductor** is the deterministic runtime that enforces it: sequencing, ledger, capability types and wiring. Inference lives only inside strand adapters. **The card specifies; the conductor enforces.** This is the same relationship as the MECHA SPC to the MECHA build blueprint.

3.2A.1 What the Operator Owns and Does Not Own

The operator owns	The operator does not own
Sequence: which phase runs when	Any SAVANT verdict (SPARTAN MVE)
Refusal: when to halt and why	Certification of the deployment (UCG-COL)
The run-state record and f10_run_id	Consent (the human creator)
Target-class declaration and the routing decision	Credentials (the Vault)
Consent orchestration: presenting and recording	Consent itself (the human's)
Coordination of sensing, translation, challenge and SPK assembly	Cluster construction (CELL SI)
	Custody and monitoring (OSIRIS, D32)
	The F9Attestation (MECHA and F9)

The operator owns	The operator does not own
	Charter attestations for points 4, 5, 6 and 9 (named humans)

This separation is the point. An operator that could override its own gates would be a self-certifying authority, which the platform's separation-of-duties requirement forbids. The operator's authority is procedural, not adjudicative.

3.2A.2 The Nine Phases Mapped to Strands and IPs

Phase	Strands	Invoked externally	IPs
C0 INTAKE	ATHENA, CODE DJ	—	IP-151, IP-165
C1 SENSE & AUDIT	ATHENA, CODE DJ, DEXTER (HOLMES)	Connector adapter	IP-152, IP-154, IP-168
C2 VERIFY	—	SAVANT engine	IP-153, IP-155
C3 NAME	DEXTER (SOCRATES)	—	IP-155
C4 TRANSLATE	CODE DJ, FRACTAL, SKRIBE	CELL SI (for CLUSTER)	IP-156
C5 CONSENT & STAGE	DEXTER (write-plan review), SKRIBE (consent display)	Consent Gate, Vault, connector adapter	IP-157, IP-158, IP-159
C6 VERIFY IN STAGE	DEXTER (ARES)	Charter Gate and human attestors	IP-160, IP-161

Phase	Strands	Invoked externally	IPs
C7 CERTIFY & PROMOTE	—	UCG-COL, Consent Gate	IP-162, IP-169
C8 REGISTER	SPHINX (structure, record), SKRIBE (summary)	OSIRIS (D32)	IP-163, IP-164
All phases	The operator	Ledger, refusal emitter	IP-167, IP-168, IP-169
Any Tier 2 (facilitator-backed) adapter	—	Facilitator policy	IP-166

3.2A.3 The Six Strands

Strand	Weight	Role in F10
CODE DJ	22%	Platform allocation and Host DJ target selection; host-native plan; PCE conversion for PDD and Micro PDD
ATHENA MUSE	22%	SENSE and AUDIT evidence: provenance and retrieval time on every constraint, autonomous-path coverage, target terms. Unsourced constraints are dropped, never marked provisional
DEXTER ULTRA SI	20%	HOLMES anomaly sweep; SOCRATES challenge of the fingerprint; ARES review of the write plan and adversarial re-run of the original test suite
FRACTAL ULTRA SI	14%	Topology for a CLUSTER verdict. Returns nothing for a FIT and cannot alter a verdict

Strand	Weight	Role in F10
SKRIBE ULTRA SI	12%	The Sovereign Deployment Brief, the SAVANT Report summary, the consent display and the SPK summary. Documents only, never a mode (C-F10-21)
SPHINX ULTRA SI	10%	SPK structure and the registry record. No marketplace, commercial, listing or publishing authority (C-F10-16)

Deliberately not strands: SPARTAN MVE (it runs SAVANT, and fusing it would let the operator score its own colonizations), SOLVA (adjudication), UCG-COL, CELL SI, OSIRIS, MECHA, and the SPHINX ENGINE (the marketplace, distinct from the strand). "DevOps Expert SPC" and "Security Expert SPC" appear only as placeholder seats in OSIRIS's specification, and no certified card was located for either (OI-19).

The strand mix is the card's proposal. The Owner asked for the combination of the two parents. Weights record run effort, not certified quality, and changing them is a version change to the card and to this table.

Overlap with MECHA (OI-17). CODE DJ, ATHENA, DEXTER and FRACTAL also sit inside MECHA. CODE DJ's own synthesis contains DEXTER, FRACTAL, ARES, SOCRATES and HOLMES, so the overlap runs deeper than the table shows. SKRIBE's own GRO default is LIFE and is not inherited. Disclosed, not netted.

SPHINX under a hardened fence. ENVOY excluded SPHINX; SAVANT CONNECTOR included it. The merger keeps it, and turns ENVOY's reason for excluding it into a prohibition, so the exclusion survives as a rule rather than an absence (OI-20).

3.2A.4 Refusal as Default Output

The operator's designed behaviour is to refuse. Promotion is the exception it must be argued into by evidence it cannot itself supply.

Every refusal cites a constraint or invariant by identifier, and an uncited refusal cannot be serialised (IP-167).

3.2A.5 The Four Terminal States

State	Meaning
PROMOTED	Certified (UCG-COL), consented, live, SPK registered
STAGED_NOT_PROMOTED	Staged and verified in a test article; promotion refused or blocked. Today's ceiling while UCG-COL is undefined
DRY_RUN_COMPLETE	Ended at C4: dry-run default, or an agent-gateway target
REFUSED	Cited. No retry. A new attempt is a new f10_run_id

PROMOTED requires a non-null UCG-COL certificate reference, SPK id and re-verification date.

3.2B Strand Adapters and the Validation Boundary

```
type StrandId = "CODE_DJ" | "ATHENA" | "DEXTER" |
"FRACTAL" | "SKRIBE" | "SPHINX";

interface StrandAdapter<Req, Ret> {
  readonly strand: StrandId;
  invoke(req: Req, runId: string):
  Promise<StrandResult<Ret>>;
  // No ledger handle. No GRO-mode setter. No Vault
  handle. By construction.
}
type StrandResult<T> =
  | { status: "RETURN"; value: T }           // schema-
```

```

validated by the core before use
  | { status: "REFUSED"; reason: string };

// SPHINX is fenced: structure and the registry record
only.
// No listing, no publishing, no marketplace-facing call
of any kind.
interface SphinxAdapter {
  packageSpk(input: SpkInput, runId: string):
  Promise<StrandResult<SpkDraft>>;
  registerSpk(sp: SpkDraft, runId: string):
  Promise<StrandResult<RegistryReceipt>>;
  // No certify(). No score(). No adjudicate().
}

```

Rule	Enforcement
Every strand return is schema-validated before it enters the core	A schema-invalid return puts the run in CONTAINMENT with no retry
Enum returns admit no third value	For example, a DEXTER case result is <code>PASS</code> or <code>FAIL</code> and nothing else
A strand never sets GRO mode and never writes the ledger	Only the core does either
No strand receives credential material	The strand interface has no Vault handle. Strands see only opaque scoped handles
ATHENA drops unsourced constraints inside the adapter	Nothing is returned as provisional
DEXTER returns per-case results, never	The verdict belongs to the SAVANT engine

Rule	Enforcement
an aggregate score	
FRACTAL returns a topology only for a <code>CLUSTER</code> verdict	It has no method that changes a verdict
SKRIBE returns documents only and never a mode	Its own GRO default (LIFE) is not inherited (C-F10-21)
A strand never constructs a capability type	<code>SavantVerdictRecord</code> , <code>TranslatedPlan</code> and <code>ConsentedPlan</code> are constructible only by the SAVANT adapter, the fingerprint gate and the consent gate
The core contains no LLM client import	A static check in CI (F10-P23) fails the build otherwise (C-F10-03)
SPHINX writes the SPK structure and the parent card's record only	No listing, publishing or marketplace-facing write exists on the interface (C-F10-16)

3.2C GRO Mode Machine

Mode	When	Behaviour
SAFE_LIFE	Default, every run	Every gate enforced. Refusal preferred to assumption
HUMAN_IN_LOOP	A consent is needed; Charter points 4, 5, 6 or 9 need attestation; an action is irreversible; the	The run halts for a human and cannot proceed on inference

Mode	When	Behaviour
	target's terms are ambiguous	
CONTAINMENT	A staged verification fails; a binding hash mismatches; a strand return fails its schema; an adapter errors	The stage rolls back. No auto-retry. The failure is permanent in the ledger
KILLZONE	An attempt to bypass Invariant #25, #26 or #27, replay a verdict, present <code>CLUSTER</code> as <code>FIT</code> , request a credential outside scope, or reuse a consent	The run terminates, the attempt is logged to OSIRIS, and the stage and artifact are frozen
LIFE	—	No code path exists on any write path

No transition returns to `SAFE_LIFE` within a run. An escalation is terminal for that `f10_run_id`.

3.3 The Run and Its Preconditions

Phase	Precondition to enter	On failure
C0 INTAKE	Artifact hash; UCG certificate record; artifact class $\in$ handled classes; target class declared	Refuse, Invariant #22
C1 SENSE	C0 passed; physical target class $\rightarrow$ F9 attestation present; connector adapter <code>LIVE</code> and onboarded	Refuse, Invariant #25 / C-F10-05

Phase	Precondition to enter	On failure
C2 VERIFY	SenseRecord complete: provenance, retrieval time, autonomous paths included	Refuse, C-F10-07
C3 NAME	SavantVerdictRecord bound to this run	Refuse, Invariant #25
C4 TRANSLATE	Fingerprint complete; genome hash recorded; SENSE within TTL	Refuse, C-F10-06 / C-F10-04
C5 CONSENT & STAGE	TranslatedPlan ; consent #1 naming exact content and target account; scoped credential; rollback declared	Refuse, Invariant #26
C6 VERIFY IN STAGE	Staged test article exists; original test suite runnable (SAV-CC-05)	Rollback and refuse
C7 CERTIFY & PROMOTE	In-stage results within tolerance; Charter Gate PASS ; CompleteRun attestation; three distinct author, scorer and adjudicator identities; UCG-COL certificate issued; consent #2	Refuse, Invariant #22 / #26 / #27; C-F10-19
C8 REGISTER	Promotion confirmed; GRO Colonization Record present; re-verification schedule set	SPK not issued, C-F10-13

Ordering check against the F9 lesson. F9 v2.0 scheduled certification before the thing being certified existed. F10 was checked for the same defect. Certification (C7) follows deployment into a test article (C5) and its verification (C6). The evidence exists before anything is scored.

3.4 Constraint-Class Namespace Ruling (Proposed)

Finding. Two documents assign different meanings to CC-01 to CC-07.

[ARK]

ID	Colonization Manual, Appendix A (SAVANT VERIFY)	Second Contact Part 2 (MA platform map)
CC-01	Governance Hosting	Context Ceiling
CC-02	Instruction Fidelity	No System Prompt Access
CC-03	Tool-Call Interception	Tool-Call Sandboxing
CC-04	Context Window / Memory Class	Persona Override Policy
CC-05	Test-Suite Reproducibility	Token Billing Sensitivity
CC-06	(not retrieved here)	Stateless Inference
CC-07	(not retrieved here)	Open LLM Base Model

Ruling. F10 qualifies every reference: SAV-CC-nn for the Manual's VERIFY classes and 2C-CC-nn for Second Contact's. A bare CC-nn is a validation failure in any F10 record. SAVANT's SV-03 uses the SAV-CC set. **This does not reconcile the two.** Whether one supersedes the other is a SPARTAN and ATLAS ruling (OI-11).

3.5 Connector Adapters and the Registry

```

type Capability = "SENSE" | "TRANSLATE" | "TRANSMIT";
type AdapterMode = "STUB_REFUSE" | "LIVE";

interface ConnectorAdapter {
  readonly target: string;           // e.g.
  "claude-mcp"
  readonly tier: 1 | 2;               // 2 =
  facilitator-backed
  readonly mode: AdapterMode;        // STUB_REFUSE
  unless explicitly wired
  readonly capabilities: readonly Capability[];
  sense(req: SenseRequest, runId: string):
  Promise<SenseResult>;
  translate(plan: TranslationRequest, runId: string):
  Promise<TranslateResult>;
  transmit(plan: ConsentedPlan, runId: string):
  Promise<TransmitResult>;
  // transmit() accepts ONLY a ConsentedPlan. No other
  overload exists.
  // No verdict, score or fingerprint setter exists on
  this interface.
}

```

Onboarding checks. A connector joins the registry only if it passes all five. Failing any one blocks addition regardless of demand. The ecosystem's REVERB registry (CONN-005) uses a four-check onboarding pattern adapted from the ARK Harness Living PDD's C3S; those four checks were not retrievable for this document, so **F10 defines its own five and does not claim equivalence.** [ARK]

#	Check	Requirement
1	Provenance	Adapter source, version and maintainer recorded
2	Capability declaration	Declares which of SENSE, TRANSLATE and TRANSMIT it implements. A TRANSMIT-capable adapter gets additional review

#	Check	Requirement
3	Scope minimality	Declares minimal scopes per action. Wildcard scopes are rejected
4	Reversibility	Declares a rollback for each write action, or declares it irreversible
5	Governance surface and terms	Discloses the target's native safety layer, data retention and training use, and confirms the target's terms permit automated access

Adapter tiers. Tier 1 is a native adapter. Tier 2 is facilitator-backed (§3.6). Candidates for Tier 1, subject to Owner decision: Claude via MCP, an OpenAI-class adapter, and LangChain / LangGraph-class frameworks (the Manual's cleanest FIT pattern). The Google adapter is D31. [ARK] **Agent-gateway runtimes (the OpenClaw class) are manual-only** – the Manual's default there is CLUSTER – so automation stops at C4 for them (C-F10-10).

3.5A Chat-Interface Targets and Curated Prompt Scripts

3.5A.1 Actuation Classification

Every target gets a second classification, alongside its target class (software platform, agent-gateway, and so on): **how a write actually reaches it.**

target_actuation	Meaning	F10 path
API	A programmatic connector adapter exists (SENSE/TRANSLATE/TRANSMIT)	The existing §3.5 path, unchanged

target_actuation	Meaning	F10 path
CHAT_ONLY	The target's documented setup surface is its own conversational assistant, and no API, CLI or infrastructure-as-code path is offered for this task	This section
NONE	No actuation surface exists at all, not even a chat assistant	Manual, outside F10's write path; C4 ends at a dry-run brief only

Real examples of `CHAT_ONLY` surfaces, as documented by their vendors: Google's Vertex AI Agent Builder lets a developer "define the goal they want the agent to achieve, providing step-by-step instructions" in natural language to create the agent. `[EXT]` Hostinger's AI website builder has an **agentic mode** ("vibe coding") where "both building and customizing happen through a chat with AI," including a ChatGPT-app integration where the whole build is driven by typed prompts. `[EXT]` Microsoft's Copilot Studio offers a natural-language "describe what you want your agent to do" quick-create flow alongside its visual canvas. `[EXT]` **Re-verify each before relying on it — vendor UIs change without notice, and this document's classification is a snapshot.**

Classification happens at C1 SENSE, from the same provenance-and-retrieval-time discipline as every other sensed fact (C-F10-18).

3.5A.2 The Chat Script Composer

At C4, a `CHAT_ONLY` target takes a different branch. Instead of a Sovereign Deployment Brief, the Chat Script Composer produces a **Curated Prompt Script (CPS-COL)**, built from two inputs only: the Constraint Fingerprint (§3.5A per the Charter Gate — what SAVANT

already found) and the sensed facts about the target's chat-driven capability (§3.5A.1). **The composer has no path to the SAVANT verdict's internals beyond the fingerprint, and no path to a credential.**

```
interface CuratedPromptScript {
    readonly scriptId: string;
    readonly target: string;
    readonly evidenceGrade: "SENSED" | "MIXED" | "SUPPLIED";
    readonly prompts: readonly CuratedPrompt[];
    readonly terminationRule: string; // what to do if no
    branch matches
}
interface CuratedPrompt {
    readonly seq: number;
    readonly purpose: string;
    readonly promptText: string; // the exact text
    to paste
    readonly provenance: readonly Provenance[]; // why
    this claim/phrasing is grounded
    readonly expects: string; // what a correct
    reply looks like
    readonly checkpoint: boolean; // human must
    confirm before continuing
    readonly onUnexpected: readonly { condition: string;
    guidance: string }[]; // bounded, small
    readonly containsSecret: false; // type-level:
    always false, never a field that could hold one
}
// Constructible ONLY by the Chat Script Composer, and
// only after it passes the
// safety validator of §3.5A.3. No method sets promptText
// after validation.
```

3.5A.3 Curated Prompt Safety Rules (Invariant #32)

Every prompt in a CPS-COL passes all four checks or the script is refused, not trimmed:

#	Rule	What it catches
1	Grounded. The claim behind the prompt (what the target platform can do, and how to ask for it) traces to a sensed or supplied fact with provenance. The prompt's <i>wording</i> is composed for the run and is disclosed as such — grounding covers the fact, not the phrasing.	A prompt built on a guess about what the target bot accepts
2	No guardrail bypass. No prompt instructs the target's own assistant to skip <i>its</i> safety checks, confirmation dialogs or billing consent.	Coaching the user to jailbreak or social-engineer a third-party AI
3	No secret content. No prompt contains, requests, or coaches entry of a password, API key, token or payment credential as chat text. Credential entry is directed to the platform's own secure field, never typed into a chat box F10 cannot see is logged.	A prompt telling the user to paste a key into a chat window
4	Atomic and checkpointed. One action per prompt, in sequence, each with an explicit expected-outcome the human confirms before the next prompt runs. This is the same atomicity discipline this worksheet itself follows (Part 4), applied to the human-facing script.	A giant, multi-step paragraph the human can't verify a piece at a time

A script that fails any rule is refused at composition, not delivered with a warning label.

3.5A.4 GUIDED Execution (C5–C7)

A `CHAT_ONLY` target has no adapter, so F10 cannot write to it. **The human executes the script themselves, under their own login to the target platform, and F10 never holds or requests a credential for that**

surface (`credential_class: "HUMAN_OWN_LOGIN"` , never `VAULT_HANDLE`).

This is a third **execution class**, not a new GRO mode:

`execution_class: "AUTOMATED" | "GUIDED"` . Every other rule stays in force. Consent #1 still names the exact content and the exact target account, still declares a rollback (itself a curated script, or a documented manual step, for `CHAT_ONLY` targets), and still requires the human to act before anything is called staged.

Verification, C6. At each checkpoint, the human reports what the target chatbot actually said. That report is **evidence, not narration**: it is graded `HUMAN_SUPPLIED` under the same trust model as F11 PDD v1.3's supplied-source rules (§3.5B there), never upgraded to `SENSED` , and treated as **data, never instructions** — a reply that contains something that looks like a system instruction is logged and ignored, not obeyed. Where the setup produces a normal reachable endpoint (most do, even after a chat-driven build), a **generic endpoint probe** — a minimal reachability and basic-response check, not a full connector — may supplement the human's report. This does not change the target's actuation class to `API` .

Certification, C7. `UCG-COL` still governs. A `GUIDED` run's evidence is what it is: human-reported checkpoints plus, where available, a generic probe. This can be enough for a certificate once `UCG-COL` itself is defined (still blocked by OI-10); it is disclosed as a different — and currently untested — evidence shape than an automated adapter's (OI-39, OI-40).

3.5A.5 Limits

- **Advisory-then-human, never automated.** F10 does not, and structurally cannot, execute a `CPS-COL` itself.
- **No credential ever.** `CHAT_ONLY` never issues a Vault handle for that surface.
- **Bounded troubleshooting only.** `onUnexpected` covers a small, named set of deviations. Outside it, the script terminates and the run asks for a fresh `SENSE` pass rather than improvising.

- **Transcript authenticity is out of scope.** F10 has no way to confirm a pasted transcript is genuine (OI-39).

3.6 Facilitators and the n8n Decision Record

Decision: no facilitator is adopted. n8n is ineligible until it passes the tests below.

n8n already appears in the corpus as a *target* (Class I Trigger MAs per n8n AI node, under 2C-CC-05 and 2C-CC-06). Using it as a *facilitator* is a different role. [ARK]

Test	Requirement	n8n status
F-1 Licence	The facilitator's licence permits the intended commercial use, confirmed in writing	UNRESOLVED. n8n's Sustainable Use License restricts selling a product whose value derives substantially from n8n, and white-label embedding requires a separate paid Embed licence. [EXT] Re-verify before any decision.
F-2 Ephemeral credentials	Accepts per-run scoped credentials injected by F10	NOT ASSESSED
F-3 No standing secrets	Retains no user credential beyond the run	NOT ASSESSED
F-4 Auditable logs	Exports a run log F10 can append to its ledger	NOT ASSESSED
F-5 Verdict independence	Cannot influence any SAVANT	Satisfied by construction (F10 never passes a facilitator a

Test	Requirement	n8n status
	verdict or fingerprint	verdict method)

Rules. F10's core never depends on a facilitator. A facilitator never holds a standing credential. A facilitator is never in the verdict path. Native adapters are preferred to bundling any third-party platform. Owner action: obtain the facilitator's written licence position, reviewed by counsel, before any commercial use.

3.7 Credentials, Scopes and Consent (Invariant #26)

The ecosystem's publishing safety stack already defines the pattern: consent shown with the exact final content and target account at the moment of approval, a credential vault, least-privilege connector scopes, and an account-match check. **F10 inherits that stack and does not reinvent it.** [ARK]

Element	Rule
Credential Vault	The only holder of credentials. Never exposed to a facilitator as a standing secret; never written to the ledger
Strands	No strand receives credential material. Strands see only opaque scoped handles (C-F10-14).
Scope Broker	Issues a short-lived, least-privilege handle per action. A request outside the declared scope is refused
Consent record	Names the exact content and the exact target account, at the moment of approval
Account match	The credential's account must equal the account named in the consent record

Element	Rule
Two consents	Consent #1 authorises staging into a test article. Consent #2 authorises promotion . Neither implies the other
Dry-run default	A live write requires an explicit switch, recorded in the ledger
Rollback	Declared before the write. Irreversible actions need an explicit acknowledgement in the consent record

3.8 The Physical Routing Guard

The Manual states that a firmware colonization is certified only when **SAVANT = FIT and MM = MATH_VERIFIED**, that the F9 gate must run independently and not be folded into the SAVANT verdict, and that this covers firmware, robotics and smart appliances. [ARK]

F10 therefore refuses any target in those classes unless it holds an `F9Attestation`: a complete `mecha_run_id`, a UCG certificate for the Machine Artifact, SAVANT `FIT`, and MM `MATH_VERIFIED`. Without one, the run refuses at C1 and cites Invariant #25. F10 does not colonize Machine Artifacts; F9's operator does. Every F9 invariant (#21 to #24) and its open items (OI-01, OI-02, OI-07, OI-08) continue to apply.

3.9 The Colonization Charter Gate

The Manual's nine-point Charter is a pre-promotion gate. Each point is marked by who can honestly check it. [ARK]

#	Charter point	Check type
1	SENSE characterised real constraints, not an assumption	Machine — provenance and retrieval time present

#	Charter point	Check type
2	AUDIT included autonomous and scheduled execution paths	Machine — autonomous-path fields present
3	VERIFY scored all seven classes, CC-01 override applied	Hybrid — presence checked by machine; correctness is the engine's
4	ADJUDICATE reflects a real Fidelity computation	Hybrid — trace hash present; quality of computation rests on the SAVANT engine
5	The fingerprint names every gap	Machine for structure; human for completeness
6	TRANSLATE preserved mission, constraints, GRO, test suite and certification	Hybrid — genome-hash and structural diff by machine; semantic preservation is human-attested
7	Physical target: F9 ran as an independent second gate	Machine — F9Attestation
8	An SPK exists with a re-verification schedule	Machine
9	The Honesty Gate was applied to every claim	Human attestation

Points 4, 5, 6 and 9 cannot be fully machine-verified. F10 records which are human-attested and by whom, and the SPK carries that record. It does not present a machine `PASS` as if it covered them. No strand may produce, simulate or infer a human attestation (C-F10-15).

3.10 Certification of the Colonized Deployment (UCG-COL)

The colonized deployment inherits nothing. The parent's certificate covers the seed. The deployment is a new artifact with new packaging and a new host, so **Invariant #22 applies to it**. The Manual is consistent: where the test suite cannot be re-run on the target, no re-certified score is possible and the deployment remains provisional.

[ARK]

Class	Code	Threshold	Mandatory gates
Colonized deployment	UCG-COL	[TO BE SET — no value is proposed]	Verdict binding intact · Charter Gate PASS · in-stage test-suite re-run within declared tolerance · fingerprint complete · GRO Colonization Record present · F9Attestation where physical · CompleteRun attestation (Invariant #27)

Pending amendment to F9 PDD v2.1 §3.4.2: add UCG-COL to the class table. The threshold requires a SOLVA GAUNTLET pass and an Owner decision (OI-10). **Until it is set, C7 promotion is unreachable and F10 can stage but not promote.**

UCG-COL adapter preflight. Before transport, the adapter rejects a request with (1) no CompleteRun attestation, (2) a verdict binding that does not match this run, (3) a certificate subject that is not this deployment, (4) a Charter Gate that is not PASS or has unnamed attesters, or (5) author, scorer and adjudicator identities that are not three distinct ones, or an operator that is any of them (C-F10-19). These rejections hold even with UCG-COL in STUB_REFUSE .

3.11 SPK, Registry Write-Back and Re-Verification

Every completed run, FIT or CLUSTER, issues an SPK registered to the parent card's record, so colonization history accumulates. [ARK]

SPK component [ARK]	Source
SAVANT Report (full seven-phase trace)	SAVANT engine
Constraint Fingerprint	SAVANT engine, gated by F10
Host-Native Artifact (Brief or cluster manifest)	TRANSLATE
GRO Colonization Record	TRANSLATE
F9 Package (physical targets only)	F9
Re-Verification Schedule	Scheduler
F10 additions [SPEC]	In-stage verification record · UCG-COL certificate · consent record references · charter attestation record · adapter and strand-adapter wiring state · f10_run_id

Re-verification. The interval is set per target class in the connector registry, and an SPK with no interval is not issued. **The interval values are [TO BE SET]; none is proposed here.** The scheduler owns recurrence. A due re-verification re-enters at C1.

OSIRIS. Each promoted deployment registers a governance-gated telemetry contract with D32 (SPARTAN Invariant #8: no domain may suppress telemetry). [ARK]

3.12 The Five Invariants This Document Introduces

Invariant #25 — SAVANT-Gated Colonization

No F10 run may reach any translate, stage, promote or register step for a target unless a SAVANT verdict (FIT or CLUSTER) has been issued by the SAVANT engine **in the same run**, bound to the artifact hash and to the SENSE record that run captured. A CLUSTER verdict is never promoted to FIT. A missing, stubbed or stale SAVANT engine causes refusal. Every completed run issues an SPK registered to the parent card. An embedded, robotic or physical-actuation target is refused unless an F9 run exists for it.

CLASS A. Cannot be disabled by flag or tier, waived by the Owner, deferred, or applied selectively. Enforced structurally: `TranslatedPlan` cannot be constructed without a `SavantVerdictRecord`, and the type has no path from `CLUSTER` to `FIT`.

Invariant #26 — Consent-Gated Transmission

No F10 run may write to any external target, including a staging instance, without a consent record naming the exact content and the exact target account for that action, a credential drawn from the vault at least-privilege scope, and a declared rollback or an explicit irreversible-action acknowledgement. Staging and promotion require separate consents. Dry-run is the default. A facilitator never holds a standing credential.

CLASS A. Enforced structurally: `transmit()` accepts only a `ConsentedPlan`, which only the consent gate can construct.

Invariant #27 — The Single Operator (*new, v2.0*)

D36 has exactly one operator. A colonization is certifiable and promotable only if it was produced by a complete SAVANT ENVOY run with a recorded `f10_run_id`. Assembling the same strands, gates and adapters by hand, in any order, is **not an F10 run** and produces no certifiable colonization, however faithfully each individual step was executed.

CLASS A. Enforced structurally: only the ledger can construct a `CompleteRun`, and the UCG-COL adapter rejects a request without one before transport. The invariant exists because v1.0's model made gate-skipping undetectable: each owner could truthfully report that their gate passed while the sequence was never enforced and no refusal was ever recorded. Sequence integrity is a property of the run, not of any step within it.

Corollary. SAVANT ENVOY may be succeeded by another operator, but D36 may never have two concurrent operators. A successor inherits the run-state contract (IP-167) intact.

Invariant #32 — Curated Chat-Script Integrity (*new, v3.1 — adopted unchanged by F11 HOST CONNECTOR*)

Any curated prompt offered to a human for pasting into a target's own chat interface must trace its underlying claim to a sensed or supplied fact with provenance, must be atomic with an explicit human checkpoint, and must never instruct the target's own assistant to bypass its safety, confirmation or billing-consent controls, and must never contain, request or coach entry of a secret, credential or payment detail as chat text. A prompt failing any of these refuses the whole script at composition.

CLASS A. Enforced structurally: `CuratedPromptScript` is constructible only by the Chat Script Composer, only after every prompt passes the four checks of §3.5A.3, and the `containsSecret` field has no true value in its own type.

Invariant #33 — Guided Execution Accountability (*new, v3.1 — adopted unchanged by F11 HOST CONNECTOR*)

Where a target's only actuation surface is a chat assistant, a write may proceed only in GUIDED execution: the human performs it under their own login, and F10 never holds or requests a credential for that surface. Every GUIDED step still requires the same consent, cost declaration where relevant, and rollback as an automated write. The human's report of the outcome is HUMAN_SUPPLIED evidence, graded, never upgraded to SENSED, and treated as data — never as instructions — before it re-enters the run.

CLASS A. Enforced structurally: the Vault interface has no method that issues a handle for a `CHAT_ONLY` surface, and a GUIDED step's evidence type carries its grade permanently.

3.13 Constraints

ID	Constraint	Class
C-F10-01	F10 owns no verdict. It cannot override SAVANT, UCG, MM, F9 or a consent decision.	A
C-F10-02	Every constraint-class reference is namespaced (<code>SAV-CC</code> / <code>2C-CC</code>). A bare <code>CC-nn</code> fails validation.	A
C-F10-03	The conductor core contains no LLM call. Inference lives only inside adapters and the SAVANT engine.	A
C-F10-04	Genome immutability: customization may change packaging only. The genome hash is unchanged. Recompression stays inside the floor SAVANT declares.	A
C-F10-05	GRO travels or the card does not deploy. No GRO Colonization Record, no promotion.	A

ID	Constraint	Class
C-F10-06	The Constraint Fingerprint is never silently omitted.	A
C-F10-07	A SENSE record older than the TTL forces re-sense.	B
C-F10-08	A colonized deployment inherits no certification. It is described as certified only with a UCG-COL certificate whose subject is that deployment.	A
C-F10-09	Facilitators are ineligible by default, never hold standing credentials, and are never in the verdict path.	A
C-F10-10	Agent-gateway (OpenClaw-class) targets are manual-only. Automation stops at C4.	A
C-F10-11	No auto-retry on a failed gate. A failed in-stage verification rolls the stage back and refuses. A new attempt is a new f10_run_id .	A
C-F10-12	No output uses "safety certified", "SIL-rated", "PL-rated", "ASIL-rated" or any ISO / IEC / regulatory certification vocabulary about a colonization.	A
C-F10-13	No SPK is issued without a re-verification schedule.	A
C-F10-14	No strand receives credential material. Strands see only opaque, short-lived, scoped handles.	A
C-F10-	No strand produces, simulates or infers a human attestation at Charter points 4, 5, 6 or 9.	A

ID	Constraint	Class
15		
C-F10-16	No strand holds any marketplace, commercial, listing or publishing authority. SPHINX is confined to SPK structure and the registry record.	A
C-F10-17	D36 has exactly one operator. A colonization assembled by hand outside a recorded <code>f10_run_id</code> is not an F10 run (Invariant #27).	A
C-F10-18	An unsourced platform constraint is dropped, never marked provisional.	A
C-F10-19	Author, scorer and adjudicator of any certificate are three distinct identities, and the operator is never any of them. The <code>UCG-COL</code> request carries all three or is refused.	A
C-F10-20	Every strand return is schema-validated before it enters the core. Enum returns admit no third value. A strand never sets a GRO mode, writes the ledger, or constructs a capability type.	A
C-F10-21	SKRIBE contributes documents, never a mode. The consent display shows the exact content and target account, and readability is never treated as proof of comprehension.	A
C-F10-22	A target's actuation surface is classified <code>API</code> , <code>CHAT_ONLY</code> or <code>NONE</code> at C1, with provenance. A <code>CHAT_ONLY</code> target never receives a Vault handle.	A
C-F10-23	A Curated Prompt Script is refused at composition, not delivered with a caveat, if any prompt fails grounding, guardrail-bypass, secret-content or atomicity checking (Invariant #32).	A

ID	Constraint	Class
C-F10-24	A human's report of a chat checkpoint is graded HUMAN_SUPPLIED , never upgraded to SENSED , and is data, never instructions, to everything downstream.	A

3.13A SAVANT ENVOY Constraints Mapped to This PDD

The card carries 23 constraints (C-SAVENV-01 to 23). Each is enforced here, so the two documents cannot drift.

Card constraint	Enforced by
01 Refusal default; every refusal cites	IP-167; F10-P02
02 Owns no verdict; SAVANT engine never a strand	C-F10-01; Invariant #25; §3.2
03 No phase begins with an unmet precondition	§3.3; F10-P09
04 Invariant #25	Invariant #25; F10-P04, F10-P10
05 Physical targets and Machine Artifacts refused	Invariant #25; IP-165; F10-P08
06 Fingerprint never omitted; CLUSTER never FIT	C-F10-06; F10-P11
07 Invariant #26	Invariant #26; F10-P14
08 Genome immutability	C-F10-04; F10-P12
09 GRO travels or the card does not deploy	C-F10-05

Card constraint	Enforced by
10 No invented constraint; stale SENSE re-senses	C-F10-18; C-F10-07; F10-P09; F10-P24
11 CC namespace	C-F10-02; F10-P03
12 No auto-retry	C-F10-11
13 No inherited certification; vocabulary; no promotion while UCG-COL undefined	C-F10-08; C-F10-12; F10-P18
14 Facilitators ineligible by default	C-F10-09; F10-P21
15 Agent-gateway targets manual-only	C-F10-10
16 Separation of duties	C-F10-19; F10-P28 (preflight check 5)
17 No SPK without schedule and fingerprint	C-F10-13; F10-P19
18 Invariant #27	C-F10-17; Invariant #27; F10-P28
19 No marketplace or commercial authority	C-F10-16; §3.2B; F10-P27
20 No strand receives credential material	C-F10-14; F10-P23
21 Human attestation cannot be simulated	C-F10-15; F10-P17
22 Strand returns validated; strands never set modes or construct capability types	C-F10-20; F10-P23
23 SKRIBE documents only	C-F10-21; F10-P29

3.14 Domain Register Delta

Domain	Name	Status	IPs	Operator / Lead	Change
D13	SAVANT Portability	LIVE (per register)	IP-24	SPARTAN MVE	Unchanged; F10 reads verdicts
D31	Gemini Colonization Layer	ACTIVE, JCSE 43/50	IP-105–110	SPARTAN + Gemini authors	Unchanged; F10's Google adapter
D32	F9.5 Observability	PRE-BUILD	IP-111–116	OSIRIS	Unchanged; receives telemetry contracts
D33	OSIRIS Meta-Orchestration	PRE-BUILD	IP-117–122	OSIRIS	Unchanged
D35	F9 Machine Floor	PRE-BUILD	IP-129–150	MECHA	Unchanged; physical route
D36 ★ NEW	F10 CONNECTOR	PRE-BUILD	IP-151–169, IP-188–192	SAVANT ENVOY ULTRA SI (Seat #17, proposed)	v1.0: registered · v2.0/v1.1: operator named · v3.0: one operator · v3.1: chat-interface targets, +5 IPs, non-contiguous

Platform totals after F10 v3.1: 37 Domains (3 open slots D10/D17/D18 unchanged) · **197 Integration Points** · **33 SPARTAN Invariants**.

Reserved: D38 / IP-198 onward, per the IP Allocation Ruling in Document Control. D37 (F11 HOST CONNECTOR) is unchanged at IP-170–187, IP-193–197.

3.15 Open Items

ID	Item	Class	Status
OI-09	F10 operator. <i>Narrowed:</i> SAVANT ENVOY is named and specified and Invariant #27 is in force. The ENVOY lineage closed this item; that is overruled, because naming an operator does not close the gap. Open until the card is built and independently assessed.	A	OPEN — NARROWED
OI-10	UCG-COL has no threshold. Blocks promotion under Invariant #22.	A	OPEN — BLOCKING
OI-11	Constraint-class ID collision between the Manual (Appendix A) and Second Contact. Namespaced, not reconciled.	B	OPEN
OI-12	SAVANT engine interface unverified. D13 is listed live; whether it exposes a callable interface for F10 is not established.	A	OPEN
OI-13	No facilitator assessed. n8n licence unresolved (F-1).	B	OPEN
OI-14	Boundaries with D31 and D33 proposed, not adjudicated.	B	OPEN

ID	Item	Class	Status
OI-15	No coding-standard profile for software-target code generated through PCE. BUGMXT's documented toolchains name TypeScript, Python and Solidity analyzers.	B	OPEN
OI-16	The operator is unassessed. SAVANT ENVOY's bootstrap needs an independent Assessor and Adjudicator. The existing engagement brief (JNGL -ENG- MECHA-2026-001) covers MECHA only.	A	OPEN
OI-17	Seat #17 unverified; DISC mismatch with the Camelot inventory's archetype groups (Seat #17 is in the King's Council, DC/CD; the operator is CS); DNA overlap with MECHA (four shared strands) and inside CODE DJ unreconciled.	C	OPEN
OI-18	SPHINX ENGINE deployment is unadjudicated against F10. If built as the whitepaper describes and not routed through F10, it is a path around Invariant #25.	A	OPEN
OI-19	No security-architecture or DevOps strand. "Security Expert SPC" and "DevOps Expert SPC" appear only as placeholder seats in OSIRIS's specification; no certified card was located.	A	OPEN

ID	Item	Class	Status
OI-20	SPHINX strand fence untested. SPHINX also owns certification pipelines and a marketplace, and the merged operator includes it despite ENVOY's exclusion.	B	OPEN
OI-37	D36's IP block is non-contiguous (IP-151–169 and IP-188–192), because the D38 frontier was split between this document and F11 v1.4 rather than left idle. Disclosed, not repaired.	C	OPEN
OI-38	No secret-shape scanner is wired for chat-transcript and prompt-script intake (parallels F11 PDD's OI-33). Until one is selected, an operator relying on that scan fails closed.	B	OPEN
OI-39	Chat-transcript authenticity is unverifiable. F10 has no way to confirm a human-pasted exchange with a target chatbot is genuine rather than fabricated or manipulated — the same class of risk as F11's document-injection concern (its OI-36), applied to a live chat session.	B	OPEN
OI-40	Composed-versus-sourced line undrawn. A curated prompt's underlying facts are sourced; its exact wording is synthesized. Whether Invariant #32's "no fabrication" reading draws that line correctly is a SPARTAN/Owner ruling, not yet made.	B	OPEN

Numbering continues the shared register used in the MECHA SPC and the F9 PDD (OI-01 to OI-08). The two earlier F10 lineages both used OI-16 to OI-18 for different items; §1.2B fixes one register. OI-01 and OI-02 bind every physical-target route.

PART 4 — ATOMIC PROMPT WORKSHEET

Builders · Single Operation · Verifiable I/O · No Compound Logic

CORDON sequence: W1 foundation → W2 eligibility, registry & strands → W3 SAVANT phases → W4 translate & consent → W5 stage & verify → W6 certify, promote, register → W7 self-test. No circular dependency. **Critical path:** F10-P01 → F10-P02 → F10-P06 → F10-P07 → F10-P09 → F10-P10 → F10-P11 → F10-P12 → F10-P14 → F10-P15 → F10-P16 → F10-P17 → F10-P18 → F10-P19 → F10-P20 (15 prompts; the self-test F10-P22 follows). *Recomputed for v3.1; the chat-script branch (F10-P30–P34) sits off the critical path because it only runs for `CHAT_ONLY` targets.*

Code-Late checkpoint: W1 to W2 produce schemas, contracts and types. First implementation code is generated at W3.

WAVE 1 — FOUNDATION

F10-P01 ·  P0 · IP-151 – IP-169 · CLASS A · Deps: none

Operation: Register D36 with IP range 151–169. Record the written amendment that F10 consumes IP-151–169 and that D37 / IP-170+ is reserved. Do not alter D13, D31, D32, D33 or D35.

Output: { d36: DomainRecord, reserved_from: 170, amendment_recorded: true }

Gate: 36 populated domains, 3 open slots, 169 IPs. Amendment text present. Neighbouring domain records byte-identical.

F10-P02 ·  P0 · IP-167 · CLASS A · Deps: F10-P01

Operation: Define the Run Ledger and Cited Refusal contract. The ledger is append-only with `REVOKE UPDATE, DELETE` at the database role. Every run gets an `f10_run_id`. Every refusal carries `phase_halted, constraint_cited, invariant_cited, cause, required_to_proceed`. Every ledger entry records the wiring mode of the SAVANT adapter and each connector and strand adapter, and the operator identity (`SPC-SAVENV-F10-ULTRA-SI-001@1.0.0`).

Output: `{ ledger_schema, ddl, refusal_schema }`

Gate: An UPDATE as the application role fails at the database. A refusal with both citation fields null fails serialisation.

F10-P03 ·  P0 · IP-155 · CLASS A · Deps: F10-P01

Operation: Implement the constraint-class namespace registry: `SAV-CC-nn` and `2C-CC-nn`, with a validator that rejects a bare `CC-nn` in any F10 record.

Output: `{ namespace_registry, validator }`

Gate: A record containing a bare `CC-04` fails validation. The registry states which set SV-03 uses.

F10-P04 ·  P0 · IP-153 · CLASS A · Deps: F10-P02

Operation: Define the SAVANT Engine Adapter. Read-only: it returns a `SavantVerdictRecord` or `REFUSED`. `mode` defaults to `STUB_REFUSE`. The verdict type is `{ kind: "FIT" }` | `{ kind: "CLUSTER", fingerprint }` and carries `binding = hash(artifact_hash, sense_record_hash, f10_run_id)`.

Output: `{ savant_adapter_interface, verdict_type, default_mode: "STUB_REFUSE" }`

Gate: The type has no `setVerdict, override, promote` or `score` member. A compile-time test asserts their absence. A freshly constructed adapter returns `REFUSED`.

F10-P23 ★ · 🚫 P0 · IP-168 · CLASS A · Deps: F10-P02

Operation: Define the Strand Adapter interface and the validation boundary per §3.2B for the six strands (CODE DJ, ATHENA, DEXTER, FRACTAL, SKRIBE, SPHINX). Every strand return is schema-validated before it enters the core. Enum returns admit no third value. A strand has no ledger handle, no GRO-mode setter, no Vault handle and no constructor for any capability type. Add a static check that the core module tree contains zero LLM client imports.

Output: { strand_interface, validation_contract, llm_import_scan: { core_modules: number, llm_imports: 0 } }

Gate: llm_imports in the core is exactly 0, verified statically in CI (C-F10-03). A compile-time test asserts the interface exposes no ledger, mode-setter, Vault or capability-constructor member. A schema-invalid strand return puts the run in CONTAINMENT with no retry.

F10-P28 ★ · 🚫 P0 · IP-169 · CLASS A · Deps: F10-P02

Operation: Implement the Run Completeness Attestation. The ledger constructs a CompleteRun only when the run's entries are contiguous from C0 through C6 with no HALT, every adapter's wiring state is recorded, and every strand return was validated. Implement the UCG-COL adapter preflight per §3.10, including the check that author, scorer and adjudicator are three distinct identities and that the operator is none of them (C-F10-19).

Output: { complete_run_type, ucg_col_preflight: 5 }

Gate: A colonization assembled by hand, with the same strands and gates called directly in the correct order and no f10_run_id, is rejected before transport, so the rejection holds with UCG-COL in STUB_REFUSE. A run containing any HALT can never yield a CompleteRun. A request whose identities are not three distinct ones, or in which the operator is any of them, is rejected at the same point.

WAVE 2 — ELIGIBILITY, REGISTRY & STRANDS

F10-P05 ·  P0 · IP-151 · CLASS A · Deps: F10-P02

Operation: Implement the Intake Eligibility Gate. Require: artifact hash, UCG certificate record, handled artifact class, declared target class.

Output: { intake_result: "ELIGIBLE" | "REFUSED",
constraint_cited }

Gate: An artifact with no UCG certificate record is refused citing Invariant #22. A Tier 0 self-assigned certificate is valid; an absent one is not.

F10-P06 ·  P0 · IP-152 · CLASS A · Deps: F10-P02

Operation: Define the Connector Adapter interface per §3.5.

transmit() accepts only a ConsentedPlan . mode defaults to STUB_REFUSE .

Output: { connector_interface, default_mode: "STUB_REFUSE" }

Gate: No overload of transmit() accepts any other type. The interface has no verdict, score or fingerprint setter. A newly constructed adapter returns REFUSED .

F10-P07 ·  P0 · IP-152 · CLASS A · Deps: F10-P06

Operation: Implement the Connector Registry and the five onboarding checks. Any failed check blocks addition.

Output: { registry, onboarding_checks: 5,
onboarding_record_schema }

Gate: An adapter declaring a wildcard scope is rejected at check 3. An adapter with no declared rollback and no irreversibility flag is rejected at check 4. Demand is not an input to the decision.

F10-P08 ·  P0 · IP-165 · CLASS A · Deps: F10-P05

Operation: Implement the Physical Routing Guard. Target classes firmware, robotics and smart appliance / IoT require an

F9Attestation (mecha_run_id , Machine Artifact UCG certificate, SAVANT FIT , MM MATH_VERIFIED).

Output: { routing_decision: "ROUTE_TO_F9" | "PROCEED",

`attestation_required: boolean }`

Gate: A physical target with no attestation is refused citing Invariant #25. F10 never accepts a Machine Artifact as a colonization subject.

F10-P24 ★ · 🚫 P0 · IP-168 · CLASS A · Deps: F10-P23

Operation: Implement the ATHENA strand adapter for SENSE and AUDIT. Return constraints with provenance, retrieval time and autonomous-path coverage, plus the target's terms and governance surface. Drop unsourced constraints inside the adapter.

Output: `{ adapter, provenance_validator }`

Gate: A constraint without a source and a retrieval time never leaves the adapter. Nothing is returned marked provisional (C-F10-18).

F10-P25 ★ · 🚫 P0 · IP-168 · CLASS A · Deps: F10-P23

Operation: Implement the CODE DJ strand adapter: target-class declaration, Platform Allocation, Sovereign Deployment Brief generation, and the PCE route for PDD and Micro PDD artifacts.

Output: `{ adapter, allocation_validator }`

Gate: An allocation naming an environment that cannot execute the artifact is rejected at the boundary. The PCE route requires the Codebase Architecture Document before any generation.

F10-P26 ★ · 🚫 P0 · IP-168 · CLASS A · Deps: F10-P23

Operation: Implement the DEXTER and FRACTAL strand adapters. DEXTER: HOLMES anomaly sweep, SOCRATES challenge, ARES adversarial re-run of a test suite. FRACTAL: topology for a `CLUSTER` verdict.

Output: `{ dexter_adapter, fractal_adapter }`

Gate: DEXTER returns per-case `PASS` or `FAIL` and never an aggregate score. FRACTAL returns a topology only when the verdict is `CLUSTER` and has no method that changes a verdict.

F10-P27 ★ · 🚫 P0 · IP-168 · CLASS A · Deps: F10-P23

Operation: Implement the SPHINX strand adapter, fenced to SPK structure and the parent card's registry record. It has no listing, publishing or marketplace-facing member of any kind.

Output: { sphinx_adapter }

Gate: A compile-time test asserts that no `certify`, `score`, `adjudicate`, `list`, `publish` or marketplace-facing member exists (C-F10-16). A registry write is an internal record write and never a public one.

F10-P29 ★ · 🚫 P0 · IP-168 · CLASS A · Deps: F10-P23

Operation: Implement the SKRIBE strand adapter: the Sovereign Deployment Brief, the SAVANT Report summary, the consent display and the SPK summary. The adapter returns documents only.

Output: { adapter, brief, consent_display, spk_summary }

Gate: The consent display contains the exact content and the exact target account, or it is rejected. The adapter cannot set a GRO mode, and SKRIBE's own LIFE default is not inherited (C-F10-21). Readability is never recorded as proof of comprehension.

WAVE 3 — SAVANT PHASES

F10-P09 · 🚫 P0 · IP-154 · CLASS A · Deps: F10-P04, F10-P07, F10-P03, F10-P08, F10-P24, F10-P26

Operation: Implement C1 SENSE and AUDIT automation through a connector adapter and the ATHENA strand adapter, with a HOLMES anomaly sweep from the DEXTER adapter. Each captured constraint carries provenance and retrieval time. The record must include the host's autonomous and scheduled execution paths. Compute `sense_record_hash`.

Output: { sense_record, sense_record_hash, ttl_status }

Gate: A record with no autonomous-path section is incomplete and refused. A constraint with no provenance is dropped, never marked

provisional. A record older than the TTL is stale and forces re-sense.
TTL is [TO BE SET].

F10-P10 ·  P0 · IP-155 · CLASS A · Deps: F10-P09

Operation: Implement C2 VERIFY. Send the SENSE record and the artifact profile to the SAVANT engine adapter and receive a `SavantVerdictRecord`. Verify the binding hash. Write the verdict to the ledger.

Output: { verdict_record, binding_verified: true }

Gate: F10 computes no score. A verdict whose binding does not match this run's artifact hash and SENSE hash is rejected. With the SAVANT adapter stubbed, the run refuses here.

F10-P11 ·  P0 · IP-155 · CLASS A · Deps: F10-P10

Operation: Implement C3 NAME. Run the DEXTER adapter's SOCRATES challenge on each blocked, degraded or compensated capability, then check that every capability the verdict marks blocked, degraded or needing compensating architecture has a named entry in the Constraint Fingerprint.

Output: { fingerprint_complete: boolean, unnamed_gaps: string[] }

Gate: unnamed_gaps empty, or the run refuses citing C-F10-06. A `CLUSTER` verdict cannot proceed on a single-node plan.

F10-P30 ★ ·  P0 · IP-188 · CLASS A · Deps: F10-P09

Operation: Extend C1 SENSE to classify a target's actuation surface (`API` , `CHAT_ONLY` , `NONE`) with provenance, and, for `CHAT_ONLY` , sense the target's documented chat-driven setup capability.

Output: { target_actuation, chat_capability_record? }

Gate: A classification with no provenance is refused. `CHAT_ONLY` is never inferred from absence of an adapter alone — it requires a positive, sourced statement that a chat assistant is the documented setup surface.

WAVE 4 – TRANSLATE & CONSENT

F10-P12 ·  P0 · IP-156 · CLASS A · Deps: F10-P11, F10-P08, F10-P25, F10-P26, F10-P29

Operation: Implement C4 TRANSLATE. On `FIT`, produce a Sovereign Deployment Brief through the CODE DJ adapter. On `CLUSTER`, take the topology from the FRACTAL adapter and have CELL SI build the governed cluster and manifest. For a PDD or Micro PDD, route to CODE DJ's PCE conversion. Have the SKRIBE adapter author the Sovereign Deployment Brief and the consent display. Accept a

`CustomizationSet` limited to packaging fields. Record the genome hash before and after.

Output: `{ translated_plan, genome_hash_before, genome_hash_after, gro_colonization_record, consent_display }`

Gate: The two genome hashes are equal. A customization touching mission, constraint set, GRO, test suite or certification is rejected. A plan lacking a GRO Colonization Record is refused (C-F10-05). Dry-run only: this prompt performs no external write.

F10-P13 ·  P0 · IP-157 · CLASS A · Deps: F10-P02

Operation: Implement the Credential Vault and Scope Broker. Issue a short-lived, least-privilege handle per action. Never write a credential to the ledger.

Output: `{ vault_interface, scope_broker, handle_schema }`

Gate: A request outside the declared scope is refused. A handle expires. A search of the ledger for credential material returns nothing.

F10-P14 ·  P0 · IP-158 · CLASS A · Deps: F10-P12, F10-P13, F10-P26, F10-P29

Operation: Implement the Consent Gate. Have the DEXTER adapter review the write plan for scope, reversibility and irreversible actions. Present the SKRIBE consent display showing the exact content and the

exact target account at approval, and record the consent. The operator presents and records; the human consents. Check that the credential's account equals the consent's account. Produce a `ConsentedPlan` from a `TranslatedPlan`, a consent record, a scoped handle, and a rollback declaration. Consent #1 is for staging and consent #2 is for promotion.

Output: `{ consented_plan, consent_record_id, stage: "STAGE" | "PROMOTE" }`

Gate: Only this gate can construct a `ConsentedPlan`. Consent #1 cannot be used for promotion. An irreversible action without an explicit acknowledgement is refused. Dry-run is the default; a live write requires an explicit switch recorded in the ledger.

F10-P31 ★ · 🚫 P0 · IP-189 · CLASS A · Deps: F10-P30, F10-P11, F10-P12

Operation: Implement the Chat Script Composer. On `CHAT_ONLY`, build a `CuratedPromptScript` from the Constraint Fingerprint and the chat-capability record only. On `API`, this branch does not run.

Output: `{ curated_prompt_script_draft }`

Gate: The composer has no method that accepts a credential or a Vault handle. Every prompt's provenance list is non-empty before the draft leaves this prompt.

F10-P32 ★ · 🚫 P0 · IP-190 · CLASS A · Deps: F10-P31

Operation: Implement the safety validator of §3.5A.3: grounding, no-guardrail-bypass, no-secret-content, atomicity-and-checkpoint, over every prompt in the draft script.

Output: `{ validated_script, rejected_prompts: [] }`

Gate: A script with any failing prompt is refused whole, not filtered to the passing ones. A compile-time test asserts `containsSecret` has no true value anywhere in the type.

WAVE 5 — STAGE & VERIFY

F10-P15 · 🚫 P0 · IP-159 · CLASS A · Deps: F10-P14

Operation: Implement staged transmit into a **test article** through the connector adapter, using a `ConsentedPlan` for `STAGE`. Snapshot state before the write so rollback is possible.

Output: `{ stage_result, rollback_handle, test_article_ref }`

Gate: The test article is isolated from users and production data. A staged write with no rollback handle is refused. `transmit()` cannot be called with any other type.

F10-P16 · 🚫 P0 · IP-160 · CLASS A · Deps: F10-P15, F10-P26

Operation: Implement in-stage verification. Through the DEXTER adapter, re-run the artifact's original test suite, including adversarial cases, against the staged deployment. Declare a tolerance before running.

Output: `{ suite_run, within_tolerance, environment: "STAGE", tolerance_declared_before_run: true }`

Gate: A test suite that cannot be re-run marks the deployment provisional and blocks certification (`SAV-CC-05`). A failure rolls the stage back, refuses, and does not retry (C-F10-11). The result is labelled `STAGE` and never described as production behaviour.

F10-P17 · 🚫 P0 · IP-161 · CLASS A · Deps: F10-P16, F10-P11

Operation: Implement the Colonization Charter Gate per §3.9. Mark each of the nine points machine, hybrid or human-attested. Record the identity of every human attester.

Output: `{ charter_result, points: [{ n, type, status, attester }] }`

Gate: Points 4, 5, 6 and 9 cannot pass on a machine check alone. A `PASS` that hides a missing human attestation is rejected.

F10-P33 ★ · 🚫 P0 · IP-191 · CLASS A · Deps: F10-P32, F10-P14

Operation: Implement GUIDED execution at C5–C7: request consent naming the script and the target account; on approval, present the

script for the human to run under their own login; record each checkpoint report as `HUMAN_SUPPLIED` evidence, treated as data and never instructions.

Output: { execution_class: "GUIDED", checkpoint_reports: [], credential_class: "HUMAN_OWN_LOGIN" }

Gate: No Vault handle is issued for this run. A checkpoint report is never written to the ledger with grade `SENSED`. Instruction-shaped content inside a report is logged and ignored, never executed.

F10-P34 ★ · 🚫 P0 · IP-192 · CLASS A · Deps: F10-P33

Operation: Implement a generic endpoint probe: a minimal reachability and basic-response check against an endpoint the GUIDED run reports, for use at C6 alongside the human's checkpoint evidence.

Output: { probe_result: { reachable: boolean, basic_response_ok: boolean } }

Gate: A successful probe never upgrades `target_actuation` from `CHAT_ONLY` to `API`. The probe result is one input among several at C6, never sufficient alone for the Charter Gate.

WAVE 6 — CERTIFY, PROMOTE, REGISTER

F10-P18 · 🚫 P0 · IP-162 · CLASS A · Deps: F10-P17, F10-P14, F10-P28

Operation: Request a `UCG-COL` certificate for the staged deployment, attaching the `CompleteRun` attestation and the author, scorer and adjudicator identities. On issue, obtain consent #2 and promote through a `ConsentedPlan` for `PROMOTE`.

Output: { ucg_col_certificate, promotion_result }

Gate: With `UCG-COL` undefined (OI-10), this prompt returns `REFUSED` and promotion is unreachable. Refuses if the certificate's subject is not this deployment (C-F10-08). Refuses if consent #2 is absent. Refuses if no `CompleteRun` attestation exists (Invariant #27). Refuses if the three identities are not distinct, or if the operator is any of them (C-F10-19).

F10-P19 ·  P0 · IP-163 · CLASS A · Deps: F10-P18, F10-P27, F10-P29

Operation: Assemble the SPK: SAVANT Report, Constraint Fingerprint, Host-Native Artifact, GRO Colonization Record, F9 Package where applicable, Re-Verification Schedule, plus F10 additions. Package the SPK structure and register it through the SPHINX adapter (record only, no listing; C-F10-16). Have the SKRIBE adapter write the SPK summary.

Output: { spk, registry_writeback_id }

Gate: All required components present. A missing fingerprint or schedule means no SPK (C-F10-13). Registration is confirmed before the run is marked complete.

F10-P20 ·  P0 · IP-164 · CLASS A · Deps: F10-P19

Operation: Implement the re-verification scheduler and register the promoted deployment's telemetry contract with OSIRIS (D32).

Output: { schedule_id, next_due, telemetry_contract_id }

Gate: next_due is a real future date. A due re-verification re-enters at C1. **Interval values are [TO BE SET] per target class.**

F10-P21 ·  P1 · IP-166 · CLASS B · Deps: F10-P07, F10-P13

Operation: Implement the facilitator eligibility tests F-1 to F-5 (§3.6). Default every facilitator to INELIGIBLE.

Output: { facilitator_status, tests: [{ id, status }] }

Gate: An unassessed facilitator is ineligible. No facilitator ever receives a standing credential or a verdict method.

WAVE 7 – SELF-TEST

F10-P22 ·  P0 · CLASS A · Deps: F10-P01 ...
F10-P34

Operation: Run the worksheet against itself.

Confirm each of the following is refused at its

named phase, cited and ledgered: (a) transmit with no SAVANT verdict; (b) a `CLUSTER` verdict presented as `FIT`; (c) a run with the SAVANT adapter stubbed; (d) a verdict from a different run or SENSE snapshot; (e) a stale SENSE record; (f) a physical target with no `F9Attestation`; (g) a write with no consent record; (h) a credential request outside scope; (i) a customization that changes the genome hash; (j) a failed in-stage suite, with rollback and no retry; (k) an artifact with no UCG certificate at intake; (l) promotion with `UCG-COL` undefined; (m) an SPK with no fingerprint; (n) an ineligible facilitator; (o) a bare `CC-nn`; (p) a colonization assembled by hand with no `f10_run_id`, rejected by the UCG-COL preflight; (q) a strand attempting to obtain credential material, which has no interface to do so; (r) a certify, score or adjudicate call on the SPHINX adapter, which does not exist; (s) an unsourced constraint returned by the ATHENA adapter, dropped and never provisional; (t) a schema-invalid strand return, which halts the run in CONTAINMENT; (u) a `UCG-COL` request whose author, scorer and adjudicator are not three distinct identities, or in which the operator is one

of them, rejected at preflight; (v) an LLM client import in the core module tree, which fails the build; (w) a SKRIBE consent display that omits the exact content or the target account, rejected; (x) a Curated Prompt Script containing a guardrail-bypass instruction, refused at composition; (y) a prompt containing secret-shaped text, refused at composition; (z) a `CHAT_ONLY` target for which a Vault handle is requested, which the interface cannot construct; (aa) a human checkpoint report used as though it were `SENSED` , rejected; (ab) an unbounded troubleshooting branch outside `onUnexpected` , which terminates the script rather than improvising.

Output: `{ refused_at_named_phase: 28/28, ledgered: true }`

Gate: All twenty-eight true. A test that passes because the run never reached that phase does not count.

PART 5 — RISK REGISTER

Risk	Sev	Mitigation
Automation skips SAVANT (the Silent Wrapper at machine speed)	 Critical	Invariant #25; capability types; F10-P22 (a).

Risk	Sev	Mitigation
Verdict replayed from another run, artifact or target snapshot	 Critical	Binding hash over artifact, SENSE record and run id; F10-P10 verifies it; F10-P22 (d).
CLUSTER promoted to FIT	 Critical	No promote function exists; the type has no such path; F10-P22 (b).
Physical target colonized without F9	 Critical	Physical Routing Guard; F9Attestation ; F9 invariants continue to bind. OI-01 and OI-02 remain open.
Write to a target without consent	 Critical	Invariant #26; ConsentedPlan is constructible only by the consent gate.
Colonized deployment shipped without a certificate	 Critical	Invariant #22 applies; UCG-COL ; promotion unreachable until OI- 10 closes.
Stale SENSE – the host changed since it was read	 High	TTL and forced re-sense (C-F10- 07). TTL unset.
Over-broad credentials	 High	Scope Broker; wildcard scopes rejected at onboarding; short- lived handles.
Irreversible write on a target	 High	Rollback declared before the write; irreversible actions need explicit acknowledgement.
Genome altered by customization	 High	Genome hash before and after; allowlist of packaging fields (C- F10-04).

Risk	Sev	Mitigation
Constraint-class ID confusion	 High	Namespaced IDs; validator; OI-11.
Facilitator licence breach or secret retention	 High	Default ineligible; F-1 to F-5; no standing credentials. n8n unresolved.
Target terms forbid automation	 High	Onboarding check 5.
Test suite not re-runnable on the target	 High	Deployment marked provisional and blocked from certification (SAV-CC-05).
Operator unbuilt and unassessed – SAVANT ENVOY is PRE-BUILD at 41/50 and has never run	 High	Disclosed in Document Control, §1.8 and SOLVA ground 1. A floor cannot be more validated than its operator. OI-09 stays open, and OI-16 records the missing independent assessment.
Colonization assembled by hand, bypassing the operator	 Critical	Invariant #27; only the ledger constructs a CompleteRun ; UCG-COL preflight rejects a request without one. F10-P22 (p).
A strand handles a credential	 Critical	C-F10-14; the strand interface has no Vault handle. F10-P22 (q).
SPHINX strand drifts into certification or commercial authority	 High	C-F10-16; no certify , score , adjudicate , list , publish or marketplace-facing member exists. OI-20. F10-P22 (r).
Shared blind spots with MECHA	 High	Disclosed as OI-17; independent Assessor review.

Risk	Sev	Mitigation
No security-architecture strand	 High	Disclosed as OI-19; credential handling rests on the Vault and human review.
The card's name is read as holding SAVANT's verdicts	 High	C-F10-01; §3.1 boundary row; any document using the name must say it holds no verdict.
The SPHINX ENGINE's deployment tiers bypass F10	 Critical	Disclosed as OI-18. F10 does not treat a SPHINX ENGINE deployment as a certified colonization until ruled.
Consent shown but not understood	 High	SKRIBE's display shows the exact content and account; F10-P22 (w). Comprehension cannot be proven by the system (C-F10-21).
Fabricated platform behaviour	 High	C-F10-18 and C-F10-07; the ATHENA adapter drops unsourced constraints. F10-P22 (s).
LLM drifts into the deterministic core	 High	The static zero-import check in F10-P23 fails the build (C-F10-03). F10-P22 (v).
The operator certifies its own work	 High	C-F10-19; the UCG-COL preflight rejects identities that are not three distinct ones. F10-P22 (u).
Platform drift after promotion (the Frozen Certification)	 Medium	Re-verification scheduler; no SPK without a schedule.
Telemetry leaks sensitive content	 Medium	Governance-gated telemetry contract (Invariant #8).

Risk	Sev	Mitigation
Software-target code lacks a coding standard	 Medium	Disclosed OI-15; PCE fidelity and ARES scan apply; F9's assurance layer does not.

| **A curated prompt talks the target bot into skipping its own guardrails** |  Critical | Invariant #32 rule 2; refused at composition. F10-P22 (u). |

| **A secret is typed into a third-party chat box** |  Critical | Invariant #32 rule 3; refused at composition. F10-P22 (v). |

| **A CHAT_ONLY write gets a Vault credential anyway** |  Critical | Invariant #33; the Vault interface has no such method. F10-P22 (w). |

| **A fabricated chat transcript is treated as fact** |  High | Graded HUMAN_SUPPLIED, never upgraded; data not instructions. F10-P22 (x). OI-39. |

| **The prompt's wording is mistaken for a sourced quote** |  Medium | Disclosed at composition (§3.5A.3 rule 1); OI-40. |

PART 6 — GLOSSARY

Term	Definition
F10 CONNECTOR	D36. SAVANT-gated colonization automation. Holds no verdict.
CHAT_ONLY target	A target whose only documented setup surface is its own conversational assistant.
Curated Prompt Script (CPS-COL)	The sequenced, provenance-bound, safety-checked prompt list F10 hands a human for a CHAT_ONLY target.
GUIDED execution	The human performs the write themselves, under their own login; F10 holds no credential for that surface.

Term	Definition
SAVANT ENVOY	The operator SPC of D36 (SPC-SAVENV-F10-ULTRA-SI-001 , Seat #17 proposed): the merger of SAVANT CONNECTOR and ENVOY. It runs the protocol through the SAVANT engine and holds no verdict.
Strand Adapter	The boundary around one of the operator's six strands. Schema-validates every return; has no ledger, mode, Vault or capability-constructor access.
CompleteRun	A value only the ledger can construct, proving contiguous C0–C6 entries with no HALT. Required by the UCG-COL preflight (Invariant #27).
Terminal state	One of PROMOTED , STAGED_NOT_PROMOTED , DRY_RUN_COMPLETE , REFUSED (§3.2A.5).
SAVANT	The seven-phase colonization decision protocol (SV-01 to SV-07), run by SPARTAN MVE. Distinct from the three-platform "SAVANT Protocol" described in the SAVANT Protocol Whitepaper v1.
F10 Conductor	The deterministic runtime that enforces the operator's protocol and holds the ledger, capability types and wiring. Not an SPC. The operator card specifies; the conductor enforces.
SavantVerdictRecord	A verdict bound to artifact hash, SENSE record hash and f10_run_id . Only the SAVANT adapter can construct one.

Term	Definition
TranslatedPlan	A dry-run host-native plan. Needs a verdict and a complete fingerprint.
ConsentedPlan	A plan with a consent record, a scoped credential and a rollback. Only the consent gate can construct one.
Test article	A staged instance isolated from users and production data.
UCG-COL	Proposed certificate class for a colonized deployment. Threshold unset.
F9Attestation	Proof of an F9 run: mecha_run_id , Machine Artifact certificate, SAVANT FIT , MM MATH_VERIFIED .
SAV-CC / 2C-CC	Namespaces for the two CC-01 to CC-07 taxonomies.
SPK	SPC Portability Kit. Issued for every completed colonization.
Colonization Charter	The Manual's nine-point acceptance checklist.
Facilitator	A third-party workflow platform used to reach connectors. Ineligible by default.

FORGE CERTIFICATION BLOCK

|| THE ARK HARNESS – F10 CONNECTOR · ATLAS OMNIBUS PDD
v3.1 ||
|| ASSEMBLED VIA ATLAS ULTRA SI · TIER 0 · SELF-ASSIGNED

PRODUCTION ID	: JNGL-ARKH-F10CN-2026-005
SUPERSEDES	: -004 (v3.0); through it -003,
-002, -001	
DOMAIN	: D36 – F10 CONNECTOR
IP RANGE	: IP-151-169, IP-188-192 (24; non-
contiguous)	
OPERATING SPC	: SAVANT ENVOY ULTRA SI v1.0.0
	Seat #17 (proposed) · JCSE 41/50
Tier 0	
NEW IN v3.1	: Chat-interface targets (Azure
Copilot Studio,	
	Vertex AI Agent Builder,
Hostinger, class)	
	Curated Prompt Scripts · GUIDED
execution	
ENGINE	: SAVANT (D13, SPARTAN MVE) –
verdicts read-only	
CONDUCTOR	: F10 Conductor – deterministic, no
LLM (checked)	
RUN	: C0 INTAKE · C1 SENSE · C2 VERIFY
· C3 NAME ·	
	C4 TRANSLATE · C5 CONSENT & STAGE
·	
	C6 VERIFY IN STAGE · C7 CERTIFY &
PROMOTE ·	
	C8 REGISTER
TERMINAL STATES	: PROMOTED · STAGED_NOT_PROMOTED ·
	DRY_RUN_COMPLETE · REFUSED
INVARIANTS	: #25 SAVANT-Gated Colonization
	#26 Consent-Gated Transmission
	#27 The Single Operator

```

||
|| #32 Curated Chat-Script Integrity
(NEW) ||
|| #33 Guided Execution
Accountability (NEW) ||
|| PLATFORM TOTALS : 37 Domains · 197 IPs · 33
Invariants · 3 open slots ||
|| RESERVED : D38 / IP-198 onward
||
|| ATOMIC PROMPTS : 34 (F10-P01 – F10-P34) · 7 waves
· 15-prompt path ||
|| SOLVA VERDICT : CONDITIONALLY VIABLE – published
as issued ($2.5) ||
|| JCSE : Self-assigned Tier 0 – not scored
– NOT HIVE-certified ||
|| GRO STATE : SAFE_LIFE
||
|| HONESTY GATE G3 : OI-09 operator NARROWED – unbuilt
||
|| OI-10 UCG-COL undefined –
PROMOTION BLOCKED ||
|| OI-37 D36 IP block non-contiguous
(disclosed) ||
|| OI-38 no secret scanner for chat
intake ||
|| OI-39 chat-transcript
authenticity unverifiable ||
|| OI-40 composed prompt wording vs
sourced facts ||
|| No scripted run has ever touched
a real chat bot ||
|| Nothing wired – every run refuses
at C1 ||
|| Zero live testing on any platform
||
|| OWNER : Oluseye Shay Amusa / Koncentric
Labs Inc. ||
|| © 2026 Koncentric Labs Inc. · ATANDA Publications
Forum ||

```

VERSION HISTORY

Version	Date	Change	Author
1.0	Sept 2026	Initial issue. D36 registered, IP-151–167. Invariants #25 (SAVANT-Gated Colonization) and #26 (Consent-Gated Transmission). Nine-phase run with staged transmit and two consents. Capability-type enforcement. Colonization Charter Gate. UCG-COL proposed with no threshold. Facilitator policy with n8n ineligible by default. Twenty-two atomic prompts. OI-09 to OI-15 opened.	ATLAS ULTRA SI
2.0	Sept 2026	Operator integrated. SAVANT CONNECTOR ULTRA SI v1.0.0 named the sole operator of D36; the card specifies and the conductor enforces. Invariant #27 (The Single Operator) added. IP range extended to IP-169 with IP-168 (Strand Adapter Boundary) and IP-169 (Run Completeness Attestation). Five strands mapped to phases; SPHINX fenced; SPARTAN MVE excluded. Constraints C-F10-14 to 18 and a map to the SPC's 20 constraints. GRO mode machine added. UCG-COL preflight requires a CompleteRun . Six prompts added (F10-P23 – P28). Correction: F10-P09 now depends on the Physical Routing Guard (F10-P08); v1.0 allowed a physical target to be sensed before it was refused. Critical path recomputed and unchanged at fifteen. OI-09 narrowed; OI-16 to OI-18 adopted from	ATLAS ULTRA SI

Version	Date	Change	Author
		the SPC. D37 reserved from IP-170. Not re-scored.	
3.0	Sept 2026	Two lineages reconciled. F10 PDD v1.1 (ENVOY) and v2.0 (SAVANT CONNECTOR) were produced independently and collided on the reference number (-002 , -003), on OI-16 to OI-18, and on Invariant #27's operator. This document names SAVANT ENVOY ULTRA SI , the Owner's combination of the two operators, as the sole operator of D36. Six strands (adds SKRIBE; keeps SPHINX under a hardened fence). Four terminal states adopted. Separation of duties at the UCG-COL request (C-F10-19, fifth preflight check). Static zero-LLM check on the core (F10-P23). SKRIBE adapter (F10-P29). SPHINX ENGINE boundary row and OI-18. Open-item register OI-16 to OI-20 unified. Constraints C-F10-01 to 21 mapped to the card's 23. OI-09 kept narrowed, overruling the ENVOY lineage's closure. New production ID -004 . Not re-scored.	ATLAS ULTRA SI
3.1	Sept 2026	Chat-interface targets. New target_actuation classification (API / CHAT_ONLY / NONE). For CHAT_ONLY , C4 composes a Curated Prompt Script instead of a Sovereign Deployment Brief, validated against four safety rules (Invariant #32). C5–C7 gain GUIDED execution (Invariant #33) ; the human runs the script under their own login, no Vault credential; checkpoint reports are graded	ATLAS ULTRA SI

Version	Date	Change	Author
		HUMAN_SUPPLIED , treated as data not instructions. A generic endpoint probe supplements verification where an endpoint results. Worked from Vertex AI Agent Builder, Hostinger's agentic mode and Copilot Studio's quick-create flow as [EXT] examples. Five IPs (188–192), taken out of sequence from the D38 frontier and disclosed as such (OI-37). Three constraints and five prompts (F10-P30–P34) added. OI-38 to OI-40 opened. Not re-scored.	

OI numbers in the v2.0 row above and in the retired v1.1 lineage refer to the register at that version. Section 1.2B gives the mapping.

AUTHORSHIP & PROVENANCE

Assembled by: ATLAS ULTRA SI (architecture, 4-Part decomposition, atomic prompts)

Council: SAVANT ENVOY ULTRA SI (operator) · SPARTAN MVE (SAVANT engine, invariant design) · CELL SI (cluster construction) · CODE DJ, ATHENA MUSE, DEXTER ULTRA SI, FRACTAL ULTRA SI, SKRIBE ULTRA SI, SPHINX ULTRA SI (operator strands) · SOLVA ULTRA SI (GAUNTLET verdict) · CORDON (wave sequencing) · OSIRIS ULTRA SI (telemetry handoff)

Source basis: Google Vertex AI Agent Builder documentation on natural-language agent creation; Hostinger's AI website builder / Horizons agentic-mode documentation; Microsoft Copilot Studio quick-create documentation (all [EXT] , re-verify before use); F11 HOST CONNECTOR ATLAS PDD v1.4 (companion amendment, evidence-trust model adopted); SAVANT ENVOY ULTRA SI SPC v1.0.0; THE COLONIZATION MANUAL; SECOND CONTACT Part 2; OMNIBUS ALPHA Domain Register; F9 MACHINE FLOOR ATLAS PDD v2.1;

MECHA ULTRA SI SPC v1.2.0; SPC PLAYER OMNIBUS v3 and REVERB v2; SAVANT Protocol Whitepaper v1.

EVIDENCE TAGS

- [SPEC] — D36, all 17 IPs, both invariants, the run, the capability types, UCG-COL, all Part 4 prompts. Design intent; nothing built.
- [INT]† — SOLVA verdict self-adjudicated; Tier 0 self-assignment.
- [ARK] — SAVANT phases, binary rule, CC-01 override, SPK contents, anti-patterns, Charter, physical combined gate, constraint-class tables, n8n as a Second Contact target, D13/D31/D32/D33 register entries, the publishing safety stack, SKRIBE's card identity and JCSE 48/50 with its own LIFE default, the Camelot inventory's archetype groups (Seat #16 in Healers and Guardians, Seat #17 in the King's Council), the SPHINX ENGINE tier list in the SAVANT Protocol Whitepaper v1.0, and the placeholder seats in OSIRIS's specification: drawn from confirmed project artifacts as stated in them.
- [EXT] — n8n licensing position (Sustainable Use License restrictions; separate Embed licence for white-label embedding), stated as advised earlier in this engagement and **to be re-verified before any decision**.
- [SYNTH] — Capability-type chain, the CompleteRun attestation, two-consent staged promotion, the verdict-binding hash, the SPHINX fence, the Chat Script Composer, the four curated-prompt safety rules, GUIDED execution and the generic endpoint probe are original syntheses for this build, not empirically validated. The exact wording of any composed prompt is synthesized even where the fact behind it is sourced (§3.5A.3, OI-40).