



Selective Marine Oil and Gas Limited

Date: 10/10/2025

Ref.: SMOG-CONT-L-25-215

To: Prospective Clients / Operators of PELs, PPLs, PMLs, OPLs, and OMLs

Subject: Provision of Offshore & Onshore Drilling & Workover Services/ Integrated & Turnkey Solution in Nigeria

Dear Sir/Madam,

We, **SELECTIVE MARINE OIL & GAS LIMITED (SMN)**, part of the **Selective Marine Services Group** are pleased to share our brief credentials with respect to the above-mentioned subject.

We Own and Operate Jack-up Drilling Rigs and Swamp Drilling Rigs for our clients in Nigeria since the last 6 years and can add value to your Exploration & Production needs through Quality & Cost-effective services in 100% compliance to Nigerian Content requirements.


Our current fleet of Rigs in West Africa is indicated below with our ability to mobilize move unit of secured with a long-term engagement for work plan.

Sr	Type	Name	Horse Power	Drilling Depth (ft)	Well Control (psi)	Status
1	Jack Up Rig	ORITSETIMEYIN	3000	30,000	10,000	Active
2	Jack Up Rig	SMS GRACE	3000	30,000	10,000	Under Recertification
3	Swamp Drilling Barge	SMS JOY	2000	23,000	10,000	Active
4	Swamp Drilling Barge	SMS MARY OUR MOTHER	3000	30,000	15,000	Under Recertification
5	Semi - Submersible Drilling Rig	Details available on request				
6	Tender Assists Drilling Barge	Details available on Request				
7	Drill Ship	Details available on Request				

A brief company profile and the brief specification of the above fleet is enclosed for your immediate information. We would be keen to receive your interest for more detailed information and prospective work engagement.

Please do not hesitate to contact us at clement@selectivemarine.com

Thanks & Regards


Albinus Vaz
Director



Enclosed: Company Profile & Technical specification of the Rig



SMS JOY

2000 HP/10,000 PSI SWAMP RIG



GENERAL

Design	Stewart Stevenson LLC/Rectangle
Built	MCDERMOTT dockyard, USA
Barge Type	Submersible
Year Of Construction	1982, Upgraded 2022
Flag	Nigeria
Classification	OMCS
IMO No:	8769303

MAIN DIMENSIONS/TECHNICAL

Hull Length	63.86 m
Hull Breadth	24.0 m
Hull Depth	4.27 m
Overall Length Including Helideck	71.98 m
Drilling Envelop	Slot (12m & 3m)
Max. Designed Water Depth	20 ft
Minimum Water Dept	09 ft
Drilling Depth	23,000 ft
Transit Speed Towed	2 Knots
Transit Variable Load	3,434 Ton
Helideck	Sikorsky S-61N
Helideck Compliance	CAAP 437
Accommodation	92
Fuel Consumption - Drilling	8 Ton / Day

STORAGE CAPACITIES

Fuel	1,950 bbls
Drinking Water	6,835 bbls
Potable Water	1,266 bbls
Mud Processing Tank	1,000 bbls
Active Liquid mud	1,000 bbls
Brine	848 bbls
Bulk Bentonite / Barite	2,826 cu ft
Cement	264000 lbs
Sack Storage	132000 lbs

POWER

Main Engines	4 x CAT 3516 @ 5986 HP
Main Generators	4 x CAT SR4B @ 1408HP
SCR	4 x SIMENSE @ 2144 HP
Emergency Power	1 x Chongqing kangmingsi KTA19-D(M) @ 448KW

DRILLING EQUIPMENT

Derrick	DRECO / M14730-2000
Dimension	30ft X 30ft X 147 ft
Hook load	4500KN (12 Lines)
Draw works	Baoji Petroleum Machinery Factory/JC-70D6 Motor 2x1600KW
Racking Capacity	23000ft 5" DP
Top Drive	HH DQ500Z, 500T 1X1000HP, 54,700ft-lb100 rpm
Rotary Table	Lanshi National Oilwell Company(LS-NOW) /ZP375 @ 37-1/2", 5850 KN

WELL CONTROL

RAM Type	13 5/8", Double @10K 13 5/8", Single @ 10K
Annular Preventer	13 5/8" @ 5K
Diverter	FH54-14, 21 1/4", 2000PSI
C&K Manifold	4"@10K, HJGS/Y-70 II
BOP Hoist	2 x TDJSC 25/5B -25T
BOP Control	FKDQ640-7

MUD SYSTEM

Mud Pumps	3 x Baoji Oilfield Machinery
Pressure Rating	F-1600 @ 7,500 psi
Shale Shakers	2xBrandt Cobra"s", 1XPuYang, SSZSII

LIFTING EQUIPMENT

Deck Crane	1 X Diesel STBD & 1 X Electric PORT Boom Length - 27 m Main Block - 35T/0-20m/min 5.3m/0-20m/min 27m/0-72m/min
Block Rating	
Whip capacity and hoist speed	5T/72m/min

Survival Craft

Life Boat : 4X BH-7A - 45 Cap. & Life Raft : 5XQJF-B25

The above information is intended for general reference only. All equipment and specifications are subject to change at any time.



SMS GRACE 3,000HP/10K JACKUP RIG



GENERAL

Design	MLT Class 82 SD-C Triangular
Built/year	Marathon LeTourneau / 1981
Jack-up Type	Self-Elevated Class 82 SD-C
Major Upgrades	2025
Flag	Liberia
Classification	A.B.S
Class notations	A1 Self Elevating Drilling Unit

MAIN DIMENSIONS/TECHNICAL

Length x Breadth	207 ft
Transit Draft	10.9 ft
Leg Length	3 x 360 ft Triangular Truss
Usable Leg Below Hull	309 ft
Leg Spacing	120 ft Transverse 121.67 ft Longitudinal
Spud can Diameter	40 ft diameter
Design Water Depth	250 ft
Min. Water Depth	12 ft
Drilling Depth	30,000 ft
Drilling Envelope	50 ft x 12 ft w/extension
Variable Load	3,939 ft
Helideck	S-61
Jacking System	Marathon LeTourneau 4Hi – 1/2 PBM211-7800

Accommodation	92
----------------------	----

STORAGE CAPACITIES

Fuel	2,059 bbls
Drill Water	6,631 bbls
Potable Water	983 bbls
Liquid Mud	1,320 bbls
Base Oil	268 bbls
Brine	None
Bulk Bentonite / Barite	3,877 ft3
Cement	3,877 ft3
Sack Storage	2,500 Sacks

POWER

Main Engines	3 x 12-645E-9B TURBOCHARGED
Main Generators	3 x EMD / AB20-6
Total Power	7650 HP

DRILLING EQUIPMENT

Derrick	Dreco 160 ft x 30 ft x 30 ft
Hook load	650 ST static hook load capacity
Draw works	National 1625 UDBE
Racking Capacity	5" 282 stands, 3-1/2" 345 stand 8" 9" 11 stands
Top Drive	Varco BJ TDS-4H
Drill line	1-5/8'
Iron Roughneck	NOV ST-80
Rotary Table	National C-375
Driller Instrumentation	MD TOTCO

WELL CONTROL

BOP RAM Type	1 Cameron type U
Annular Preventer	Shaffer 13 5/8", 5,000 Psi annular, 1 Double and 1 Single Cameron type U 13 5/8" 10 M
Diverter	Shaffer 21 1/4" 2,000 Psi
C&K Manifold	3 1/16" x 10 M, 2 manual and 2 hydraulic chokes
BOP Hoist	2 x 25 ton hoist and trolley handling system



MUD SYSTEM

Mud Pumps	3 x National 12-P-160 triplex
Pressure Rating	5000 PSI
Shale Shakers	4 x Derrick FLC 514 / LINEAR MOTION CASCADE

LIFTING EQUIPMENT

Deck Crane	3 API Marathon LeTourneau PCM 120 AS Electronic
Block Rating	
LIFE SAVING APPLICANCES	
Life Boat	2 x Watercraft EL28 (58 EA) , 1 x Fassmer CLR-T5.9 (38PAX)
Life Raft	4 Viking 25 Man
Fast Rescue Boat	N/A

The above information is intended for general reference only. All equipment and specifications are subject to change at any time.

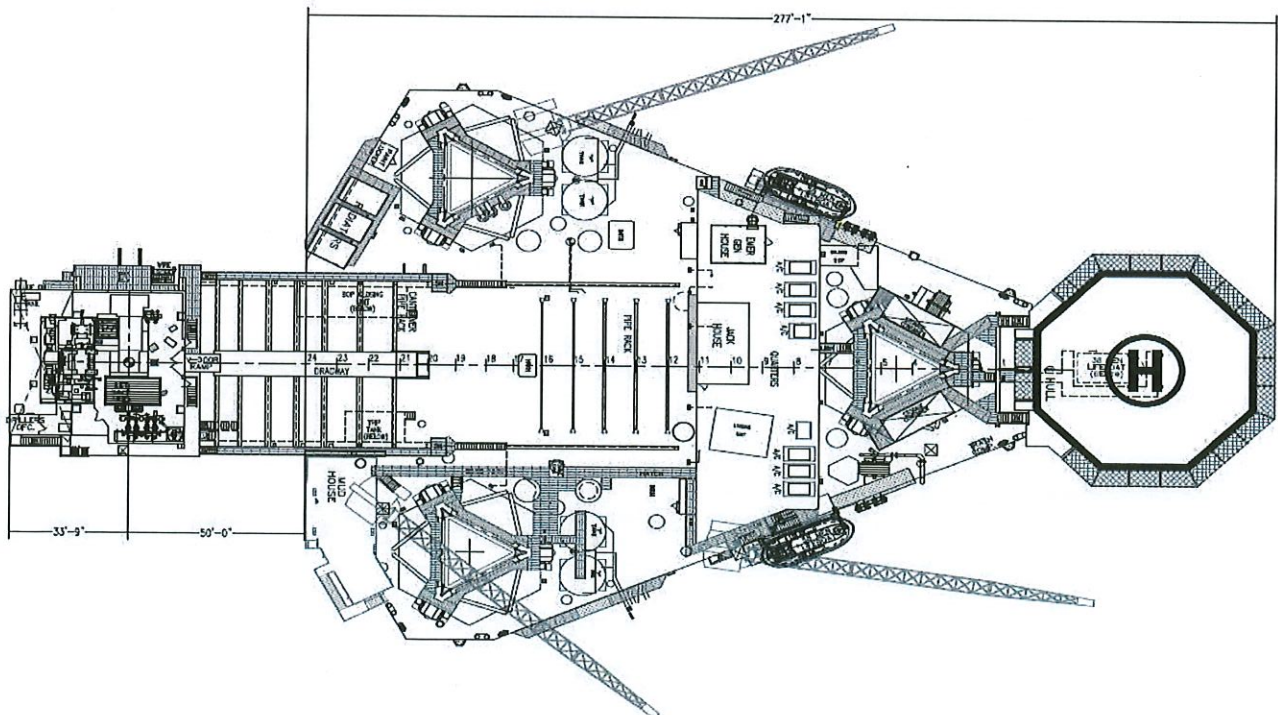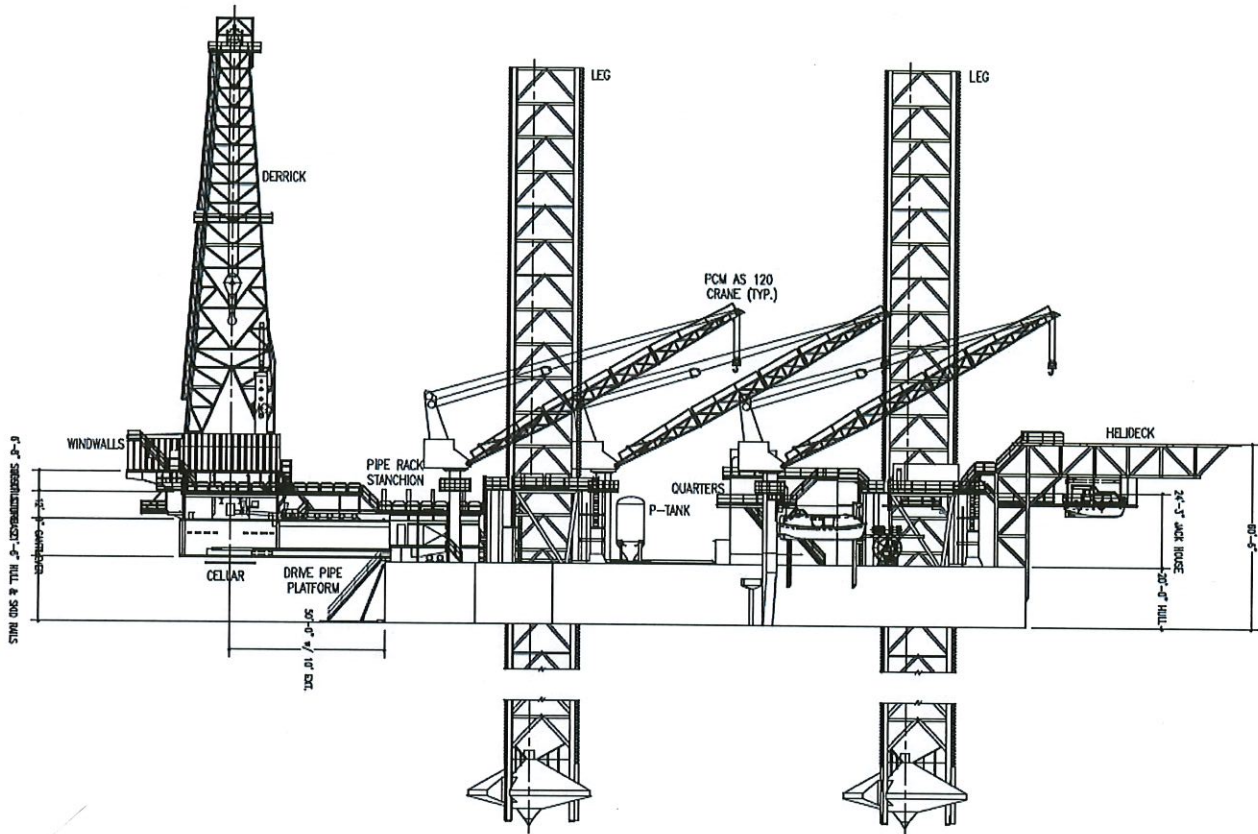



SMS MARY OUR MOTHER

3000 HP/15K PSI
SWAMP BARGE RIG

LAST UPGRADED / YEAR BUILD: 2025/1977

DRILLING DEPTH RATING: 30,000'

LIGHTSHIP:

(Overall Average Draft) 7'

(Towing Height) 66.7'

BARGE DIMENSIONS, SPECIFICATIONS:

Length	230'
Beam	64'
Hull Depth	14'
Posted Deck Height	14'
Key Slot	40 X 10'
Main Deck to Rotary Pan	30'
Main Deck to Top of Rotary	35'
Main deck to Bottom of Trolley Beams	25'
Accommodations	60 bunks
Helipad	68' X 50'

CAPACITIES:

Potable water	63,000 gallons
Drill water	5,100 barrels
Fuel	75,000 gallons
Mud tank capacity:	1,810 barrels
Bulk Barite	4,000 sacks
Tear-Drop Bulk Barite	75 sacks



Equipped for full zero discharge operations for work within environmentally sensitive areas.

DRAWWORKS:

- Continental Emsco C-3 Type II (3000 hp)
w/15050 Elmago elec. brake, driven by (3) GE
752 elec. motors (3000 hp)

MUD PUMPS:

-(3) LEWCO W-2215 (2200 hp ea) pumps,
each driven by (2) GE-752 Hi-Torque electric
motors (1130 hp each)
-7500 psi wp Working Pressure Mud System

MAST AND TRAVELING EQUIPMENT:

- 156' DSI cantilever mast, w/static hook load of 2,000,000 lbs
- 750T DSI 8 sheave crown grooved for 1 5/8" drill line
- 750T Traveling Block
- 750T CanRig Top Drive Unit (AC)
- 37 1/2" Rotary Table
- (1) 7500 psi wp Rotary Hose

WELL CONTROL EQUIPMENT:

- (1) 13 5/8" 5,000 psi Annular BOP
- (1) 13 5/8" 10,000 psi Cameron Type U Single Ram BOP
- (1) 13 5/8" 10,000 psi Cameron Type U Double Ram BOP w/
LBSBTB blind shear rams
- (1) 13 5/8" 10,000 lb. Drilling Spool
- 240 gal. Koomey Accumulator and Closing Unit
- 10,000 psi Choke Manifold

Note: Other BOP equipment available from stock

Note: equipment subject to client-specific requirements

*The above information is intended for general reference only. All equipment and specifications are subject to
change at any time*
SMS MARY OUR MOTHER – Technical Overview

MUD HANDLING/SOLIDS CONTROL:

- Shale Shaker (1) Derrick Primer shaker FLP 28/258 + (4) Derrick Hyperpool 4 Panel
- Desilter (3) Derrick 10" Hypercyclone
- Desander (20) Derrick 4" Hypercyclone
- Degasser Brandt DG-10
- Mud Agitators (1) Brandt MA-25 + (4) MA-15 + (2) MA-5
- Mud Mixing Pumps (3) 6 X 8 centrifugal pumps w/100 HP motors
- (2) Vortex shear hoppers – equipped with dust recovery system

POWER & ELECTRICAL SYSTEM:


- (4) D-3516 BHD Caterpillar (2150 hp) engines
- (4) KATO 1800 kw generator sets
- (5) Bay SIEMENS Digital SCR System

TUBULARS:

- 5" drill pipe w/handling tools,
- 15 joints of 5" Hevi-wate,
- 15 drill collars (8", 7 1/4", or 6 1/2" as available from Contractor's stock)

MISCELLANEOUS EQUIPMENT:

- (2) 30T cranes w/70' booms
- (2) 50 bbl trip tanks
- (2) Quincy Model 245-A compressors (rig air)
- (1) Quincy Model QSI 60 LP compressor (bulk air)
- (1) Ingersoll Rand cold start air compressor
- (1) 10' x 30' + (2) 12' x 30' cantilever deck – Port Side
- (1) .092 Wireline unit
- (1) 950 Spin Master pipe spinner
- 90' Mouse Hole

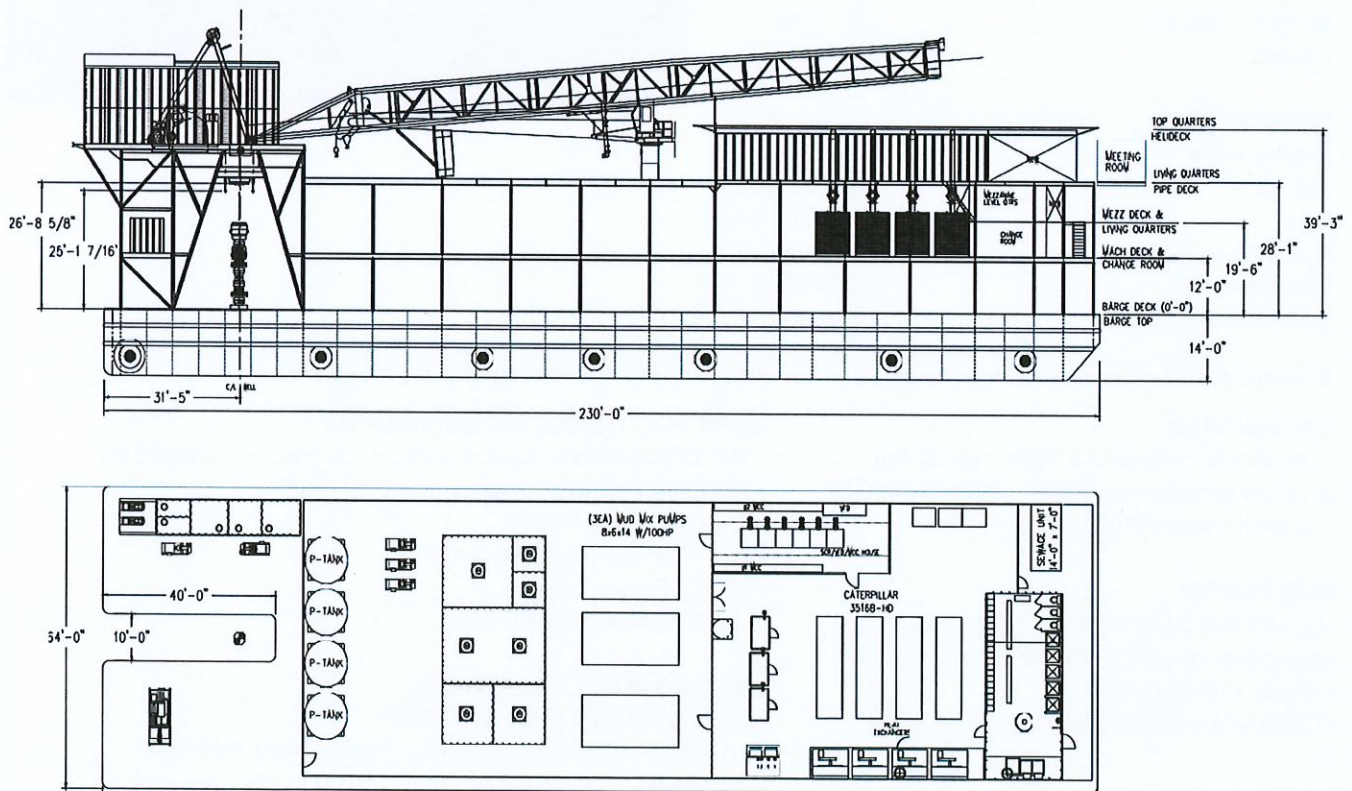

Note: equipment subject to client-specific requirements



ORITSETIMEYIN 3000 HP/10K JACKUP RIG



GENERAL

Design	Friede & Goldman Super M2
Built/year	M.I.S. Shipyard in Sharjah/2008
Jack-up Type	A1- Self-Elevating - MODU
Major Upgrades	2018/2023
Flag	Panama
Classification	Lloyds Register
IMO Number	8769387
GRT / NRT	6880 / 2064

MAIN DIMENSIONS/TECHNICAL

Length x Breadth	196 ft x 183 ft x 25 ft
Transit Draft	15 ft
Leg Length	3 x 410 ft
Usable Leg Below Hull	362 ft
Leg Spacing	120 ft Transverse / 115 ft Longitudinal
Spud can Diameter	50 ft
Design Water Depth	300 ft
Min. Water Depth	19 ft
Drilling Depth	30,000 ft
Drilling Envelope	50 ft x 15 ft
Variable Load	4276 kips
Helideck	Sikorsky S-61N
Helideck Compliance	CAAP 71
Accommodation	110
Jacking System	NOV D60H Electric Racks 54 Pinion

STORAGE CAPACITIES

Fuel	4,150 bbl
Drill Water	5,455 bbl
Potable Water	2,490 bbl
Liquid Mud	1,926 bbl
Base Oil	920 bbl
Brine	1,230 bbl
Bulk Bentonite / Barite	200 cu ft
Cement	100 cu ft
Sack Storage	5,000 Sacks

POWER

Main Engines	4 x 3516 BHD
Main Generators	4 X Kato @ 1600 kW
Total Power	8,650 HP
Emergency Power	1 x CAT 3412

DRILLING EQUIPMENT

Derrick	32 ft x 35 ft x 160 ft
Hook load	1,500 kips (14 Lines)
Drill line	1-5/8"
Draw works	Varco ADS-10D AC 2 x 1400 HP
Racking Capacity	341 stands 5-1/2" DP
Top Drive	NOV TDS-8SA Max Torque 62,250 ft-lbs
Iron Roughneck	NOV ST-120
Rotary Table	Varco BJ/RST 495 , 49-1/2"
Power Slips	Nil
Auto driller	No
Driller Instrumentation	Varco MD-Totco V-ICIS & Rig sense

WELL CONTROL

RAM Type	NOV 13 5/8" -- 10K
Annular Preventer	NOV 13/5" -- 5K Hydrill

C&K Manifold	3-1/16" - 10 K
BOP Hoist	2 x IR - 50T

MUD SYSTEM

Mud Pumps	3 x NOV 12-P-160
Pressure Rating	7,500 psi
Shale Shakers	4 x NOV Brandt / VSM 300
Desander / Desilter	Brandt - 24 Cone.
Mud Gas Separator	M.I.S. 48", Discharge - ID 10"
Degasser	Brandt / DG-10

LIFTING EQUIPMENT

Deck Crane	3 x AMCLYDE 10000 XHD-Diesel
Block Rating	59.5T @ 22.6 ft Radius

LIFE SAVING APPLIANCES

Life Boat	2 x 110 Person
Life Raft	5 x 25 Person
Fast Rescue Boat	1 x JNM - NPT60RB

The above information is intended for general reference only. All equipment and specifications are subject to change at any time.

