

EngSci 721

Inverse Problems and Learning From Data

Oliver Maclaren (oliver.maclaren@auckland.ac.nz)

Module overview

Inverse Problems and Learning From Data (*Oliver Maclaren*)

[~14 lectures/3 tutorials]

1. *Basic concepts* [5 lectures + 1 Tutorial]

Forward vs inverse problems. Well-posed vs ill-posed problems. Algebra and calculus of inverse problems (left and right inverses, generalised and pseudo inverses, resolution operators, matrix calculus). Representing higher dimensional problems (image data etc).

2. *Instability and regularisation in linear and nonlinear problems* [6 lectures + 1 Tutorial]

Instability and related issues for generalised inverses. Introduction to regularisation and trade-offs. Tikhonov regularisation. Higher-order Tikhonov regularisation. Sparsity and regularisation using different norms. Truncated singular value decomposition. Iterative regularisation, including stochastic/mini-batch gradient descent.

3. *Further topics* [3 lectures + 1 Tutorial]

Regularisation parameter choice, including statistical and machine learning views of regularisation. Confidence sets for linear and nonlinear models. Physics-informed machine learning and neural networks.

Lecture 10: Iterative regularisation

Topics:

- Features of nonlinear and/or large linear inverse problems
 - Benefits of/need for iterative methods
- Brief overview of iterative minimisation for regularised problems
- Iteration plus early stopping as a regularisation method
 - Semi-convergence and singular limits

Eng Sci 721 : Lecture 10.

Iterative methods

For nonlinear &/or large,
need:

- Iterative minimisation algorithms
- Iterative regularisation
↳ main focus.

Motivation I. Solving regularised equations.

- Nonlinear problems : $\min \|F(x) - y\|^2 + \lambda \|x\|^2$
↳ nonlinear optimisation → iterative methods ✓

- Large linear systems → large sparse systems

factorisations like
SVD, QR etc
often denser
than original
matrix

↓
require lots of
memory ;)

(Though see eg
CUR factorisations
& matrix sketches)

↓
methods that
only require
"ability to
compute
actions of matrix"
eg matrix
times vector

↓
iterative
methods ✓

Only need 'action of matrix on a vector'?

→ As seen in lectures & assignment, linear operators can be represented by matrices & matrix multiplication, but they can also often be computed more efficiently (eg memory, number of FLOPS etc) using other representations, eg convolution, sparse linear algebra etc

→ these sidestep working with an explicit matrix, & focus on input-output behavior of linear op:

vector $\rightarrow$ LinOp $\rightarrow$ vector $\neq$
action/effect on vector

→ these are sometimes called 'matrix free' methods & are good for large-scale (memory) problems

* Γ input & output vectors can be dense,

Iterative methods & matrix-free methods

→ Many iterative methods only require the 'input-output' behaviour ('action') & can hence handle large (memory etc) problems

Actually often need action of A & A^T not just A

In Python?

→ scipy provides LinearOperator

```
import numpy as np
from scipy.sparse.linalg import LinearOperator
```

```
print("=== Custom Operation Example ===")
```

```
def diagonal_scale_matvec(x):
    """Custom operation: scale each element by its position + 1"""
    return (np.arange(len(x)) + 1) * x
```

```
# Create LinearOperator for custom operation
n = 4
D_linop = LinearOperator(shape=(n, n), matvec=diagonal_scale_matvec)
```

```
# Equivalent matrix form
D_matrix = np.diag(np.arange(n) + 1)
```

```
print(f"Diagonal matrix D:")
print(D_matrix)
```

```
=== Custom Operation Example ===
```

```
Diagonal matrix D:
[[1 0 0 0]
 [0 2 0 0]
 [0 0 3 0]
 [0 0 0 4]]
```

```
# Test with vector
y = np.array([1, 1, 1, 1])
print(f"Test vector y: {y}")
```

```
result_matrix_D = D_matrix @ y
result_linop_D = D_linop @ y
```

```
print(f"Matrix result: {result_matrix_D}")
print(f"LinearOperator result: {result_linop_D}")
print(f"Results are equal: {np.allclose(result_matrix_D, result_linop_D)}")
```

```
Test vector y: [1 1 1 1]
Matrix result: [1 2 3 4]
LinearOperator result: [1 2 3 4]
Results are equal: True
```

So far so good...

Problem? regularisation parameter
search: λ in range

→ iteration takes more function
evaluations than single solve

↳ doing iteration for each
 λ is expensive

Can we combine λ search
& iteration?

Motivation II As regularisation methods!

Key idea: early stopping rules for iterative
opt.


Stopping rule plays role of regularisation

- too soon: bad fit/underfit/biased
- too late: overfit noise/too unstable

Advantage:

- rather than solve eq

for λ in range:
best $x(\lambda)$ via iterative



- generate:

sequence $x_k, k=0,1,\dots$


where each x_k can be considered
a regularised estimate &
 $x_k \rightarrow x^+ = A^+y$ as $k \rightarrow \infty$

Iterative regularisation

Want:

- initial iterates close to regularised / 'simple' solⁿs
- better in middle stages, i.e. close to 'true' goal
- 'diverge' to exact but noise amplifying later

} Controlled descent + stopping rule

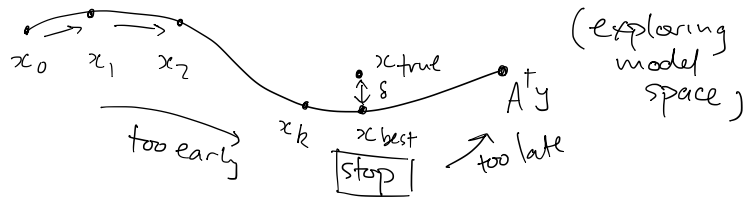

(Note: continuation, i.e. use previous $x(\lambda_n)$ as guess for $x(\lambda_{n+1})$ is closely related!)

This idea is sometimes called 'semi-convergence'

Disadvantage:

- 'implicit' rather than explicit
 - hard to analyse!
- iteration num
not direct
measure of
actual solⁿ
complexity
- ↳ But, really, true of nonlinear problems in general!

Regularisation schemes

	<u>Tikhonov</u>	<u>TSVD</u>	<u>iterative</u>
parameter:	λ $\lambda \ Lx\ ^2$	p (singular values)	k (iteration number to stop)
parameter choice:	- L-curve / pareto	- pareto fit trade-off	- pareto fit stopping rule
rule:	- discrepancy principle - cross-validation etc	- Picard plot : etc	('good enough') etc

(in general: start with 'simple' / biased model that doesn't fit so well, allow to become more complex / variable but not too complex.)

Analysis?

711? Iterative methods as dynamical systems --

→ Singular limit: A^+y [nonhyperbolic?]
↳ goal 'in principle'


↳ unstable! all models/data wrong

→ want to approach, but not too closely

→ design a controlled approach to /flow on centre manifold?

→ eg

Even related to 'hot topics' like
deep learning! (eg [stochastic] gradient descent)

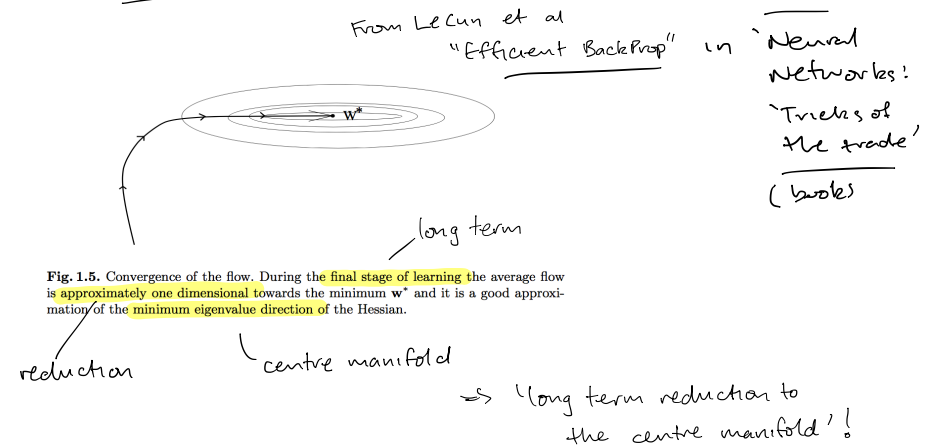

CBMM Memo No. 073

January 30, 2018

Theory of Deep Learning III: the non-overfitting puzzle

by T. Poggio¹, K. Kawaguchi^{1†}, Q. Liao¹, B. Miranda¹, L. Rosasco²

with X. Boix¹, J. Hidy^{1†}, H. Mhaskar²

¹Center for Brains, Minds and Machines, MIT

[†]CSAIL, MIT

^{††}Alphabet (Google) X

²Claremont Graduate University

Abstract: A main puzzle of deep networks revolves around the apparent absence of overfitting intended as robustness of the expected error against overparametrization, despite the large capacity demonstrated by zero training error on randomly labeled data.

In this note, we show that the dynamics associated to gradient descent minimization of nonlinear networks is topologically equivalent, near the asymptotically stable minima of the empirical error, to a gradient system in a quadratic potential with a degenerate (for square loss) or almost degenerate (for logistic or crossentropy loss) Hessian. The proposition depends on the qualitative theory of dynamical systems and is supported by numerical results. The result extends to deep nonlinear networks two key properties of gradient descent for linear networks, that have been recently recognized (1) to provide a form of implicit regularization:

One of the key ideas in stability theory is that the qualitative behavior of an orbit under perturbations can be analyzed using the linearization of the system near the orbit. Thus the first step is to linearize the system, which means considering the Jacobian of F or equivalently the Hessian of L at W^* , that is

$$H_{ij} = \frac{\partial^2 L}{\partial w_i \partial w_j} \quad (2)$$

We obtain

$$\dot{W} = -HW, \quad (3)$$

where the matrix H , which has only real eigenvalues (since it is symmetric), defines in our case (by hypothesis we do not consider unstable critical points) two main subspaces:

- the stable subspace spanned by eigenvectors corresponding to negative eigenvalues
- the center subspace corresponding to zero eigenvalues.

The center manifold existence theorem (16) states then that if F has r derivatives (as in the case of deep polynomial networks) then at every equilibrium W^* there is a C^r stable manifold and a C^{r-1} center manifold which is sometimes called slow manifold. The center manifold emergence theorem says that there is a neighborhood of W^* such that all solutions from the neighborhood tend exponentially fast to a solution in the center manifold. In general, properties of the solutions in the center manifold depends on the nonlinear parts of F . We assume that the center manifold is not unstable in our case, reflecting empirical results in training networks. Of course, the dynamics associated with the center manifold may be non trivial, especially in the case of SGD. We simply assume for now that perturbations of it will not grow and trigger instability.

qualitative theory of dynamical systems

centre manifold theory

} explaining deep learning/non-overfitting using qualitative theory of ODEs, incl. centre manifolds.

side
Warning: Plateaus, double descent in ML etc

→ iteration number is not a direct measure of the complexity of the particular solⁿ found so far


↳ not bad for simple cases & simple iteration schemes

↳ can be misleading in more complex settings

→ see confusion over (test) 'double descent' & 'bias-variance' in ML

→ also changing learning rate etc matters & common to get (training) plateaus

Training error

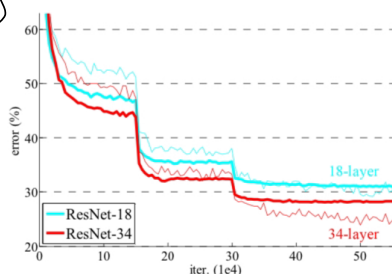

(He et al 2016)

Deep Residual Learning for Image Recognition

Kaiming He Xiangyu Zhang Shaoqing Ren Jian Sun
Microsoft Research
(khe, v-xiangz, v-shren, jiansun)@microsoft.com

iteration

→ will hopefully discuss more later!

First: Iterative minimisation

- Quick review/recap.

see $\left[\begin{array}{l} \text{Nocedal \& Wright 'Numerical Optimisation'} \\ \text{Boyd \& Vandenberghe 'Convex Optimisation'} \end{array} \right]$ for more.

Descent methods for minimising a

function $f(x)$, $x \in \mathbb{R}^n$, $f(x) \in \mathbb{R}$

are all based on constructing a sequence

$$\boxed{x_0, x_1, \dots, x_k, \dots}$$

such that

$$\boxed{f(x_{k+1}) < f(x_k)}$$

unless x_k is optimal / a stopping condition is reached.

→ even non monotonic methods are usually descent methods for subsequences eg

$$f(x_{k+m}) < f(x_k), \quad m \geq 1 \text{ etc.}$$

Descent method flavours

Two basic flavours:

1. line search given x_k

↳ choose a search direction s_k (vector)

↳ solve $\min_{\alpha > 0} f(x_k + \alpha s_k)$

(scalar optimisation prob. in α)



2. trust region given x_k .

↳ replace f by 'surrogate' model m_k that we 'trust' to represent f inside a given trust region

↳ solve $\min_s m_k(x_k + s)$
for all s inside trust region
↑
vectors



1. Choose direction, identify distance

2. Choose distance, identify direction.

Common search methods

- Nelder-Mead } derivative-free
 - Gradient/steepest descent
 - Newton
 - Quasi-Newton
 - Conjugate gradient
- } derivative-based
(at least first, often second)

etc

Trade-offs:

- computational expense
(derivative computation, memory etc)
 - exploration vs exploitation
 - ↳ look for better in new/wider neighbourhood
 - ↳ make use of what you have!
 - robustness
- etc

Tools:

Matlab: - fminsearch (Nelder-Mead)
- optimisation toolbox

Python: - scipy.optimize library
- sklearn
- etc.

Iterative regularisation

Recall:


Want: - initial iterates close to regularised / 'simple' sol^{ns}

- better in middle stages, close to 'true' goal

- 'diverge' to exact but noise amplifying later

Linear example.

Full/
initial:



start 'simple'

→ think overdetermined (effectively)

→ approach A^+ from over → under det.

So



→ Can find a left
inverse
(if col indep.)

Least squares & Normal equations...

But first!

Zeros & Fixed Points

'Theory of everything' (LeCun)

$$\boxed{F(x) = 0} \text{ for some } F, x$$

(everything is a zero of some function)

Alternative:

$$\boxed{T(x) = x} \text{ for some } T, x.$$

(everything is a fixed point of some function)

Relationship

If eg

$$\boxed{T(x) := \alpha F(x) + x}, \quad \alpha \neq 0$$

Then

$$\boxed{\begin{array}{c} F(x) = 0 \\ \Leftrightarrow \\ T(x) = x \end{array}}$$

Fixed point iterations : (define goal as fixed point of same map.)

Define:

$$\boxed{x_{k+1} = T(x_k)}$$

If $x_k \rightarrow x^*$ as $k \rightarrow \infty$

Then get $\underline{x^* = T(x^*)}$ & hence
solves $F(x) = 0$

Contraction mappings

The above works if eg

$$\|Tx - Ty\| \leq a \|x - y\| \quad \text{for all } x, y$$

$$\& \quad 0 < a < 1$$

More detail: functional analysis
&
dynamical systems

Difficult/interesting area for eg
nonlinear T !

Normal equations

$$\bullet \quad A^T A x = A^T y$$

$$\bullet \quad F(x) = A^T y - A^T A x = 0$$

$$\bullet \quad T(x) = \alpha F(x) + x = x$$

Define:

$$x_{k+1} = T(x_k)$$

$$= x_k + \alpha F(x_k)$$

$$= x_k + \alpha A^T (y - Ax_k)$$

→ 'Landweber iteration'

Note:

$$\nabla_x \|y - Ax\|^2 = -2A^T(y - Ax)$$

⇒ gradient descent!

$$x_{k+1} = x_k - \alpha \nabla_x \phi(x_k)$$

$$\text{for } \phi = \|y - Ax\|^2$$

Landweber iteration

$$x_{k+1} = x_k + \alpha A^T (y - Ax_k)$$

&

$$0 < \alpha < 2/s_1^2$$

s_1 : largest
singular
value

Stop when eg

• $\|Ax_k - y\| \approx \epsilon$ = measure of noise level

• 'Flattens' off (monitor)

Note: only need matrix-vector products

→ no matrix factorisations

→ efficient for large sparse systems.

Landweber iteration

Can show in linear case iterates have form

$$x_k = V F_k \Lambda^{-1} U^T y$$

$\underbrace{\quad}_{\text{model space basis}}$ coefficients
= Filter factors x usual SVD

$$F_k = \begin{bmatrix} f_1^k & & \\ & \ddots & \\ & & f_n^k \end{bmatrix}$$

$$f_i^k = 1 - (1 - \alpha s_i^2)^k$$

↑ using s_i for singular values


ie 'damps out singular values'
similar to Tikhonov/TSVD

→ iteration closely tied to model complexity & degree of regularisation


Iterative regularisation : Example.

Deconvolution again!

slightly noisy $Ax \approx y$

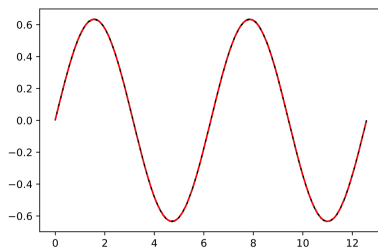

Naive A^+y :

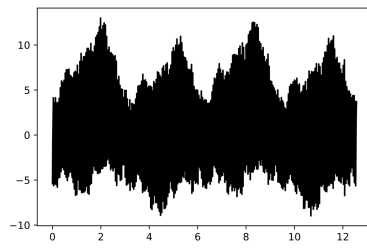

Landweber iteration (Naive!)

```
niter = 1000
xs = np.zeros((niter, len(x)))
for i in range(0, niter-1):
    #update rule
    xs[i+1, :] = xs[i, :] + A.T @ (y_noisy - A @ xs[i, :])
```

Notes:

- just do 1000 & choose earlier stopping after (fast here so OK)


- largest s_i , s_1 , is 1 here
 $\Rightarrow 0 < \alpha < 2$

I used $\alpha = 1$
in iterations.


```
from scipy.sparse.linalg import svds
U, s, VT = svds(A, k=1)
s1 = s
print(s1)
[ 1.]
```

Iterative regularisation : results


Solutions:

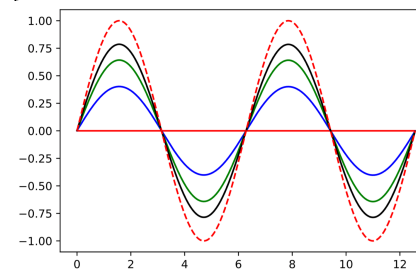

First few iterations

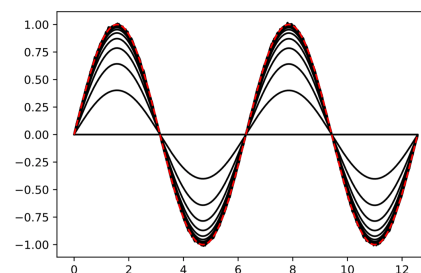

All iterations

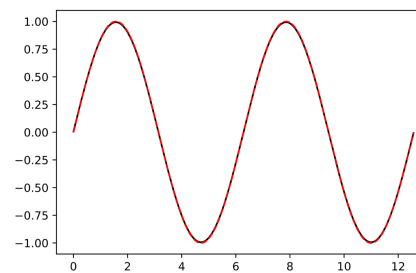

10th iteration.


Pattern: | underfit $\rightarrow$ good fit $\rightarrow$ overfit |

ie 'semi-convergence'


(not as
obv here
 $\rightarrow$ see noise $\Rightarrow$)

Iterative regularisation : results

convergence

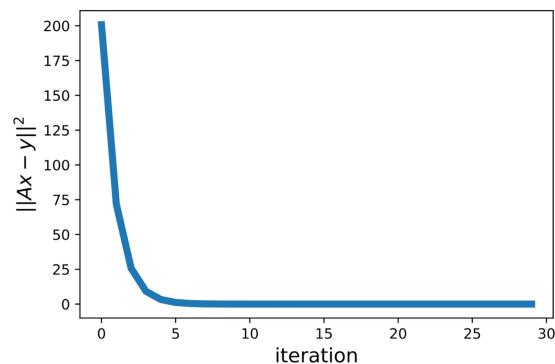

Fit vs Iteration

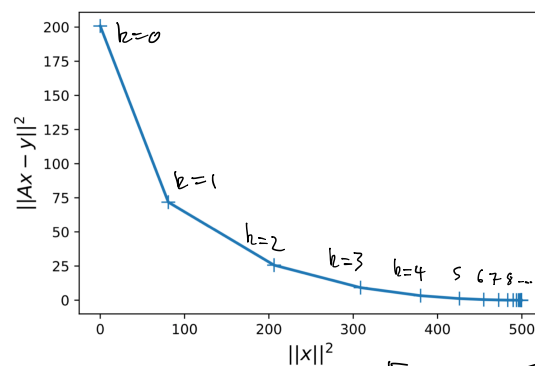


Lcurve

actual 'complexity'

Note: 'slowing down' (slow manifold!)
→ smaller changes per it.

Complexity & iteration number

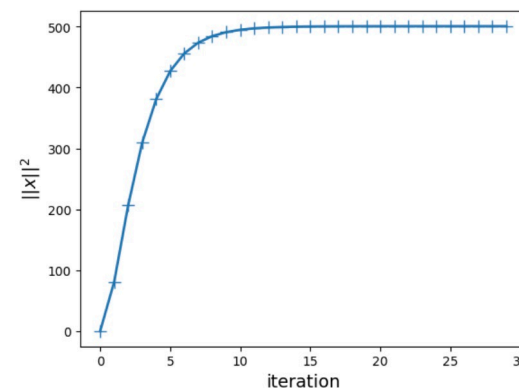

Notes: complexity saturating here
(growing but slow)


→ actually quite hard to
badly overfit

→ cf $\|A^+ y\|_2^2 \sim 10^6$

pseudo inverse solⁿ
much bigger

iterative regularisation: Noiser


Noise $\uparrow \times 10$

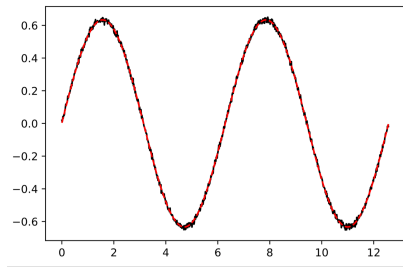



data:

$$Ax + \epsilon$$

all inversions (1000)

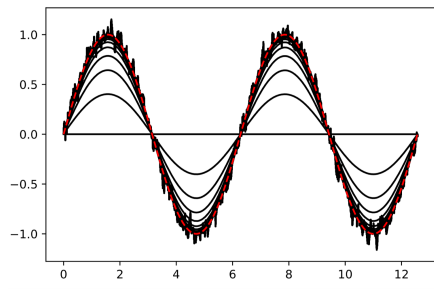


$k = 300$. Noise ampl.

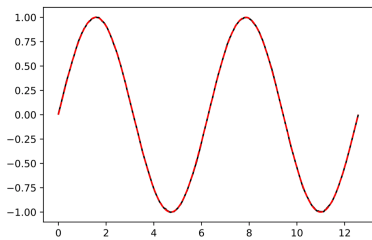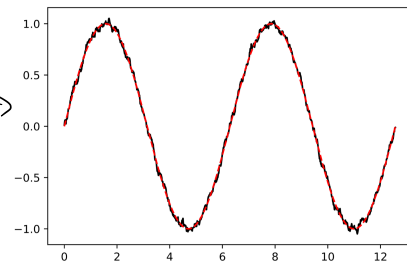

$k = 30$ still good!

$k = 1000$. Noise ampl.

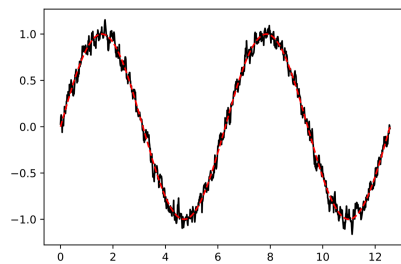

(overfitting noise)

iterative regularisation: more sophisticated

→ Landweber iteration is basically
(first-order) gradient descent

→ just as in optimisation, we can
choose a search/update direction
based on higher-order information

↳ more derivatives, 'larger'
local neighbourhood

general

$$x_{k+1} = x_k + F_k(x_k, y)$$

expansion based
on deriv. at
 x_k .

where F_k can take into account
higher-derivatives* etc.

[* Think: Taylor series for $x(k+1) = T(x(k))$]

Trade-off: don't want it to
optimise too well!

→ want to avoid $x^+ = A^+ y$ limit!

Iterative regularisation

Aster et al. (Chapter 6) Example 6.3 (see attached)

→ Deblurring 2D image (200x200 pixels)

→ with & without explicit regularisation

→ use conjugate gradient least squares

→ Blurring operator:

- 40,000 x 40,000

- very sparse

- ↳ SVD produces denser matrices & requires a lot of storage

- ↳ CGLS works well & only requires access to matrix-vector products

→ CGLS w/out explicit regularisation

- doesn't matter if only iterative!
- much cheaper!

Modern frontier

- Stochastic gradient descent

- ↳ workhorse of ML

- ↳ will look at next lecture

- Applied to eg very large neural networks, not always clear when to stop

- ↳ plateaus in training error:



- ↳ 'double descent' in test error etc behaviour

→ I believe we can explain with standard theory!

(as do others, but not all...)

- ↳ will try to convince you?

Note that this algorithm only requires one multiplication of $\mathbf{G}\mathbf{p}_k$ and one multiplication of $\mathbf{G}^T \mathbf{s}_{k+1}$ per iteration. We never explicitly compute $\mathbf{G}^T \mathbf{G}$, which might require considerable time, and which might have far more nonzero elements than $\mathbf{G}$ itself.

The CGLS algorithm has an important property that makes it particularly useful for ill-posed problems. It can be shown that, for exact arithmetic, $\|\mathbf{m}_k\|_2$ increases monotonically and $\|\mathbf{G}\mathbf{m}_k - \mathbf{d}\|_2$ decreases monotonically with increasing iterations [61, 65]. We can use the discrepancy principle together with this property to obtain a regularized solution. Simply stop the CGLS algorithm as soon as $\|\mathbf{G}\mathbf{m}_k - \mathbf{d}\|_2 < \delta$. In practice, this algorithm typically gives good solutions after a very small number of iterations.

An alternative way to use CGLS is to solve the Tikhonov regularization problem (4.4) by applying CGLS to

$$\min \left\| \begin{bmatrix} \mathbf{G} \\ \alpha \mathbf{L} \end{bmatrix} \mathbf{m} - \begin{bmatrix} \mathbf{d} \\ \mathbf{0} \end{bmatrix} \right\|_2^2. \quad (6.76)$$

For nonzero values of the regularization parameter α , this least squares problem should be reasonably well-conditioned. By solving this problem for several values of α , we can compute an L-curve. The disadvantage of this approach is that the number of CGLS iterations for each value of α may be large, and we need to solve the problem for several values of α . Thus the computational effort is far greater.

Example 6.3

A commonly used mathematical model of image blurring involves the two-dimensional convolution of the true image $I_{\text{true}}(x, y)$ with a **point spread function**, $\Psi(u, v)$ [14]:

$$I_{\text{blurred}}(x, y) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} I_{\text{true}}(x - u, y - v) \Psi(u, v) du dv. \quad (6.77)$$

Here the point spread function shows how a point in the true image is altered in the blurred image. A point spread function that is commonly used to represent the blurring that occurs because an image is out of focus is the **Gaussian point spread function**

$$\Psi(u, v) = e^{-\frac{u^2 + v^2}{2\sigma^2}}. \quad (6.78)$$

Here the parameter σ controls the relative width of the point spread function. In practice, the blurred image and point spread function are discretized into pixels. In theory, Ψ is nonzero for all values of u and v . However, it becomes small quickly as u and v increase. If we set small values of Ψ to 0, then the $\mathbf{G}$ matrix in the discretized problem will be sparse.

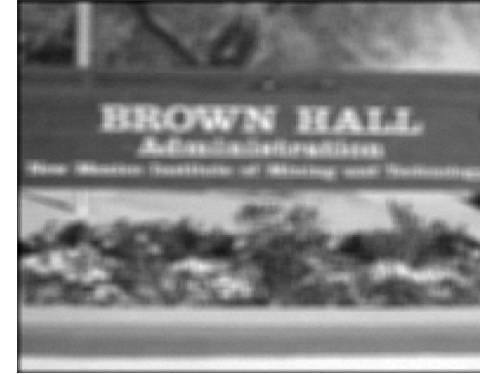


Figure 6.8 Blurred image.

Figure 6.8 shows an image that has been blurred and also has a small amount of added noise. This image is of size 200 pixels by 200 pixels, so the $\mathbf{G}$ matrix for the blurring operator is of size 40,000 by 40,000. Fortunately, the blurring matrix $\mathbf{G}$ is quite sparse, with less than 0.1% nonzero elements. The sparse matrix requires about 12 MB of storage. A dense matrix of this size would require about 13 GB of storage. Using the SVD approach to Tikhonov regularization would require far more storage than many current computers have. However, CGLS works quite well on this problem.

Figure 6.9 shows the L-curve for the solution of this problem by CGLS without explicit regularization and by CGLS with explicit regularization. The line with circles shows the solutions obtained by CGLS without explicit regularization. For the first 30 or so iterations of CGLS without explicit regularization, $\|\mathbf{G}\mathbf{m} - \mathbf{d}\|_2$ decreases quickly. After that point, the improvement in misfit slows down, while $\|\mathbf{m}\|_2$ increases rapidly.

Figure 6.10 shows the CGLS solution without explicit regularization after 30 iterations. The blurring has been greatly improved. Note that 30 iterations is far less than the size of the matrix ($n = 40,000$). Unfortunately, further CGLS iterations do not significantly improve the image. In fact, noise builds up rapidly, both because of the accumulation of round-off errors and because the algorithm is converging slowly towards an unregularized least squares solution. Figure 6.11 shows the CGLS solution after 100 iterations. In this image the noise has been greatly amplified, with little or no improvement in the clarity of the image.

We also computed CGLS solutions with explicit Tikhonov regularization for 22 values of α . For each value of α , 200 iterations of CGLS were performed. The resulting

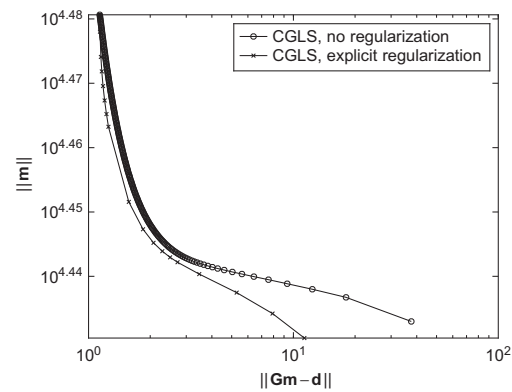


Figure 6.9 L-curves for CGLS deblurring.

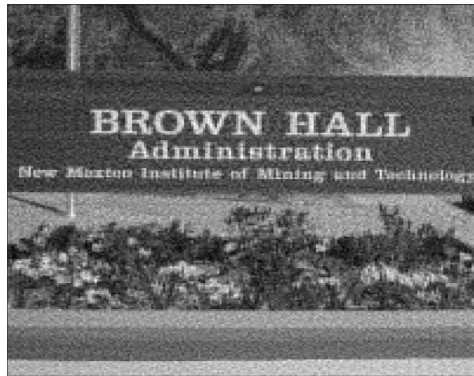


Figure 6.10 CGLS solution after 30 iterations, no explicit regularization.

L-curve is shown in Figure 6.9 with “x” markers for each regularized solution that was obtained. This L-curve is slightly better than the L-curve from the CGLS solution without explicit regularization in that the values of $\|\mathbf{m}\|_2$ and $\|\mathbf{Gm} - \mathbf{d}\|_2$ are smaller. However, it required 40 times as much computational effort. The corner solution for $\alpha = 7.0 \times 10^{-4}$ is shown in Figure 6.12. This solution is similar to the one shown in Figure 6.10.

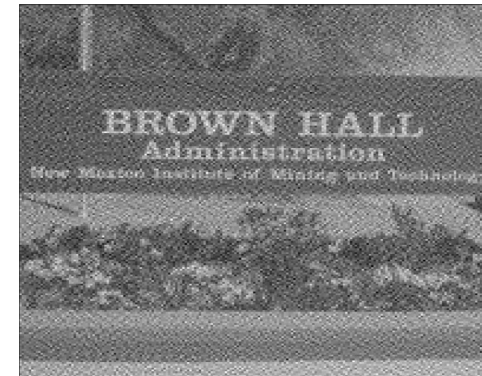
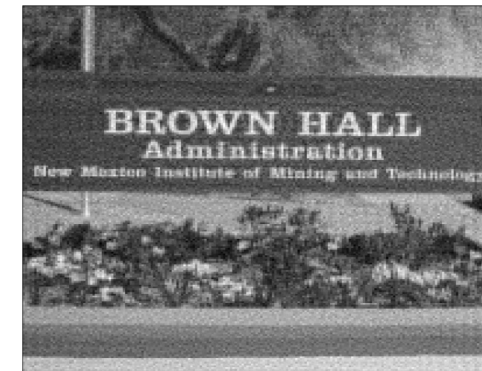


Figure 6.11 CGLS solution after 100 iterations, no explicit regularization.

Figure 6.12 CGLS solution, explicit regularization, $\alpha = 7.0 \times 10^{-4}$.

We have focused on the CGLS method in this section because it is particularly easy to derive and because of the implicit regularization effect of the CGLS method. However, many other iterative methods have been developed for large-scale least squares problems [5, 135]. An analysis of the implicit regularizing effects of these methods can be found in Hanke [61]. The LSQR method of Paige and Saunders has been very widely used in many geophysical applications [123, 124]. MATLAB has an efficient and robust implementation of LSQR in its `lsqr` routine.