

OMAR CHEHAIMI

NOTES ON DATA STRUCTURES  
AND ALGORITHMS IN PYTHON

March 24, 2021



This book is released into the public domain using the GNU Free Documentation License.

To view a copy of the GNU Free Documentation License visit:

<http://www.gnu.org/licenses/fdl-1.3.txt>

## COLOPHON

This document was typeset using the typographical look-and-feel classicthesis developed by André Miede. The style was inspired by Robert Bringhurst's seminal book on typography *"The Elements of Typographic Style"*.

Felix qui potuit rerum cognoscere causas.

– Publius Vergilius Maro

## PREFACE

The following notes are based on the Udacity online course [Intro to Data Structures and Algorithms in Python](#). These notes are not intended to be a book, nor a formal introduction to data structures and algorithms, they are just my personal attempt to have a small, yet comprehensive notes about the huge world on this topic.

*Omar Chehaimi*

## CONTACTS

✉ [omar.chehaimi@outlook.it](mailto:omar.chehaimi@outlook.it)

# CONTENTS

Preface	iv
1 PRELIMINARIES CONCEPTS	1
1.1 Computational Complexity	1
1.2 Big O Notation	1
1.2.1 Properties	1
1.3 Time complexity evaluation example	2
1.4 Recursion	3
1.4.1 Python Implementation Examples	4
2 DATA STRUCTURES	6
2.1 Collection	6
2.2 List	6
2.3 Array	6
2.4 Linked List	8
2.4.1 Linked List Implementation	11
2.5 Stack	12
2.5.1 Stack Implementation	12
2.6 Queue	13
2.6.1 Queue Implementation	15
2.7 Set	16
2.8 Map	16
2.9 Hash Table	16
2.9.1 Hashing	16
2.10 String Keys	18
2.10.1 String Keys Implementation	19
3 SEARCHING AND SORTING	20
3.1 Binary Search	20
3.1.1 Efficiency of the Binary Search Algorithm	21
3.1.2 Binary Search Implementation	22
3.2 Bubble Sort	23
3.2.1 Efficiency of the Bubble Sort Algorithm	25
3.2.2 Bubble Sort Implementation	26
3.3 Merge Sort	26
3.3.1 Efficiency of the Merge Sort Algorithm	27
3.3.2 Merge Sort Implementation	28
3.4 Quicksort	30
3.4.1 Efficiency of the Quicksort Algorithm	32
3.4.2 Quicksort Implementation	34
4 TREES	36
4.1 General Definitions	36
4.2 Tree Traversal	38
4.2.1 Depth-first search	39
4.3 Binary Trees	41
4.3.1 Search	41

4.3.2	Delete	42
4.3.3	Insert	43
4.3.4	Perfect binary tree	44
4.3.5	Binary Tree Implementation	45
4.4	Binary Search Trees (BST)	46
4.4.1	Binary Search Tree Implementation	48
4.5	Heaps	49
4.5.1	Heapify	50
4.5.2	Heap Implementation	50
4.6	Self-balancing Binary Search Trees	51
4.7	Red-Black Trees	52
5	GRAPHS	55
5.1	General Definitions	55
5.1.1	Connectivity	56
5.2	Graph Representations	57
5.2.1	Edge List	57
5.2.2	Adjacency List	57
5.2.3	Adjacency Matrix	58
5.3	Graph Traversal	59
5.3.1	Depth-first Search (DFS)	59
5.3.2	Breadth-first Search (BFS)	60
5.3.3	Eulerian Path and Circuit	61
5.3.4	Hamiltonian Path and Circuit	62
5.3.5	Shortest Path Problem	63
5.3.6	Dijkstra's Algorithm	64
6	DYNAMIC PROGRAMMING	68
6.1	General Definitions	68
6.2	Knapsack Problem	69
6.3	Travelling Salesman Problem	69
	Appendix	70
A	BINARY SEARCH COMPLETE IMPLEMENTATION	71
A.1	Pre-order Traversal	71
A.2	In-order Traversal	74
A.3	Post-order Traversal	77
A.4	Breadth-first search Implementation	81
A.5	Complexity Summary	83
B	IMPLEMENTATION OF GRAPH REPRESENTATION	84
C	IMPLEMENTATION OF GRAPH TRAVERSAL	86
C.1	Depth-first search	86
C.2	Breadth-first search	88
D	COMPLEXITY OF DATA STRUCTURES FOR GRAPHS	90
E	DIJKSTRA'S ALGORITHM IMPLEMENTATION	91
	BIBLIOGRAPHY	94

## LIST OF FIGURES

Figure 1	Plots of the main functions and their evaluation for computational complexity.	2
Figure 2	Pseudocode of a recursive function and its internal execution.	3
Figure 3	Factorial recursive execution.	5
Figure 4	Factorial recursive execution.	5
Figure 5	An example of an array with elements and indexes.	7
Figure 6	An example of an array with elements and indexes.	7
Figure 7	Removing or adding an element from an array and the indexes update.	7
Figure 8	Adding 8a or removing 8b an element from an array and the indexes update.	8
Figure 9	An example of a linked list with the data and the reference to the next element.	8
Figure 10	An example of a linked list with the data and the reference to the next element.	8
Figure 11	Adding a new element to a linked list.	9
Figure 12	Adding a new element to a linked list.	9
Figure 13	Removing an element to a linked list.	10
Figure 14	Removing an element to a linked list.	10
Figure 15	Doubly linked list.	10
Figure 16	Doubly linked list.	10
Figure 17	In a stack only the element at the top is modified.	12
Figure 18	In a stack only the element at the top is modified.	12
Figure 19	Allowed operations on queue elements.	14
Figure 20	Allowed operations on queue elements.	14
Figure 21	In a deque the operations can be done on both head and tail.	14
Figure 22	In a deque the operations can be done on both head and tail.	15
Figure 23	A priority queue.	15
Figure 24	A priority queue.	15
Figure 25	An example of a map.	16
Figure 26	An example of a map.	16
Figure 27	An example of collision and a possible way to solve this issue by using the bucket method.	17
Figure 28	An example of collision and a possible way to solve this issue by using the bucket method.	18
Figure 29	An array with numeric values ordered in an ascending order.	20
Figure 30	An array with numeric values ordered in an ascending order.	20
Figure 31	Binary search algorithms steps.	21

Figure 32	Binary search algorithms steps.	21
Figure 33	Array splitting in the implementation of the binary search algorithm.	22
Figure 34	Array splitting in the implementation of the binary search algorithm.	23
Figure 35	Bubble sort algorithm.	23
Figure 36	The swapping process is repeated until the array is completely ordered.	24
Figure 37	The swapping process is repeated until the array is completely ordered.	25
Figure 38	Merge sort algorithm.	26
Figure 39	Merge sort algorithm.	27
Figure 40	Merge sort algorithm implementation.	30
Figure 41	Merge sort algorithm implementation.	30
Figure 42	Quicksort algorithm part one.	31
Figure 43	Quicksort algorithm steps part two.	31
Figure 44	Quicksort algorithm.	32
Figure 45	Quicksort algorithm worst case.	33
Figure 46	Quicksort algorithm worst case.	33
Figure 47	Quicksort algorithm best and average case.	33
Figure 48	Quicksort algorithm best and average case.	33
Figure 49	Quicksort algorithm implementation.	35
Figure 50	Elements of a tree and linked list.	36
Figure 51	Elements of a tree and linked list.	36
Figure 52	Possible structures of a tree.	37
Figure 53	Possible structures of a tree.	37
Figure 54	A tree and its fundamentals elements.	37
Figure 55	A tree and its fundamentals elements.	38
Figure 56	The depth-first search and the breadth-first search.	38
Figure 57	The depth-first search (57a) and the breadth-first search (57b).	39
Figure 58	Pre-order search.	39
Figure 59	Pre-order search.	40
Figure 60	In-order search.	40
Figure 61	In-order search.	40
Figure 62	Post-order search.	41
Figure 63	Post-order search.	41
Figure 64	Example of tree search and traversal.	42
Figure 65	Example of tree search and traversal.	42
Figure 66	Delete an element of a tree.	43
Figure 67	Delete an element of a tree.	43
Figure 68	Add an element of a tree.	44
Figure 69	Add an element of a tree.	44
Figure 70	Perfect binary tree results.	44
Figure 71	Perfect binary tree.	45
Figure 72	Search on an ordered binary tree.	46
Figure 73	Search on an ordered binary tree.	46
Figure 74	Addition on an ordered binary tree.	47
Figure 75	Addition on an ordered binary tree.	47



Figure 76	An unbalanced binary tree.	47
Figure 77	An unbalanced binary tree.	48
Figure 78	Max heap (a) and min heap (b) example.	49
Figure 79	Max heap (79a) and min heap (79b) example.	49
Figure 80	Add a new node to a heap.	50
Figure 81	Add a new node to a heap.	50
Figure 82	Implementation example of a heap using an array.	51
Figure 83	Implementation example of a heap using an array.	51
Figure 84	Example of balanced (b) and unbalanced (a) tree.	52
Figure 85	Example of unbalanced (85a) and balanced (85b) tree.	52
Figure 86	A red-black tree.	53
Figure 87	A red-black tree.	53
Figure 88	Insertion of a new node and the following updating of the color nodes.	53
Figure 89	Insertion of a new node and the following updating of the color nodes.	54
Figure 90	Left and right rotation for balancing the tree after an insertion.	54
Figure 91	An example of right rotation.	54
Figure 92	Undirected (a) and directed (b) graphs and its elements.	55
Figure 93	Undirected and directed graphs and its elements.	55
Figure 94	A weakly connected graph.	56
Figure 95	A weakly connected graph.	56
Figure 96	Edge list.	57
Figure 97	Edge list.	57
Figure 98	Adjacency list.	58
Figure 99	Adjacency list.	58
Figure 100	Adjacency matrix.	58
Figure 101	Adjacency matrix.	58
Figure 102	Depth-first search example.	59
Figure 103	Depth-first search example.	59
Figure 104	Breadth-first search example.	60
Figure 105	Breadth-first search example.	60
Figure 106	Eulerian path (a) and not Eulerian path (b).	61
Figure 107	Eulerian path (107a) and not Eulerian path (107b).	61
Figure 108	Eulerian circuit.	62
Figure 109	Eulerian circuit.	62
Figure 110	Hamiltonian path (a) and Hamiltonian circuit (b).	63
Figure 111	Hamiltonian path (111a) and Hamiltonian circuit (111b).	63
Figure 112	Shortest path.	63
Figure 113	Shortest path.	64
Figure 114	Relaxation condition.	64
Figure 115	Relaxation condition.	65
Figure 116	Dijkstra's algorithms example.	65
Figure 117	Dijkstra's algorithms example.	65
Figure 118	Calculation of the fifth number of the Fibonacci sequence.	68
Figure 119	Pre-order iterative example.	73

Figure 120	Pre-order iterative example.	74
Figure 121	In-order iterative example.	76
Figure 122	In-order iterative example.	77
Figure 123	Post-order iterative example.	80
Figure 124	Post-order search.	81
Figure 125	Breadth-first search example.	83
Figure 126	Breadth-first search example.	83
Figure 127	Depth-first search example.	87
Figure 128	Depth-first search example.	87
Figure 129	Breadth-first search example.	89
Figure 130	Breadth-first search example.	89
Figure 131	Dijkstra's algorithms example.	91
Figure 132	Dijkstra's algorithms example.	91

## LIST OF TABLES

Table 1	Binary Search Efficiency.	22
Table 2	Merge Sort Efficiency.	28
Table 3	Traversal paths for the tree in Figure 65.	42
Table 4	Eulerian path and circuit existence rules.	62
Table 5	Number of computation for each value of the Fibonacci sequence.	69
Table 6	Dijkstra's algorithms example for the graph in figure 132. The shortest path from a to b is also shown.	92

## LISTINGS

Listing 1.1	Sum of all elements of a matrix.	3
Listing 1.2	Pseudocode of a recursive function and its internal execution.	3
Listing 1.3	Implementation of the Fibonacci series with both iterative and recursive way.	4
Listing 1.4	Implementation of calculating the factorial of a number using the recursive way.	4
Listing 2.1	Linked List implementation.	11
Listing 2.2	Stack implementation.	12
Listing 2.3	Queue implementation.	15
Listing 2.4	String key implementation.	19
Listing 3.1	Binary search python implementation.	22
Listing 3.2	Bubble Sort python implementation.	26

Listing 3.3	Merge Sort python implementation (for the recursive part credits: <a href="#">Merge Sort, GeeksforGeeks</a> ). 28
Listing 3.4	Quicksort python implementation. 34
Listing 4.1	Class definition for a node and a tree. 45
Listing 4.2	Recursive pre-order traversal and search implementation. 45
Listing 4.3	implementation of insert and search operation for a binary search tree. 48
Listing 5.1	Recursive implementation of a depth-first search. 59
Listing 5.2	Recursive implementation of a depth-first search. 60
Listing A.1	Class definition for a node and a tree. 71
Listing A.2	Recursive and iterative implementation of pre-order traversal. 72
Listing A.3	Recursive and iterative implementation of in-order traversal. 74
Listing A.4	Recursive and iterative implementation of post-order traversal. 78
Listing A.5	Breadth-first search implementation. 82
Listing B.1	Graph representation and fundamental operations. 84
Listing C.1	Recursive and iterative implementation of depth-first search on graphs. 86
Listing C.2	Breadth-first search implementation on graphs. 88
Listing E.1	Dijkstra's algorithm. 93

## ACRONYMS

**ADT** Abstract data type  
**LIFO** Last In, First Out  
**FIFO** First In, First Out  
**DFS** Depth-first search  
**BFS** Breadth-first search  
**BST** Binary Search Trees

## PRELIMINARIES CONCEPTS

### 1.1 COMPUTATIONAL COMPLEXITY

The **computational complexity**, or **complexity**, of an algorithm is the amount of resources (time and memory) needed for solving it, and it is the minimum complexity of all possible implementations for solving that given algorithm, included also the unknown ones [1] ([Computational complexity, Wikipedia](#)).

The amount of needed resources for solving an algorithm varies with the size of the input  $n$ . The computational complexity in general is a function  $n \rightarrow f(n)$ , and it represents the worst case complexity or the average complexity over all the inputs of size  $n$ .

When the kind of the complexity is not explicitly indicated, generally is meant to be the **time complexity**, which is different from computer to computer, and it is generally expressed as the number of elementary operations required to solve a given algorithm. It is assumed that these elementary operations take the same time for being solved. The computational complexity can be related also to the memory consumption.

### 1.2 BIG O NOTATION

The **big O notation** [2] ([Big O Notation, Wikipedia](#)) describe the behavior of a function when its argument tends to infinity or to a particular value.

#### Definition 1.1

*Let  $f$  be a real or complex value function and let  $g$  be a real function. Let both functions be defined on the same positive and real unbounded interval, and let  $g(x)$  be strictly positive for all large enough  $x$  values:  $g(x) > 0, \forall x$  large enough. Thus:  $f(x) = O(g(x))$  as  $x \rightarrow \infty$  if  $\exists M \in \mathbb{R}, M > 0$  and  $x_0 \in \mathbb{R}$  such that  $|f(x)| \leq Mg(x) \forall x \geq x_0$ .*

Usually  $f(x) = O(g(x))$  is used as  $x \rightarrow \infty$ , but it can be also defined for the case  $x \rightarrow a$ , where  $a$  is a real number.

O notation is asymptotic for big  $x$ , so the important terms are the ones which grow faster than the others, which become irrelevant.

#### Example 1.1

*In  $f(x) = 6x^4 - 2x^3 + 5$  as  $x \rightarrow \infty$ ,  $6x^4$  is the fastest growing term. 6 is a constant and can be omitted, thus  $f(x) = O(x^4)$ .*

#### 1.2.1 Properties

Here are listed some simple properties about Big O notation.

**Definition 1.2** Product-Sum-Multiplication by a constant**Product**

$$f_1 = O(g_1) \text{ and } f_2 = O(g_2) \Rightarrow f_1 f_2 = O(g_1 g_2)$$

**Sum**

$$f_1 = O(g_1) \text{ and } f_2 = O(g_2) \Rightarrow f_1 f_2 = O(\max(f_1, f_2))$$

**Multiplication by a constant**

Let  $k$  be a nonzero constant, then:  $O(k|g) = O(g)$ ,  $f = O(g) \Rightarrow kf = O(g)$

**Definition 1.3** Logarithm and Exponential


Let  $c$  be a nonzero constant, then:  $O(\log n^c) = O(\log n)$ , because:  $(\log n^c = c \log n)$ .

$O(n^c)$  and  $O(c^n)$  are very different, if  $c > 1$  the latter grows much faster.

Let  $c$  be a nonzero constant.  $(cn)^2 = c^2 n^2 = O(n^2)$ , but  $2^n$  and  $3^n$  are not of the same order. In general  $2^{cn} = (2^c)^n$  is not of the same order of  $2^n$ .

**Example 1.2**

$$f = 9 \log n + 5(\log n)^4 + 3n^2 + 2n^2 = O(n^3) \text{ as } n \rightarrow \infty$$

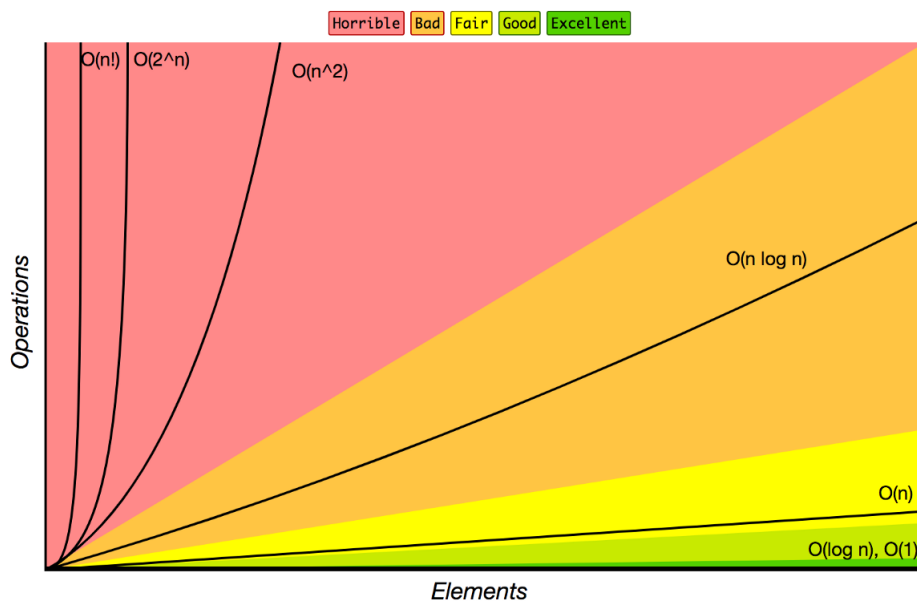

**Figure 1:** Plots of the main functions and their evaluation for computational complexity. Credits: [biggocheatsheet.com](http://biggocheatsheet.com).

### 1.3 TIME COMPLEXITY EVALUATION EXAMPLE

Let us suppose we want to calculate the sum of all elements of a  $n \times n$  matrix. For evaluating the time complexity of this function we have to identify all the elementary operations, and evaluating their complexity based on

how many times they are repeated. Here is the pseudocode for the function that calculate the sum of a matrix.

**Listing 1.1:** Sum of all elements of a matrix.

```

1 def find_sum_2d(array_2d):
2     totoal = 0 # -> O(1)
3     for each row in array_2d: # -> repeated n times
4         for each column in array_2d: # -> repeated n times
5             total += array_2d[column][row] # -> O(1)
6     return total # -> O(1)

```

The total time complexity is:


$$T = O(1) + n^2O(1) + O(1) = O(n^2)$$

Where  $O(1)$  is a constant value.

## 1.4 RECURSION

In recursion a function calls itself again on a smaller size input, until the exit condition stops this self calling (recursive calling) [3] ([Recursion, Wikipedia](#)). There are three fundamentals elements in a recursive function:

- 1 A function that calls itself.
- 2 Exit condition. Without this condition a recursive function would call itself forever without an end.
- 3 Input alteration. When the function is called again the input is changed to a smaller dimension than the previous call.

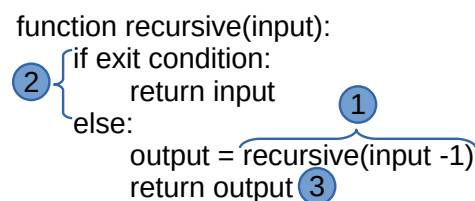

**Figure 2:** Pseudocode of a recursive function and its internal execution.

**Listing 1.2:** Pseudocode of a recursive function and its internal execution.

```

function recursive(input):
    if exit condition: # Element 2
        return input
    else:
        output = recursive(input-1) # Element 1
        return output # Element 3

```

In recursion the exit condition is fundamental, because if it contains some errors the recursion will never end, resulting in an infinite process.

### 1.4.1 Python Implementation Examples

**Listing 1.3:** Implementation of the Fibonacci series with both iterative and recursive way.

```

1 def fibonacci_iterative(position):
2     if position == 0:
3         return 0
4     elif position == 1:
5         return 1
6     else:
7         first = 0
8         second = 1
9         next_value = first + second
10        for i in range(2, position):
11            first = second
12            second = next_value
13            next_value = first + second
14        return next_value
15
16 def fibonacci_recursive(position):
17     if position <= 1: # Exit condition
18         return position
19     return fibonacci(position - 1) + fibonacci(position - 2) # Calling
    the function on a smaller size input

```

**Listing 1.4:** Implementation of calculating the factorial of a number using the recursive way.

```

1 def factorial(n):
2     if n <= 1: # Exit condition
3         return n
4     else:
5         return n*factorial(n - 1) # Calling the function on a
    smaller input

```

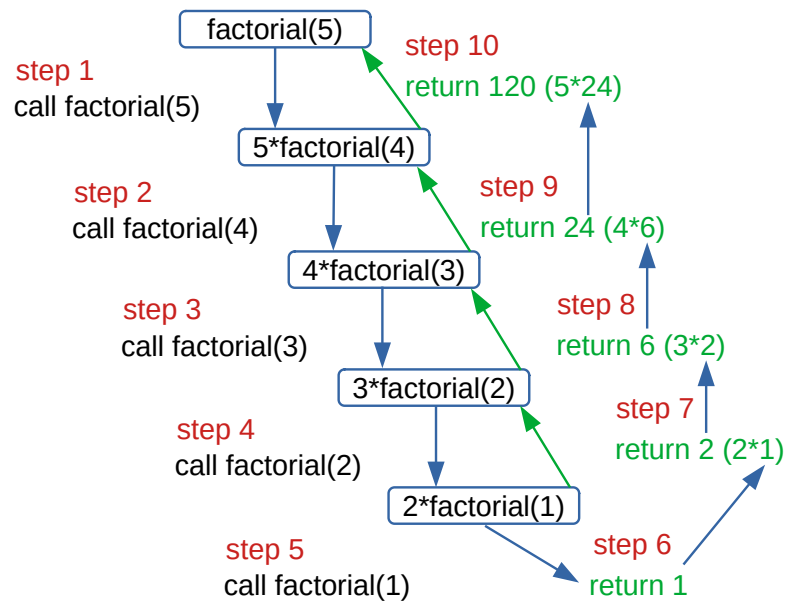


Figure 3: Factorial recursive execution.

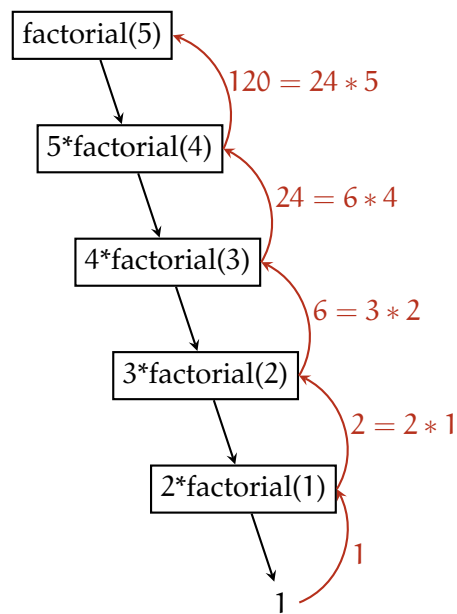


Figure 4: Factorial recursive execution.



## DATA STRUCTURES

A **data structure** is a data organization, management, and storage format that enables efficient access and modification of the collected data. The relationship among collected data, their properties, the operations that can be done on them, are all properties of the data structure [4] ([Data Structure, Wikipedia](#)). Data structure is the basis for an **abstract data type (ADT)**, a mathematical model for a **data type** [5] ([Data Type, Wikipedia](#)), which is defined by its behavior from the point of view of a user, its type of data, specifically in terms of possible values, by possible operations on these data, and by the behavior of these operations. This mathematical model contrasts with data structures, which are concrete representations of data, and are the point of view of an implementer, not of a user [6] ([Abstract Data Type, Wikipedia](#)).

In this chapter the most important data structures like **collections**, **lists**, **arrays**, **linked lists**, **stacks**, and **queues** are introduced. For each data structure are shown all the most important properties, operations, and implementations.

### 2.1 COLLECTION


A **collection** is an object that groups several different elements in only single unit. Collections are used to save, to find, to manipulate, and to communicate grouped data [7] ([Collection \(abstract data type\), Wikipedia](#)). Usually the elements belonging to a collection are of the same type, such as a poker hand (a collection of playing cards), a folder containing emails (a collection of emails), or a phone book (a map  $name \rightarrow phone\ number$ ).

### 2.2 LIST


A **list** is a collection which represents a set of **ordered** elements, which can be also of different type. Same value elements can be repeated several times. Lists do not have a fixed size, and it is possible to add, to remove, and to modify all the elements in the list. The complexity of adding or removing an element is constant ( $O(1)$ ).

### 2.3 ARRAY

An **array** is a collection of elements of the same or also different type, in which each of them is identified with at least one **array index** or **key** [8] ([Array data structure, Wikipedia](#)). In some programming languages arrays have a fixed size, in others instead is fixed.

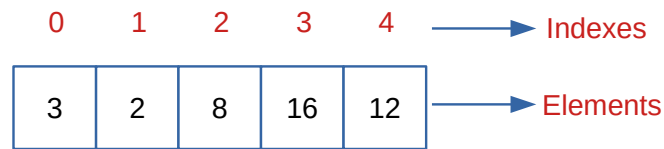


**Figure 5:** An example of an array with elements and indexes.




**Figure 6:** An example of an array with elements and indexes.

For doing any allowed operation to an element of an array it is enough to know its index.


Adding or removing an element of an array could be a very expensive operation. This is because when a change take place to an element all the following indexes must be updated (Figure 8). The worst case complexity is  $O(n)$ , where  $n$  is the size of the array.

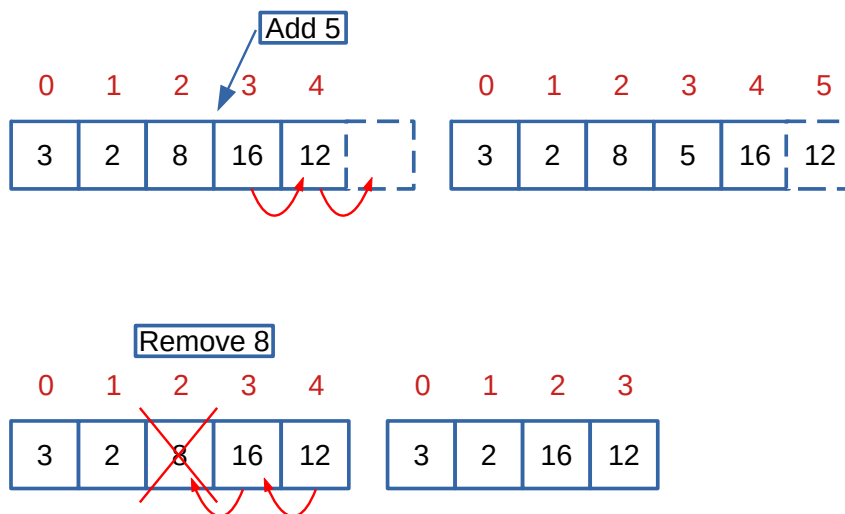

**Figure 7:** Removing or adding an element from an array and the indexes update.

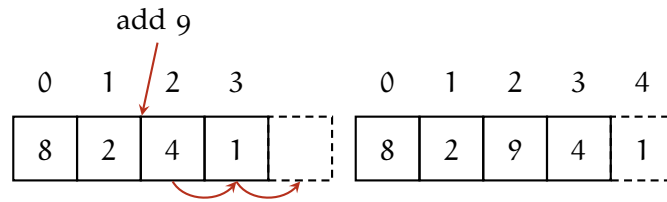

(a) Adding an element to an array.




(b) Removing an element to an array.


**Figure 8:** Adding 8a or removing 8b an element from an array and the indexes update.

## 2.4 LINKED LIST

A **linked list** is a linear collection in which each element has the data and a reference to the next element (a link) [9] ([Linked List, Wikipedia](#)).

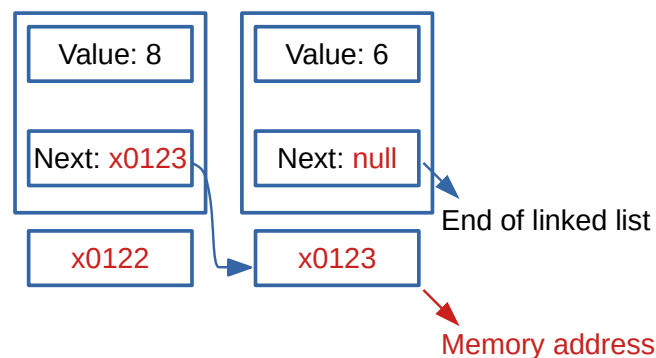

**Figure 9:** An example of a linked list with the data and the reference to the next element.

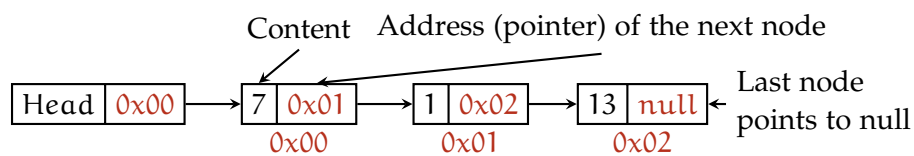


**Figure 10:** An example of a linked list with the data and the reference to the next element.


In a linked list the order of the elements is not assured.

Operations like adding or removing an element in a linked list are very efficient, because it is enough to change the references of the elements involved in the operation. For example for adding a new element is enough


to change the previous element reference to the just added element, and change the reference of the new element to the next element (Figure 12). In case of removing an element it is enough to update the previous element's reference to the next element of the removed one (Figure 14).

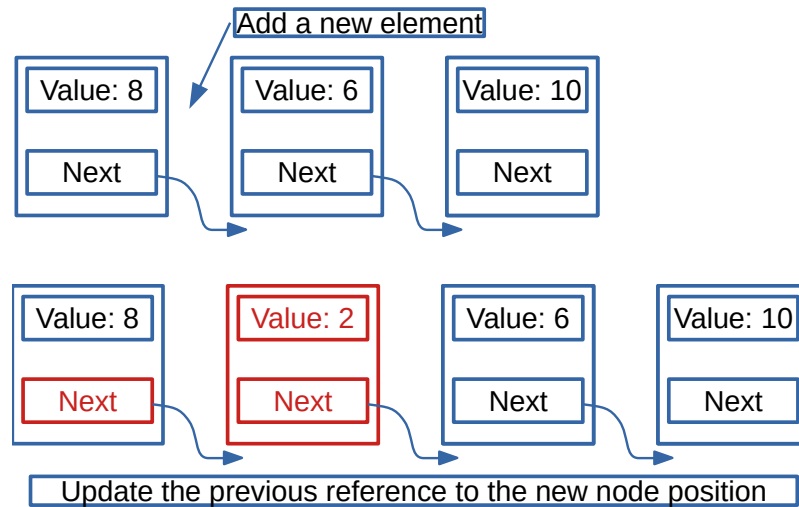


**Figure 11:** Adding a new element to the linked list. As explained before this operation is very efficient because it is enough to change the references of the new element and the previous element to the one just added.

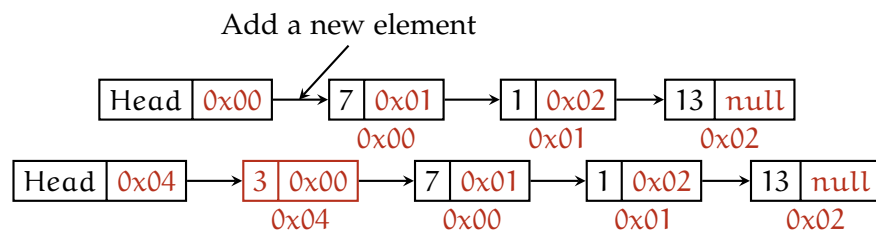

**Figure 12:** Adding a new element to the linked list. As explained before this operation is very efficient because it is enough to change the references of the new element and the previous element to the one just added.

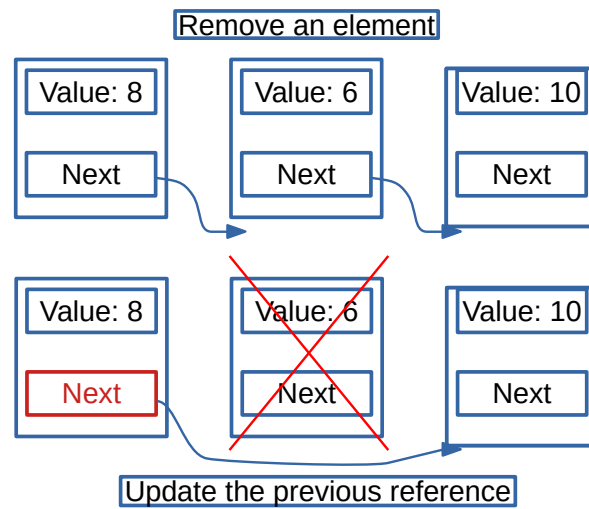


**Figure 13:** Removing an element to a linked list.

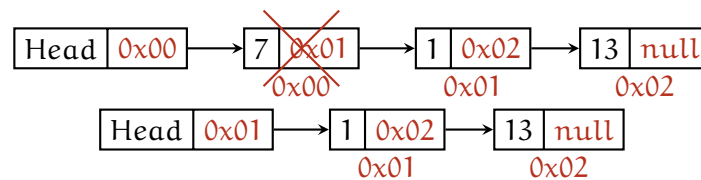


**Figure 14:** Removing an element to a linked list.

The complexity for adding or removing an element is constant  $O(1)$ . Linked lists can be also **doubly linked list** (Figure 16), which every element has the reference to the previous and next element of the collection [10] ([Doubly linked list, Wikipedia](#)).

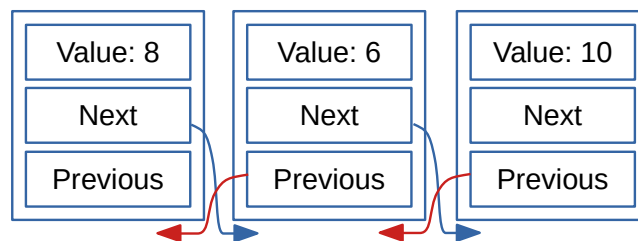

**Figure 15:** Doubly linked list.



**Figure 16:** Doubly linked list.

Linked list are used for implementing other data structures such as lists, stacks, queues, and associative array.

### 2.4.1 Linked List Implementation

The following code is the implementation of a linked list in Python.

**Listing 2.1:** Linked List implementation.

```

1 class Element():
2
3     def __init__(self, value):
4         self.value = value
5         self.next = None
6
7 class LinkedList():
8
9     def __init__(self, head=None):
10         self.head = head
11
12     def append(self, new_element):
13         current = self.head
14         if self.head:
15             while current.next:
16                 current = current.next
17             current.next = new_element
18         else:
19             self.head = new_element
20
21     def get_position(self, position):
22         counter = 0
23         current = self.head
24         if position < 1:
25             return None
26         while current and counter <= position:
27             if counter == position:
28                 return current
29             current = current.next
30             counter += 1
31         return None
32
33     def insert(self, new_element, position):
34         counter = 1
35         current = self.head
36         if position > 1:
37             while current and counter < position:
38                 if counter == position - 1:
39                     new_element.next = current.next
40                     current.next = new_element
41                     current = current.next
42                     counter += 1
43             elif position == 1:
44                 new_element.next = self.head
45                 self.head = new_element


```

## 2.5 STACK


A **stack** is abstract data type belonging to collections, in which only two operations are allowed [11] ([Stack](#), [Wikipedia](#)):

- **Push**: add an element at the top of the stack
- **Pop**: remove the newest element of the stack

In the stacks only the element at the top of the stack can be modified. The complexity remains constant for adding and removing operations. The stacks are also called **Last In, First Out (LIFO)**.

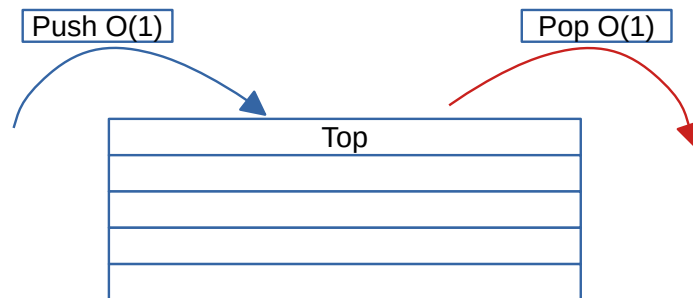

**Figure 17:** In a stack only the element at the top is modified.



**Figure 18:** In a stack only the element at the top is modified.

### 2.5.1 Stack Implementation

The following is the implementation in Python of a stack using the linked list.

**Listing 2.2:** Stack implementation.

```

1 class Element():
2     ...
3
4 class LinkedList():
5     ...
6
7     def insert_first(self, new_element):
8         new_element.next = self.head
9         self.head = new_element

```

```

10
11     def delete_first(self):
12         if self.head:
13             delete_element = self.head
14             temp = delete_element.next
15             self.head = temp
16             return delete_element
17         else:
18             return None
19
20 class Stack():
21
22     def __init__(self, top=None):
23         self.ll = LinkedList(top)
24
25     def push(self, new_element):
26         self.ll.insert_first(new_element)
27
28     def pop(self):
29         self.ll.delete_first()

```

## 2.6 QUEUE


A **queue** is abstract data type belonging to collections very similar to the stacks. For a queue the admitted operations are only on the oldest element, thus the first element to be added [12] ([Queue](#), [Wikipedia](#)). The allowed operations on a queue are:

- **Enqueue**: adding an element at the bottom of the queue
- **Deque**: removing the element at the head of the queue
- **Pick**: observing the element at the head of the queue


For adding and removing operations the complexity remain constant. Queues are also called **First In, First Out (FIFO)**.

The most efficient way to implement a queue is using linked lists.



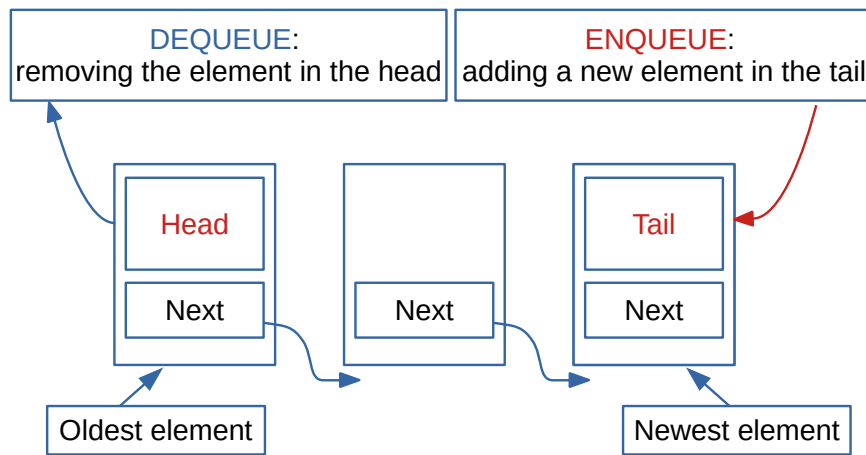


**Figure 19:** In a queue only the first element to be added can be removed or where a new element can be added.

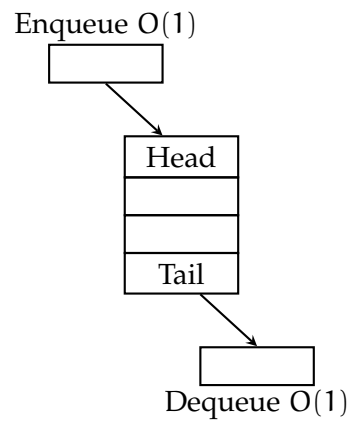


**Figure 20:** In a queue only the first element to be added can be removed or where a new element can be added.

A generalization of queues and linked lists are **deques**, in which is possible to perform deque and enqueue operations on both the **head** and **tail**.

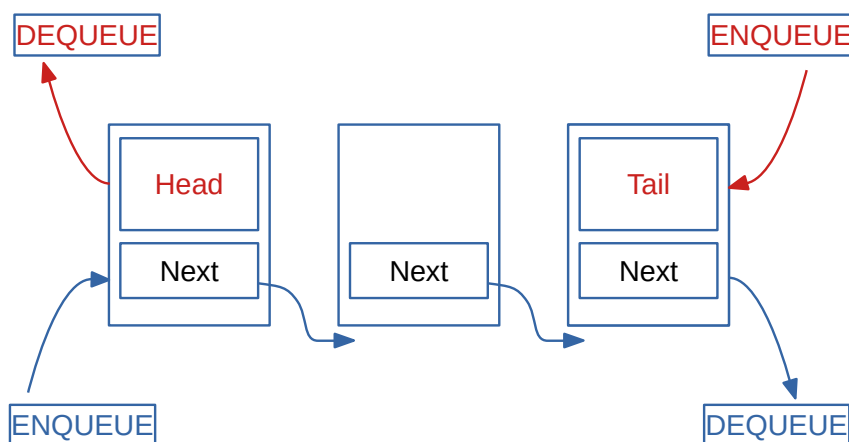


**Figure 21:** In a deque the operations can be done on both head and tail.

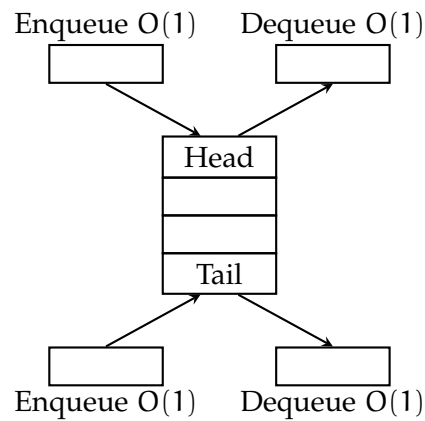


**Figure 22:** In a deque the operations can be done on both head and tail.

Another modification of queue are **priority queue**, in which each element has a priority (a numeric value that indicates its importance). When an element of the queue is removed (deque), the element to be removed is the one which has the highest priority. In case two or more elements have the same priority the oldest element is removed.

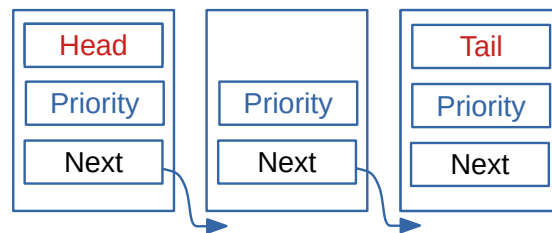

**Figure 23:** A priority queue.



**Figure 24:** A priority queue.

### 2.6.1 Queue Implementation

The following is the implementation of a queue using the list of Python.

**Listing 2.3:** Queue implementation.

```

1 class Queue():
2     def __init__(self, head=None):
3         self.storage = [head]
4
5     def enqueue(self, new_element):
6         self.storage.append(new_element)

```

```

7
8     def peek(self):
9         return self.storage[0]
10
11     def dequeue(self):
12         return self.storage.pop(0)

```

## 2.7 SET

A **set** is an abstract data type in which the unique values are stored without a particular order [13] ([Set, Wikipedia](#)).

## 2.8 MAP

A **map**, **associative array**, **symbol table**, or **dictionary** is an abstract data type composed of a collection of (key, value) pairs [14] ([Hash Map, Wikipedia](#)). The group of the key is a set, in which each element has a unique value. Map is a very useful data type, used in a lot of situations.

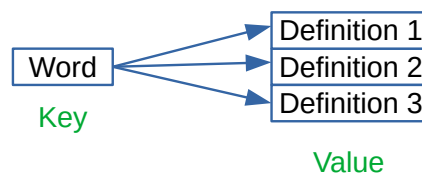


Figure 25: An example of a map.

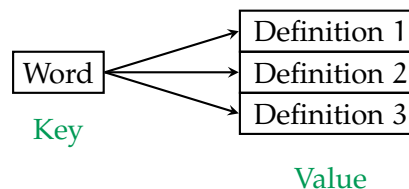


Figure 26: An example of a map.

## 2.9 HASH TABLE

A **hash table** or **hash map** is a data structure that implements the map abstract data type [15] ([Hash Table, Wikipedia](#)). Hash table uses the **hash function** for working [16] ([Hash Function, Wikipedia](#)). Using the hash function is called hashing.


### 2.9.1 Hashing

Hashing is an operation that allows to transform the value of a variable to another one which is much easier to find within a collection. If we want to


find a value inside a collection (list, stack, queue, etc) the time requested for the search is linear with the size of the collection. In fact we have to check all the elements until the searched one is found (in case of stack and queue this is not true is only the last or the first element respectively is checked). For solving this problem and thus to find an element in a constant time hash function are used.

Let us consider the follow example, where we have an array in which we would like to store big random numbers. A simple way for hashing these numbers is to consider only the last numbers (56 and 17) and divide them for a fixed number. The remainder of the division is used as the new index of the array associated to the number (Figure ).

What happen when the hash function transforms two different number in the same? In this case we have a **collision**. In case of a collision there are several strategies for solving this issue: one way could be to change the the hash function, another one could be to use an array for storing different values associated to the same key (**bucket**). For the last occurrence the worst case complexity for a search is  $O(n)$  (Figure 28).

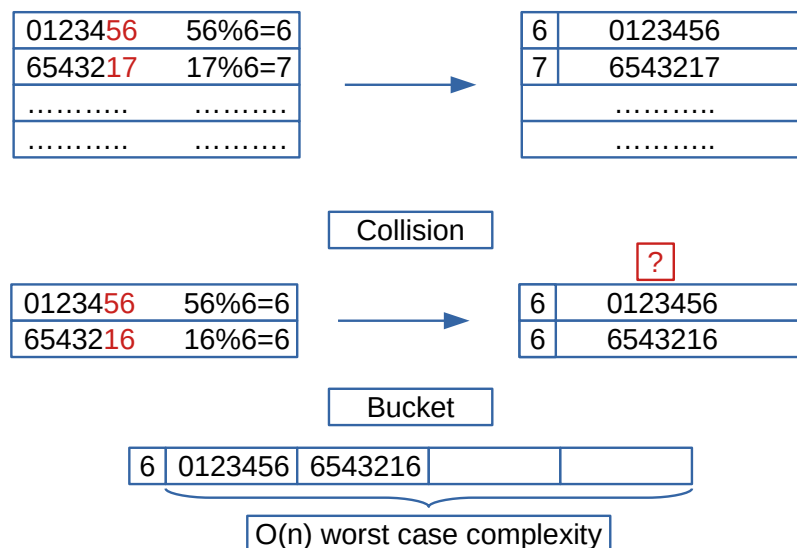

**Figure 27:** An example of collision and a possible way to solve this issue by using the bucket method.

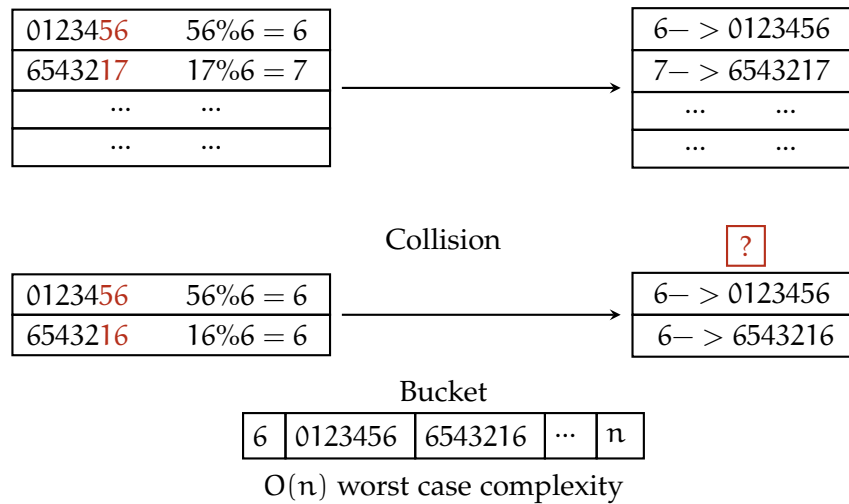

**Figure 28:** An example of collision and a possible way to solve this issue by using the bucket method.

It does not exist a perfect hash function and a trade off must always be reached. A way to analyse a hash function is by using the **load factor** defined as follow:  $\text{Load Factor} = \# \text{ of entries} / \# \text{ of buckets}$ . For example, if we want to save 10 values using 1000 buckets the Load Factor is equal to 0.01, and most of the buckets is empty. In this case is convenient to change the hash function by using less buckets. More the Load Factor is closed to 0 more the hash table will be empty (**sparse**), and more the Load Factor is closed to 1 more the has table will be full and efficient. In case the Load Factor is bigger than 1 there is the certainty there will happen some collisions. Another example: let us consider a hash function that divide the numbers by 100. If we consider 100 values all multiple of 5, the Load Factor will be:  $\text{Load Factor} = \# \text{ of entries} / \# \text{ of buckets} = 100/100 = 1$ . But this way is very slow and a different configuration should be used to make this more efficient. For example if we use more bucket, for example 107, we still avoid collisions and we do not have the hash map too much sparse.

## 2.10 STRING KEYS

Let us consider a hash function that associates a word to a numerical value. For example we can use the ASCII character encoding of the first two letters of the string as numerical value. Thus, in case of *UDACIY* we have  $U=85$  and  $D=68$ . For hash function we can use the following:  $S[0] * 31^{(n-1)} + S[1] * 31^{(n-2)} + \dots + S[n-1]$ , where  $n$  is the length of the string. In this way for the word in the previous example, in which only the first two letters are encoded in a numerical value for simplicity, we have  $85 * 31^1 + 68 = 2703$ .

This hash function works very well because it assures a very low probability of collision. 31 is a number empirically obtained by several researches and showed good results in hashing strings.

### 2.10.1 String Keys Implementation

The following is the implementation of the string key map in Python.

The hash function of this implementation is: Hash Function = (ASCII[0] \* 100) + ASCII[1]. In this code *ord()* and *char()* functions are used. *ord()* takes a char as an argument and return the respective ASCII code (*ord('U') = 85*), and *char()* takes a numeric value as ASCII code and return the respective char (*char(85) = 'U'*).

**Listing 2.4:** String key implementation.

```

1 class HashTable():
2     def __init__(self):
3         self.table = [None]*10000
4
5     def store(self, string):
6         hv = self.calculate_hash_value(string)
7         if hv != -1:
8             if self.table[hv] != None:
9                 self.table[hv].append(string)
10            else:
11                self.table[hv] = [string]
12
13    def lookup(self, string):
14        hv = self.calculate_hash_value(string)
15        if hv != -1:
16            if self.table[hv] != None:
17                if string in self.table[hv]:
18                    return hv
19        return -1
20
21    def calculate_hash_value(self, string):
22        value = ord(string[0]*100) + ord(string[1])
23        return value

```

## SEARCHING AND SORTING

In this chapter are introduced the most important and used algorithms about **searching**, which retrieve some data stored in a particular data structure [17] ([Search algorithm, Wikipedia](#)), and **sorting**, which put in a certain order some data stored in a list [18] ([Sorting algorithm, Wikipedia](#)).

### 3.1 BINARY SEARCH

Let us consider the problem of finding a number stored in an array with an **ascending** order (Figure 30).

1	3	9	11	15	19	29
---	---	---	----	----	----	----

25?

**Figure 29:** An array with numeric values ordered in an ascending order.

1	3	9	11	15	19	29
---	---	---	----	----	----	----

25?

**Figure 30:** An array with numeric values ordered in an ascending order.

A first way to tackle the problem could be to check all the numbers of the array, in others words this method consists in performing a loop all over the elements of the array and check one by one if the number where is the element we are looking for. The complexity of this method is  $O(n)$  because in the worst case we have to look at all the elements of the array.

There is a more efficient way to search an element in an ascending ordered array then the method showed previously. This method is called **binary search** [19] ([Binary Search Algorithm, Wikipedia](#)). Let us start to check as the first element the central value of the array (in case the array has an even number of elements there are two central values, and one can choose the bigger or the lower). If the central element is the one we are looking for the search ends, otherwise, because the array is ascending ordered, we can ignore one half of the array. If the central number is bigger than the number we are looking for thus we will ignore the right half of the array, if the central number is lower than the number we are looking for thus we will ignore the left half of the array. This procedure is repeated: we consider the central value of the new array, which has half of the size of the previous step,

and we check if that value is the one we are looking for, and we repeat the procedure until we find or we do not find the number we are looking for (Figure 32).

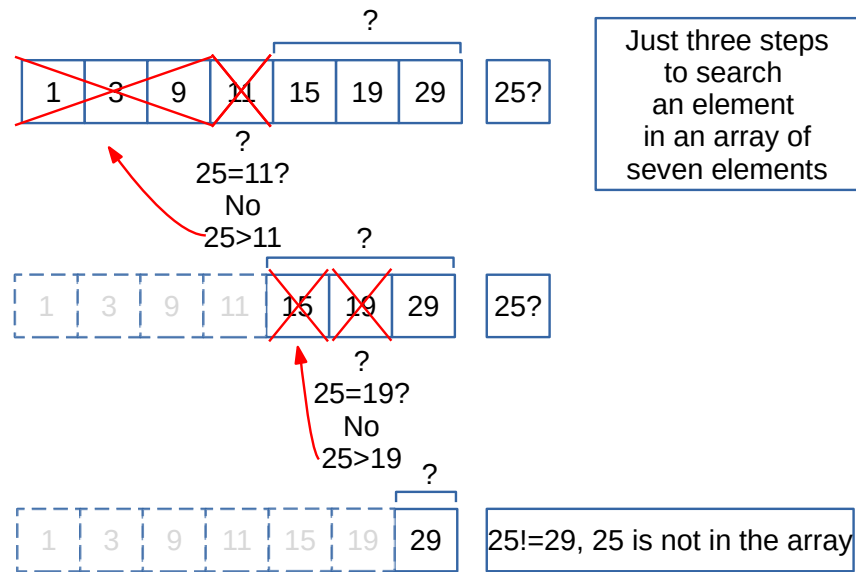


Figure 31: Binary search algorithms steps.

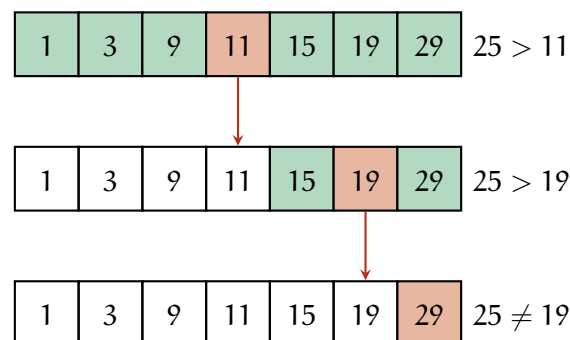


Figure 32: Binary search algorithms steps.

### 3.1.1 Efficiency of the Binary Search Algorithm

For evaluating the efficiency of this algorithm we have to evaluate the number of steps required for solving the problem. We already know that the efficiency of this algorithm will not be  $O(n)$ , because in this algorithm not all the elements of the array are checked. The way for evaluating the complexity of an algorithm is to execute the algorithms varying the size of the input, and evaluating how many operations are done in the worst case. In the binary search algorithm the worst case is when the size of the array becomes one, so we find or we do not find the searched element at the end of the array splitting process.



**Table 1:** The number of iterations grows of one every power of two, in others words it grows as  $\log(n)$ .

	$2^0$		$2^1$		$2^2$			$2^3$		
Array Size	0	1	2	3	4	5	6	7	8	
Iterations (worst case)	0	1	2	2	3	3	3	3	4	

We observe that the exponent of the power of two is the number of iteration minus one, or at the contrary the number of iteration is the exponent of a power plus one.

$$\log(\text{power of exponent } 2 + 1) = \log_2(n) + 1$$

In general it is used  $\log$  and is said that the binary search algorithm has a complexity of  $\log(n)$ .

### 3.1.2 Binary Search Implementation


The following code is the python implementation of the binary search algorithm.

**Listing 3.1:** Binary search python implementation.

```

1 def binary_search(array_input, value):
2     low = 0
3     high = len(array_input) - 1
4     while low <= high:
5         mid = (low + high) // 2
6         if array_input[mid] == value:
7             return mid
8         elif value > array_input[mid]:
9             new_low = mid + 1
10        else:
11            new_high = mid - 1
12    return -1

```

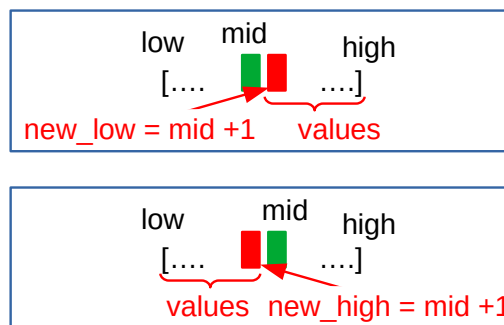

**Figure 33:** Array splitting in the implementation of the binary search algorithm.

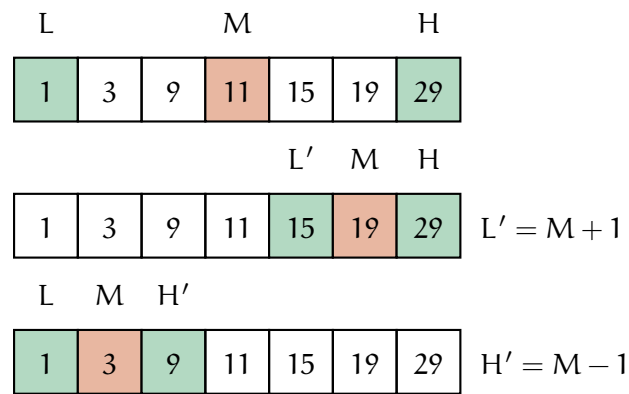


Figure 34: Array splitting in the implementation of the binary search algorithm.

### 3.2 BUBBLE SORT

**Bubble sort** is the easiest sorting algorithm working on arrays. Bubble sort works by swapping two element at each step if they are in the wrong order, repeating this process until all the array is not completely ordered [20] ([Bubble Sort, Wikipedia](#)). In this algorithm the bigger elements tend to move at the bottom of the array, like bubbles that move at the top of a water bottle.


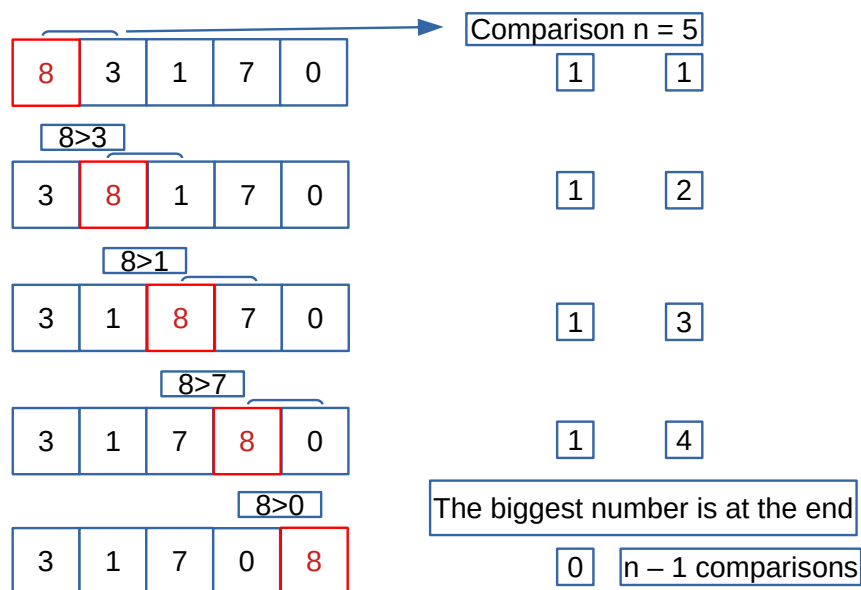


Figure 35: In bubble sort the biggest element goes at the and of the array.



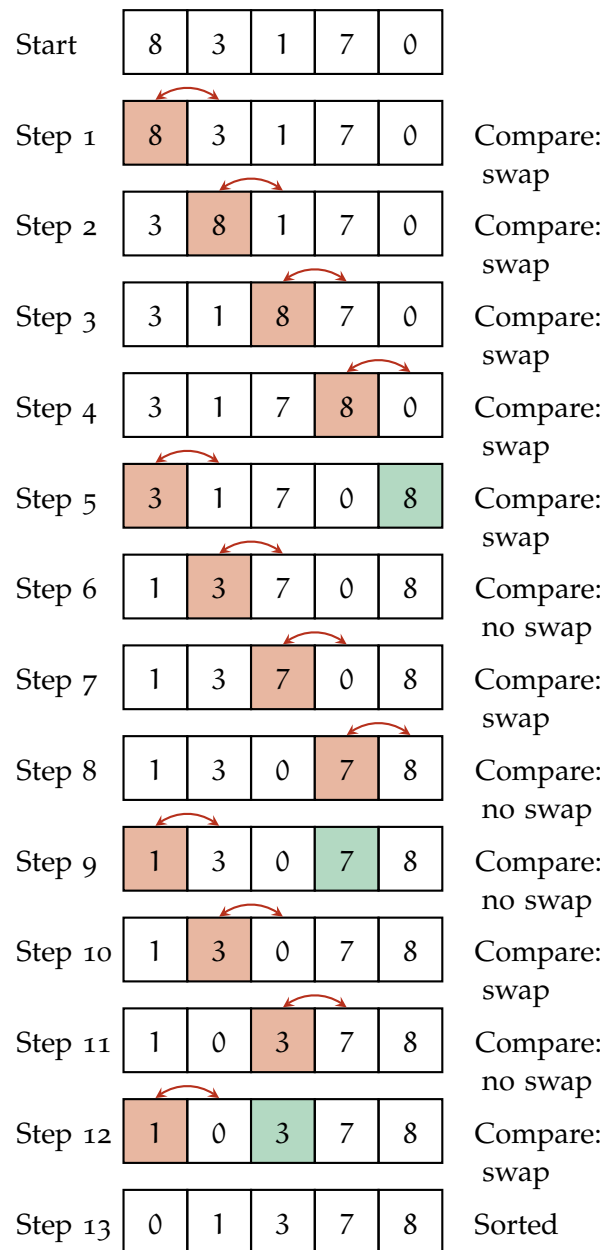

**Figure 37:** The swapping process is repeated until the array is completely ordered.

### 3.2.1 Efficiency of the Bubble Sort Algorithm

For ordering an array using the bubble sort  $n - 1$  iterations are required, every step. The number of total steps are  $n - 1$ , thus the total number of operations to be executed for ordering an array is  $(n - 1) * (n - 1) = n^2 - 2n + 1 = O(n^2)$ . In summary:

- **Worst Case:**  $O(n^2)$
- **Average Case:**  $O(n^2)$
- **Best Case:**  $O(n)$ . The array is already completely ordered and it is enough to cycle all the elements.

### 3.2.2 Bubble Sort Implementation

The following code is the python implementation of the bubble sort algorithm.

**Listing 3.2:** Bubble Sort python implementation.


```

1 def bubble_sort(array_input):
2     index = len(array_input) - 1
3     sorted = False
4
5     while not sorted:
6         sorted = True
7         for i in range(0, index):
8             if array_input[i] > array_input[i + 1]:
9                 sorted = False
10                array_input[i], array_input[i + 1] = array_input
11                [i + 1], array_input[i]
12
13     return array_input


```

## 3.3 MERGE SORT

The **merge sort** algorithm works by dividing the array in single elements at first, grouping and ordering all the elements two by two. After the first step we will have a lot of subarrays of two elements. The next step is to merge all these subarrays and to order the elements. The merging and ordering process is repeated until the array is unified again [21] ([Merge Sort, Wikipedia](#)). This way of reducing a big problem in several smaller is called **Divide et impera** (Divide and conquer).

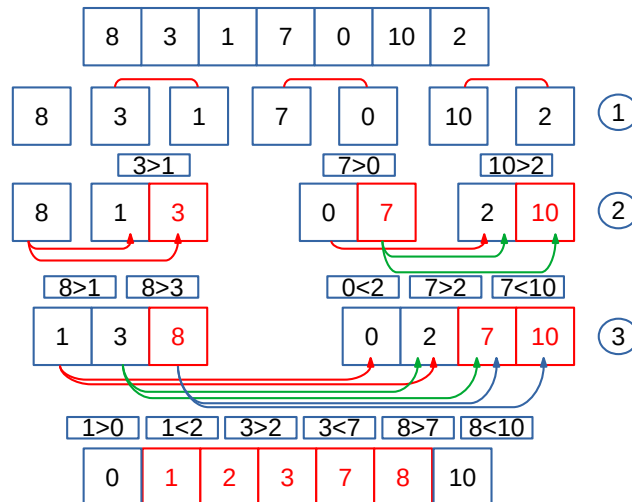

**Figure 38:** In merge sort merging and sorting process is repeated until the array is again unified with all the elements sorted.

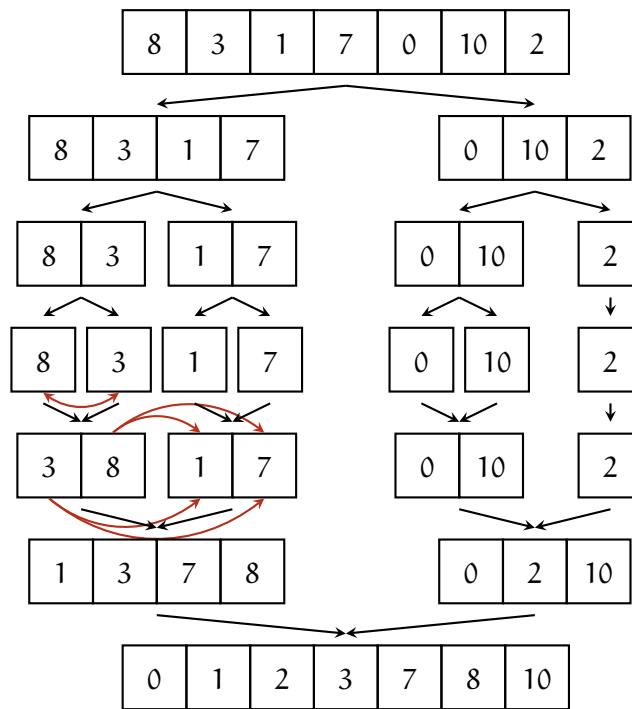

**Figure 39:** In merge sort merging and sorting process is repeated until the array is again unified with all the elements sorted.

The steps are (Figure 39):

- 1 Divide the array in subarrays of one element. Merge two by two and order the elements. The number of the subarrays is odd, so one array at this step is not merged. **The number of comparison for this step is 3.**
- 2 Merge and order again the new subarrays. For ordering in this case we start from the first element of the array on the left, and we compare this value with all the elements of the array on the right. If the first element is bigger than the picked one from the array on the right is moved, otherwise is not moved and we go to the next element. **The number of comparison for this step is 5.**
- 3 Merge and order again as at the previous step. **The number of comparison for this step is 6.**

### 3.3.1 Efficiency of the Merge Sort Algorithm

For evaluating the efficiency of this algorithms we have to count the number of iterations and comparisons are being done. By using the example showed in Figure 39 we will try to extrapolate a general pattern for an array of dimension  $n$ .

The number of comparisons depends by the array size. For an array of two elements the number of comparisons is one, for one of three elements are two, for one of four are three, and for one of seven are six. It is impossible to calculate in general the number of comparisons, but it is possible to calculate

the worst case given the array dimension. From the previous example we see that for each step the maximum number of comparisons is seven, the size of the array. The reason is that the sum of all subarrays is seven. In general the sum of all subarrays is always the size of the array. Thus the total efficiency is  $O(\# \text{ of comparison} * \# \text{ of iterations})$ .

How many iterations are required? In our example for an array of seven elements, the iterations required are three. From the subprocess of our example we observe that for an array of size four the number of iterations are two, for one of size three are two, and for one of size two is one. Thus we can create the following table:

**Table 2:** The number of iterations grows of one every power of two, in others words it grows as  $\log(n)$ .

	$2^0$		$2^1$		$2^2$			$2^3$	
Array Size	1	2	3	4	5	6	7	8	9
Iterations (worst case)	0	1	2	2	3	3	3	3	4

In conclusion the efficiency is  $O(n \log(n))$ , which is better than  $O(n^2)$  of the bubble sort.

The memory efficiency in this case is bigger than the bubble sort algorithm. For the merge sort some subarrays (in the worst case are  $n$ ) are used and they need to be stored in the memory.

### 3.3.2 Merge Sort Implementation

The following code is the python implementation of the merge sort algorithm.

**Listing 3.3:** Merge Sort python implementation (for the recursive part credits: [Merge Sort, GeeksforGeeks](#)).

```

1 def merge_sort_iterative(array_input):
2
3     if len(array_input) > 1:
4         mid = len(array_input)//2
5         left_side = array_input[:mid]
6         right_side = array_input[mid:]
7
8         merge_sort(left_side)
9         merge_sort(right_side)
10
11         i = 0 # Left side index
12         j = 0 # Right side index
13         k = 0 # Sorted array index
14
15         while i < len(left_side) and j < len(right_side):
16             if left_side[i] < right_side[j]:
17                 array_input[k] = left_side[i]
18                 i+= 1
19             else:
20                 array_input[k] = right_side[j]
21                 j+= 1

```

```

22         k+= 1
23
24         # Adding all elements if some of
25         # them have been left behind
26         while i < len(left_side):
27             array_input[k] = left_side[i]
28             i+= 1
29             k+= 1
30
31         while j < len(right_side):
32             array_input[k] = right_side[j]
33             j+= 1
34             k+= 1
35
36         return array_input
37
38 # Recursive implementation
39 def merge(left, right):
40     if not len(left) or not len(right):
41         return left or right
42
43     result = []
44     i, j = 0, 0
45     while (len(result) < len(left) + len(right)):
46         if left[i] < right[j]:
47             result.append(left[i])
48             i+= 1
49         else:
50             result.append(right[j])
51             j+= 1
52         if i == len(left) or j == len(right):
53             result.extend(left[i:] or right[j:])
54             break
55
56     return result
57
58 def mergesort(list):
59     if len(list) < 2:
60         return list
61
62     middle = len(list)/2
63     left = mergesort(list[:middle])
64     right = mergesort(list[middle:])
65
66     return merge(left, right)

```



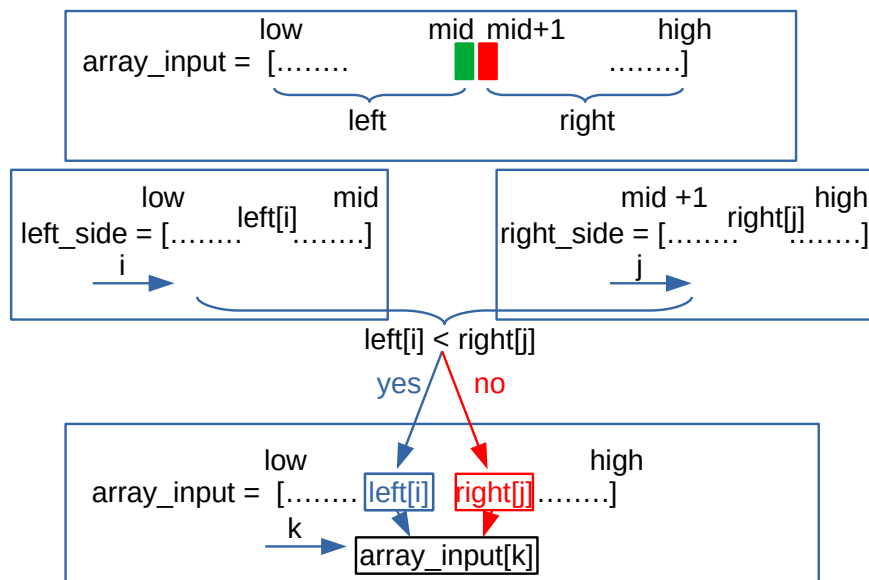


Figure 40: Merge sort algorithm implementation.

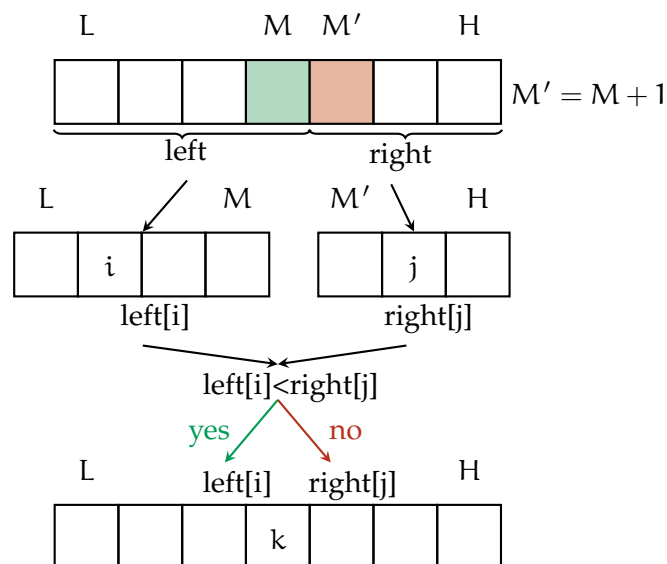


Figure 41: Merge sort algorithm implementation.

### 3.4 QUICKSORT

The **quicksort** is a sorting algorithm of the divide et impera type. It works by randomly choosing an element of the array, called pivot, and putting all the bigger and lower values on its left or on its right respectively. This procedure is repeated recursively on the two new subarrays until all the elements have been a pivot [22] ([Quicksort, Wikipedia](#)).

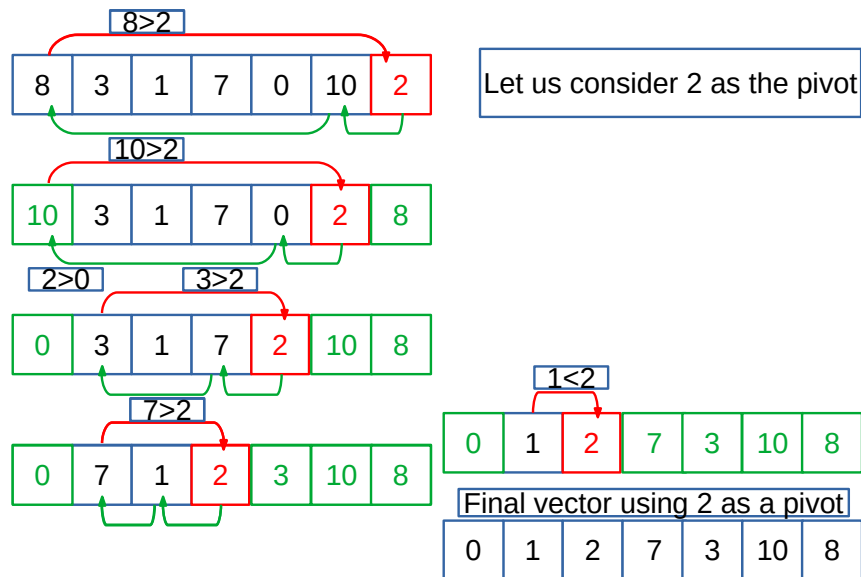


Figure 42: Quicksort algorithm part one.

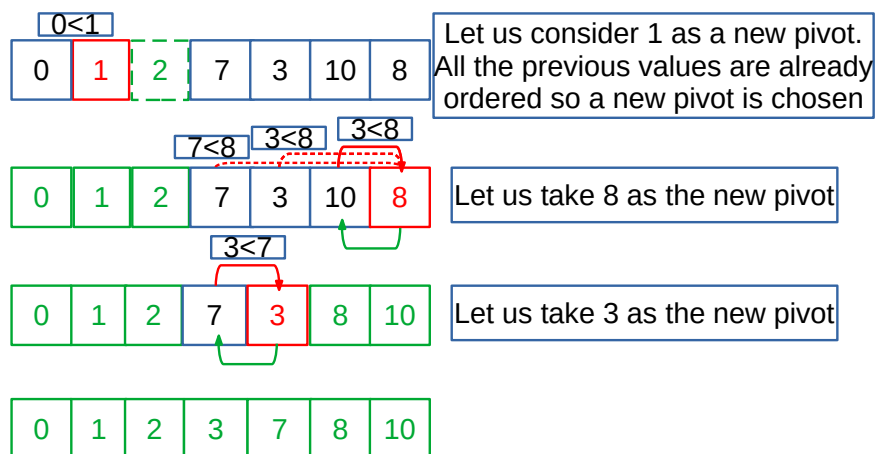


Figure 43: Quicksort algorithm steps part two.

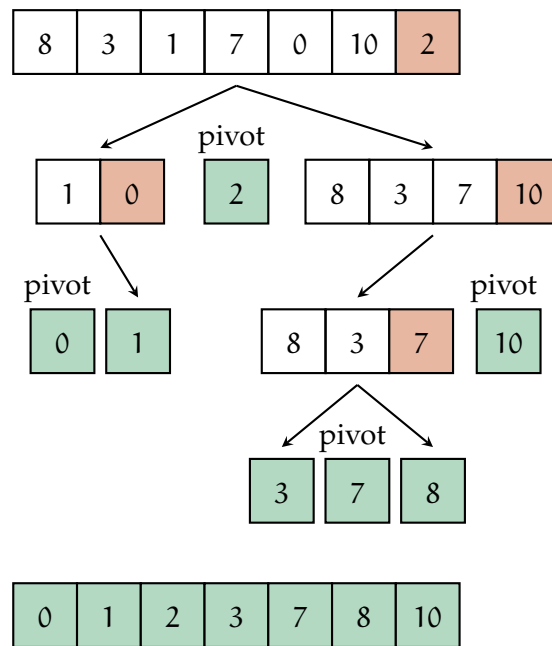


Figure 44: Quicksort algorithm.

Here are the steps of quicksort algorithm based on the example of Figure 44 and Figure 43:

- 1 Let us consider the last element as pivot, two in this case, and let us compare it with all the elements to its left. Let us start from the first element of the array, and let us compare their values. In this case  $8 > 2$ , so 8 is moved on the position of the pivot (2) which is moved of one position to the left. The number to be removed, 10 in this case, is moved in the first position.
- 2 Let us repeat the process. Now we have to compare the pivot (2) in the new position with the first element (10), and because  $10 > 2$  we repeat the previous step of moving the elements.
- 3 In this case  $0 < 2$  so we do not have to do anything, but going to the next element, 3 in this case.
- 4 For the pivot 2 all the elements to the left are less than it, and all the element to the right are bigger than it. 2 is not moved anymore. We can change the pivot and repeat all the steps for the new pivots until all the elements have been a pivot.

### 3.4.1 Efficiency of the Quicksort Algorithm

Evaluating the efficiency of quicksort is very hard. In the following there are some justifications for the worst case, and for the best and average complexity.

Let us consider first the worst case. In this situation the last elements of the array are the bigger ones, so it is necessary to check all the previous elements, by doing  $n^2$  comparisons Figure 46.

1	8	2	5	3	9	13
1<13	8<13	2<13	5<13	3<13	9<13	
1<9	8<9	2<9	5<9	3<9		

Figure 45: Quicksort algorithm worst case.

1	8	2	5	3	9	13
1 < 13 8 < 13 2 < 13 5 < 13 3 < 13 9 < 13						
1 < 9 8 < 9 2 < 9 5 < 9 3 < 9						

Figure 46: Quicksort algorithm worst case.

In the best and in the average case the complexity is  $O(n \log(n))$ . The reason is because the first pivot tends to move at the center of the array, having in this way two subarrays. The pivots of these two subarrays will tend to move at their center and the process is repeated until all the elements have been a pivot, having in this way an ordered array.




Figure 47: Quicksort algorithm best and average case.




Figure 48: Quicksort algorithm best and average case.

The space complexity of quicksort is constant,  $O(1)$ .

This algorithm can be optimized in several ways. For example it is possible to order at the same time two half of the array, or considering as pivot always the last elements.

**QUICKSORT AND MERGE SORT COMPARISON** Quicksort is often a better solution than merge sort, because even if its worst case performance is  $O(n^2)$ , this problem can be solved by using the randomized quicksort. If the right pivot is chosen the problem related to having a worst case performance is solved. Moreover the quicksort algorithm dose not require an auxiliary memory, which is a big advance in a lot of situations.

On the other hand merge sort is a better solution than quicksort and heap-sort [23] ([Heapsort](#), [Wikipedia](#)) when the sorting is done on linked lists that

do not require big auxiliary space and on very large data sets stored on slow-to-access media, such as disk storage or network-attached storage [22].

In summary:

- **Worst Case:**  $O(n^2)$
- **Average Case:**  $O(n \log(n))$
- **Best Case:**  $O(n \log(n))$
- **Space:**  $O(1)$

### 3.4.2 Quicksort Implementation


The following code is the python implementation of the quicksort algorithm [24] ([Quicksort Python Implementation](#)).

Listing 3.4: Quicksort python implementation.

```

1 def partition(arr, low, high):
2     i = (low-1)    # Index of smaller element
3     pivot = arr[high] # pivot
4
5     for j in range(low, high):
6
7         # If current element is smaller than or
8         # equal to pivot
9         if arr[j] <= pivot:
10
11             # Increment index of smaller element
12             i = i+1
13             arr[i], arr[j] = arr[j], arr[i]
14
15     arr[i+1], arr[high] = arr[high], arr[i+1]
16     return (i+1)
17
18 # Function to do Quick sort
19 def quick_sort(arr, low, high):
20     if len(arr) == 1:
21         return arr
22     if low < high:
23
24         # pi is partitioning index, arr[p] is now
25         # at right place
26         pi = partition(arr, low, high)
27
28         # Separately sort elements before
29         # partition and after partition
30         quick_sort(arr, low, pi-1)
31         quick_sort(arr, pi+1, high)

```

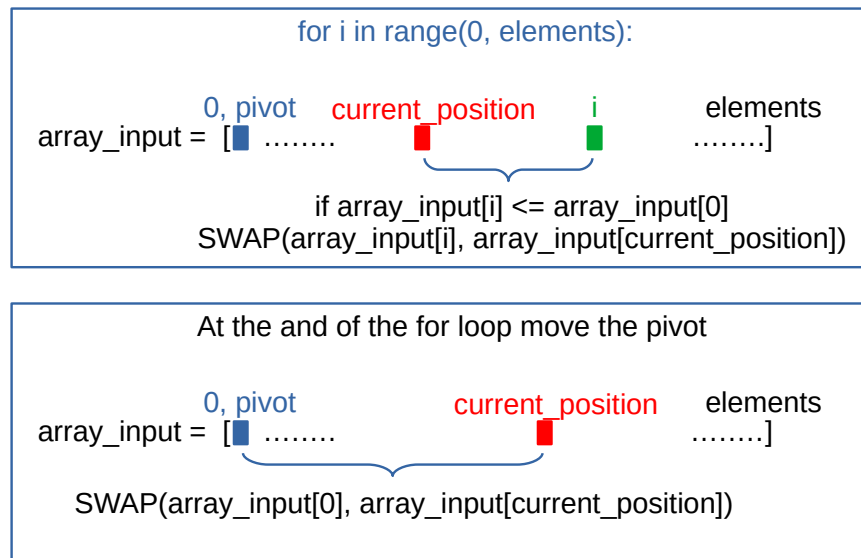

**Figure 49:** Quicksort algorithm implementation.

## TREES

In this chapter are introduced the fundamentals concepts of tree as abstract data type, and the most used algorithms related to **trees**.

### 4.1 GENERAL DEFINITIONS

A **tree** is an abstract datatype that simulate a hierarchical structure [25] ([Trees, Wikipedia](#)). A tree is a particular kind of a linked list where there are more next elements. The base element of a tree is called **node** while the first element is called **root**.

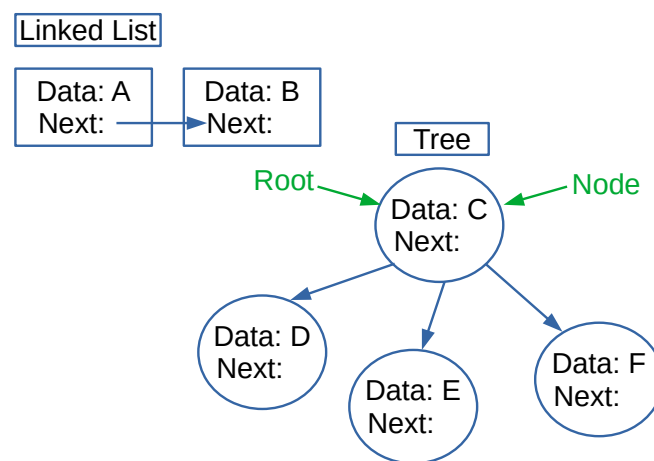


Figure 50: Elements of a tree and linked list.



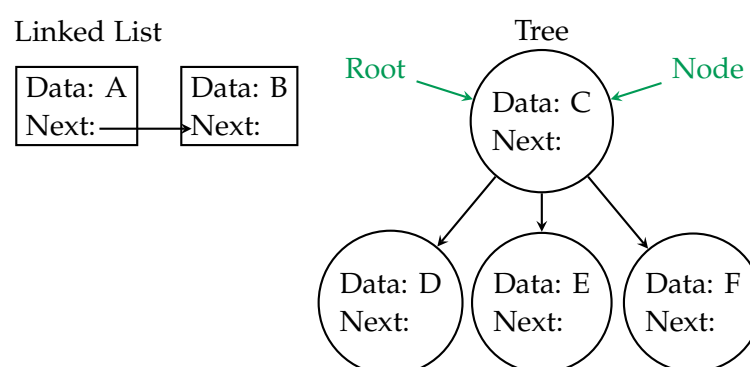


Figure 51: Elements of a tree and linked list.

Trees must be completely connected structures, this means that there are not any nodes which are not connected to anything (Figure 53 case (a)), and there must not be present any cycles (Figure 53 case (c)).

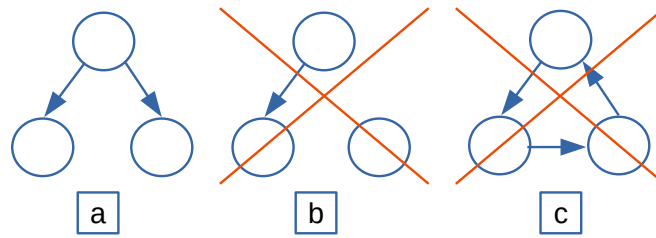


**Figure 52:** Completed connected structure (a), a non completed connected structure (b), and a cycle (c).

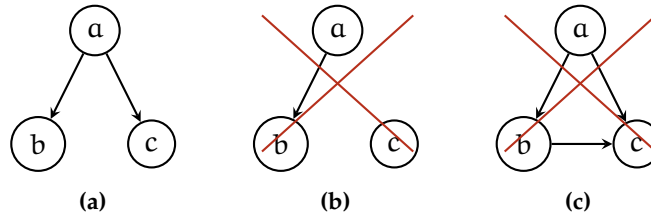

**Figure 53:** Completed connected structure (53a), a non completed connected structure (53b), and a cycle (53c).

Trees are a hierarchical structures divided into layers: the first layer is the one belonging to the root node, the first node of a tree. The next element of the root are called children, which became parents in case they have next node connected as well. The last nodes of a trees are the nodes which do not have any children and they are called **leaf**. The numbers of connections is called **height**. A set of connections creates a **path**. The numbers of edges starting from the root to a node is called **depth**. All this definitions are defined in following figure (Figure 55).

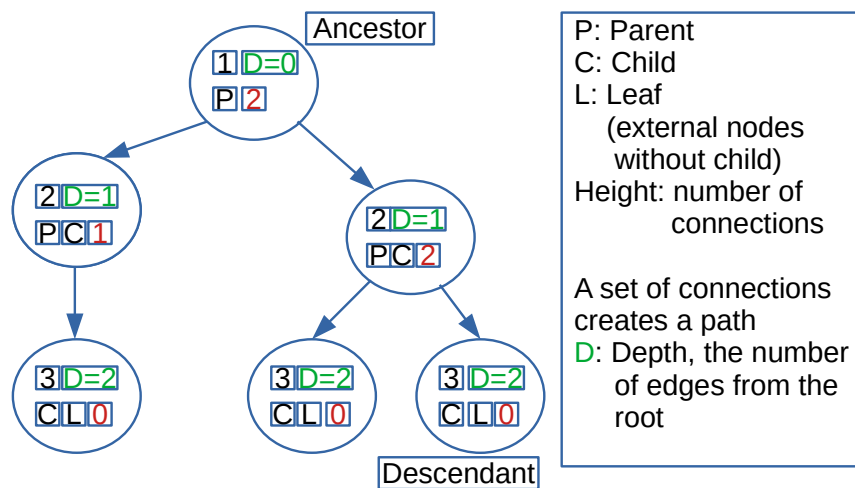

**Figure 54:** A tree and its fundamentals elements.



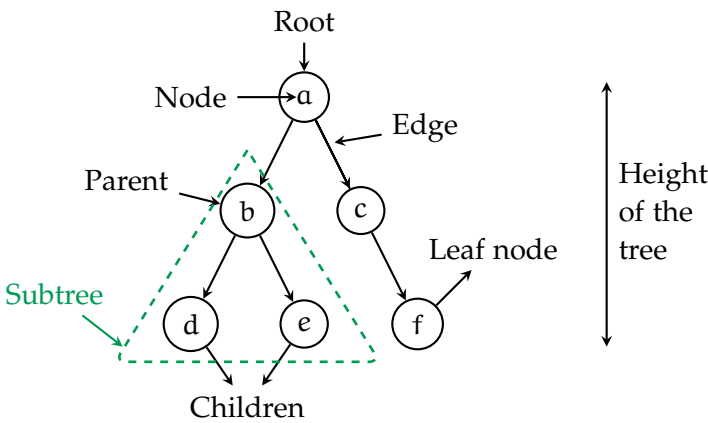


Figure 55: A tree and its fundamentals elements.

4.2 TREE TRAVERSAL

Which way is the most efficient for visiting all the nodes of a tree? Is it more efficient looking layer by layer or looking at subtrees? There are two different approach to traverse a tree: the **depth-first search (DFS)** and the **breadth-first search (BFS)**. In the first one the priority is to look at the children of a node, instead in the second one the priority is to look at the node of the same layer 57.


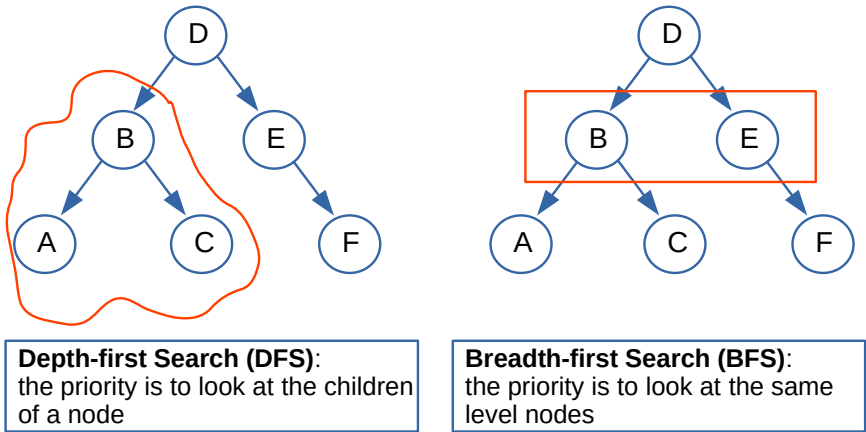


Figure 56: The depth-first search and the breadth-first search.

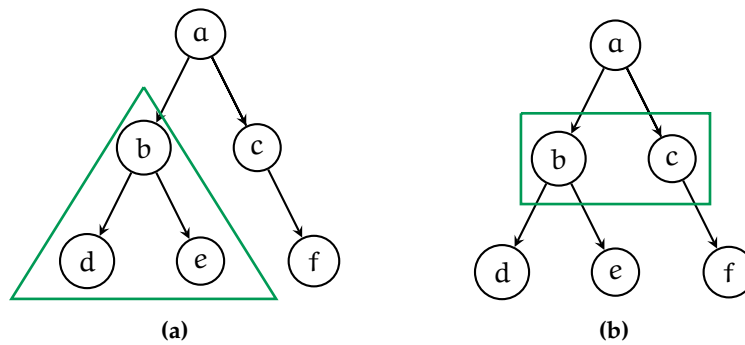


**Figure 57:** The depth-first search (57a) and the breadth-first search (57b)

AGGIUNGERE LA COMPLESSITÀ COMPUTAZIONALE DEI DUE AP-  
PROCCI.

#### 4.2.1 Depth-first search

In the depth-first search there are several different ways to perform a search on a tree. AGGIUNGERE LO SPANNING TREE E IL METODO DI RICERCA: VISIT, LEFT, RIGHT...

**PRE-ORDER SEARCH** In the **pre-order search** the first node to be checked as visited is the root. The following node is the left child by convention. Once checked the left child the process is repeated until the first node without any children is reached. At that point the same process is applied to the right side: all the nodes on the right are checked until all the nodes are checked as visited 59.

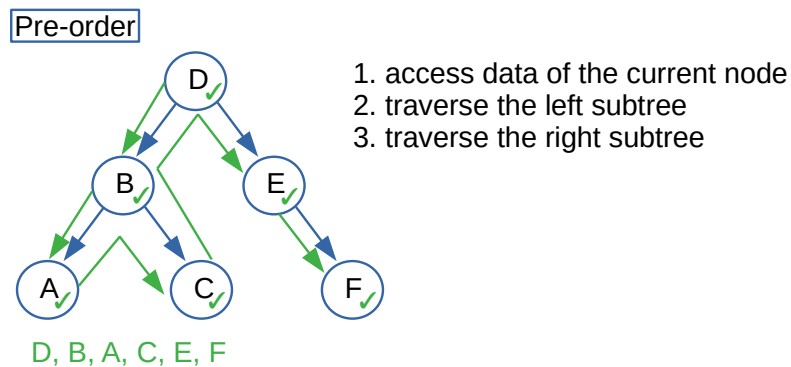

**Figure 58:** Pre-order search.

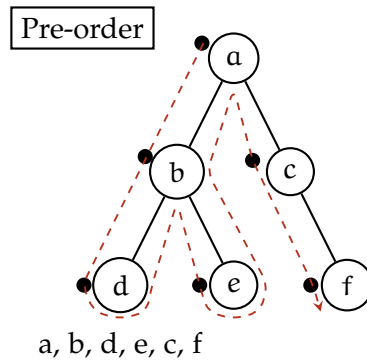


Figure 59: Pre-order search.

**IN-ORDER SEARCH** In the **in-order search** the first node to be checked is the first node without children on the left side (or right side). Once checked off this node the next one to be checked off is its parent, and the process is repeated again on the right side of the nodes, until all the nodes are checked off.

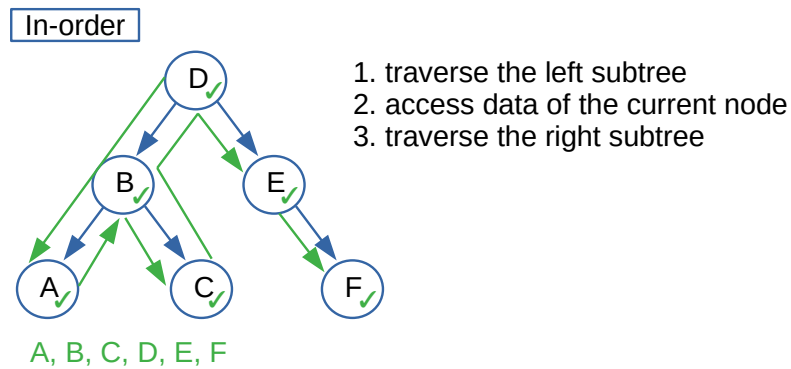


Figure 60: In-order search.

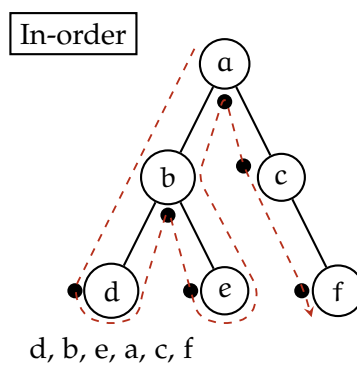


Figure 61: In-order search.

**POST-ORDER SEARCH** In the **post-order search** the first node to be checked off is the first node without children on the left side (or right side). Once checked off this node the next one to be checked off is the one which does not have any children. Once all the nodes of the current left subtree without

any children are checked off, the parents can be checked off, and the whole process is repeated until all the nodes are checked off.

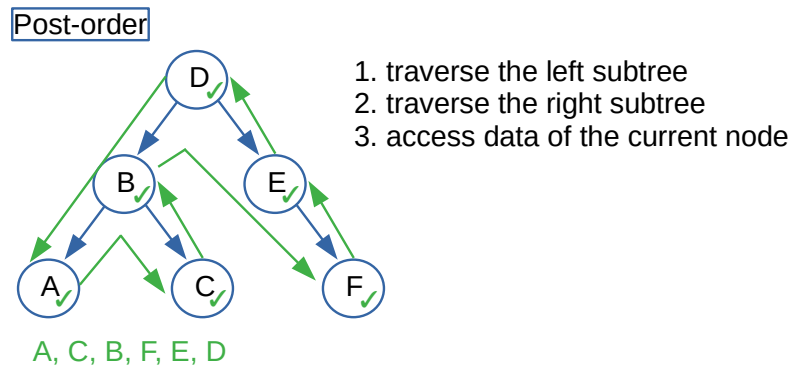


Figure 62: Post-order search.

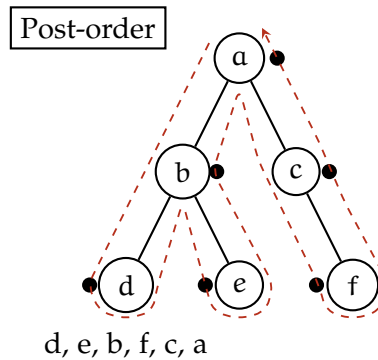


Figure 63: Post-order search.

## 4.3 BINARY TREES

**Binary trees** are trees in which the parent has at most two children (0, 1, 2 are the only number of admitted children). On binary trees some operations like searching, deleting, and inserting can be easily and efficiently done.

### 4.3.1 Search

To search an element in the tree one of the previous methods can be used. Because in a general tree there is no ordering this means that potentially all the elements of the tree can be visited, then the complexity results in  $O(n)$ .

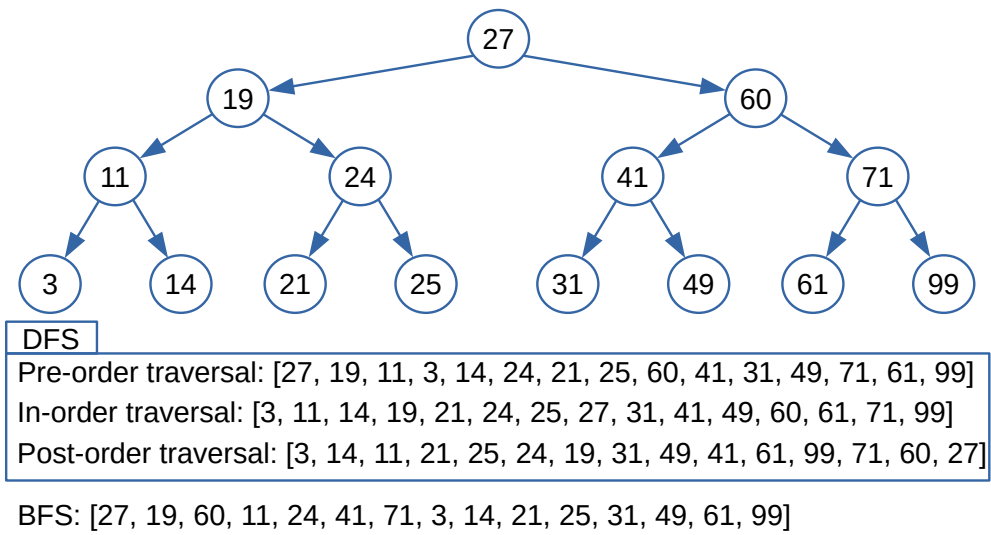


Figure 64: Example of tree search and traversal.

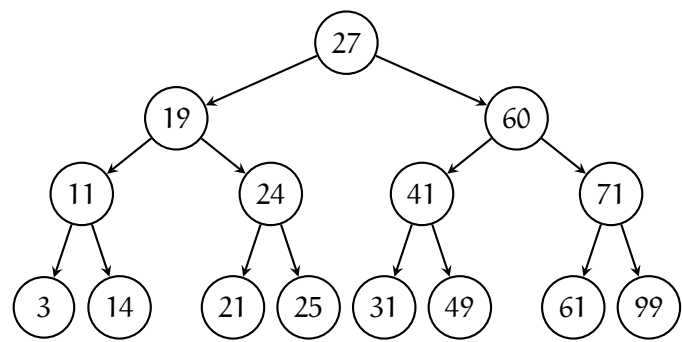


Figure 65: Example of tree search and traversal.

DFS	
Pre-order traversal	[27, 19, 11, 3, 14, 24, 21, 25, 60, 41, 31, 49, 71, 61, 99]
In-order traversal	[3, 11, 14, 19, 21, 24, 25, 27, 31, 41, 49, 60, 61, 71, 99]
Post-order	[3, 14, 11, 21, 25, 24, 19, 31, 49, 41, 61, 99, 71, 60, 27]
BRF	[27, 19, 60, 11, 24, 41, 71, 3, 14, 21, 25, 31, 49, 61, 99]

Table 3: Traversal paths for the tree in Figure 65.

4.3.2 Delete

Before the delete process there is always a search one for finding the element to be deleted. If the element to be deleted is a leaf, deleting it is not a problem because there are not any children to be moved. Instead if the node to be removed has some children there are several opportunities to reorganize the nodes, because the condition for a binary tree must remain valid (a node can have at most two nodes). So there are several strategies. Let us consider the following tree 67.

- If the node to be removed has only one child it can be replaced by the child node (case 1 Figure 67).
- If the node to be removed has two children it can be replaced with the child node which has no children node (case 2 Figure 67).
- If the node to be removed has two children which have again children as well, in this case there are several options which can be done. For example on child node can be moved to the position of the one to be removed (case 3 Figure 67).

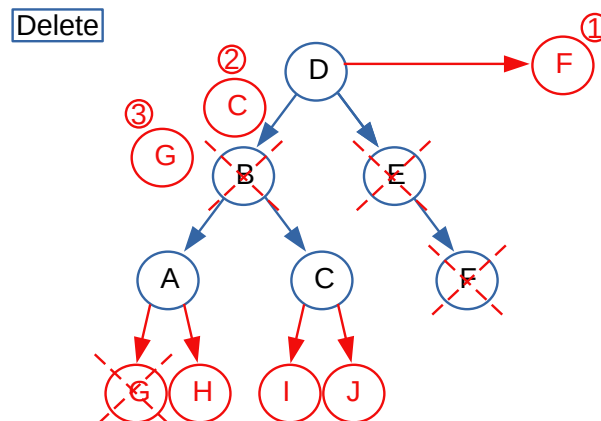


Figure 66: Delete an element of a tree.

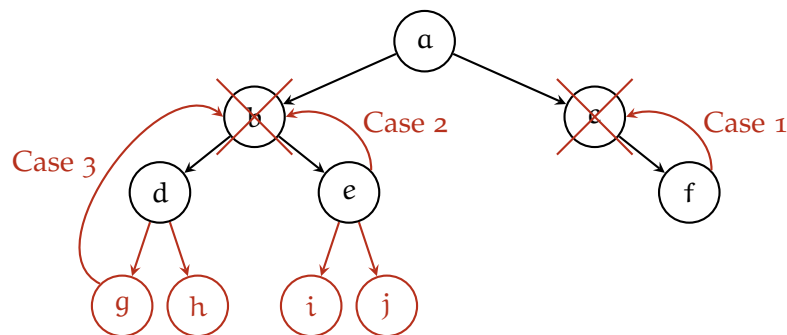


Figure 67: Delete an element of a tree.

AGGIUNGERE IL LIBRO DI ALGORITMI CITANDO CHE SIA UNA LETTURA APPROFONDATA PER MAGGIORI DETTAGLI.

#### 4.3.3 Insert

Insert a new element to a binary tree is not a hard operation, because it is enough to find a node which can take a new children node. In the worst case to find the proper node in which a child can be add the farthest leaf must be reached (case 1 69).

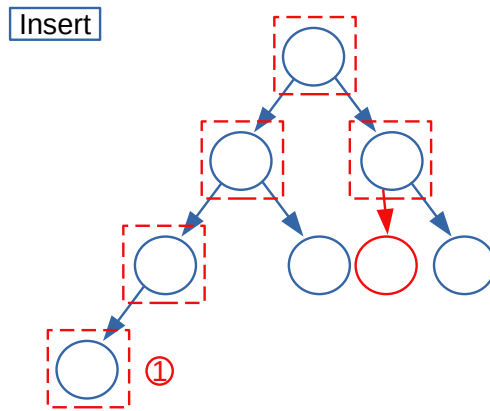


Figure 68: Add an element of a tree.

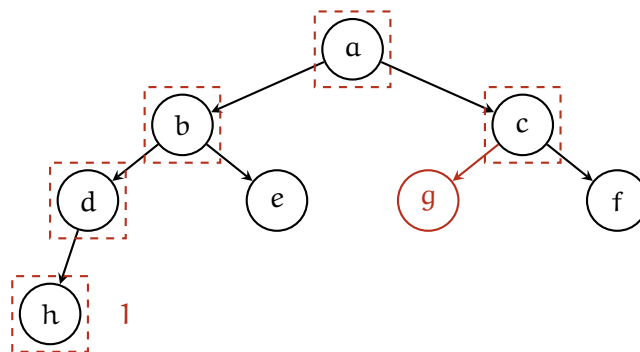


Figure 69: Add an element of a tree.

AGGIUNGERE IL LIBRO DI ALGORITMI CITANDO CHE SIA UNA LETTURA APPROFONDATA PER MAGGIORI DETTAGLI.

#### 4.3.4 Perfect binary tree

A perfect binary tree is a binary tree in which all the nodes have two children except the leaf which do not have any children. In this case the following results are valid


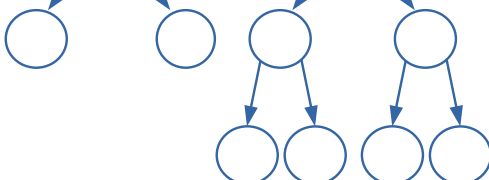
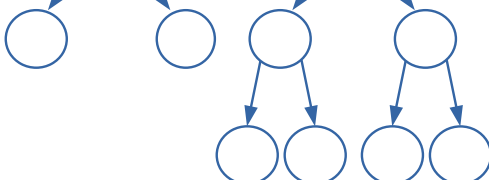
Level		Nodes in level		Total nodes
1		1	$2^0$	1
2		2	$2^1$	3
3		4	$2^2$	7

Figure 70: Perfect binary tree results.

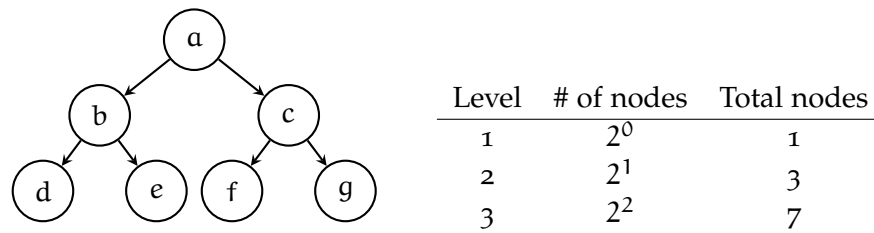


Figure 71: Perfect binary tree.

When a new row is added, the number of nodes double. Given a level  $n$  the total number of nodes is  $2n + 1$ .

#### 4.3.5 Binary Tree Implementation

The following code is the recursive Python implementation of the pre-order search and traversal (Figure 59). The recursive and iterative implementations of the other ways of search and traverse a tree are in appendix A.

Listing 4.1: Class definition for a node and a tree.

```

1 class Node():
2
3     def __init__(self, value):
4         self.value = value
5         self.left = None
6         self.right = None
7
8 class BinaryTree():
9
10    def __init__(self, root):
11        self.root = Node(root)

```

Listing 4.2: Recursive pre-order traversal and search implementation.

```

1 class Node():
2     ...
3
4 class BinaryTree():
5     ...
6
7     def print_tree(self):
8         return self.preorder_print(tree.root, "")[:-1]
9
10    def preorder_search_recursive(self, start, find_val):
11        if start:
12            if start.value == find_val:
13                return True
14            self.preorder_search_recursive(start.left, find_val)
15            self.preorder_search_recursive(start.right, find_val)
16
17    def preorder_print(self, start, traversal):
18        if start:
19            traversal += (str(start.value) + "-")
20            traversal = self.preorder_print(start.left, traversal)

```



```

21         traversal = self.preorder_print(start.right, traversal)
22     return traversal

```

## 4.4 BINARY SEARCH TREES (BST)

Performing operations such as search, addition, or removal of an element it is a very efficient process if the binary tree is ordered. A binary tree is ordered if for all nodes the left child has a minor value, and the right child has a greater value than the considered node [26]([Binary search tree, Wikipedia](#)).

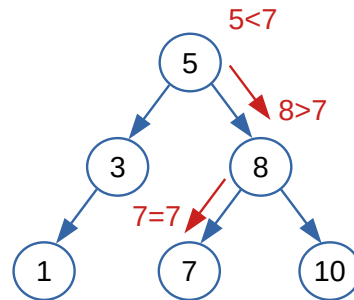


Figure 72: Search on an ordered binary tree.

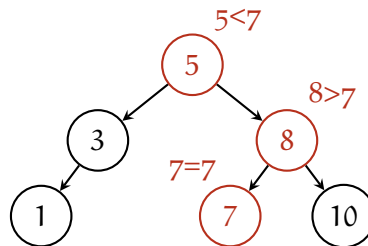


Figure 73: Search on an ordered binary tree.

For example in Figure 73 is an ordered tree. Let us consider we would like to find the node which value is 7. Because the tree is ordered for efficiently finding 7 is enough to compare 7 with the value of the node and choose every time if to search on the right or on the left. In this way for finding a value is not mandatory to look at all the nodes, and the complexity for this operation is  $\log(n)$ .

Let us consider instead we would like to add a new node of value 4 to the tree of Figure 73. Because the tree is ordered, there is only one place in which the node can be added. In the case of the tree in Figure 73 the node can be easily added because there is an empty space that can correctly take it (Figure 75). In this case the complexity for this operation is again  $\log(n)$ .

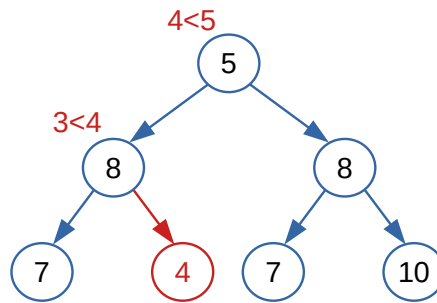


Figure 74: Addition on an ordered binary tree.

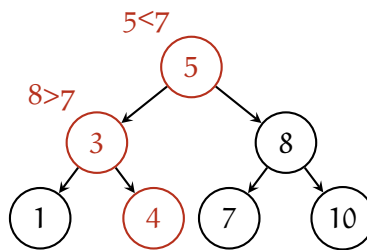


Figure 75: Addition on an ordered binary tree.

In case the position of the node is already occupied, adding the node could be a very difficult task. For a more complete and formal description of this topic refer to [27] in the chapter about trees.

When all the possible nodes are present in each level the tree is said **balanced**. In Figure 75 there is an example of a balanced tree. When instead a tree has all its children nodes which have always a bigger value, all the tree is on the right, and it is said to be **unbalanced**. In this case the search of an element has a  $O(n)$  complexity in the worst case.

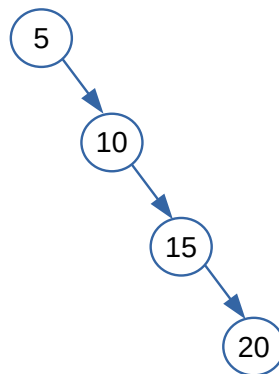


Figure 76: An unbalanced binary tree.




Figure 77: An unbalanced binary tree.

#### 4.4.1 Binary Search Tree Implementation

The following code is the python implementation of the search and addition operations performed on a ordered binary tree.

**Listing 4.3:** implementation of insert and search operation for a binary search tree.

```

1 class BST():
2
3     def __init__(self, root):
4         self.root = Node(root)
5
6     def insert(self, new_val):
7         self.insert_helper(self.root, new_val)
8
9     def insert_helper(self, current, new_val):
10        if current.value < new_val:
11            if current.right:
12                self.insert_helper(current.right, new_val)
13            else:
14                self.current.right = Node(new_val)
15        else:
16            if current.left:
17                self.insert_helper(current.left, new_val)
18            else:
19                current.left = Node(new_val)
20
21    def search(self, find_val):
22        return self.search_helper(self.root, find_val)
23
24    def search_helper(self, current, find_val):
25        if current:
26            if current.value == find_val:
27                return True
28            elif current.value < find_val:
29                return self.search_helper(current.right,
30                                         find_val)
31        else:
32            return self.search_helper(current.left, find_val)
  
```

32

`return False`

## 4.5 HEAPS

**Heaps** are particular tree-based data structure in which the elements are ordered in increasing or decreasing order [28] ([Heap, Wikipedia](#)). Heaps are a very efficient implementation of the abstract data type (Chapter 2) priority queue (Section 2.6). The value with the highest (or lowest) priority is always stored at the root. Heaps are very useful when an element with a high (or low) priority must be repeatedly removed from the heap. Moreover, heaps are not sorted structure, but are regarded as partially ordered.

We say the *max heap* (Figure 79a) if for every node its children have the values less or equal than the one of the parent (the root has always the highest value). We say instead *min heap* (Figure 79b) if for every node its children have the values higher or equal than the one of the parent (the root has the lowest value).

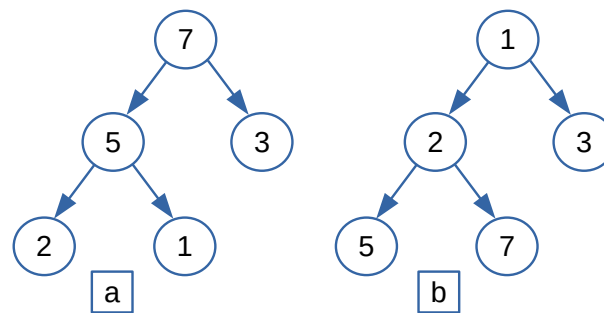


Figure 78: Max heap (a) and min heap (b) example.

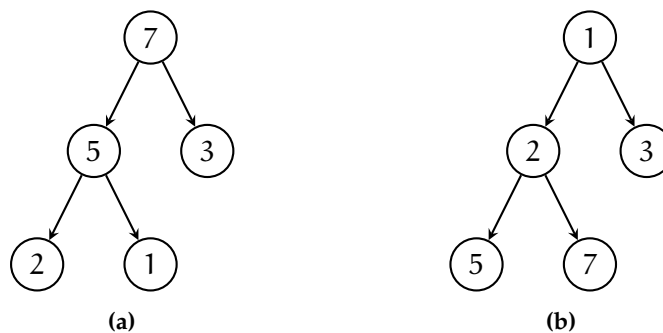


Figure 79: Max heap (79a) and min heap (79b) example.

In general heaps are not binary trees so they can have more than two nodes.

In a max heap tree the search of the biggest value is called **peek** and it has a constant complexity ( $O(1)$ ). For searching other values instead we have to check node by node as the ordering of the left and right side is not guarantee. The average case is  $O(\frac{n}{2}) = O(n)$ .

### 4.5.1 Heapify

Let us consider we would like to add a new node to a heap. In this case the node to be add must respect the heap condition. For doing so the node is added in the first available position, and later the node of the heap are swapped in order to keep true the heap condition.

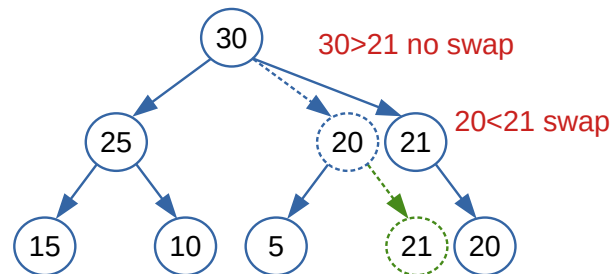


Figure 80: Add a new node to a heap.


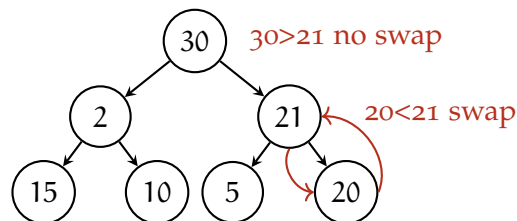


Figure 81: Add a new node to a heap.


In the example of Figure 81 only one swap is necessary. The complexity of adding a new element and swap all the node, in order to keep valid the heap condition, is  $\log(n)$ , and in the worst case the highest number of operations correspond to the height of the tree.

### 4.5.2 Heap Implementation

To implement a heap we can use an array. An example of this application is shown in the following figure (Figure 83).

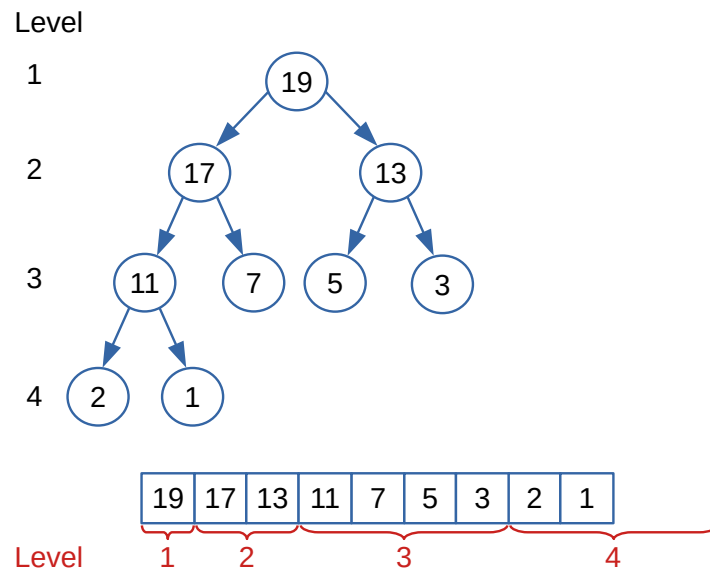


**Figure 82:** Implementation example of a heap using an array.

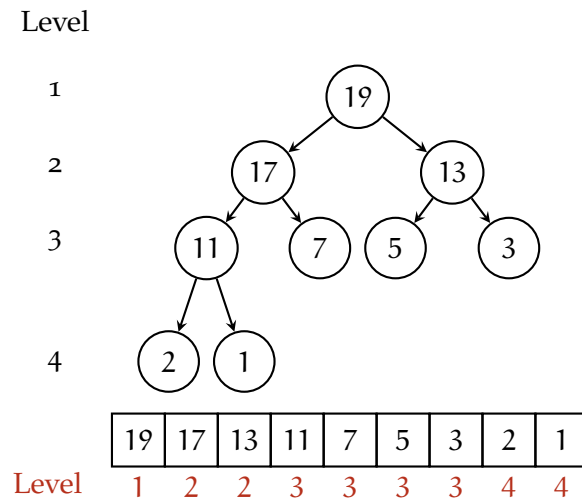


**Figure 83:** Implementation example of a heap using an array.

## 4.6 SELF-BALANCING BINARY SEARCH TREES

**Self-balancing binary trees** are binary tree-based structure that automatically maintain the lowest height (number of levels below the root) when an insertion or deletion is done [29] ([Self-balancing binary search tree, Wikipedia](#)). This structure is an efficient way to implement abstract data type like lists, priority queue, and sets.

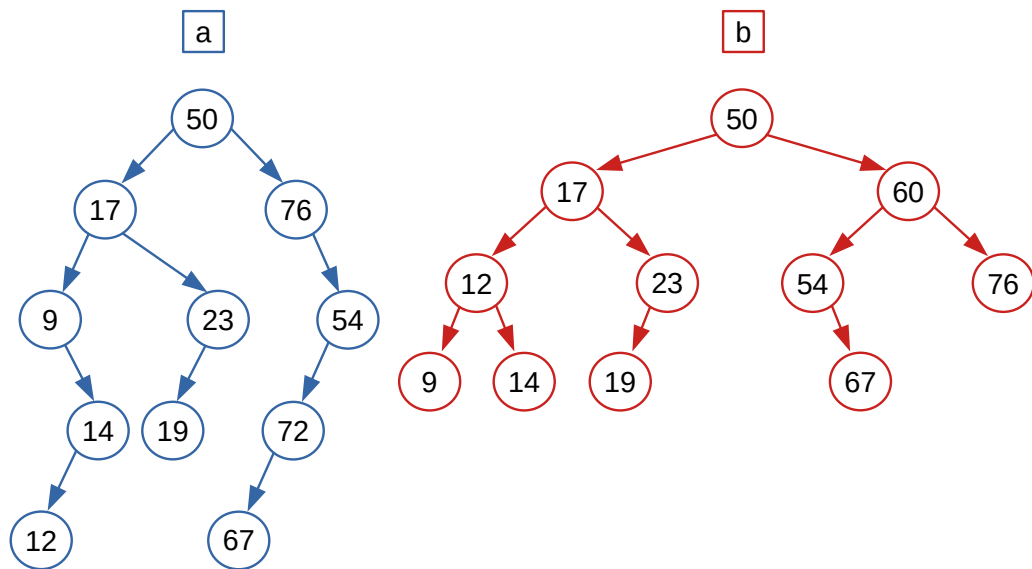

**Figure 84:** Example of balanced (b) and unbalanced (a) tree. Credits: [Self-balancing binary search tree, Wikipedia](#)

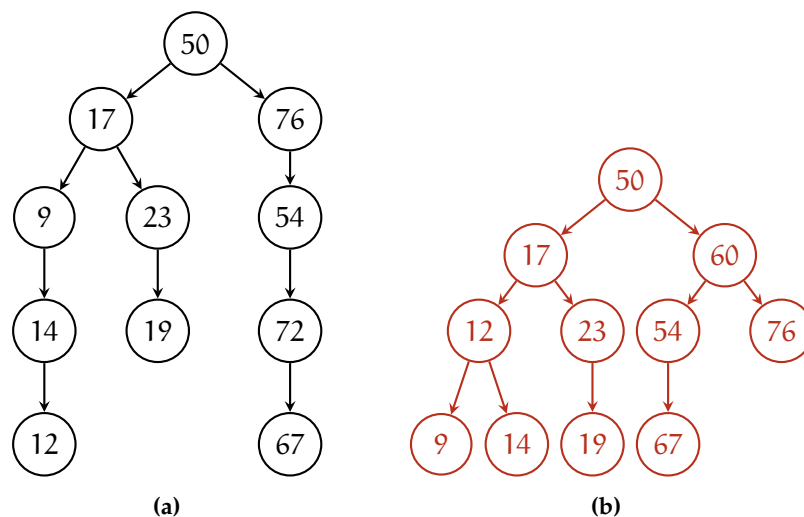

**Figure 85:** Example of unbalanced (85a) and balanced tree (85b). Credits: [Self-balancing binary search tree, Wikipedia](#)

In Figure 85 is show an unbalanced tree (85a) in which the average path to reach the leaf is 3.27 nodes. If the same tree is balanced (85b) the average path to reach any leaf from the root decreased to 3.

## 4.7 RED-BLACK TREES

The **red-black trees** are particular kind of self balancing trees. An extra bit is used to store the color of the node, which can be only **red** or **black**. Using a color for each node assures that the tree remains balanced during insertion and deletion operations [30] ([Red-black tree, Wikipedia](#)).

The rules that a red-black tree must respect are:

- 1 Nodes can be only of two types: **red** or **black**.
- 2 There must exist the **null leaf nodes**. Every node which does not have two leaf must have the children **null**.
- 3 If a node is **red** all its children must be **black**.
- 4 Usually the root is **black**, but this is not mandatory.
- 5 Every path from a the upper nodes to the lower ones must contain the same number of **black** nodes. This property is very important when inserting new nodes.

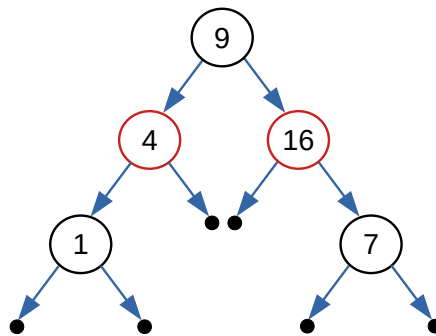


Figure 86: A red-black tree.

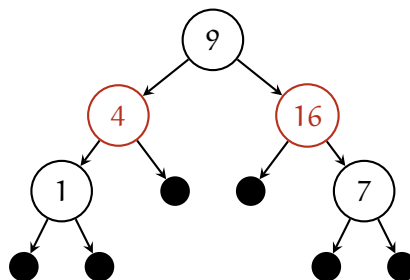


Figure 87: A red-black tree.

Usual only red nodes are added and the color of the other nodes are changed accordingly in order to respect the rule for the red-black tree.


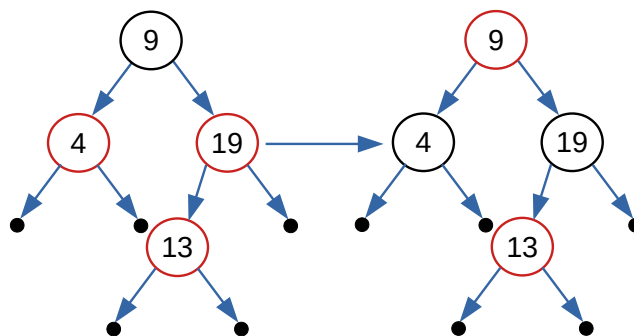



Figure 88: Insertion of a new node and the following updating of the color nodes.



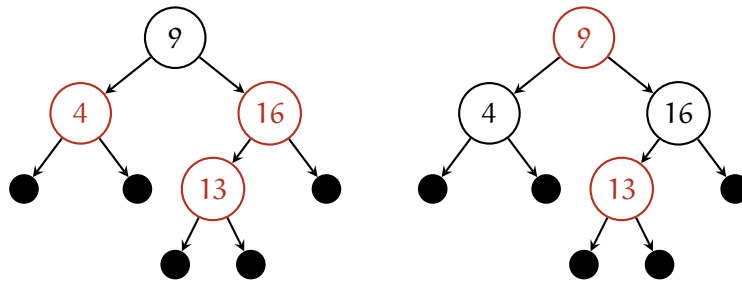


**Figure 89:** Insertion of a new node and the following updating of the color nodes.

In case the insertion or the removal does not respect the rules of the red-black tree and BST some more complex operations must be done as in the following figure.

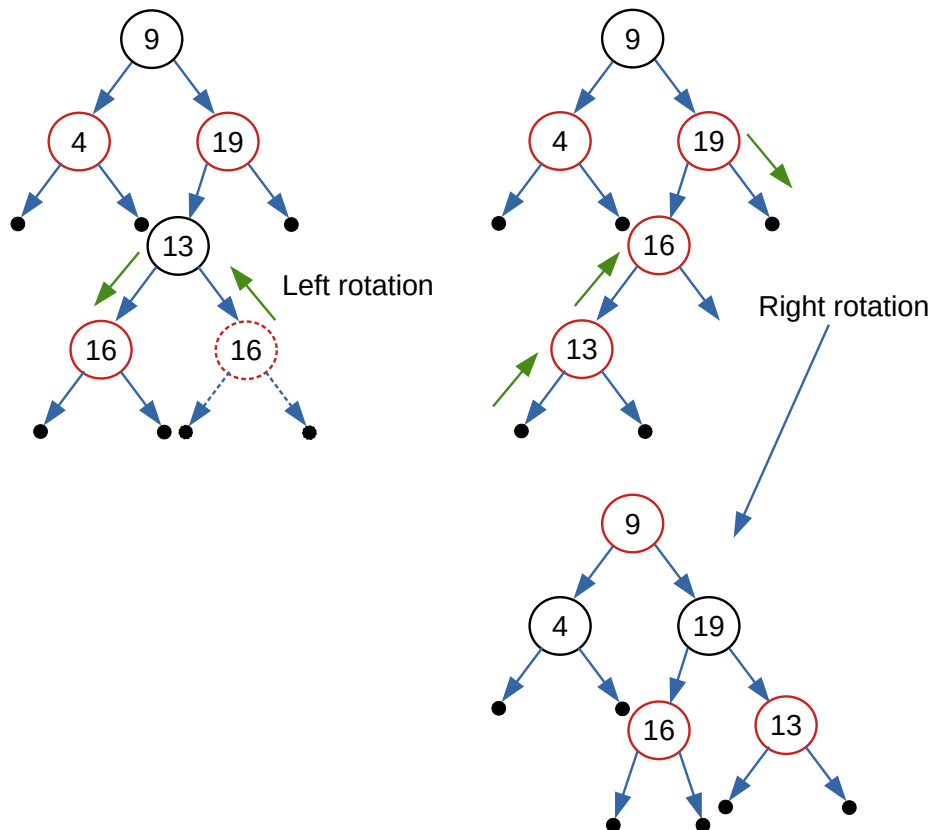

**Figure 90:** Left and right rotation for balancing the tree after an insertion.

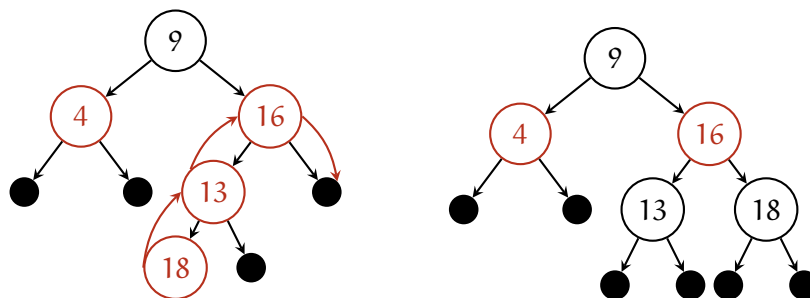


**Figure 91:** An example of right rotation.

## GRAPHS


In this chapter are introduced the fundamentals concepts of **graphs** as mathematical objects, and as an abstract data type, its applications in computer science, and the most important and notable algorithms with their implementation.

### 5.1 GENERAL DEFINITIONS

A graph is a discrete mathematical structure in which the connections between its elements, and their relationship are highlighted. A graph is made up by two different elements: **nodes** or **vertices**, and **links** or **edges**. In case the links do not have any direction the graph is called **undirected graph** (Figure), in case instead the links have a direction the graph is called **directed graph**.

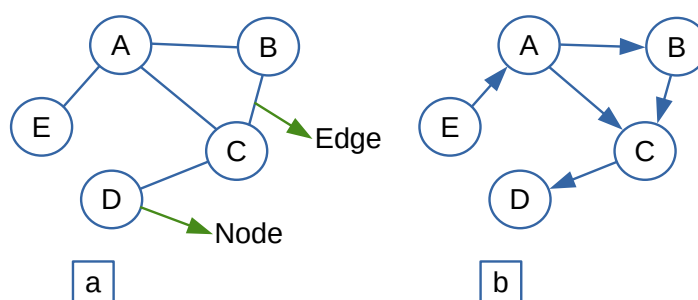

**Figure 92:** Undirected (a) and directed (b) graphs and its elements.

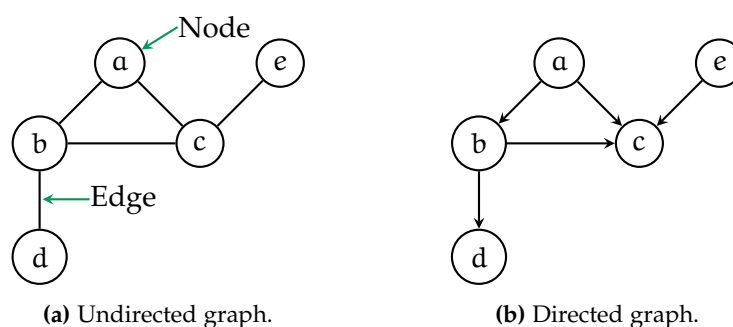

**Figure 93:** Undirected and directed graphs and its elements.

Formally a graph is the pair  $G = (V, E)$ , where  $V$  is the set of all vertices, and  $E$  is the set of paired vertices, whose elements are called edges [31] ([Graph, Wikipedia](#)).

A **tree** (Chapter 4) is a special kind of graph.

Graphs are very useful to describe a lot of real situations like: connections between people, computers (internet), web pages (world wide web), airports, cities, and gene inside the DNA.

In graphs, differently to trees, closed loops can exist. These kind of closed loops can be dangerous for the algorithms because they could lead to infinite executions.

### 5.1.1 Connectivity

**Connectivity** is a measure that describe how much the nodes of a graph are connected. It is defined as the minimum number of elements (nodes or edges) that need to be removed to separate the remaining nodes into isolated subgraphs [32] ([Connectivity, Wikipedia](#)).

A graph is said to be **connected** if every pairs of nodes are connected. Thus it always exists at least one path that connects every pairs of nodes. If an undirected graphs is not connected then it is **disconnected**: in this case there is one or more nodes that can not be reached by any paths.

**STRONGLY CONNECTED** A directed graph is said to be **strongly connected** if every pairs of nodes can be reached by one or more path.

**WEAKLY CONNECTED** A directed graph is said to be **weakly connected** if by replacing all the direct edges with undirectd ones, the new graph is connected. in a directed graph some nodes can not be reached if all the edges exit or enter from them. The graph in Figure 95 is weakly connected because the node g has only entering edges.




Figure 94: A weakly connected graph.

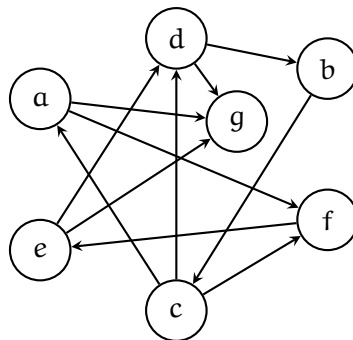


Figure 95: A weakly connected graph.

## 5.2 GRAPH REPRESENTATIONS

There are several ways to represent graphs using data structures. For example in an object oriented programming language a way could be to define a type for the vertex, and a type for the edges.

The most common data structures used for representing a graph are: **edge list**, **adjacency list**, and **adjacency matrix** [27].

In appendix D there is a summary of the complexities for the most common operations performed on graphs for the different data structures.

### 5.2.1 Edge List

The **edge list** is an unordered list of all pairs of nodes that form an edge. This representation is minimal but it does not allow to locate a specific edge, or the set of edges incident to a particular node [27].

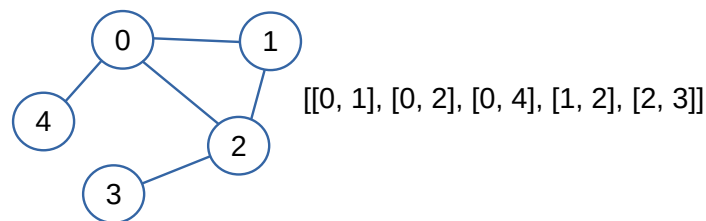


Figure 96: Edge list.

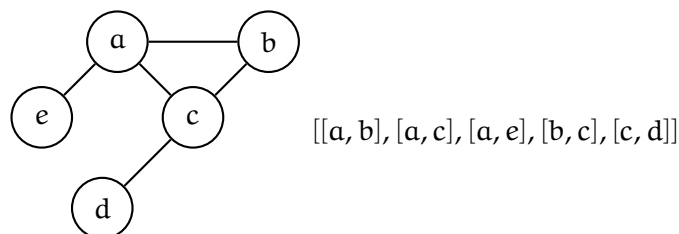


Figure 97: Edge list.

### 5.2.2 Adjacency List

The **adjacency list** is a list containing a separate list for each node containing all the incident edges of that node. In this representation identify all the edges incident to a node is easy [27]. In case of directed graphs for each node there are two different lists: one for entering edges, and another one for the edges that go out.

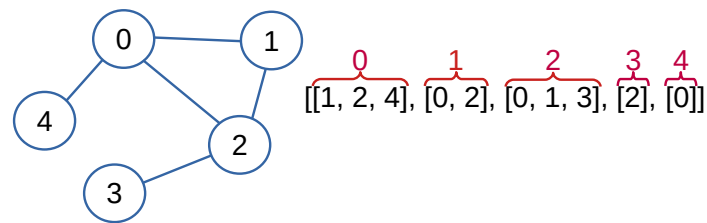


Figure 98: Adjacency list.

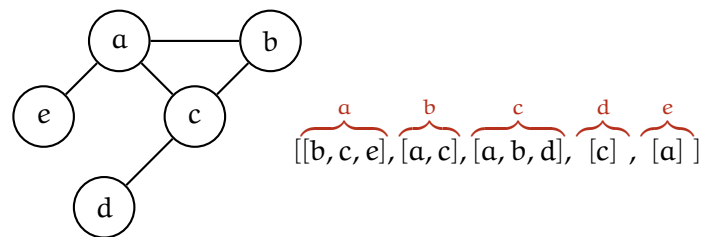


Figure 99: Adjacency list.

### 5.2.3 Adjacency Matrix

The **adjacency matrix** is a matrix  $A$  in which each element  $A[i, j]$  represent the relationship between the edge  $i$  with the edge  $j$ . If between  $i$  and  $j$  there is an edge  $A[i, j] = 1$ , otherwise 0. In case the an ed go out and enter in the same edge  $A[i, i] = 1$ . For undirected graphs this matrix is symmetric, and in case there are not edges going in and out the same node the principal diagonal is all of 0.

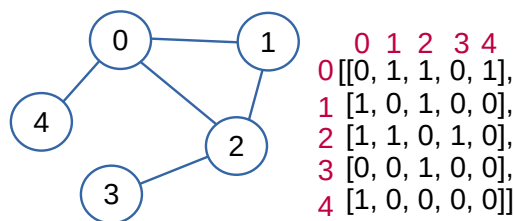


Figure 100: Adjacency matrix.

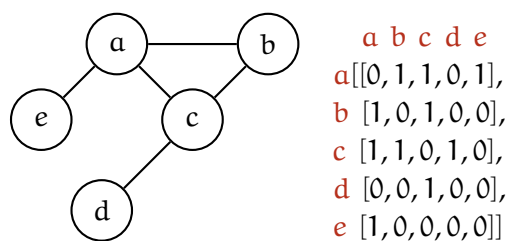


Figure 101: Adjacency matrix.

In the appendix B there is the full python implementation of the graph representation. There are defined the classes for nodes, edges, and graphs

objects. Moreover, all the main operations on graphs like: insert a new node, a new edge, get the edge list, the adjacency list, the adjacency matrix, and find the max index are also implemented.

### 5.3 GRAPH TRAVERSAL

Like in the case of trees (Chapter 4), also for graphs there are two different ways of traverse: **depth-first search**, and **breadth-first search**. But for graphs, differently from trees, there is not a privileged way of traverse, and it is arbitrarily chosen a node where to start the traverse.

#### 5.3.1 Depth-first Search (DFS)

In the **depth-first search** the search starts from an arbitrary node and traverse one of the connected node. This process is repeated until there are not any new nodes on that path and start again with new nodes, until the searched node is found, or all the nodes have been traversed [33] ([Depth-first search, Wikipedia](#)). This traversal can be implemented both recursively, and iteratively by using a stack.




Figure 102: Depth-first search example.

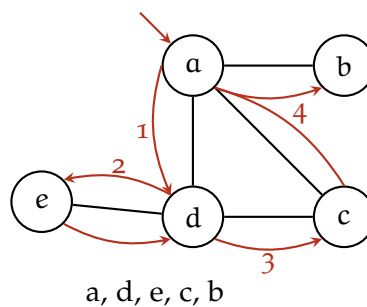


Figure 103: Depth-first search example.

Listing 5.1: Recursive implementation of a depth-first search.

```

1 class Graph():
2     ...
3
4     def depth_first_search_recursive(self, start_node):
5         ret_list = [start_node.value]
```

```

6         start_node.visited = True
7         edges_out = [e for e in start_node.edges
8                       if e.node_to.value != start_node.value]
9         for e in edges_out:
10             if not edge.node_to.visited:
11                 ret_list.extend(depth_first_search_recursive(
12                     edge.node_to)
13         return ret_list

```

The complexity in this case is  $O(|E| + |V|)$ , where  $E$  is the number of edges and  $V$  the number of vertexes. For more details on complexities evaluation on graphs refer here [27].

In appendix C there is a detailed recursive and iterative implementation, with also an additional example.

### 5.3.2 Breadth-first Search (BFS)

In **breadth-first search** the traversal is done starting from a node, and the first visited nodes are all its neighbors. Once visited all the neighbors the traversal keeps going in the same previous way [34] ([Breadth-first search, Wikipedia](#)).




Figure 104: Breadth-first search example.

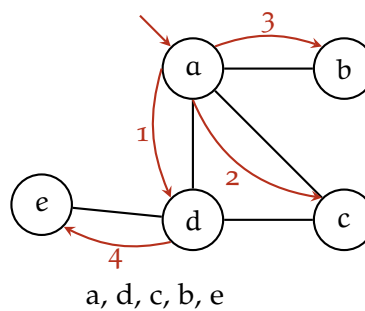


Figure 105: Breadth-first search example.

The only possible implementation is the iterative one, and it is implemented by using a queue.

**Listing 5.2:** Recursive implementation of a depth-first search.

```

1 class Graph():
2     ...

```

```

3
4     def breadth_first_search(self, start_node):
5
6         return ret_list

```

The complexity in this case is  $O(|E| + |V|)$ , where  $E$  is the number of edges and  $V$  the number of vertexes. For more details on complexities evaluation on graphs refer here [27].

In appendix C there is the detailed implementation, with also an additional example. AGGIUNGERE LO SPANNING TREE DELLA RICERCA.

### 5.3.3 Eulerian Path and Circuit

An **Eulerian path** (or **Eulerian trail**) is a path of edges that visits all the edges in a graph exactly once [35] ([Eulerian path, Wikipedia](#)). Not every graph has an Eulerian path, and even if a graph has an Eulerian path it could be found only at specific starting nodes (Figure 107).

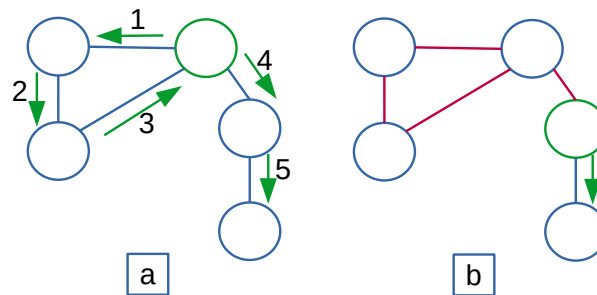


Figure 106: Eulerian path (a) and not Eulerian path (b).

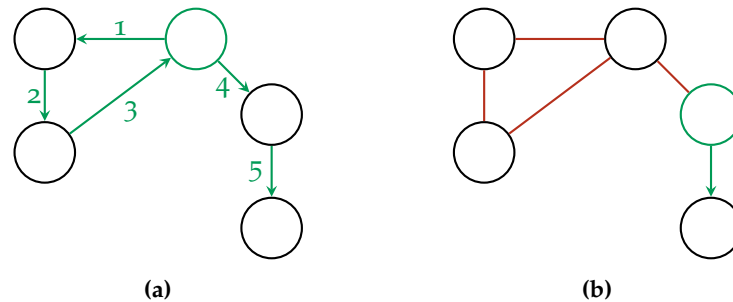


Figure 107: Eulerian path (107a) and not Eulerian path (107b).

An **Eulerian circuit** (or **Eulerian cycle**) is an Eulerian path which starts and ends on the same node. As before not every graph has an Eulerian circuit.



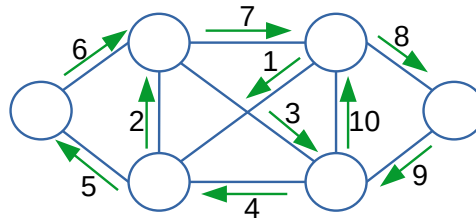


Figure 108: Eulerian circuit.

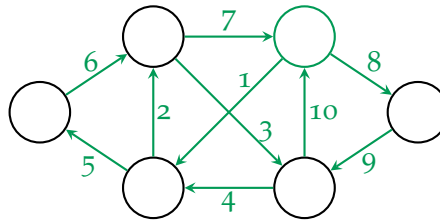


Figure 109: Eulerian circuit.

In the following table are summarized some rules for finding if a graph has Eulerian path and/or circuit [36].

Table 4: Eulerian path and circuit existence rules.

	Eulerian Path	Eulerian Circuit
<b>Undirected Graph</b>	Either every vertex has even degree or exactly two vertices have odd degree.	Every vertex has an even degree.
<b>Directed Graph</b>	At most one vertex has $(\text{outdegree}) - (\text{indegree}) = 1$ and at most one vertex has $(\text{indegree}) - (\text{outdegree}) = 1$ and all other vertices have equal in and out degrees.	Every vertex has equal indegree and outdegree.

#### 5.3.4 Hamiltonian Path and Circuit

A **Hamiltonian path** (or **traceable path**) is a path in which all nodes are visited exactly once. A **Hamiltonian circuit** (or **Hamiltonian Cycle**) is a Hamiltonian path that starts and ends in the same node [37] ([Hamiltonian path, Wikipedia](#)).

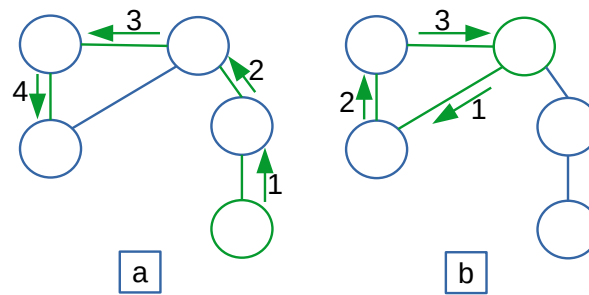


Figure 110: Hamiltonian path (a) and Hamiltonian circuit (b).

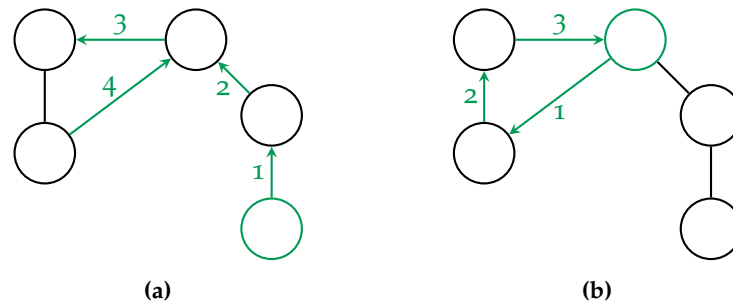


Figure 111: Hamiltonian path (111a) and Hamiltonian circuit (111b).

### 5.3.5 Shortest Path Problem

The **shorted path problem** is the problem of finding a path between two nodes such that the sum of the weights is minimized. In case of an undirected graph the shortest path is the path that pass through the minimum number of nodes [38] ([Shortest path problem, Wikipedia](#)). The breadth-first search can be used for finding the shortest path from a node to all the others, but it expects that all the edges are of the same nature, and in several situation this approach is not useful. Let us image we would like to find the best path connecting two cities. In this case the links between the nodes are not the same, as some strees are faster or slower than others. Another interesting application of finding the shortest path in graphs is about routing packages from a computer to another in internet in order to be as fast as possible.

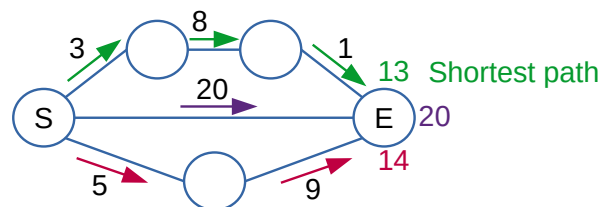


Figure 112: Shortest path.

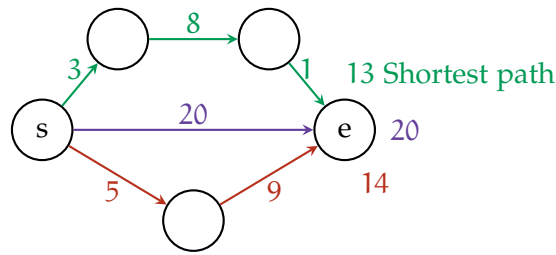


Figure 113: Shortest path.

### 5.3.6 Dijkstra's Algorithm

The Dijkstra's algorithm single source shortest path for a non-negative weighted graphs, in which all the shortest paths from a given node to all the other nodes are found. The distance between two nodes is the sum of the weights of the edges of the path [39].

This algorithm is part of a broader class of algorithms which is called **greedy algorithms** [40] ([Greedy algorithms, Wikipedia](#)). In greedy algorithms the optimal solution is found by finding the optimal solution at every step without considering the previous ones. This approach does not always find the optimal solution of a problem. A more advanced technique to greedy algorithm is **dynamic programming**, which will be the topic of the next chapter.

**RELAXATION** Before introducing the Dijkstra's algorithm it is important to introduce the **relaxation condition**. Let us consider the following weighted directed graph Figure 115. The cost for going from node 1 to node 2 is 2, and  $\infty$  from 1 to 3, as there is not any direct link. The relaxation condition is then:

**Definition 5.1** Relaxation condition

if  $(d[u] + w(u, v) < d[v])$

$d[v] = d[u] + w(u, v)$

Where  $d[u]$  is the distance of node  $u$  from the starting node (1 in this case), and  $w(u, v)$  is the weight from the node  $u$  to node  $v$ .

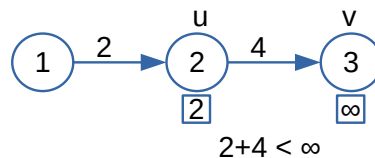


Figure 114: Relaxation condition.

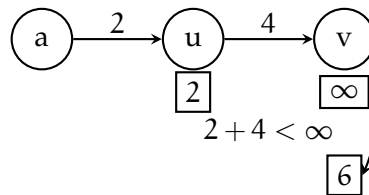


Figure 115: Relaxation condition.

In other words the relaxation condition says that if there is a shorter path connecting two nodes, this distance should be used as the new distance.

In the Dijkstra's algorithm at each step the new node is chosen based on the lowest value of the distance at that given step, and eventually the distances for all the adjacent nodes are updated accordingly the relaxation condition.

Let us consider the following graph Figure 117, and let us start from the node a [41].

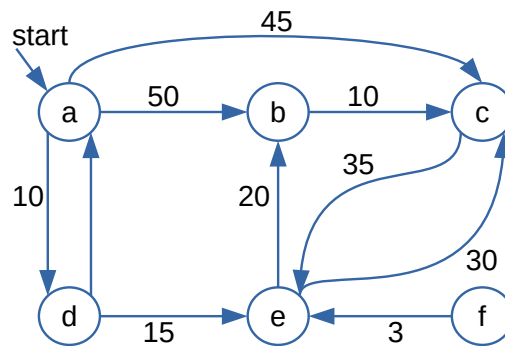


Figure 116: Dijkstra's algorithm example.

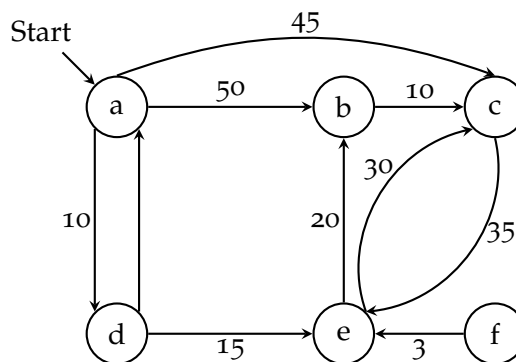


Figure 117: Dijkstra's algorithm example.

For describing how the algorithm works we use the following table, in which for each column there is a node, and at every step a new row is added for the node for which the shortest path has just been found. At the first step the table it looks like:

explored vertex	a	b	c	d	e	f
a	0 <sub>a</sub>	50 <sub>a</sub>	45 <sub>a</sub>	10 <sub>a</sub>	∞	∞

All the nodes are listed as columns, and all the distances from the node  $a$  to all the others are reported in the table. The nodes  $e$  and  $f$  do not have any directed link to the node  $a$ , then their distance is infinity. Once listed all the distances the node with the lowest one is selected: at the first step it is the node  $a$ .

At the second step the lowest distance is chosen: in this case it is for the node  $d$ , then it is added in the visited node as the shortest path from  $a$  to  $d$  is found. The node  $e$  is now reachable and it has a distance of 15 from  $d$ , then 25 from  $a$  ( $10_a + 15_{d,e}$ ).

visited node	a	b	c	d	e	f
a	0 <sub>a</sub>	50 <sub>a</sub>	45 <sub>a</sub>	10 <sub>a</sub>	$\infty$	$\infty$
d		50 <sub>a</sub>	45 <sub>a</sub>	10 <sub>a</sub>	25 <sub>d</sub>	$\infty$

The process is repeated again: the lowest distance is chosen, in this case is the distance to reach the node  $e$ . As for the previous step we check for all nodes if it is shorter to pass through the new shortest path found, and in case true the weight are updated (relaxation condition). At this step the weight to be updated is the one for the node  $b$  because for reaching it from  $a$  the weight is 50 ( $50_a$ ), while for reaching it passing through  $e$  (which in turn for be reached with its shortest path we have to go through  $d$ , which in turn again is reached with its shortest path from  $a$ ) is 45 ( $25_d + 20_{e,b} = 45_e < 50_a$ ).

visited node	a	b	c	d	e	f
a	0 <sub>a</sub>	50 <sub>a</sub>	45 <sub>a</sub>	10 <sub>a</sub>	$\infty$	$\infty$
d		50 <sub>a</sub>	45 <sub>a</sub>	10 <sub>a</sub>	25 <sub>d</sub>	$\infty$
e		45 <sub>e</sub>	45 <sub>a</sub>		25 <sub>d</sub>	$\infty$

The same process is repeated again, the new shortest path found is for the node  $b$  passing through  $e$  with a weight of 45. In this case there are two shortest path and for this example is the same choosing one of them.

visited node	a	b	c	d	e	f
a	0 <sub>a</sub>	50 <sub>a</sub>	45 <sub>a</sub>	10 <sub>a</sub>	$\infty$	$\infty$
d		50 <sub>a</sub>	45 <sub>a</sub>	10 <sub>a</sub>	25 <sub>d</sub>	$\infty$
e		45 <sub>e</sub>	45 <sub>a</sub>		25 <sub>d</sub>	$\infty$
b		45 <sub>e</sub>	45 <sub>a</sub>			$\infty$

In the last step all the shortest paths are found. Only the node  $f$  has been left out as it can not be reached in any ways from  $a$ .

visited node	a	b	c	d	e	f
a	0 <sub>a</sub>	50 <sub>a</sub>	45 <sub>a</sub>	10 <sub>a</sub>	$\infty$	$\infty$
d		50 <sub>a</sub>	45 <sub>a</sub>	10 <sub>a</sub>	25 <sub>d</sub>	$\infty$
e		45 <sub>e</sub>	45 <sub>a</sub>		25 <sub>d</sub>	$\infty$
b		45 <sub>e</sub>	45 <sub>a</sub>			$\infty$
d			45 <sub>e</sub>			$\infty$

All the shortest paths from a are:

- b:  $a \rightarrow d \rightarrow e \rightarrow b$ ,  $W=45$ ;
- c:  $a \rightarrow c$ ,  $W=45$ ;
- d:  $a \rightarrow d$ ,  $W=10$ ;
- e:  $a \rightarrow d \rightarrow e$ ,  $W=25$ ;
- f:  $\infty$ .

For example for finding the shortest path for reaching the node b the steps to follow are:

visited node	a	b	c	d	e	f
a	0 <sub>a</sub>	50 <sub>a</sub>	45 <sub>a</sub>	10 <sub>a</sub>	$\infty$	$\infty$
d		50 <sub>a</sub>	45 <sub>a</sub>	10 <sub>a</sub>	25 <sub>d</sub>	$\infty$
e		45 <sub>e</sub>	45 <sub>a</sub>		25 <sub>d</sub>	$\infty$
b		45 <sub>e</sub>	45 <sub>a</sub>			$\infty$
d			45 <sub>e</sub>			$\infty$

In the appendix E the full implementation of the Dijkstra's algorithm is reported.

The complexity of this algorithm is  $O(|V|^2)$  where  $V$  is the number of nodes. This is because all the nodes are relaxed with respect all the others, and in the worst case all nodes must be checked. If the implementation of the algorithm is optimized the complexity in this case is  $O(|E| + |V|\log(|V|))$ , where  $E$  is the number of edges.

## DYNAMIC PROGRAMMING

In this chapter are introduced the fundamentals concepts of **dynamic programming**.


### 6.1 GENERAL DEFINITIONS

Dynamic programming is a mathematical optimization method and a computer programming method [42] ([Dynamic Programming, Wikipedia](#)).

In computer science a problem can be solved with a dynamic programming method must have an optimal substructure (the problem can be broken down in smaller parts) and an overlapping sub-problems (the broken down problems share some results). If a problem can be solved with an optimal substructure but with non-overlapping sub-problems then the strategy is called **divide and conquer**.

When a problem is solved with dynamic programming, the starting point is to find the base case, which is the sub-problem with the lowest computational cost. Once solved this problem its result is saved in a table called **lookup table**, and the same general formula is called recursively. At each step the result is saved in the lookup table, as in the following steps it might be used. Instead of calculating the same value again, we look at the lookup table and retrieve it. This aspect of dynamic programming makes this technique extremely powerful, as a lot of calculations must not be repeated several times.

For example, in the calculation of the Fibonacci number we have to use the same function several time in different sub-problems. Let us suppose we want to calculate the fifth number of the Fibonacci sequence:

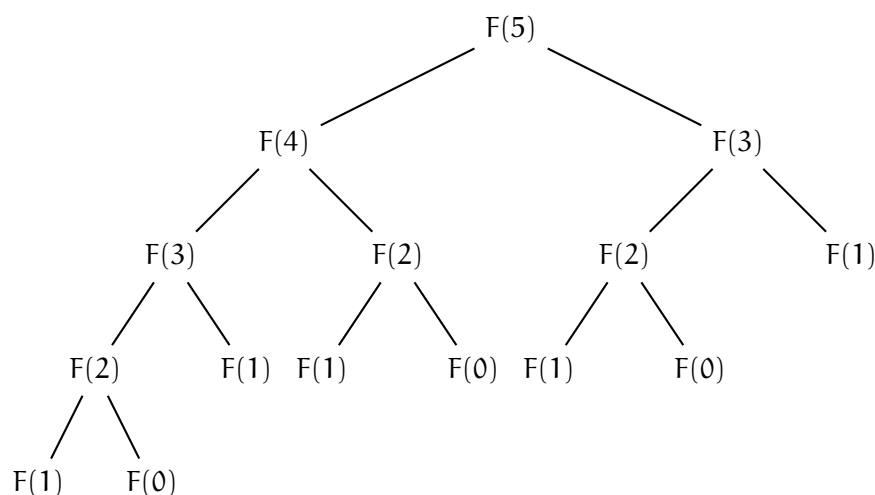

**Figure 118:** Calculation of the fifth number of the Fibonacci sequence.

Some values are used several times in different sub-problem as shown in the following table:

function	F(0)	F(1)	F(2)	F(3)	F(4)	F(5)
number of computation	3	4	3	2	1	1

**Table 5:** Number of computation for each value of the Fibonacci sequence.

If the values of the functions which are repeated are stored in a lookup table, instead of calculating them again are retrieved from the table and used.

## 6.2 KNAPSACK PROBLEM

## 6.3 TRAVELLING SALESMAN PROBLEM



# APPENDIX

## BINARY SEARCH COMPLETE IMPLEMENTATION

The best way to implement the tree data structure is to create a class for the nodes (**Node**) and a class for the binary tree (**BinaryTree**). As all the nodes of a binary trees has at most two children, in the class **Node** is enough to have three attributes: the value of the node, the left, and the right child, in turn of **Node** type as well. This way of implement tree is very similar to the one used for the linked list (2.4).

**Listing A.1:** Class definition for a node and a tree.

```
1 class Node():
2
3     def __init__(self, value):
4         self.value = value
5         self.left = None
6         self.right = None
7
8 class BinaryTree():
9
10     def __init__(self, root):
11         self.root = Node(root)
```

In this appendix there is a detailed implementation, both recursive and iterative, of all possible ways to perform a tree traversal in the case of **depth-first search**: pre-order traversal A.1, in-order traversal A.2, and post-order traversal A.3. The convention followed here is to look up first at the left child always, and later look up the right one. The opposite approach is equivalent.

The pseudocode of the iterative implementations is taken from [43]([Tree traversal, Wikipedia](#)).

### A.1 PRE-ORDER TRAVERSAL

In the pre-order traversal every new node is first checked as visited, and the left subtree is traversed first, and later the right one. This process is repeated until all the nodes of the tree are visited (4.2.1).

For implementing the pre-order traversal iteratively a stack (2.5) is used. The steps are [43]:

---

**Algorithm 1:** Pre-order pseudocode.

---

```

1 Function Recursive-Preorder(node):
2   if (node == null) then
3     return
4   visit(node)
5   Recursive-Preorder(node.left)
6   Recursive-Preorder(node.right)
7
8 Function Iterative-Preorder(node):
9   s ← empty stack
10  s.push(node)
11  while (not s.isEmpty()) do
12    node ← s.pop()
13    visit(node)
14    /* Right child is pushed first so that left is
15       processed first (LIFO) */
16    if (node.right ≠ null) then
17      s.push(node.right)
18    if (node.left ≠ null) then
19      s.push(node.left)

```

---

**Listing A.2:** Recursive and iterative implementation of pre-order traversal.

```

1 class BinaryTree():
2   ...
3
4   def recursive_print_tree(self):
5       return self.preorder_recursive_print(tree.root, "")[:-1]
6
7   def iterative_print_tree(self):
8       return self.preorder_search_iterative(self, tree.root, "")
9
10  def preorder_search_recursive(self, start, find_val):
11      if start:
12          if start.value == find_val:
13              return True
14          self.preorder_search_recursive(start.left, find_val)
15          self.preorder_search_recursive(start.right, find_val)
16
17  def preorder_search_iterative(self, start, find_val):
18      if start == None:
19          return None
20      visited = []
21      stack = []
22      stack.push(start)
23      while stack: # Keep cycle until the stack is empty
24          node = stack.pop()
25          visited.append(node)

```

```

26         if node.value == find_val:
27             return True
28         # Right child is pushed first so that the left one is
           processed first
29         if node.right:
30             stack.append(node.right)
31         if node.left:
32             stack.append(node.left)
33         return visited
34
35     def preorder_recursive_print(self, start, traversal):
36         if start:
37             traversal += (str(start.value) + "-")
38             traversal = self.preorder_recursive_print(start.left,
39                                                         traversal)
40             traversal = self.preorder_recursive_print(start.right,
41                                                         traversal)
42         return traversal

```

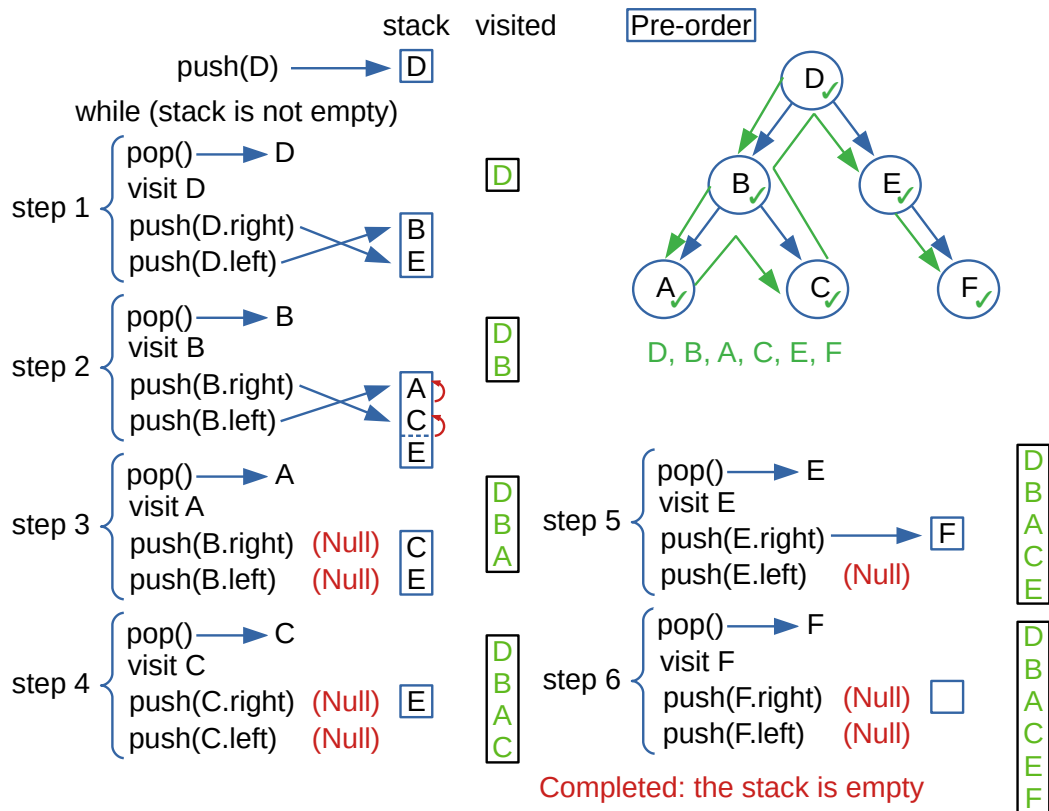


Figure 119: Pre-order iterative example.

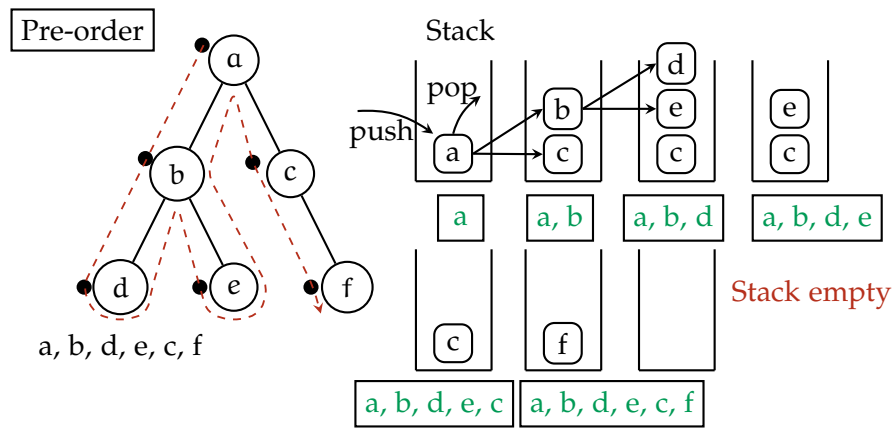


Figure 120: Pre-order iterative example.

## A.2 IN-ORDER TRAVERSAL

In the in-order traversal the first node to be checked is the first leaf of the left subtree. The second one is the parent of the first checked node, and then the right subtree is checked repeating the previous process. All this process is repeated until all the nodes are visited or the value is found [4.2.1](#).

For implementing the in-order traversal iteratively a stack is used. The steps are [\[43\]](#):

---

### Algorithm 2: In-order pseudocode.

---

```

1 Function Recursive-Inorder(node):
2   if (node == null) then
3     return
4   Recursive-Inorder(node.left)
5   visit(node)
6   Recursive-Inorder(node.right)
7
8 Function Iterative-Inorder(node):
9   s ← empty stack
10  while (not s.isEmpty() or node ≠ null) do
11    if (node ≠ null) then
12      s.push(node)
13      node ← node.left
14    else
15      node ← s.pop()
16      visit(node)
17      node ← node.right

```

---

Listing A.3: Recursive and iterative implementation of in-order traversal.

```

1 class BinaryTree():
2   ...
3
4   def recursive_print_tree(self):

```

```

5         return self.inorder_recursive_print(tree.root, "")[:-1]
6
7     def iterative_print_tree(self):
8         return self.inorder_search_iterative(self, tree.root, "")
9
10    def inorder_search_recursive(self, start, find_val):
11        if start:
12            self.inorder_search_recursive(start.left, find_val)
13            if start.value == find_val:
14                return True
15            self.inorder_search_recursive(start.right, find_val)
16
17    def inorder_search_iterative(self, start, find_val):
18        if start == None:
19            return None
20        stack = []
21        stack.append(start)
22        current = start
23        visited = []
24        while stack or current != None:
25            if current != None:
26                stack.append(current)
27                current = current.left
28            else:
29                current = stack.pop()
30                if current.value == find_val:
31                    return True
32                visited.append(current)
33                current = current.right
34        return visited
35
36    def inorder_recursive_print(self, start, traversal):
37        if start:
38            traversal = self.inorder_recursive_print(start.left,
39                                                    traversal)
40            traversal += (str(start.value) + "-")
41            traversal = self.inorder_recursive_print(start.right,
42                                                    traversal)
43        return traversal

```

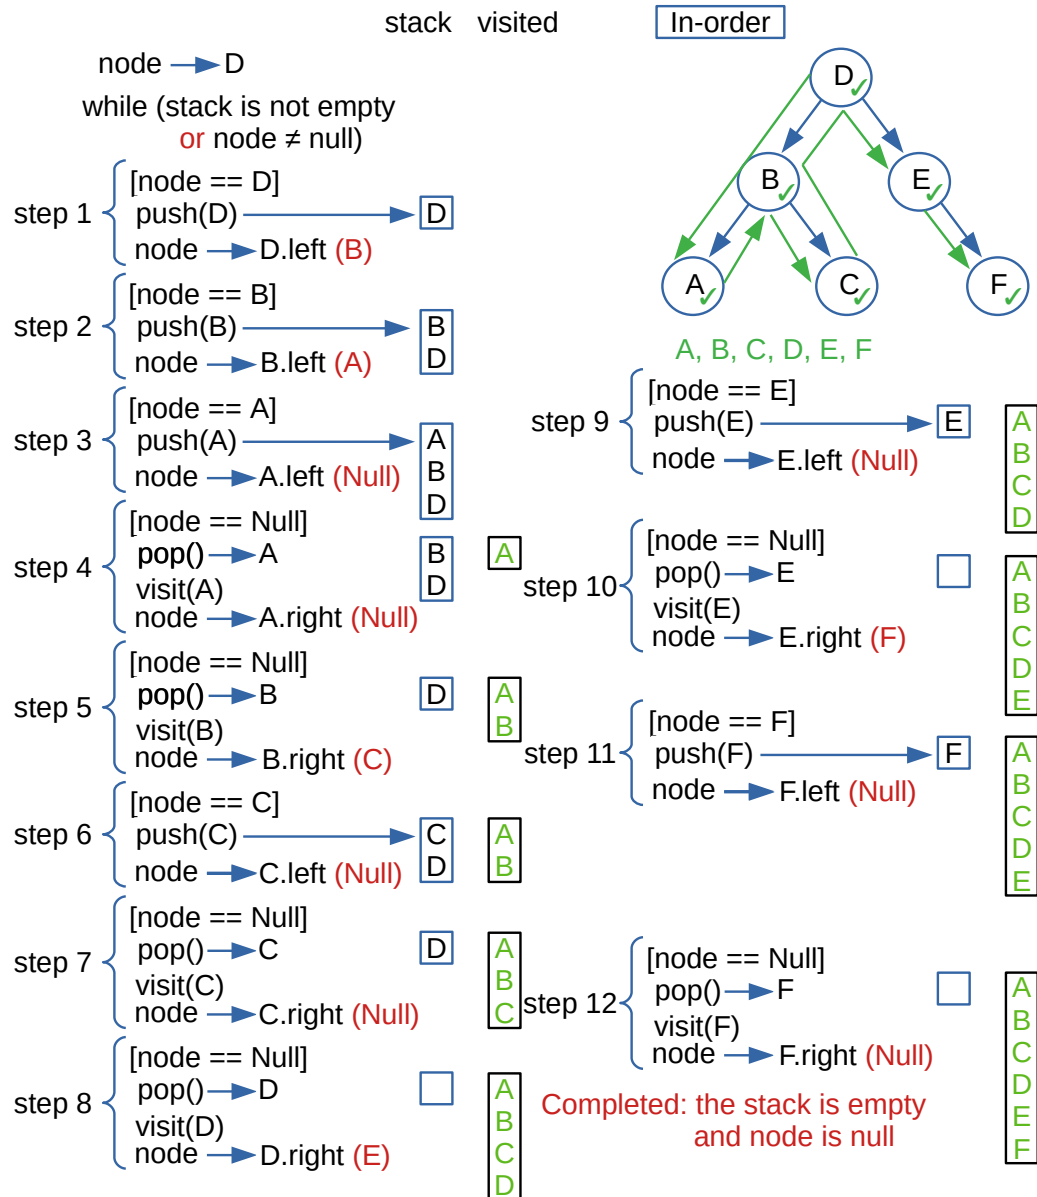


Figure 121: In-order iterative example.

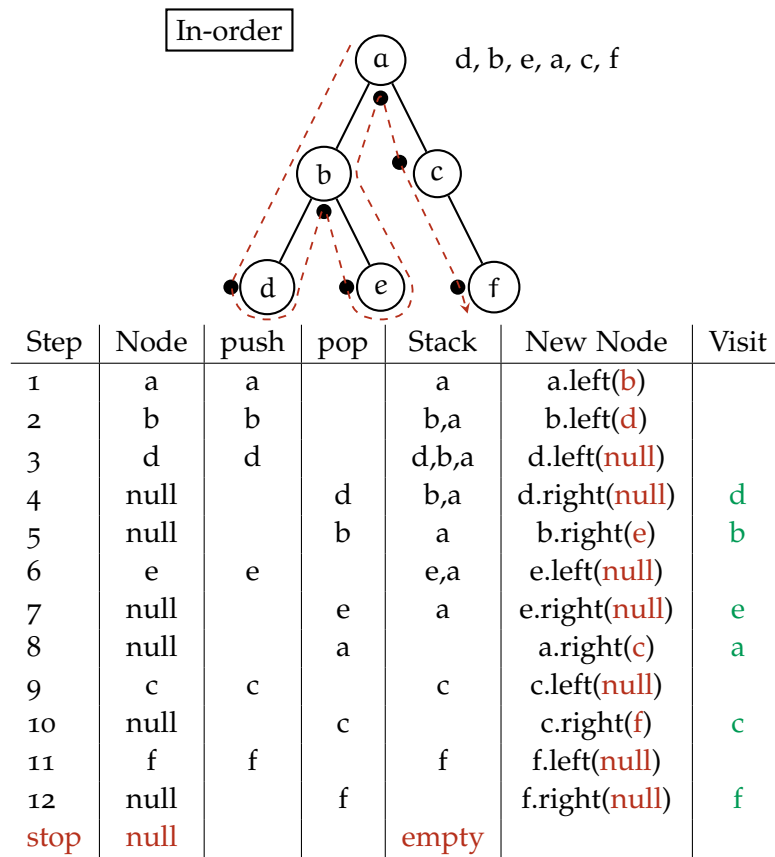


Figure 122: In-order iterative example.

### A.3 POST-ORDER TRAVERSAL

In the post-order traversal the first node to be checked is the first leaf of the left subtree. The second node is the right node of the parent of the first checked node. Once checked the right side of the subtree also the parent is checked and the process is repeated until all the node are visited or the value is found [4.2.1](#).



Also in this case for implementing the post-order traversal iteratively a stack is used. The steps are [43]:

---

**Algorithm 3:** Post-order pseudocode.

---

```

1 Function Recursive-Postorder(node):
2   if (node == null) then
3     return
4   Recursive-Postorder(node.left)
5   Recursive-Postorder(node.right)
6   visit(node)
7
8 Function Iterative-Postorder(node):
9   s ← empty stack
10  lastNodeVisited ← null
11  while (not s.isEmpty() or node ≠ null) do
12    if (node ≠ null) then
13      s.push(node)
14      node ← node.left
15    else
16      peekNode ← s.peek()
17      /* If right child exists and traversing node from
18         left child, then move right */
19      if (peekNode.right ≠ null and lastNodeVisited ≠
20         peekNode.right) then
21        node ← peekNode.right
22      else
23        visit(peekNode)
24        lastVisitedNode ← s.pop()

```

---

**Listing A.4:** Recursive and iterative implementation of post-order traversal.

```

1 class BinaryTree():
2   ...
3
4   def recursive_print_tree(self):
5     return self.postorder_recursive_print(tree.root, "")[:-1]
6
7   def iterative_print_tree(self):
8     return self.postorder_search_iterative(tree.root, "")
9
10  def postorder_search_recursive(self, start, find_val):
11    if start:
12      self.postorder_search_recursive(start.left, find_val)
13      self.postorder_search_recursive(start.right, find_val)
14      if start.value == find_val:
15        return True
16
17  def postorder_search_iterative(self, start, find_val):
18    if start == None:
19      return None

```

```

20     stack = []
21     stack.push(start)
22     last_visited_node = None
23     visited = []
24     current = start
25     while stack or current != None:
26         if current != None:
27             s.push(current)
28             current = current.left
29         else:
30             # Take the last element of the stack
31             peeked_node = stack[-1]
32             # If right child exists and traversing node from
               left child, then move right
33             if (peeked_node.right != null and
                 last_visited_node != peeked_node.right):
34                 current = peeked_node.right
35             else:
36                 if peeked_node.value == find_val:
37                     return True
38                 visited.append(peeked_node)
39                 last_visited_node = stack.pop()
40     return visited
41
42 def postorder_recursive_print(self, start, traversal):
43     if start:
44         traversal = self.postorder_recursive_print(start.left,
               traversal)
45         traversal = self.postorder_recursive_print(start.right,
               traversal)
46         traversal += (str(start.value) + "-")
47     return traversal

```

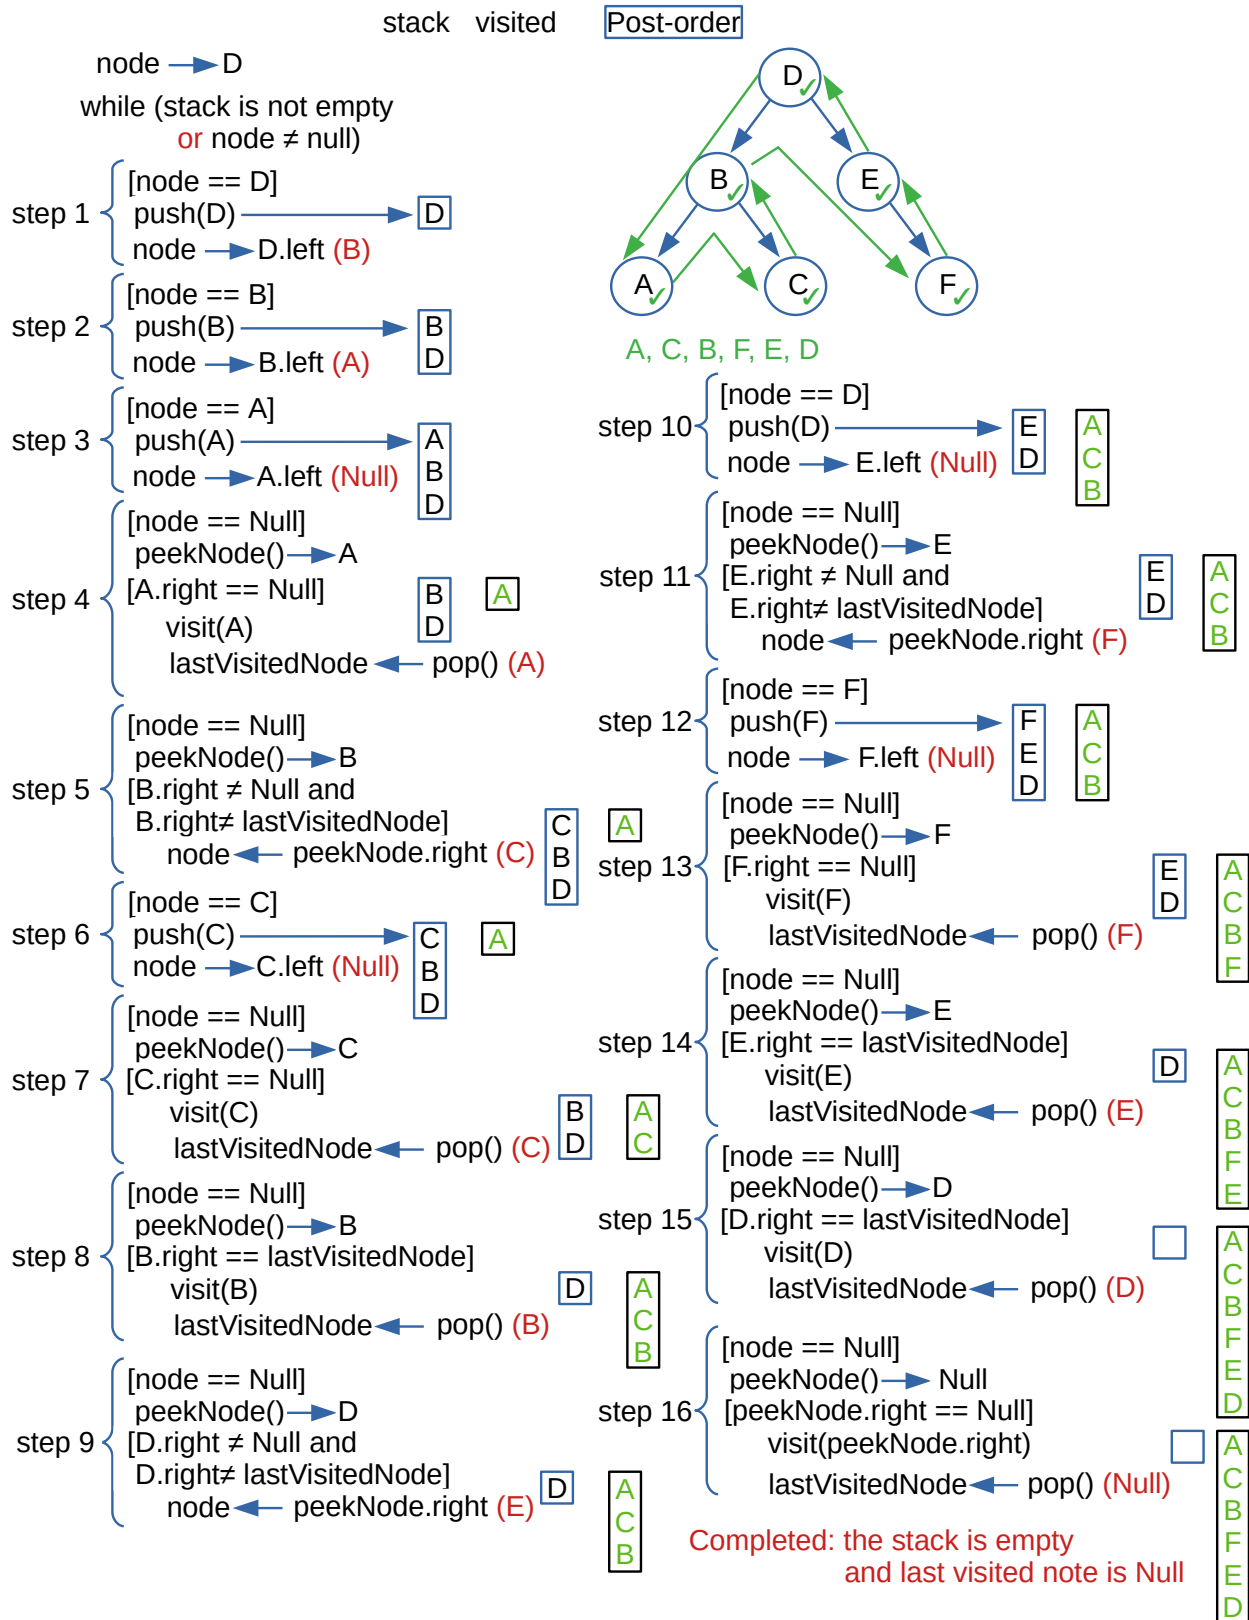


Figure 123: Post-order iterative example.

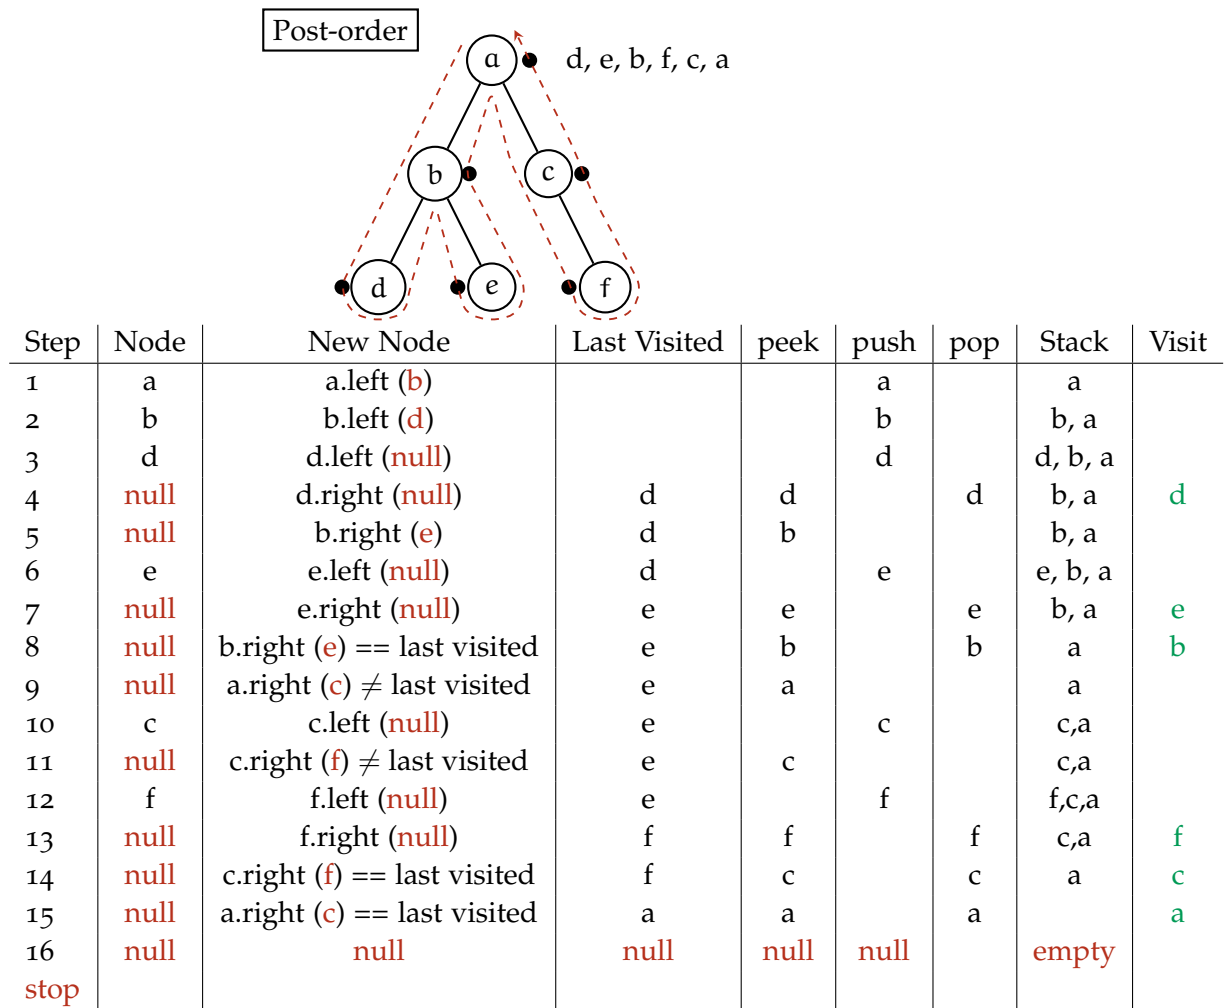


Figure 124: Post-order search.

## A.4 BREADTH-FIRST SEARCH IMPLEMENTATION

In the case of the **breadth-first search** (Chapter 4) the implementation uses a queue (Section 2.6) instead of a stack. Also here the convention is to check the left node first and later the right ones. The pseudocode is adapted from

the general case of the breadth-first search taken from here [34] ([Breadth-first search, Wikipedia](#)).

---

**Algorithm 4:** Breadth-first search pseudocode.

---

```

1 Function Breadth-first-search(node):
2   q ← empty queue
3   visit(node)
4   q.enqueue(node)
5   while (not q.isEmpty()) do
6     node ← q.dequeue()
7     visit(node)
8     /* Left child is enqueue first so that left is
       processed first (FIFO) */
9     if node.left ≠ null then
10      | q.enqueue(node.left)
11     if node.right ≠ null then
12      | q.enqueue(node.right)

```

---

**Listing A.5:** Breadth-first search implementation.

```

1 class BinaryTree():
2   ...
3
4   def breadth_first_search(self, start, find_val):
5       if start == None:
6           return None
7       visited = []
8       queue = []
9       queue.append(start)
10      while queue:
11          node = queue.pop(0)
12          visited.append(node)
13          if node.value == find_val:
14              return True
15          # Left node is added first so that the left side nodes
            are visited first
16          if node.left:
17              queue.append(node.left)
18          if node.right:
19              queue.append(node.right)
20      return visited

```

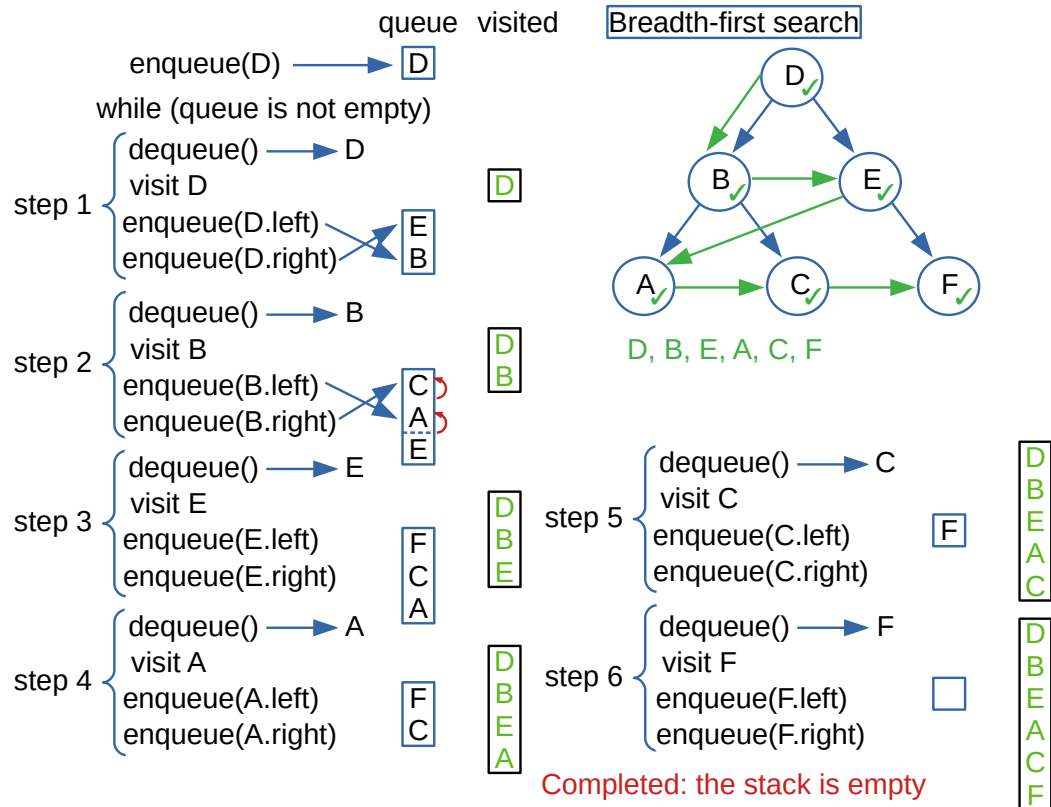


Figure 125: Breadth-first search example.

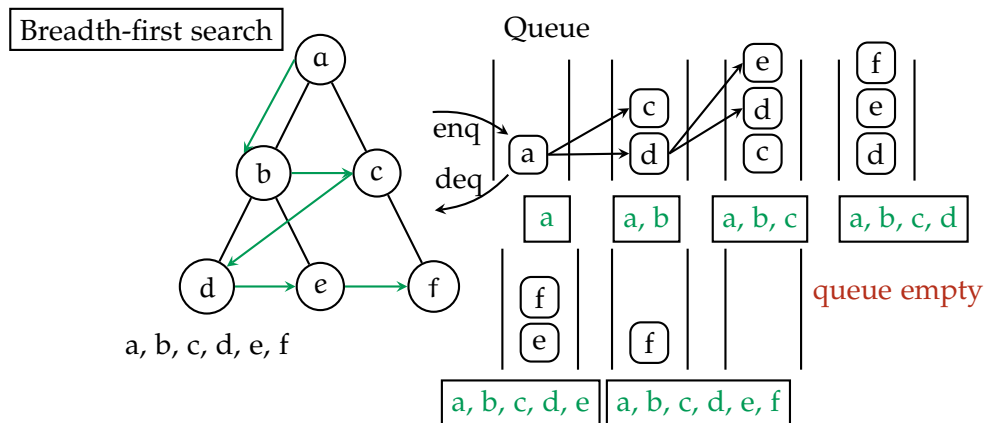


Figure 126: Breadth-first search example.

## A.5 COMPLEXITY SUMMARY

## IMPLEMENTATION OF GRAPH REPRESENTATION

In the following python code there is the implementation for the all the different graph representation, and the operation of insertion of nodes and edges.

**Listing B.1:** Graph representation and fundamental operations.

```

1 class Node():
2
3     def __init__(self, value):
4         self.value = value
5         self.edges = []
6
7 class Edge():
8
9     def __init__(self, value, node_from, node_to):
10        self.value = value
11        self.node_from = node_from
12        self.node_to = node_to
13
14 class Graph():
15
16     def __init__(self, nodes=[], edges=[]):
17         self.nodes = nodes
18         self.edges = edges
19
20     def insert_node(self, new_node_value):
21         new_node = Node(new_node_value)
22         self.nodes.append(new_node)
23
24     def insert_edge(self, new_edge_val, node_from, val, node_to_val):
25         from_found = None
26         for node in self.nodes:
27             if node_from_val == node.value:
28                 from_found = node
29             if node_to_val == node.value:
30                 to_found = node
31             if from_found == None:
32                 from_found = Node(node_from_val=
33                     self.nodes.append(from_found)
34             if to_found == None:
35                 to_found = Node(node_to_val)
36                     self.nodes.append(to_found)
37         new_edge = Edge(new_edge_val, from_found, to_found)
38         from_found.edges.append(new_edge)
39         to_found.edges.append(new_edge)
40         self.edges.append(new_edge)
41
42     def get_edge_list(self):

```

```

43         get_list = []
44         for edge_object in self.edges:
45             edge = (edge_object.value, edge_object.node_from.value,
46                     value, edge_object.node_to.value)
47             edge_list.append(edge)
48         return edge_list
49
50     def get_adjacency_list(self):
51         max_index = self.find_max_index()
52         adjacency_list = [None]*(max_index + 1)
53         for edge_object in self.edges:
54             if adjacency_list[edge_object.node_from.value]:
55                 adjacency_list[edge_object.node_from.value].
56                     append((edge_object.node_to.value,
57                             edge_object.value))
58             else:
59                 adjacency_list[edge_object.node_from.value] = [(
60                     edge_object.node_to.value, edge_object.value
61                     )]
62         return adjacency_list
63
64     def get_adjacency_matrix(self):
65         max_index = self.find_max_index()
66         adjacency_matrix = [[0 for i in range(max_index + 1)] for j
67                             in range(max_index + 1)]
68         for edge_object in self.edges:
69             adjacency_matrix[edge_object.node_from.value][
70                 edge_object.node_to.value] = edge_object.value
71         return adjacency_matrix
72
73     def find_max_index(self):
74         max_index = 1
75         if len(self.nodes):
76             for node in self.nodes:
77                 if node.value > max_index:
78                     max_index = node.value
79         return max_index

```



## IMPLEMENTATION OF GRAPH TRAVERSAL

In the following chapter **depth-first search** and **breadth-first search** are implemented, with both recursive and iterative implementation.

## C.1 DEPTH-FIRST SEARCH

In the following there are the pseudocode, the python implementation, and an example of execution of the depth-first search on a graph.

---

**Algorithm 5:** Depth-first search pseudocode.

---

```

1 Function Recursive-Depth-first-search(graph, vertex):
2   visit(vertex)
3   for all adjacent nodes adj_vertices to vertex do
4     Recursive-Depth-first-search(graph, adj_vertices)
5
6 Function Iterative-Depth-first-search(graph, vertex):
7   s ← empty stack
8   s.push(vertex)
9   while not s.isEmpty() do
10    vertex ← s.pop()
11    if vertex not visited then
12      visit(vertex)
13      for all adjacent nodes adj_vertices to vertex do
14        s.push(adj_vertices)

```

---

**Listing C.1:** Recursive and iterative implementation of depth-first search on graphs.

```

1
2 class Graph():
3     ...
4
5     def depth_first_search_recursive(self, start_node):
6         ret_list = [start_node]
7         start_node.visited = True
8         edges_out = [e for e in start_node.edges
9                       if e.node_to.value != start_node.value]
10        for e in edges_out:
11            if not edge.node.visited:
12                ret_list.extend(
13                    depth_first_search_recursive(

```

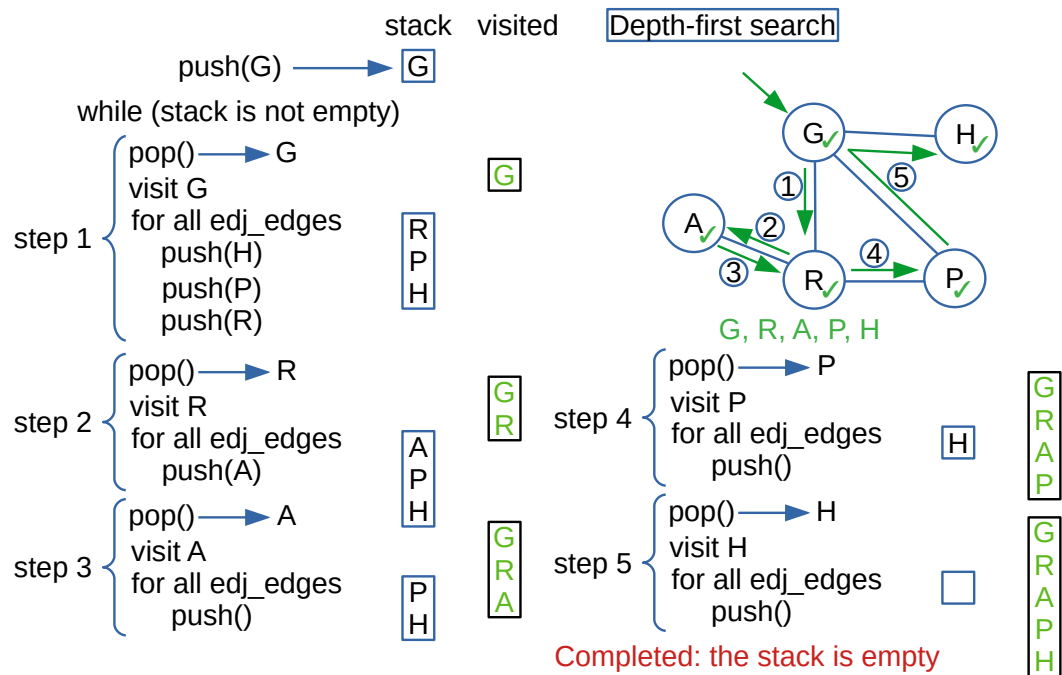


Figure 127: Depth-first search example.

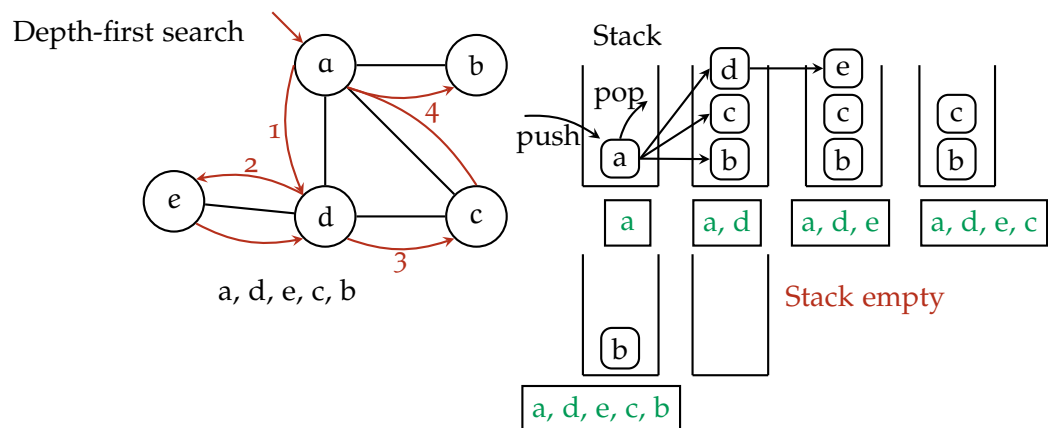


Figure 128: Depth-first search example.

## C.2 BREADTH-FIRST SEARCH

In the following there are the pseudocode, the python implementation, and an example of execution of the breadth-first search on a graph.

---

**Algorithm 6:** Breadth-first search pseudocode.

---

```

1 Function Breadth-first-search(graph, vertex):
2   q ← empty queue
3   visit(vertex)
4   q.enqueue(vertex)
5   while not q.isEmpty() do
6     vertex ← s.dequeue()
7     for all adjacent nodes adj_vertices to vertex do
8       if adj_not visited then
9         visit(adj_vertices)
10        q.enqueue(adj_vertices)

```

---

**Listing C.2:** Breadth-first search implementation on graphs.

```

1
2 class Graph():
3     ...
4
5     def breadth_first_search(self, start_node):
6         ret_list = [start_node]
7         start_node.visited = True
8         edges_out = [for e in start_node.edges
9                       if e.node_to.value != start_node.value]
10        for e in edges_out:
11            if not edge.node.visited:
12                ret_list.extend(
13                    depth_first_search_recursive(

```

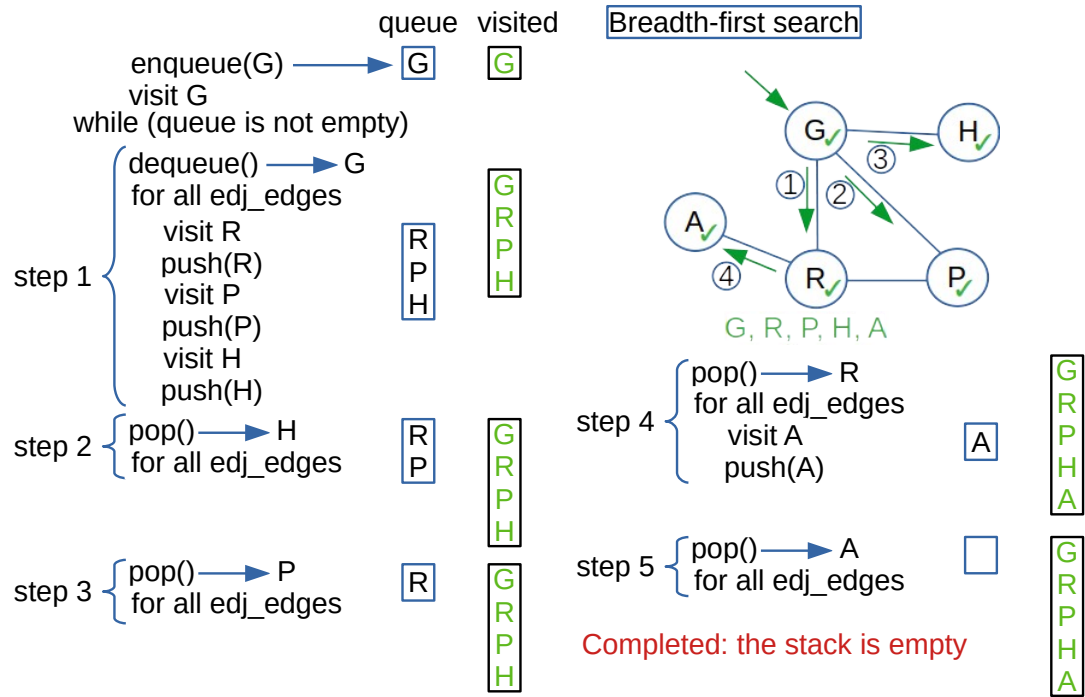


Figure 129: Breadth-first search example.

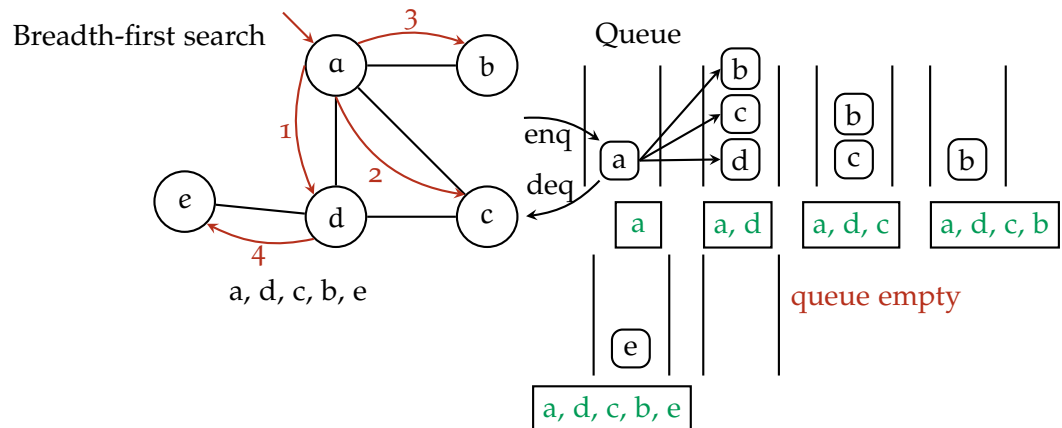


Figure 130: Breadth-first search example.


## COMPLEXITY OF DATA STRUCTURES FOR GRAPHS

In the following table are summarized the complexities of the most common operations on graphs for the different data structures [\[27\]](#).


## DIJKSTRA'S ALGORITHM IMPLEMENTATION

As described in the section 5.3.6 the Dijkstra's algorithm is a greedy algorithm that find the optimal solution by finding the optimal solution at each step. The implementation of the Dijkstra's algorithm is based on priority queue.

Let us consider the following graph (Figure 132).

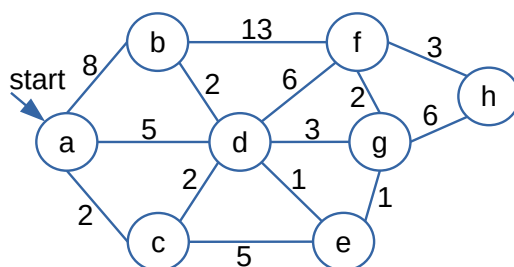

**Figure 131:** Dijkstra's algorithms example.

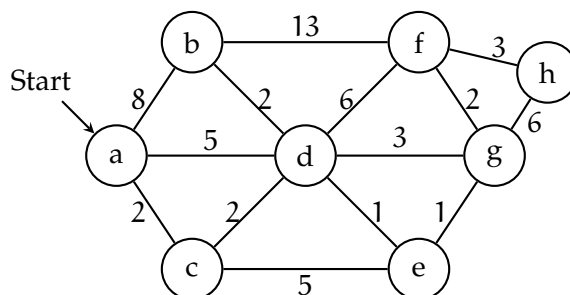

**Figure 132:** Dijkstra's algorithms example.

Solving the shortest problem for this graph starting from the node a leads to the following table:

visited node	a	b	c	d	e	f	g	h
a	0 <sub>a</sub>	8 <sub>a</sub>	2 <sub>a</sub>	5 <sub>a</sub>	∞	∞	∞	∞
c		8 <sub>a</sub>	2 <sub>a</sub>	4 <sub>c</sub>	7 <sub>c</sub>	∞	∞	∞
d		6 <sub>d</sub>		4 <sub>c</sub>	5 <sub>d</sub>	10 <sub>d</sub>	7 <sub>d</sub>	∞
e		6 <sub>d</sub>			5 <sub>d</sub>	10 <sub>d</sub>	6 <sub>e</sub>	∞
b		6 <sub>d</sub>				10 <sub>d</sub>	6 <sub>e</sub>	∞
g						8 <sub>g</sub>	6 <sub>e</sub>	12 <sub>g</sub>
f						8 <sub>g</sub>		11 <sub>f</sub>
h								11 <sub>f</sub>

**Table 6:** Dijkstra's algorithms example for the graph in figure 132. The shortest path from a to b is also shown.

All the shortest paths from a are:

- b:  $a \rightarrow c \rightarrow d \rightarrow b$ ,  $W=6$ ;
- c:  $a \rightarrow c$ ,  $W=2$ ;
- d:  $a \rightarrow c \rightarrow d$ ,  $W=4$ ;
- e:  $a \rightarrow c \rightarrow d \rightarrow e$ ,  $W=5$ ;
- f:  $a \rightarrow c \rightarrow d \rightarrow e \rightarrow g \rightarrow f$ ,  $W=8$  ;
- g:  $a \rightarrow c \rightarrow d \rightarrow e \rightarrow g$ ,  $W=6$ ;
- h:  $a \rightarrow c \rightarrow d \rightarrow e \rightarrow g \rightarrow f \rightarrow h$ ,  $W=11$ .

For implementing this algorithm there are several ways. The one presented here uses the priority queues. In fact each line of the table where are reported the updated distances with the shortest path can be see as a priority queue in which at every step the shortest value (then the shortest path for the current visited node) is selected.

In the following the pseudocode [39] and the Python implementation [44] ([stackoverflow](#)) are reported.

---

**Algorithm 7:** Dijkstra's algorithm pseudocode.

---

```

1 Function Dijkstra(graph, source):
2   dist[source]  $\leftarrow$  0 // Initialization
3   create vertex priority queue q
4   for all vertex v in graph do
5     if v  $\neq$  source then
6       dist[v]  $\leftarrow$  infinity // Unknown distance from source to v
7       prev[v]  $\leftarrow$  undefined // Predecessor of v
8     q.add_with_priority(v, dist[v])
9   while not q.isEmpty() do
10    u  $\leftarrow$  q.extract_min() // Remove and return best vertex
11    for all neighbor v of u do
12      // Only v that are still in q
13      alt  $\leftarrow$  dist[u] + length(u, v)
14      if alt < dist[v] then
15        dist[v]  $\leftarrow$  alt
16        prev[v]  $\leftarrow$  u
17        q.decrease_priority(v, alt)
18  return dist, prev

```

---

**Listing E.1:** Dijkstra's algorithm.

```

1 import heapq
2
3 def dijkstra(graph, start):
4     """Visit all nodes and calculate the shortest paths to each from
5     start"""
6     queue = [(0, start)]
7     distances = {start: 0}
8     visited = set()
9
10    while queue:
11        _, node = heapq.heappop(queue) # (distance, node), ignore distance
12        if node in visited:
13            continue
14        visited.add(node)
15        dist = distances[node]
16
17        for neighbour, neighbour_dist in graph[node].items():
18            if neighbour in visited:
19                continue
20            neighbour_dist += dist
21            if neighbour_dist < distances.get(neighbour, float('inf')):
22                heapq.heappush(queue, (neighbour_dist, neighbour))
23                distances[neighbour] = neighbour_dist
24
25    return distances

```



## BIBLIOGRAPHY

- [1] Wikipedia. *Computational complexity*. URL: [https://en.wikipedia.org/wiki/Computational\\_complexity](https://en.wikipedia.org/wiki/Computational_complexity).
- [2] Wikipedia. *Big O notation*. URL: [https://en.wikipedia.org/wiki/Big\\_O\\_notation](https://en.wikipedia.org/wiki/Big_O_notation).
- [3] Wikipedia. *Recursion (computer science)*. URL: [https://en.wikipedia.org/wiki/Recursion\\_\(computer\\_science\)](https://en.wikipedia.org/wiki/Recursion_(computer_science)).
- [4] Wikipedia. *Data structure*. URL: [https://en.wikipedia.org/wiki/Data\\_structure](https://en.wikipedia.org/wiki/Data_structure).
- [5] Wikipedia. *Data type*. URL: [https://en.wikipedia.org/wiki/Data\\_type](https://en.wikipedia.org/wiki/Data_type).
- [6] Wikipedia. *Abstract data type*. URL: [https://en.wikipedia.org/wiki/Abstract\\_data\\_type](https://en.wikipedia.org/wiki/Abstract_data_type).
- [7] Wikipedia. *Collection (abstract data type)*. URL: [https://en.wikipedia.org/wiki/Collection\\_\(abstract\\_data\\_type\)](https://en.wikipedia.org/wiki/Collection_(abstract_data_type)).
- [8] Wikipedia. *Array data structure*. URL: [https://en.wikipedia.org/wiki/Array\\_data\\_structure](https://en.wikipedia.org/wiki/Array_data_structure).
- [9] Wikipedia. *Linked list*. URL: [https://en.wikipedia.org/wiki/Linked\\_list](https://en.wikipedia.org/wiki/Linked_list).
- [10] Wikipedia. *Doubly linked list*. URL: [https://en.wikipedia.org/wiki/Doubly\\_linked\\_list](https://en.wikipedia.org/wiki/Doubly_linked_list).
- [11] Wikipedia. *Stack (abstract data type)*. URL: [https://en.wikipedia.org/wiki/Stack\\_\(abstract\\_data\\_type\)](https://en.wikipedia.org/wiki/Stack_(abstract_data_type)).
- [12] Wikipedia. *Queue (abstract data type)*. URL: [https://en.wikipedia.org/wiki/Queue\\_\(abstract\\_data\\_type\)](https://en.wikipedia.org/wiki/Queue_(abstract_data_type)).
- [13] Wikipedia. *Set*. URL: [https://en.wikipedia.org/wiki/Set\\_\(abstract\\_data\\_type\)](https://en.wikipedia.org/wiki/Set_(abstract_data_type)).
- [14] Wikipedia. *Hash map*. URL: [https://en.wikipedia.org/wiki/Associative\\_array](https://en.wikipedia.org/wiki/Associative_array).
- [15] Wikipedia. *Hash table*. URL: [https://en.wikipedia.org/wiki/Hash\\_table](https://en.wikipedia.org/wiki/Hash_table).
- [16] Wikipedia. *Hash function*. URL: [https://en.wikipedia.org/wiki/Hash\\_function](https://en.wikipedia.org/wiki/Hash_function).
- [17] Wikipedia. *Search algorithm*. URL: [https://en.wikipedia.org/wiki/Search\\_algorithm](https://en.wikipedia.org/wiki/Search_algorithm).
- [18] Wikipedia. *Sorting algorithm*. URL: [https://en.wikipedia.org/wiki/Sorting\\_algorithm](https://en.wikipedia.org/wiki/Sorting_algorithm).
- [19] Wikipedia. *Binary search algorithm*. URL: [https://en.wikipedia.org/wiki/Binary\\_search\\_algorithm](https://en.wikipedia.org/wiki/Binary_search_algorithm).

- [20] Wikipedia. *Bubble sort*. URL: [https://en.wikipedia.org/wiki/Bubble\\_sort](https://en.wikipedia.org/wiki/Bubble_sort).
- [21] Wikipedia. *Merge sort*. URL: [https://en.wikipedia.org/wiki/Merge\\_sort](https://en.wikipedia.org/wiki/Merge_sort).
- [22] Wikipedia. *Quicksort*. URL: <https://en.wikipedia.org/wiki/Quicksort>.
- [23] Wikipedia. *Heapsort*. URL: <https://en.wikipedia.org/wiki/Heapsort>.
- [24] GeeksforGeeks. *Quicksort python implementation*. URL: <https://www.geeksforgeeks.org/python-program-for-quicksort/>.
- [25] Wikipedia. *Trees*. URL: [https://en.wikipedia.org/wiki/Tree\\_\(data\\_structure\)](https://en.wikipedia.org/wiki/Tree_(data_structure)).
- [26] Wikipedia. *Binary search tree*. URL: [https://en.wikipedia.org/wiki/Binary\\_search\\_tree](https://en.wikipedia.org/wiki/Binary_search_tree).
- [27] M.T. Goodrich, R. Tamassia, and M.H. Goldwasser. *Data Structures and Algorithms in Python*. John Wiley & Sons, Incorporated, 2013. ISBN: 9781118476734. URL: <https://books.google.it/books?id=2UccAAAAQBAJ>.
- [28] Wikipedia. *Heap*. URL: [https://en.wikipedia.org/wiki/Heap\\_\(data\\_structure\)](https://en.wikipedia.org/wiki/Heap_(data_structure)).
- [29] Wikipedia. *Self-balancing binary search tree*. URL: [https://en.wikipedia.org/wiki/Self-balancing\\_binary\\_search\\_tree](https://en.wikipedia.org/wiki/Self-balancing_binary_search_tree).
- [30] Wikipedia. *Red-Black tree*. URL: [https://en.wikipedia.org/wiki/Red%E2%80%93black\\_tree](https://en.wikipedia.org/wiki/Red%E2%80%93black_tree).
- [31] Wikipedia. *Graph*. URL: [https://en.wikipedia.org/wiki/Graph\\_\(discrete\\_mathematics\)](https://en.wikipedia.org/wiki/Graph_(discrete_mathematics)).
- [32] Wikipedia. *Connectivity*. URL: [https://en.wikipedia.org/wiki/Connectivity\\_\(graph\\_theory\)](https://en.wikipedia.org/wiki/Connectivity_(graph_theory)).
- [33] Wikipedia. *Depth-first search*. URL: [https://en.wikipedia.org/wiki/Depth-first\\_search](https://en.wikipedia.org/wiki/Depth-first_search).
- [34] Wikipedia. *Breadth-first search*. URL: [https://en.wikipedia.org/wiki/Breadth-first\\_search](https://en.wikipedia.org/wiki/Breadth-first_search).
- [35] Wikipedia. *Eulerian path*. URL: [https://en.wikipedia.org/wiki/Eulerian\\_path](https://en.wikipedia.org/wiki/Eulerian_path).
- [36] William Fiset. *Existence of Eulerian Paths and Circuits | Graph Theory*. URL: <https://www.youtube.com/watch?v=xR4sGgwTR2I>.
- [37] Wikipedia. *Hamiltonian path*. URL: [https://en.wikipedia.org/wiki/Hamiltonian\\_path](https://en.wikipedia.org/wiki/Hamiltonian_path).
- [38] Wikipedia. *Shortest path problem*. URL: [https://en.wikipedia.org/wiki/Shortest\\_path\\_problem](https://en.wikipedia.org/wiki/Shortest_path_problem).
- [39] Wikipedia. *Dijkstra's algorithm*. URL: [https://en.wikipedia.org/wiki/Dijkstra%27s\\_algorithm](https://en.wikipedia.org/wiki/Dijkstra%27s_algorithm).
- [40] Wikipedia. *Greedy algorithms*. URL: [https://en.wikipedia.org/wiki/Greedy\\_algorithm](https://en.wikipedia.org/wiki/Greedy_algorithm).
- [41] Abdul Bari. *3.6 Dijkstra Algorithm - Single Source Shortest Path - Greedy Method*. URL: <https://www.youtube.com/watch?v=XB4MIexjvY0>.

- [42] Wikipedia. *Dynamic programming*. URL: [https://en.wikipedia.org/wiki/Dynamic\\_programming](https://en.wikipedia.org/wiki/Dynamic_programming).
- [43] Wikipedia. *Trees traversal*. URL: [https://en.wikipedia.org/wiki/Tree\\_traversal](https://en.wikipedia.org/wiki/Tree_traversal).
- [44] Martijn Pieters. *StackOverflow answer*. URL: <https://stackoverflow.com/a/57234618>.