Capturas de Tela da Demo – OpenChoreo

Last Updated: April 2026

Data Planes

View more

Cluster Data Planes (1)

default
openchoreo-cluster ● Connected

Cluster Workflow Planes (1)

default
openchoreo-cluster ● Connected

Cluster Observability Planes (1)

default
openchoreo-cluster ● Connected

Cluster Data Plane Configuration

Status
Ready

Agent Connection
Connected (1)

Observability
default

Hosted Environments

- Development (demo-manufacturing) non-prod
- Staging (default) non-prod
- Quality (connection-demo) non-prod
- Production (default) prod
- Development (default) non-prod

1–5 of 7

Gateway Configuration

External

Name gateway-default
Namespace openchoreo-data-plane

HTTP
Host openchoreoapis.localhost

Internal

HTTP
Not configured

HTTPS
Not configured

Definições-Padrão de Workflow

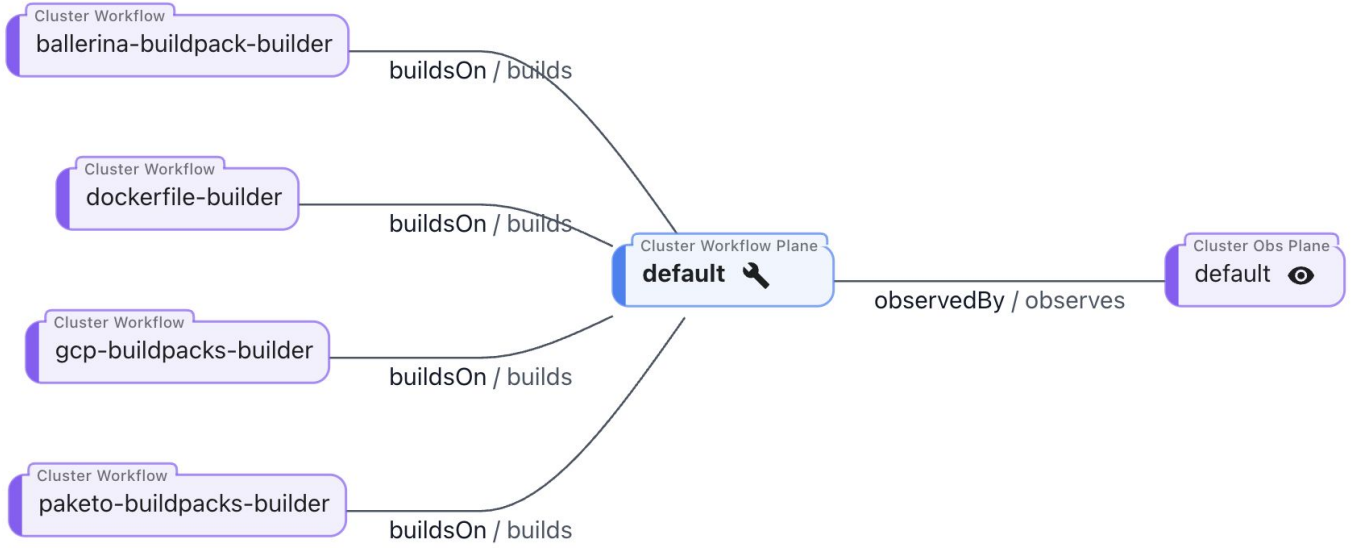

Use pinch & zoom to move around the diagram. Click to change active node, shift click to navigate to entit

Overview da Plataforma

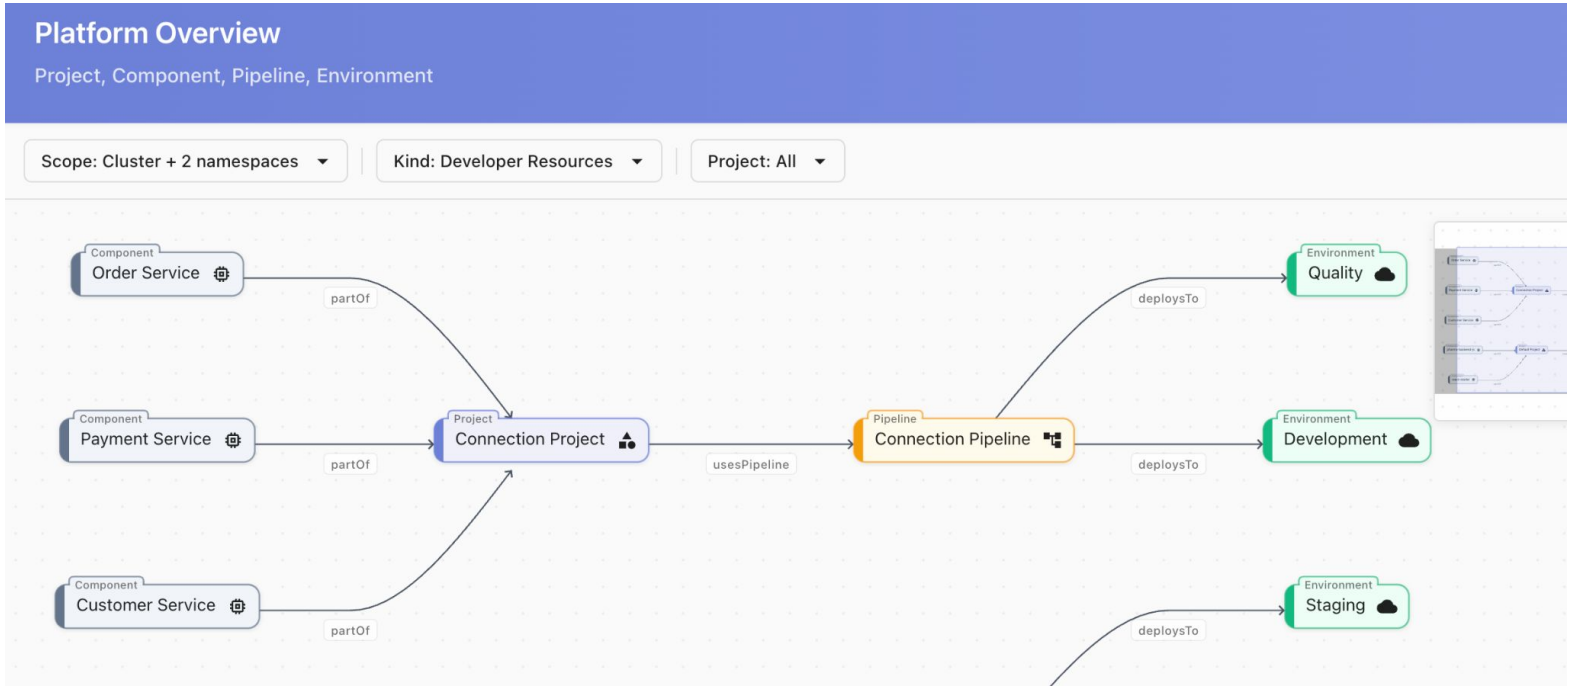

Catálogo de Ambientes

Catalog

Kind Environment

All Environments (7)

Namespace | Type | Starred (0) | Search | Create Environment

NAME	DESCRIPTION	NAMESPACE	TYPE	ACTIONS
Development	development environment	demo-manufacturing	non-production	
Development	Development	default	non-production	
Development	development environment	connection-demo	non-production	
Homolog	Homolog Environment	demo-manufacturing	non-production	
Production	Production	default	production	

Pipelines de CI/CD

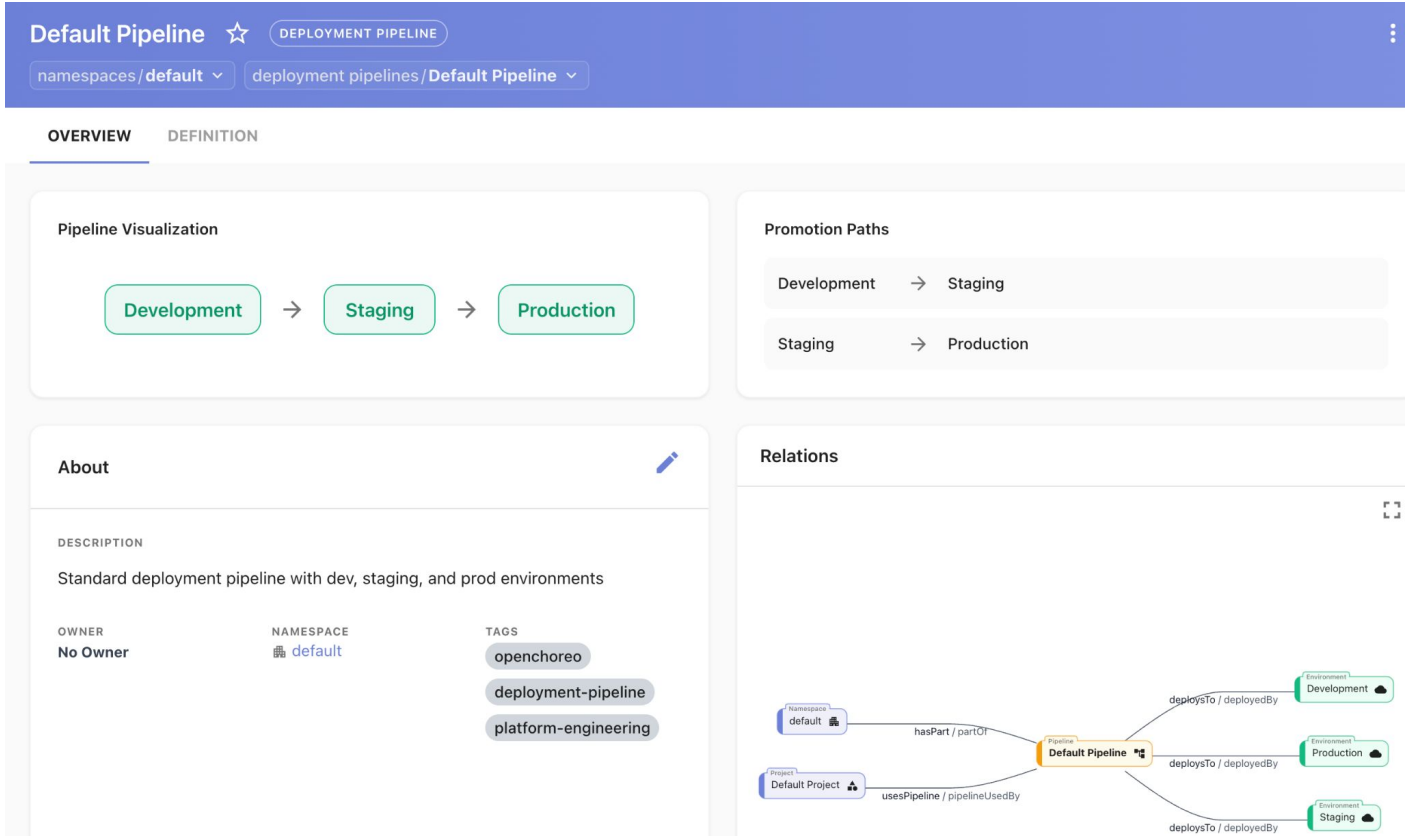

Recursos da Plataforma

Platform Resources

Workflow
Define a template for running standalone automation tasks in OpenChoreo

Trait
Define a reusable trait template to add cross-cutting capabilities like storage or observability to components.

Environment
Create a new environment for deploying components across your organization.

Deployment Pipeline
Create a new deployment pipeline that defines promotion paths between environments for component deployments.

ComponentType
Define a reusable deployment pattern for how components are deployed.

ClusterWorkflow
Define a cluster-wide workflow template for building and automating tasks across all namespaces in OpenChoreo.

Namespace
Organize and isolate groups of related platform resources such as projects, environments, and dataplanes.

ClusterTrait
Define a cluster-wide reusable trait template to add cross-cutting capabilities like storage or observability to components across all namespaces.

ClusterComponentType
Define a cluster-wide reusable deployment pattern for how components are deployed across all

Criação de Componente via Git

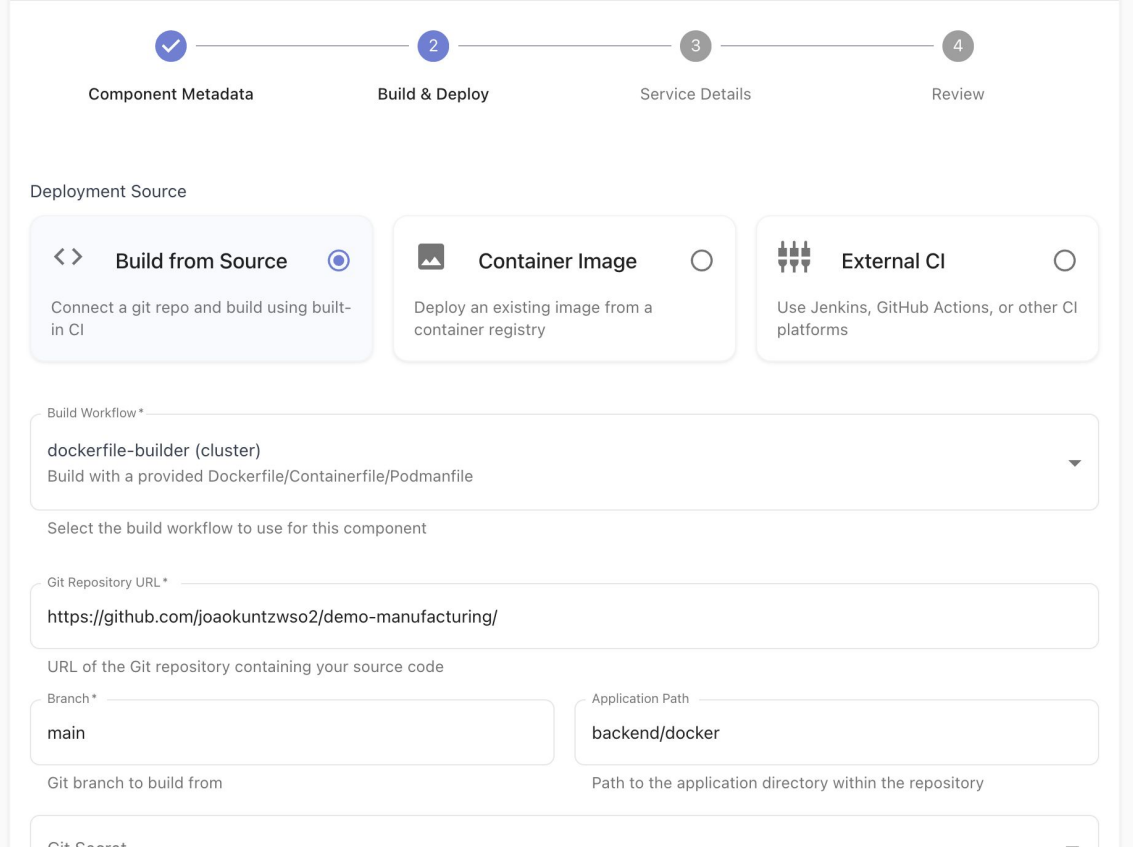

Definição Estática de Réplicas via Traits

Advanced Configurations

Select and configure traits for your component.

Enhance your component with optional capabilities. You can add the same trait multiple times with different confi

Cluster

autoscaling-trait

No description available

+ Add Trait

Cluster

observability-alert-rule

No description available

+ Add Trait

Cluster Added (1)

order-service-runtime-trait

No description available

+ Add Trait

Configured Traits (1)

order-service-runtime-trait-1 (order-service-runtime-trait)

Instance Name *

order-service-runtime-trait-1

A unique name to identify this trait instance

```
1 replicas: 3
2
```

Definição de Endpoint

OVERVIEW DEFINITION BUILD **DEPLOY** LOGS METRICS ALERTS

Configure Component
Review and update your component's runtime configuration

Next

Workload
Component

Container | Endpoints 1 | Dependencies 0 | FORM | YAML

Endpoint Name
erp-endpoint

Type
HTTP

Port
9001

Visibility
☑ Project ☐ Namespace ☐ Internal ☑ External

Schema Content
OpenAPI schema (optional)

+ Add Endpoint

Endpoint URLs

erp-endpoint (HTTP)

External

http://development-demo-manufacturing.openchoreoapis.localhost:19080/erp-backend-erp-endpoint

Project

http://erp-backend.dp-demo-manufact-manufacturing-development-ecc8b1ca.svc.cluster.local:9001

Close

Definição de Dependências

OVERVIEW DEFINITION BUILD **DEPLOY** LOGS METRICS ALERTS

Configure Component
Review and update your component's runtime configuration

Workload
Component

Container | Endpoints 1 | Dependencies 2 | FORM | YAML

customer-service `customer-service → api → [project]` Edit

Project: connection-project
Component: payment-service
Endpoint: api
Visibility: Project

Environment Variable Bindings

Address Env Var: PAYMENT_SERVICE_URL
Full connection string

Host Env Var: PAYMENT_SERVICE_HOST
Hostname only

Port Env Var
Port number only

Base Path Env Var
Base path only

Projeto com Microsserviços

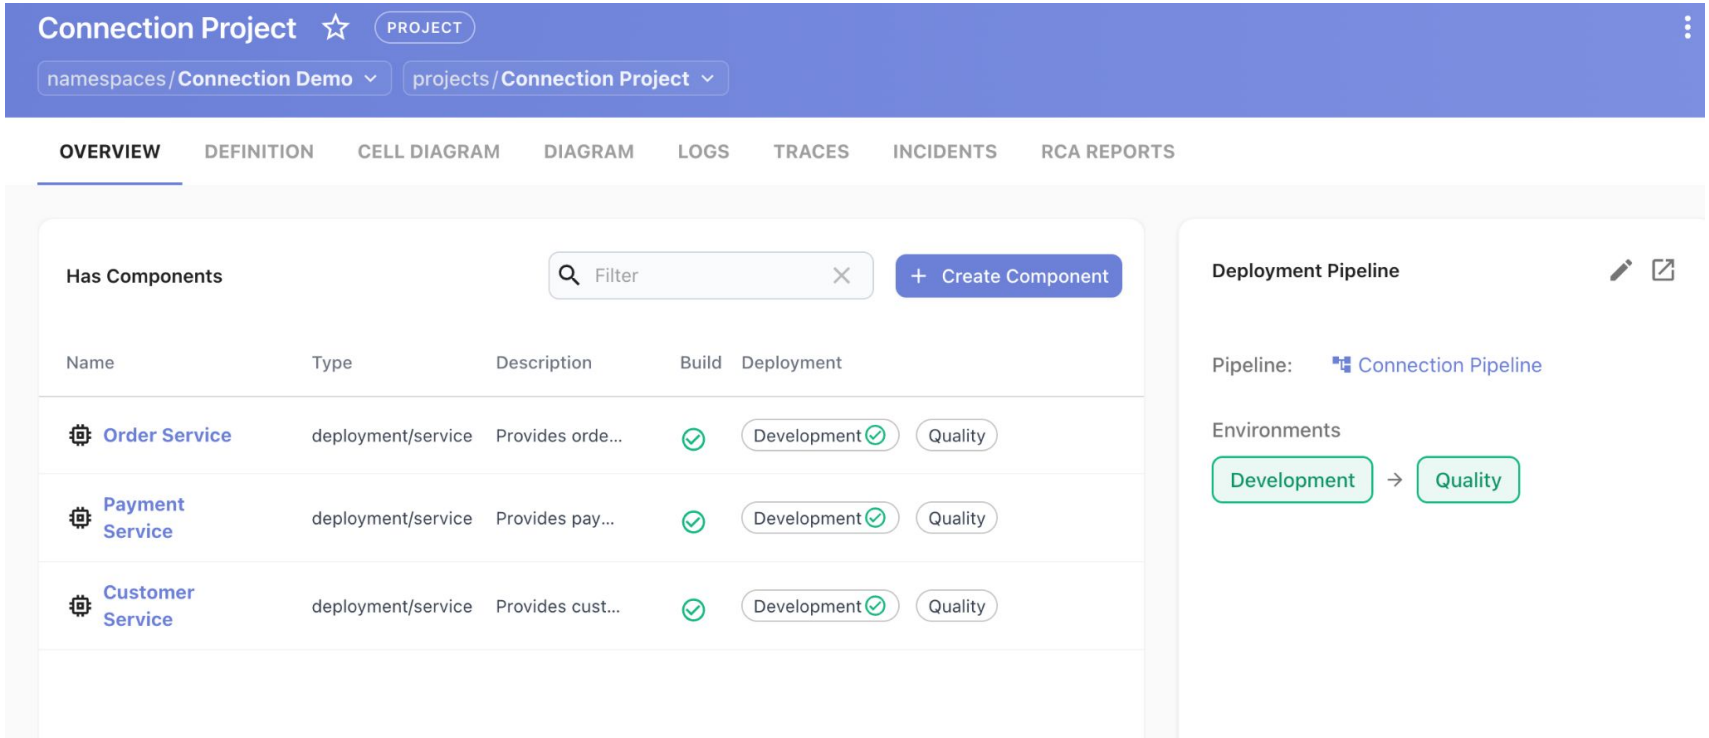

Diagrama de Dependências e Integração

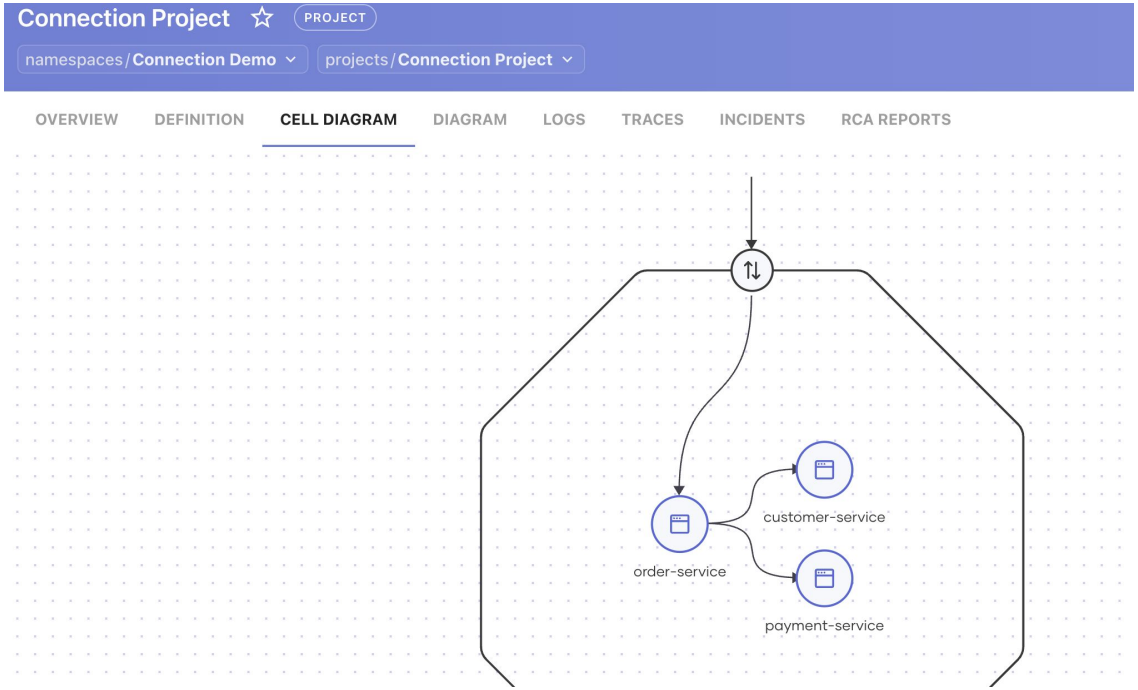


```
joaoluiskuntz@Mac openchoreo-connection-demo % curl -s
{
  "service": "order-service",
  "dependencies": [
    "customer-service",
    "payment-service"
  ],
  "customerServiceUrl": "http://customer-service.dp-con
  "paymentServiceUrl": "http://payment-service.dp-conne
  "orders": [
    {
      "id": "ord-001",
      "customerId": "cus-001",
      "product": "Notebook",
      "total": 4500,
      "customer": {
        "id": "cus-001",
        "name": "Ana Silva",
        "email": "ana.silva@example.com"
      },
      "payment": {
        "orderId": "ord-001",
        "status": "APPROVED",
        "method": "Credit Card",
        "amount": 4500
      }
    },
    {
      "id": "ord-002",
      "customerId": "cus-002",
      "product": "Monitor",
      "total": 1200,
      "customer": {
```

Logs de Serviços

Total logs: 193
Last updated at: 26/04/2026, 19:55:00

Timestamp	LogLevel	Component Name	Log
4/26/2026, 7:31:05 PM	ERROR	order-service	
4/26/2026, 7:26:00 PM	INFO	order-service	order-service running on port 9090
4/26/2026, 7:26:00 PM	INFO	order-service	Using customer-service at http://customer-service.dp-conne b886e208.svc.cluster.local:8080/customers
4/26/2026, 7:26:00 PM	INFO	order-service	Using payment-service at http://payment-service.dp-connect b886e208.svc.cluster.local:7070
4/26/2026, 7:26:00 PM	INFO	order-service	Using payment-service at http://payment-service.dp-connect b886e208.svc.cluster.local:7070
4/26/2026, 7:26:00 PM	INFO	order-service	order-service running on port 9090
4/26/2026, 7:26:00 PM	INFO	order-service	Using customer-service at http://customer-service.dp-conne b886e208.svc.cluster.local:8080/customers
4/26/2026, 7:25:59 PM	INFO	order-service	> node src/index.js

Build de Serviço

Order Service COMPONENT DEPLOYMENT/SERVICE

namespaces / Connection Demo | projects / Connection Project | components / Order Service

OVERVIEW | DEFINITION | BUILD | DEPLOY | LOGS | METRICS | ALERTS

Workflows

Build Latest

Runs 8

Configurations

Workflow Runs

Filter

Workflow Run Name	Status	Commit	Time
order-service-1777241540238	Succeeded	latest	43 minutes ago
order-service-1777241184384	Succeeded	latest	49 minutes ago
order-service-	Succeeded	latest	1 hour ago

Deploy de Serviço

OVERVIEW | DEFINITION | BUILD | **DEPLOY** | LOGS | METRICS | ALERTS

Release Details
Development

HEALTH	RESOURCES	LAST UPDATED
Healthy Reason: Ready ReleaseBinding is ready	7 resources 7 Healthy	36 minutes ago 4/26/2026, 7:20:27 PM

RR **RenderedRelease**
order-service-development
Target plane: dataplane

HP **HorizontalPodAutoscaler**
order-service-autoscaler

HT **HTTPRoute**
order-service-api-03ce4d3e

D **Deployment**
order-service-development-1db02e8d

P **Pod**
order-service-development-1db02e8d-8c...

CM **ConfigMap**
order-service-development-env-configs-2...

Inspeção de Pods

P payment-service-development-27aac1ac-7fcb7795d6-whd66

dp-connection-de-connection-pr-development-b886e208 | Healthy | v1

EVENTS LOGS DEFINITION

Reason	Message	Count
Pulling	Pulling image "host.k3d.internal:10082/connection-demo-connection-project-payment-service:v1-ae614901"	1
Pulled	Successfully pulled image "host.k3d.internal:10082/connection-demo-connection-project-payment-service:v1-ae614901" in 265ms (265ms including waiting). Image size: 53062316 bytes.	1
Created	Created container: main	1
Started	Started container main	1
Scheduled	Successfully assigned dp-connection-de-connection-pr-development-b886e208/payment-service-development-27aac1ac-7fcb7795d6-whd66 to k3d-openchoreo-server-0	-

Métricas de Consumo

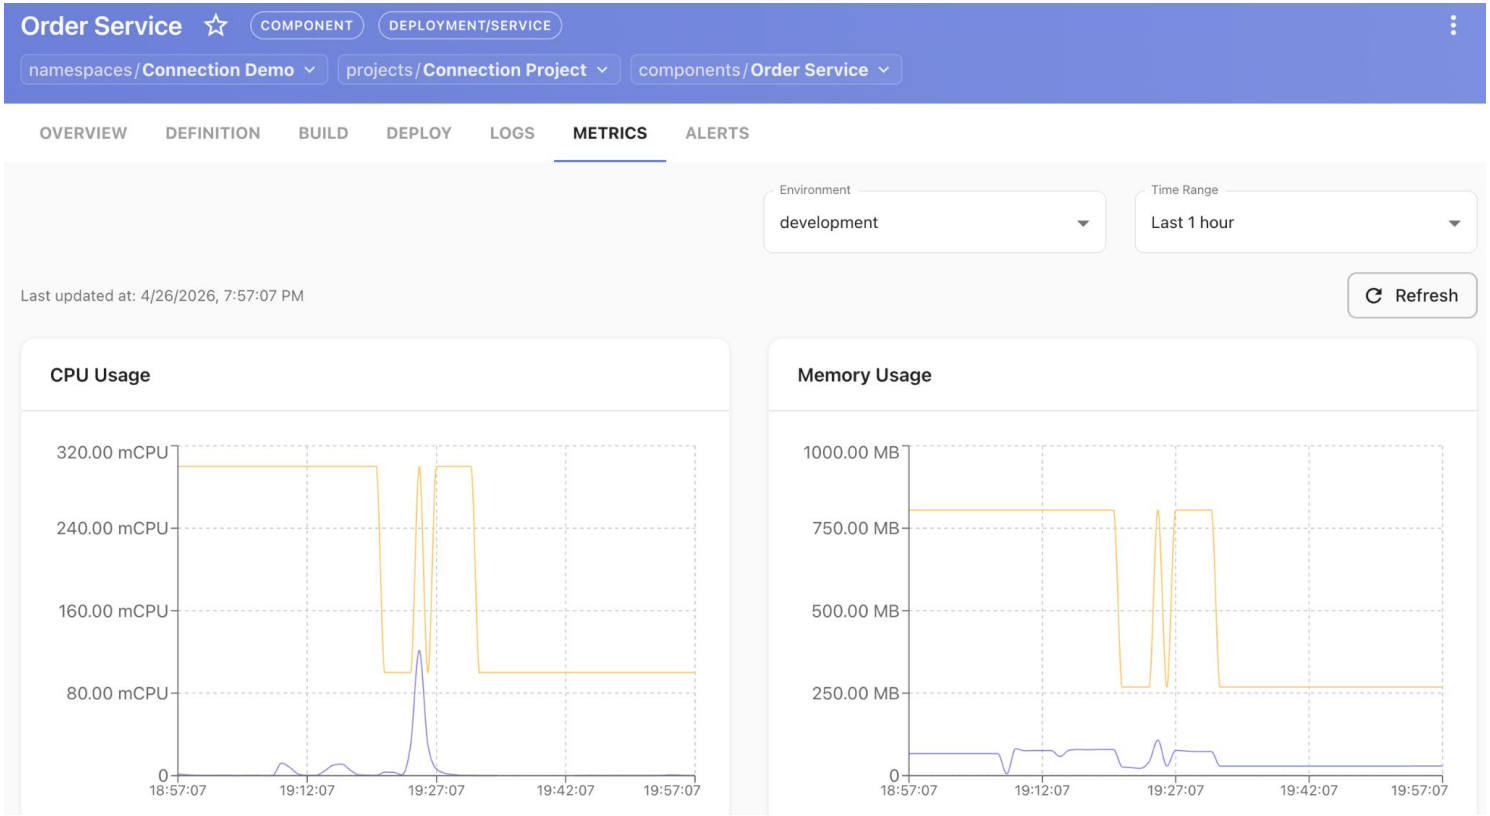

Trait de Autoscaling

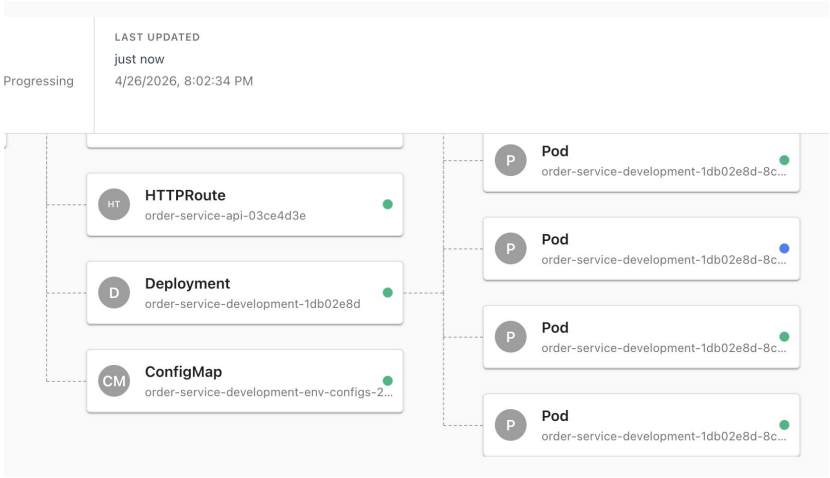

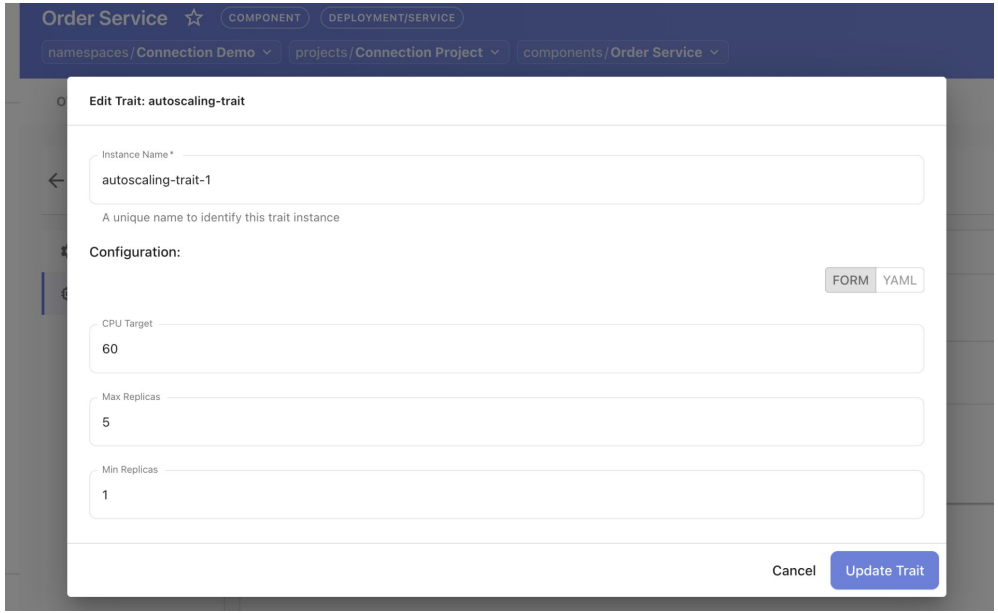


```
joaoluiskuntz@Mac OpenChoreo % kubectl get hpa -n dp-connection-de-connection-pr-development-b886e208
NAME                      REFERENCE                                    TARGETS          MINPODS   MAXPODS   REPLICAS   AGE
order-service-autoscaler  Deployment/order-service-development-1db02e8d  cpu: 84%/60%   1         5         2          41m
joaoluiskuntz@Mac OpenChoreo % kubectl get hpa -n dp-connection-de-connection-pr-development-b886e208
NAME                      REFERENCE                                    TARGETS          MINPODS   MAXPODS   REPLICAS   AGE
order-service-autoscaler  Deployment/order-service-development-1db02e8d  cpu: 68%/60%   1         5         3          41m
joaoluiskuntz@Mac OpenChoreo %
```

Thanks!

wso2.com