

# Cyber Security Foundations | CySec

## Summary

## CONTENTS

|                                                    |           |
|----------------------------------------------------|-----------|
| <b>1. Preface</b>                                  | <b>5</b>  |
| <b>2. Information security</b>                     | <b>5</b>  |
| 2.1. Types of information                          | 6         |
| 2.2. How can information be attacked               | 6         |
| 2.3. Components of an Information System (IS)      | 6         |
| 2.4. Balancing security and system usability       | 6         |
| 2.5. Implementation of information security        | 7         |
| 2.6. CIA Triad                                     | 7         |
| 2.7. Non-Repudiation and Accountability            | 8         |
| 2.7.1. Non-Repudiation                             | 8         |
| 2.7.2. Accountability                              | 8         |
| 2.8. STRIDE Model                                  | 8         |
| 2.9. McCumber Cube                                 | 8         |
| <b>3. Threat categorization</b>                    | <b>9</b>  |
| 3.1. Social engineering                            | 9         |
| 3.2. Software attacks                              | 9         |
| 3.3. Denial of service                             | 9         |
| 3.4. Web application attacks                       | 10        |
| 3.5. Password / Authentication attacks             | 10        |
| 3.6. Physical threats                              | 10        |
| <b>4. Information Security Management</b>          | <b>11</b> |
| 4.1. Information Security Governance               | 11        |
| 4.2. Information Security Management System (ISMS) | 12        |
| <b>5. Policy</b>                                   | <b>12</b> |
| 5.1. Designing effective policies                  | 13        |
| 5.2. Enterprise Information Security Policy (EISP) | 13        |
| 5.2.1. Elements of an EISP                         | 13        |
| 5.3. Issue-Specific Security Policy                | 14        |
| <b>6. Risk analysis</b>                            | <b>14</b> |
| 6.1. Identifying Assets                            | 14        |
| 6.2. Classifying Assets                            | 14        |
| 6.3. Identifying Threats                           | 15        |
| 6.4. Security Controls                             | 15        |
| 6.4.1. Types                                       | 15        |
| 6.4.2. By Function                                 | 15        |
| 6.5. Business Continuity Management                | 15        |
| 6.5.1. Key Objectives                              | 16        |
| 6.6. Security and Awareness Training               | 16        |
| 6.7. Gap Analysis                                  | 16        |
| 6.8. Security Framework                            | 16        |

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>6.9. ISO/IEC 2700</b>                                    | <b>17</b> |
| <b>6.10. NIST Cybersecurity Framework</b>                   | <b>17</b> |
| <b>6.11. Risk, Vulnerabilities and Threats</b>              | <b>17</b> |
| 6.11.1. Vulnerabilities                                     | 17        |
| 6.11.2. Threat                                              | 17        |
| 6.11.3. Threat Actors                                       | 18        |
| 6.11.4. Threat Vector                                       | 18        |
| 6.11.5. Attack surface                                      | 18        |
| 6.11.6. Risk                                                | 18        |
| <b>6.12. Risk Management</b>                                | <b>18</b> |
| 6.12.1. RM Framework                                        | 18        |
| 6.12.2. Risk Management Process                             | 19        |
| 6.12.3. CVE & CVSS                                          | 20        |
| 6.12.4. Risk Analysis                                       | 20        |
| 6.12.5. Quantitative Risk Analysis                          | 20        |
| 6.12.6. Risk Evaluation                                     | 21        |
| 6.12.7. Risk Treatment                                      | 22        |
| 6.12.8. Other RM Frameworks                                 | 22        |
| <b>7. Identity &amp; Access Management (IAM)</b>            | <b>23</b> |
| <b>7.1. Access Control</b>                                  | <b>23</b> |
| 7.1.1. Control methods                                      | 23        |
| <b>7.2. Mechanisms</b>                                      | <b>24</b> |
| 7.2.1. Identification                                       | 24        |
| 7.2.2. Authentication                                       | 24        |
| 7.2.3. Authorization                                        | 29        |
| 7.2.4. Auditing                                             | 30        |
| 7.2.5. Accounting                                           | 30        |
| <b>7.3. Establishing accountability and non-repudiation</b> | <b>30</b> |
| <b>7.4. Common Access Control Attacks</b>                   | <b>30</b> |
| 7.4.1. Access Aggregation Attacks (passive attack)          | 30        |
| 7.4.2. Password Attacks (brute-force attack)                | 31        |
| 7.4.3. Dictionary Attack (brute-force attack)               | 31        |
| 7.4.4. Birthday Attack (brute-force attack)                 | 31        |
| 7.4.5. Rainbow Table Attacks                                | 31        |
| 7.4.6. Sniffer Attacks                                      | 31        |
| <b>8. Cryptography</b>                                      | <b>32</b> |
| <b>8.1. Objectives</b>                                      | <b>33</b> |
| <b>8.2. Kerckhoff's Principles</b>                          | <b>33</b> |
| <b>8.3. Shannon's Principles</b>                            | <b>33</b> |
| <b>8.4. Caesar Cipher</b>                                   | <b>34</b> |
| <b>8.5. SP-Network</b>                                      | <b>34</b> |
| <b>8.6. XOR</b>                                             | <b>34</b> |
| <b>8.7. One-Time PAD (OTP)</b>                              | <b>34</b> |
| <b>8.8. Hashing</b>                                         | <b>35</b> |
| 8.8.1. How it works                                         | 35        |
| 8.8.2. Strong hash functions                                | 35        |
| 8.8.3. Important properties                                 | 35        |
| 8.8.4. Current standards in cryptographic hash functions    | 35        |
| 8.8.5. Hash functions for Password Storage                  | 36        |

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| 8.8.6. Comparison of hash families .....                         | 36        |
| 8.8.7. Where are hashes used? .....                              | 36        |
| 8.8.8. HMAC .....                                                | 37        |
| <b>8.9. Symmetric cryptography .....</b>                         | <b>37</b> |
| 8.9.1. Stream ciphers .....                                      | 37        |
| 8.9.2. Block ciphers .....                                       | 37        |
| 8.9.3. Remarks .....                                             | 42        |
| <b>8.10. Asymmetric cryptography .....</b>                       | <b>42</b> |
| 8.10.1. Rivest – Shamir – Adleman (RSA) Algorithm .....          | 42        |
| 8.10.2. Euler's Theorem .....                                    | 42        |
| 8.10.3. Discrete Logarithm Problem .....                         | 44        |
| 8.10.4. Primitive roots of prime numbers .....                   | 44        |
| 8.10.5. Diffie-Hellman (DH) .....                                | 44        |
| 8.10.6. Elliptic Curve Cryptography (ECC) .....                  | 45        |
| 8.10.7. Perfect Forward Secrecy in Ephemeral DH KEX .....        | 45        |
| <b>9. Transport Layer Security (TLS) .....</b>                   | <b>45</b> |
| 9.1. Handshake .....                                             | 46        |
| 9.2. Authenticated Encryption with Associated Data (AEAD) .....  | 46        |
| 9.2.1. AES Galois Counter Mode (GCM) .....                       | 46        |
| <b>10. Public Key Infrastructure (PKI) .....</b>                 | <b>46</b> |
| 10.1. Digital certificate .....                                  | 47        |
| 10.1.1. Certificate pinning (HPKP) .....                         | 48        |
| 10.1.2. X.509 .....                                              | 48        |
| 10.2. Cipher suites .....                                        | 48        |
| 10.2.1. Recommended HTTPS Cipher suites (TLS 1.2) .....          | 48        |
| 10.3. PKI Components .....                                       | 49        |
| 10.3.1. Certificate Authority (CA) .....                         | 49        |
| 10.3.2. Subscriber .....                                         | 49        |
| 10.3.3. Trust- and keystore .....                                | 49        |
| 10.3.4. Registration Authority (RA) .....                        | 49        |
| 10.3.5. Validation Authority (VA) .....                          | 49        |
| 10.3.6. Certificate Revocation List (CRL) .....                  | 50        |
| 10.3.7. Certificate Status Protocol (OCSP) .....                 | 50        |
| 10.3.8. OCSP Stapling .....                                      | 50        |
| 10.3.9. Certificate Transparency (CT) .....                      | 50        |
| <b>11. E-Mail .....</b>                                          | <b>50</b> |
| 11.1. MIME .....                                                 | 50        |
| 11.2. S/MIME .....                                               | 50        |
| 11.2.1. Signed S/MIME with Multiple Signatures .....             | 50        |
| 11.2.2. Encapsulated S/MIME Signatures .....                     | 50        |
| 11.2.3. Encrypted S/MIME Messages .....                          | 51        |
| 11.2.4. Encrypted S/MIME Messages with Multiple Recipients ..... | 51        |
| 11.2.5. Storage of Signature and Encryption Keys .....           | 51        |
| 11.3. PGP .....                                                  | 51        |
| 11.3.1. Web of Trust in PGP .....                                | 52        |
| 11.4. Cryptography in Detail .....                               | 52        |
| 11.4.1. Sign-then-Encrypt .....                                  | 52        |
| 11.4.2. Encrypt-then-Sign .....                                  | 52        |


|                                                                                 |           |
|---------------------------------------------------------------------------------|-----------|
| <b>11.5. Sender Authentication</b>                                              | <b>52</b> |
| 11.5.1. Sender Policy Framework (SPF)                                           | 52        |
| 11.5.2. DomainKeys Identified Mail (DKIM)                                       | 53        |
| 11.5.3. Domain-based Message Authentication, Reporting, and Conformance (DMARC) | 53        |
| <b>12. Web</b>                                                                  | <b>53</b> |
| 12.1. Common Weakness Enumerations (CWE)                                        | 53        |
| 12.2. Open Web Application Security Project (OWASP)                             | 53        |
| 12.3. Application Security Risks                                                | 53        |
| 12.3.1. Broken Access Control                                                   | 53        |
| 12.3.2. Injection                                                               | 54        |
| <b>13. Cyber Kill Chain</b>                                                     | <b>55</b> |
| 13.1. Why Start with the Attacker?                                              | 55        |
| 13.2. Phase 1: Reconnaissance                                                   | 55        |
| 13.3. Phase 2: Weaponization                                                    | 55        |
| 13.4. Phases 3 & 4: Delivery and Exploitation                                   | 56        |
| 13.5. Phases 5 & 6: Installation and C2                                         | 56        |
| 13.6. Phase 7: Actions on Objectives                                            | 56        |
| 13.7. Breaking the chain                                                        | 56        |
| 13.8. Kill Chain vs. MITRE ATT&CK                                               | 57        |
| <b>14. Incident Response</b>                                                    | <b>57</b> |
| 14.1. Event vs Incident                                                         | 57        |
| 14.2. Escalation path                                                           | 57        |
| 14.3. Classifying Incidents                                                     | 58        |
| 14.3.1. Pipkin's Indicators                                                     | 58        |
| 14.3.2. Classifier's Dilemma                                                    | 58        |
| 14.4. Detect and Respond                                                        | 58        |
| 14.4.1. From "Prevent Everything" to "Assume Breach"                            | 58        |
| 14.4.2. The Metrics That Matter                                                 | 58        |
| 14.4.3. Who Actually Does What? SOC, CSIRT, CERT                                | 59        |
| 14.4.4. The NIST IR Process                                                     | 59        |
| 14.4.5. Phase 2: Detection & Analysis                                           | 59        |
| 14.4.6. Phase 3a: Containment                                                   | 60        |
| 14.4.7. Phase 3b & 3c: Eradication and Recovery                                 | 60        |
| 14.4.8. Phase 4: Post-Incident Activity                                         | 60        |
| 14.4.9. Common IR Mistakes                                                      | 61        |
| 14.5. Intrusion Detection Systems                                               | 61        |
| 14.5.1. Intrusion Detection System (IDS)                                        | 61        |
| 14.5.2. Intrusion Prevention System (IPS)                                       | 61        |
| 14.5.3. Signature-Based Detection                                               | 61        |
| 14.5.4. Anomaly-Based Detection                                                 | 62        |
| 14.5.5. Intrusion Detection in Practice                                         | 62        |
| 14.6. Security Information and Event Management (SIEM)                          | 62        |
| 14.6.1. Why Do We Need a SIEM?                                                  | 62        |
| 14.6.2. SIEM Architecture                                                       | 63        |
| 14.6.3. Correlation: Turning Noise Into a Story                                 | 63        |
| 14.6.4. What SOCs use a SIEM for                                                | 63        |
| 14.6.5. SIEM vs. SOAR vs. XDR                                                   | 63        |
| 14.6.6. Where SIEM Projects Fail                                                | 64        |

## 1. PREFACE

Copypasted straight from the lectures. Best viewed as the anki deck, so that all of the hundreds of abbreviations and corpospeak can be burned into your brain for the duration of the exams and be forgotten right afterwards.

## 2. INFORMATION SECURITY

| <i>Term</i>          | <i>Definition</i>                                                                                                                                           |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Information          | An organization's data that has been processed, organized, or structured in a way that gives it meaning and value to an organization or individual.         |
| Information security | Protection of the integrity, confidentiality and availability of information data whether in storage, transit or processing.                                |
| non-repudiation      | prevents parties from denying actions they have performed.                                                                                                  |
| accountability       | ability to trace actions and decisions back to a specific person or system.                                                                                 |
| authentication       | verifies the identity of a user or system.                                                                                                                  |
| authorization        | determines what actions an authenticated entity is allowed to perform.                                                                                      |
| access control       | restricts access to resources based on defined rules.                                                                                                       |
| business continuity  | ensures critical operations continue during disruptions.                                                                                                    |
| security policy      | a rule or expectation for protecting information.                                                                                                           |
| compliance           | adherence to laws, regulations, and (security-)standards.                                                                                                   |
| asset                | any item of value belonging to an organization<br>– For example: information, systems, people and processes                                                 |
| attack               | an act that intends to damage, steal or degrade an organizations assets                                                                                     |
| vulnerability        | a flaw or weakness in a system that can be abused                                                                                                           |
| exploit              | a technique or method used to take advantage of a vulnerability                                                                                             |
| threat               | an event or action with the potential to cause harm by exploiting a vulnerability                                                                           |
| risk                 | the likelihood of a threat exploiting a vulnerability and the potential harm that could cause                                                               |
| control              | a measure designed to reduce the potential risk of an attack<br>– Can be achieved through training employees, enforcing policies or implementing technology |

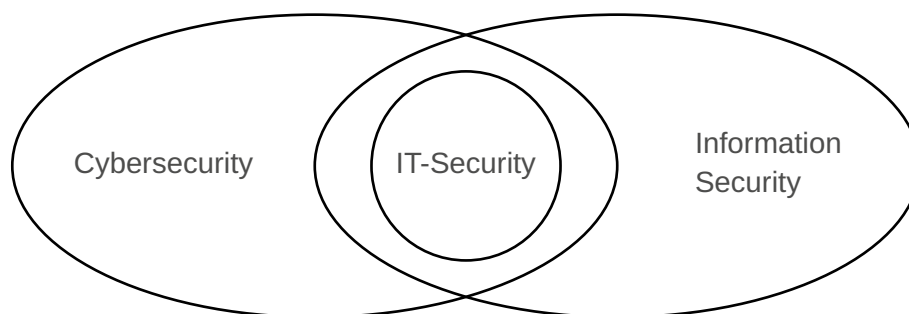

## 2.1. TYPES OF INFORMATION

- Personal information
  - Business information
  - Financial information
  - Intellectual property
    - Copyright
    - Trademarks
    - Patents
    - Trade secrets
  - System information
- 

## 2.2. HOW CAN INFORMATION BE ATTACKED

- In storage
    - Data that is stored on a server or in a database short-term or long-term.
  - In transit
    - Data that is currently being transported from one place to another.
  - In use
    - Data that is currently being processed by a service or another entity.
- 


## 2.3. COMPONENTS OF AN INFORMATION SYSTEM (IS)

- Software
  - Hardware
  - Data
  - People
  - Procedures
  - Networks
- 

## 2.4. BALANCING SECURITY AND SYSTEM USABILITY

- Obtaining perfect information security is impossible.
- Security needs to protect the system without slowing people down.
- Too much security can lead to workarounds.
  - Example: If strong passwords are enforced, people might start writing them down on sticky notes.
- Too much convenience exposes the system to unnecessary risks.
- It's all about finding that sweet spot between security and usability.
  - Example Solution: Employees must use multi-factor authentication. This way, they are free to use a less secure password without compromising the overall security.
- An even better, continuously review policies and involve users to find the best solution.

## 2.5. IMPLEMENTATION OF INFORMATION SECURITY

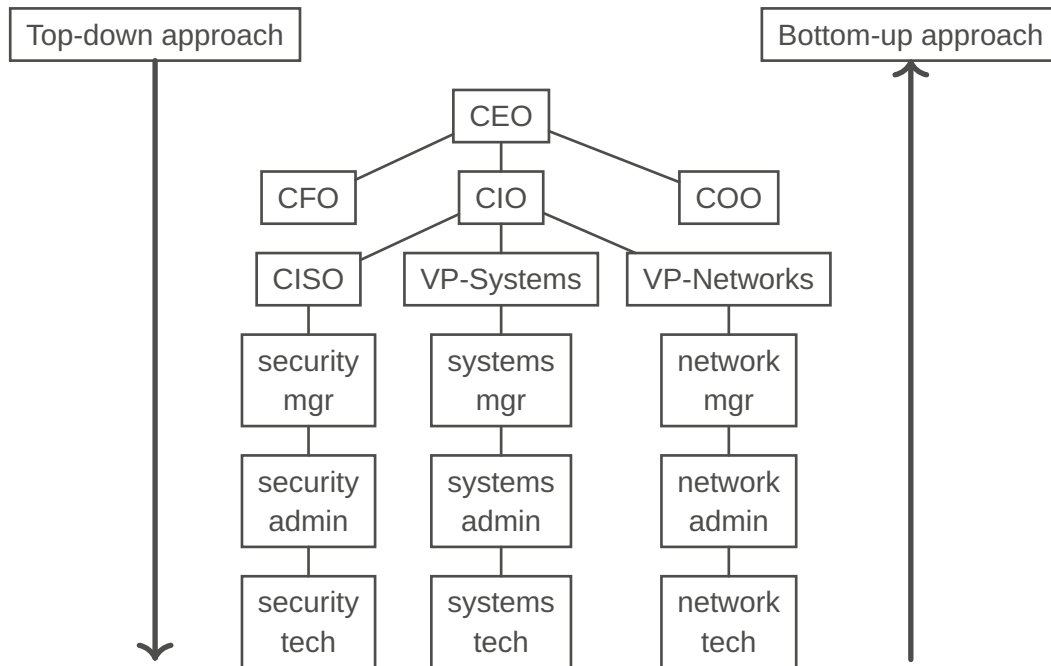

### Bottom-Up

- Initiated by an organization's technical staff (system engineers, admins, etc.).
- Implementations happen before policies are defined.
- Often lacks support from management, budget and consistency.
- Generally less effective and not scalable in large organizations.

### Top-Down

- Initiated and supported by an organization's upper management.
- Policies come first and provide guidance for implementations.
- Ensures proper funding, authority and organization-wide enforcement.
- Generally more effective and in-line with the business strategy

## 2.6. CIA TRIAD

The CIA triad is a foundational information-security model stating that systems should protect:

- **Confidentiality** - Keeping information secret
- **Integrity** - Keeping information correct and unaltered
- **Availability** - Ensuring information and systems remain accessible

|                    | <i>Confidentiality</i>                                                                                                                                 | <i>Integrity</i>                                                                                                                     | <i>Availability</i>                                                                                                                |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Goal               | Prevent or minimize unauthorized access to information                                                                                                 | Protecting the reliability and correctness of information.                                                                           | Ensuring that subjects have timely and uninterrupted access to information.                                                        |
| Steps to ensure it | <ul style="list-style-type: none"> <li>– Encryption</li> <li>– Access Control</li> <li>– Allow / enforce advanced authentication mechanisms</li> </ul> | <ul style="list-style-type: none"> <li>– Digital Signatures</li> <li>– Hashing and Checksums</li> <li>– Change Management</li> </ul> | <ul style="list-style-type: none"> <li>– Redundance and Backups</li> <li>– DDoS Protection</li> <li>– Incident Response</li> </ul> |

## 2.7. NON-REPUDIATION AND ACCOUNTABILITY

Example of security controls through which non-repudiation can be established: Digital certificates, session identifiers, transaction logs, etc.

### 2.7.1. Non-Repudiation

- Ensures that the subject of an activity or who caused an event cannot deny having performed an action or cannot deny that the event occurred.
- Non-Repudiation prevents a subject from claiming not to have sent a message, not to have performed an action, or not to have been the cause of an event.

### 2.7.2. Accountability

- Being responsible or obligated for actions and results.
- Non-Repudiation is an essential part of accountability. A suspect cannot be held accountable if they can repudiate the claim against them.

## 2.8. STRIDE MODEL

A structured model developed by Microsoft used in cybersecurity to identify and categorize threats to systems by looking at how they can be attacked.

### TODO:

Authenticity

| Term                     | Definition                                                                   |
|--------------------------|------------------------------------------------------------------------------|
| S(poofing)               | Pretending to be someone else. (see <a href="#">Authenticity</a> )           |
| T(ampering)              | Unauthorized data modification or altering. (see <a href="#">Integrity</a> ) |
| R(epudiation)            | Denying actions without proof. (see <a href="#">Non-Repudiation</a> )        |
| I(nformation disclosure) | Exposing sensitive information. (see <a href="#">Confidentiality</a> )       |
| D(enial of service)      | Making systems or services unavailable. (see <a href="#">Availability</a> )  |
| E(levation of privilege) | Gaining unauthorized rights or privileges.                                   |

## 2.9. MCCUMBER CUBE

**Y-Axis: Security Goals (C.I.A. Triad)**


- Defines what needs to be protected.

**X-Axis: Information States**

- Describes where the information exists.

**Z-Axis: Safeguards / Controls**

- Defines how protection is implemented.

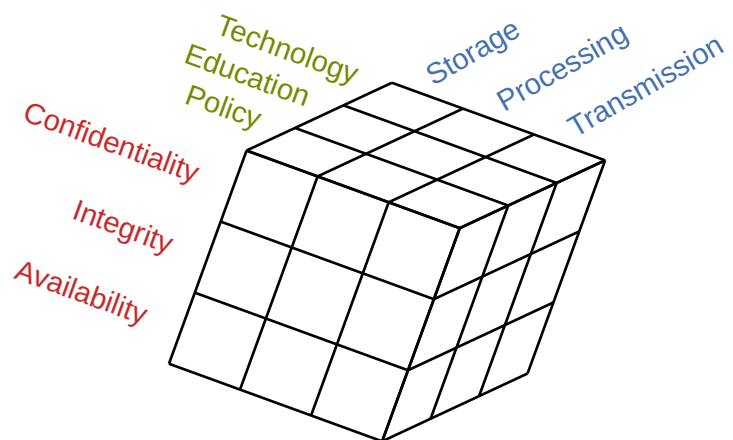



### 3. THREAT CATEGORIZATION

| <i>Term</i>                                       | <i>Definition</i>                                                                |
|---------------------------------------------------|----------------------------------------------------------------------------------|
| <a href="#">Social Engineering</a>                | Manipulating people to reveal confidential information.                          |
| <a href="#">Software Attacks</a>                  | Exploiting vulnerabilities in software to gain access to a system or steal data. |
| <a href="#">Denial of Service</a>                 | Overloading one or multiple systems to make it unavailable.                      |
| <a href="#">Web Application Attacks</a>           | Exploiting vulnerabilities in websites or servers hosting websites.              |
| <a href="#">Password / Authentication Attacks</a> | Attempting to bypass or compromise login systems to gain unauthorized access.    |
| <a href="#">Physical Attacks</a>                  | Bypassing technical controls by accessing physical infrastructure directly.      |

#### 3.1. SOCIAL ENGINEERING

The psychological manipulation of individuals to trick them into revealing confidential information or performing actions that can compromise security.

| <i>Term</i>    | <i>Definition</i>                                |
|----------------|--------------------------------------------------|
| Phishing       | Forged emails impersonating legitimate entities. |
| Spear Phishing | Targeted phishing against specific individuals.  |
| Vishing        | Voice-based phishing over phone or video calls.  |
| Smishing       | SMS / Text-based phishing.                       |

#### 3.2. SOFTWARE ATTACKS

Attacks involving malicious code or malware designed to damage systems, steal sensitive data, or gain unauthorized access to systems or services.

| <i>Term</i>  | <i>Definition</i>                                                           |
|--------------|-----------------------------------------------------------------------------|
| Virus        | Malware that attaches to programs and spreads.                              |
| Worms        | Self-replicating malware that spreads over a network.                       |
| Trojan Horse | Malicious software disguised as legitimate applications.                    |
| Ransomware   | Malware that encrypts victim's data and demands payment to restore access.  |
| Rootkits     | Stealthy tools that hide malicious activity and maintain privileged access. |

#### 3.3. DENIAL OF SERVICE

Attacks aims at making a system or service unavailable by overwhelming it with excessive traffic or requests.

| <i>Term</i> | <i>Definition</i>                                                                                                                             |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| DoS         | Single source denial of service attacks.                                                                                                      |
| DDoS        | Denial-of-service attacks performed by multiple attackers or attacking devices.                                                               |
| Botnet      | A network of compromised computers and other devices controlled by an attacker and used to together to flood a target with excessive traffic. |

| <i>Term</i>       | <i>Definition</i>                                                                                                                                     |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| SYN-Flood Attack  | Sending many connection requests without completing them.                                                                                             |
| Reflection Attack | Attacker sends requests to a service and spoofs the victim's IP making the service send (many) replies to the victim instead of back to the attacker. |

### 3.4. WEB APPLICATION ATTACKS

Exploits vulnerabilities in web applications to steal data, manipulate content, or gain unauthorized access.

| <i>Term</i>                       | <i>Definition</i>                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| SQL Injection                     | An attacker inserts malicious SQL commands into an input to manipulate a database and access, modify, or delete data.        |
| Cross-Site Scripting (XSS)        | An attacker injects malicious scripts into a website that execute in other users' browsers to steal sensitive data.          |
| Cross-Site Request Forgery (CSRF) | An attacker tricks a logged-in user's browser into sending unauthorized requests to a web application on their behalf.       |
| Broken Authentication             | Weak authentication mechanisms allow attackers to compromise passwords, sessions, or identities to gain unauthorized access. |

### 3.5. PASSWORD / AUTHENTICATION ATTACKS

Attacks that attempt to bypass or compromise login systems to gain unauthorized access to a system or service.

| <i>Term</i>           | <i>Definition</i>                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------------------------|
| Rainbow Table Attacks | Attackers using precomputed hash lookup tables to reverse weakly hashed passwords back into plaintext.              |
| Password Spraying     | Attackers trying a few common password like "password" across many accounts to avoid lockouts or timeouts.          |
| Credential Stuffing   | Attackers using leaked usernames and passwords from previous breaches to attempt logins on other services.          |
| Brute Force Attack    | Attackers repeatedly try many username and password combinations until they successfully gain access to an account. |

### 3.6. PHYSICAL THREATS

Threats or attacks that affect the physical infrastructure supporting information systems, usually bypassing technical controls overall.

| <i>Term</i>        | <i>Definition</i>                                                                                                                                       |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Theft of devices   | Attackers physically steal hardware to gain direct access to stored data, credential, internal systems, or other sensitive data.                        |
| Hardware tampering | An attacker modifies or implants malicious components in physical equipment to intercept data, bypass security, or disrupt operations.                  |
| Power disruption   | Attackers interrupt or manipulate power supply to shut down or destabilize critical systems or services impacting availability and business continuity. |

| Term                 | Definition                                                                                                                                                       |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environmental damage | Natural or deliberate environmental events that damage infrastructure, causing data loss, downtime, or destruction of critical systems (e.g., earthquake, fire). |

## 4. INFORMATION SECURITY MANAGEMENT

### 4.1. INFORMATION SECURITY GOVERNANCE

The system by which an organization directs and controls its information security strategy to ensure that it supports business objectives, manages risk appropriately, and complies with legal and other regulatory requirements.

Strategic Direction

- Defining security objectives aligned with business goals.

Leadership and Accountability

- Having clear roles and responsibilities for security decisions.

Risk Management

- Defining risks and ensuring they are identified and addressed appropriately.

Regulatory Compliance

- Ensuring adherence to laws and regulations (e.g. NIS2, HIPAA, CRA)

| Responsibilities                                                                                                                                                                                                                                          | Functional Role Examples                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>– Oversee overall corporate security posture (accountable to board)</li><li>– Brief board, customers, public</li></ul>                                                                                              | <ul style="list-style-type: none"><li>– Chief Executive Officer</li></ul>                                                                                                  |
| <ul style="list-style-type: none"><li>– Set security policy, procedures, program, training for company</li><li>– Respond to security breaches (investigate, mitigate, litigate)</li><li>– Responsible for independent annual audit coordination</li></ul> | <ul style="list-style-type: none"><li>– Chief Security Officer</li><li>– Chief Information Officer</li><li>– Chief Risk Officer</li><li>– Department/Agency Head</li></ul> |
| <ul style="list-style-type: none"><li>– Implement/audit/enforce/assess compliance</li><li>– Communicate policies, program (training)</li></ul>                                                                                                            | <ul style="list-style-type: none"><li>– Mid-Level Manager</li></ul>                                                                                                        |
| <ul style="list-style-type: none"><li>– Implement policy; report security vulnerabilities and breaches</li></ul>                                                                                                                                          | <ul style="list-style-type: none"><li>– Enterprise Staff/Employees</li></ul>                                                                                               |

**TODO:**  
change <note> to <deftbl>

## 4.2. INFORMATION SECURITY MANAGEMENT SYSTEM (ISMS)

A structured framework used to systematically manage and protect an organization's assets through various policies, processes and controls

Security governance defines **what** an organization wants to achieve. An ISMS defines **how** the organization wants to manage it.

Enterprise Information Security Policy (EISP)

- The information security policy that sets the strategic direction and scope for all an organization's security efforts.

Risk Management Process

- Definition of processes to identify assets, analyze threats and evaluate risk.

Security Awareness and Training

- Educational programs to ensure employees understand their security responsibilities.


Monitoring, Measurement and Audits

- Ongoing evaluation of control effectiveness and ISMS performance.

## 5. POLICY

A high-level, management-approved rule that defines mandatory organizational behavior and translates external laws and regulations into enforceable internal requirements.

| <i>Term</i>       | <i>Definition</i>                                                                           |
|-------------------|---------------------------------------------------------------------------------------------|
| policy            | instructions that dictate certain behavior within an organization.                          |
| guidelines        | non-mandatory recommendations employees may use as a reference.                             |
| procedures        | step-by-step instructions designed to assist employees in following policies.               |
| practices         | examples of actions that illustrate compliance with policies.                               |
| standard          | a detailed statement of what must be done to comply with a policy.                          |
| de jure standard  | a standard that has been formally evaluated and approved by a formal standards organization |
| de facto standard | a standard that is widely adopted or accepted by a public group.                            |

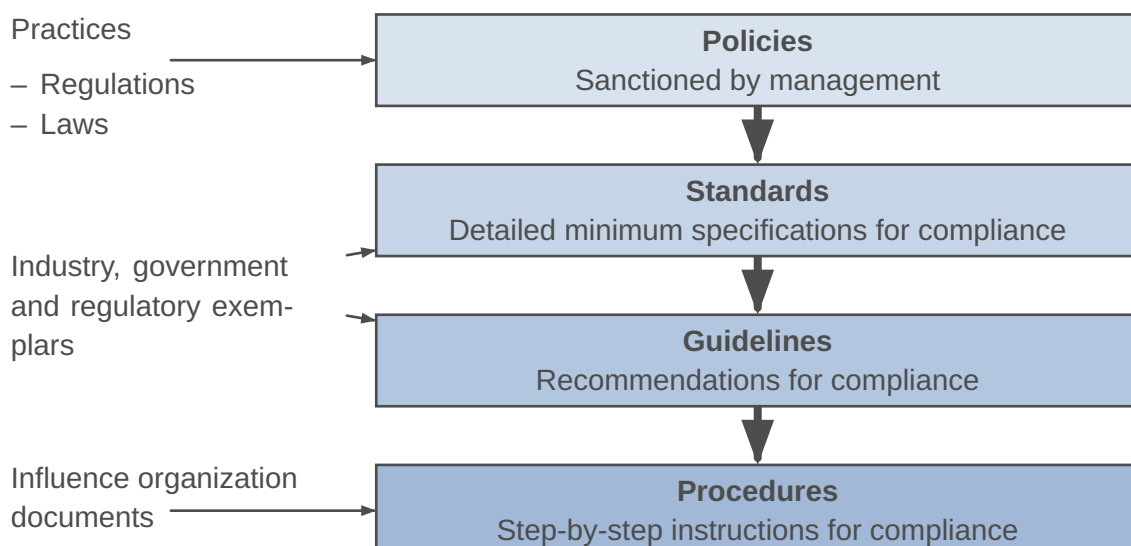

**What does a policy do?** Establishes authority, accountability, and responsibilities for protecting information assets. Provides the foundation for standards, procedures and guidelines.

**Who is responsible for policies?** Policies are created and approved by senior management, ensuring organizational commitment. Management is responsible for enforcement while employees and users are responsible for compliance.

**How is a policy enforced?** By clearly communicating it to all relevant parties, integrating it into standards and procedures, monitoring compliance through audits and oversight, and applying defined disciplinary measures when violations occur.

Cyber Resilience Act (EU)

- Requires secure-by-design digital products and vulnerability management (starting December 2027).

Health Insurance Portability and Accountability Act (U.S.)

- Requires administrative, technical, and physical safeguards for protecting patient health data from disclosure.

NIS2 Directive (EU)

- Mandates cybersecurity risk management and incident reporting for critical and important entities.

Local Laws

- Many regions have their own data protection or breach notification laws in addition to national or EU regulations.

---

## 5.1. DESIGNING EFFECTIVE POLICIES

1) Development

- Policies must align with organizational goals, business risks and legal requirements.

2) Distribution

- Policies must be distributed to all affected entities in a timely manner.

3) Comprehension

- Policies must be readable for, available to and read by all affected entities.

4) Compliance

- Policies must be formally agreed to by act or affirmation.

5) Enforcement

- Policies must be uniformly applied to all affected entities.

6) Review

- Policies must be reviewed regularly in a changing environment.

---

## 5.2. ENTERPRISE INFORMATION SECURITY POLICY (EISP)

The high-level information security policy that sets the strategic direction, scope and tone for all an organization's security efforts and policies.

- Guidance for the development, implementation and management of the security program.
- Sets the requirements that must be met by the information security blueprint.
- Defines the purpose, scope, constraints and applicability of the security program.
- Assigns responsibilities for the various areas of information security.
- Addresses legal compliance.

### 5.2.1. Elements of an EISP

Although the content of EISP documents varies among organizations, most EISP documents should include the following elements.

- Statement of Purpose
  - Statement of intent that defines the scope, objectives, and purpose of the enterprise information security policy and establishes its role as the foundation for all supporting security documents.
- Information Security Elements
  - Definition of information security that outlines the core principles and concepts, including confidentiality, integrity, and availability, guiding the organization's security efforts.
- Need for Information Security
  - Definition of the importance of information security within an organization and its legal and ethical responsibility to protect information about customers, employees, and markets.
- Information Security Responsibilities and Roles
  - Description of the organizational structure that supports information security, including defined roles and responsibilities for management, employees, and users, as well as responsibility for maintaining the policy itself.


### 5.3. ISSUE-SPECIFIC SECURITY POLICY

An organizational policy that provides detailed, targeted guidance to instruct members of an organization in the use of a specific resource.

- Supports the EISP by translating it into an issue-specific guidance.
- Establishes rules for access, monitoring, and protection of the resource.
- Defines acceptable and unacceptable use of the specified technology or resource.
- Assigns responsibilities and accountability to users, administrators, and management.

## 6. RISK ANALYSIS

The process of identifying assets, threats, and vulnerabilities, and evaluating the likelihood and impact of potential adverse events to determine the level of risk.

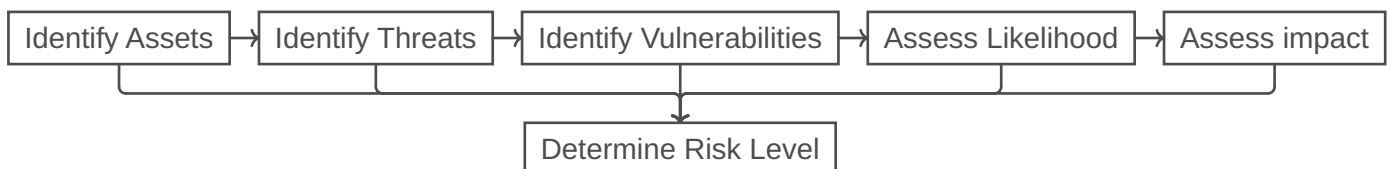

### 6.1. IDENTIFYING ASSETS

| <i>Term</i>             | <i>Definition</i>                                                                              |
|-------------------------|------------------------------------------------------------------------------------------------|
| Asset                   | Any resource that has some kind of value to an organization and therefore requires protection. |
| Information Assets      | Customer data, intellectual property, source code, etc.                                        |
| Technical Assets        | Services, applications, databases, networks, etc.                                              |
| Physical Assets         | Servers, devices, facilities, infrastructure, etc.                                             |
| Human Assets            | Employees, administrators, contractors, key personnel, etc.                                    |
| Business Process Assets | Critical operational workflows                                                                 |

### 6.2. CLASSIFYING ASSETS

The process of assigning every asset to a class based on their value, sensitivity and impact if compromised

| <i>Term</i>  | <i>Definition</i>                                                     |
|--------------|-----------------------------------------------------------------------|
| Public       | Information that can be shared without risk                           |
| Internal     | Information for organization internal use only                        |
| Confidential | Sensitive information that could cause harm if disclosed              |
| Restricted   | Highly sensitive, strictly limited and strongly protected information |

### 6.3. IDENTIFYING THREATS

A potential event, actor, or action that could exploit a vulnerability and cause harm to an asset.

Examples: Power outage, insider threat, phishing attack

### 6.4. SECURITY CONTROLS

Measures to reduce risk by detecting, preventing, responding to, or mitigating threats to organizational assets.

**TODO:**

belongs into information security management

#### 6.4.1. Types

| <i>Term</i>                          | <i>Definition</i>                                                            |
|--------------------------------------|------------------------------------------------------------------------------|
| Administrative / Management Controls | Policies, procedures, security training, security governance, etc.           |
| Technical / Logical Controls         | Firewalls, encryption, access control systems, system hardening, etc.        |
| Physical Controls                    | Physical locks, surveillance cameras, secure access badges, turnstiles, etc. |

#### 6.4.2. By Function

| <i>Term</i>           | <i>Definition</i>                                                                                                                    |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Preventive Controls   | Stop incidents before they occur.<br>e.g., Firewalls, access control, encryption, etc.                                               |
| Detective Controls    | Identify incidents when they occur.<br>e.g., Intrusion detection, log monitoring, SIEM, CCTV, etc.                                   |
| Corrective Controls   | Limit damage and restore systems after an incident.<br>e.g., Backups, system restore, incident response, etc.                        |
| Deterrent Controls    | Discourage malicious behavior.<br>e.g., Warning banners, monitoring notices, disciplinary policies, etc.                             |
| Compensating Controls | Reduce risk when a primary control cannot be implemented.<br>e.g., Network isolation, layered security, alternative safeguards, etc. |

### 6.5. BUSINESS CONTINUITY MANAGEMENT

Ensures that critical business functions can continue during and after incidents or disruptions such as cyberattacks, system failures, or physical incidents.

Even with strong security controls in place, incidents can and will still occur at some point. BCM prepares the organization to operate and recover during these times.

#### 6.5.1. Key Objectives

- Maintain critical operations during incidents.  
e.g., backups, redundant services, manual processing, etc.
- Minimize downtime and financial impact.  
e.g., fast system restore, emergency support contracts, incident response team, etc.
- Protect people, assets and reputation  
e.g., evacuation plans, fire suppression systems, customer notification processes, etc.
- Enable fast and structured recovery  
e.g., disaster recovery playbooks, tested backup restoration, post-incident review processes, etc.

### 6.6. SECURITY AND AWARENESS TRAINING


A coordinated program designed to ensure that all members of an organization understand their security responsibilities and have the knowledge and skills to protect information assets.

|                  | <i>Awareness (Level 1)</i>                                                                                                        | <i>Training (Level 2)</i>                                                                                               | <i>Education (Level 3)</i>                                                                                                                  |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Objective        | Seeks to teach members of an organization <b>what</b> security is and what to do in certain situations                            | Seeks to train members of an organization <b>how</b> they should react and respond to certain situations                | Seeks to educate members of an organization as to <b>why</b> the organization reacts the way it does                                        |
| Complexity Level | Offers <b>basic information</b> about threats and responses                                                                       | Offers more <b>detailed knowledge</b> about detecting threats and teaches skills needed for effective reaction          | Offers the background and <b>depth of knowledge</b> to gain insight into how processes are developed and enables ongoing improvement        |
| Teaching Method  | <ul style="list-style-type: none"> <li>– Videos</li> <li>– Newsletters</li> <li>– Posters</li> <li>– Informal Training</li> </ul> | <ul style="list-style-type: none"> <li>– Informal Training</li> <li>– Workshops</li> <li>– Hands-on Practice</li> </ul> | <ul style="list-style-type: none"> <li>– Theoretical Instruction</li> <li>– Discussions / Seminars</li> <li>– Background Reading</li> </ul> |
| Impact timeframe | Short-term                                                                                                                        | Intermediate                                                                                                            | Long-term                                                                                                                                   |

### 6.7. GAP ANALYSIS

The process of comparing an organization's current security posture with a required or desired target to identify missing or insufficient controls.

- Risk Analysis: What could go wrong?
- Gap Analysis: Where are we non-compliant or under-protected?



### 6.8. SECURITY FRAMEWORK

A structured set of principles, processes, and controls that organizations use to manage risks and protect their information systems, assets, and operations.



| <i>Framework</i>             | <i>Definition</i>                                                   |
|------------------------------|---------------------------------------------------------------------|
| ISO/IEC 27000                | Global standard for information security management systems (ISMS). |
| NIST Cybersecurity Framework | Practical framework for managing cyber risk                         |
| CIS Controls                 | Defines 18 highly practical technical security controls             |
| ISACA CORBIT                 | An IT governance and risk management framework.                     |

## 6.9. ISO/IEC 2700

A set of standards for ISMS, helping organizations systematically protect information assets using a risk-based approach.

| <i>Standard</i> | <i>Definition</i>                                                              |
|-----------------|--------------------------------------------------------------------------------|
| ISO/IEC 27000   | Introduction, terminology, and key concepts (e.g., risk, asset, control, etc.) |
| ISO/IEC 27001   | Defines requirements to establish, implement, maintain, and improve an ISMS.   |
| ISO/IEC 27002   | Practical guidance for implementing controls.                                  |
| ISO/IEC 27005   | Focuses on risk management methodology.                                        |
| ISO/IEC 27017   | Additional guidance for cloud services.                                        |
| ISO/IEC 27018   | Focuses on privacy and personal data protection in cloud environments.         |

## 6.10. NIST CYBERSECURITY FRAMEWORK

A risk-based guideline that helps organizations to structure, manage, and improve their cybersecurity activities across the full lifecycle of prevention, detection, and response.

- It's organized into five core functions; Identify, Protect, Detect, Respond, Recover.
- Provides categories and subcategories of cybersecurity outcomes and controls.
- Includes implementation tiers to assess cybersecurity maturity.
- Is very flexible and adaptable to any organization or business sector.
- Not certifiable, primarily used as guidance and best practice.

## 6.11. RISK, VULNERABILITIES AND THREATS

### 6.11.1. Vulnerabilities

A potential weakness in an asset or its defensive control system. Can be **known** or **unknown**.

Examples:

- Software vulnerabilities (Bugs, design flaws, ...).
- Human vulnerabilities (sharing passwords, ...).

### 6.11.2. Threat

A potential malicious action, or event that aims to damage, or steal unauthorized access to assets. A threat exploits system vulnerabilities.

- Threat: What?
- Threat Actor: Who?
- Threat Vector: How?

### 6.11.3. Threat Actors

| <i>Motivations</i>                                                                                                                                                                                                                                                                                       | <i>Actor Types</i>                                                                                                                                                                                                                                    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>– Service disruptions</li> <li>– Data exfiltration</li> <li>– Disinformation</li> <li>– Chaotic / Vandalism</li> <li>– Financial               <ul style="list-style-type: none"> <li>– Blackmailing</li> <li>– Fraud</li> </ul> </li> <li>– Political</li> </ul> | <ul style="list-style-type: none"> <li>– Hackers</li> <li>– Unskilled Attackers &amp; Script Kiddies</li> <li>– Hacker Teams &amp; Hacktivists</li> <li>– Nation-State Actors</li> <li>– Organized Crime</li> <li>– Internal Threat Actors</li> </ul> |

### 6.11.4. Threat Vector

The path, method, or delivery mechanism that a threat uses to reach an asset and exploit a vulnerability.

Types:

- Software Vectors (Bugs, Virus, ...)
- Network Vectors (Bluetooth, Open Ports, Remote Network, ...)
- Lure-Based Vectors (Drop Attacks with USB Sticks, Trojans, ...)
- Message-Based Vectors (SMS, Email, IM, Web and Social Media, ...)
- Supply Chain Vectors (Updates, Libraries, ...)

### 6.11.5. Attack surface

The sum of vulnerabilities, pathways, or methods (Threat vectors) that hackers can use to gain unauthorized access to the network or sensitive data, or to carry out a cyberattack.

### 6.11.6. Risk

The probability of an unwanted occurrence, such as an undesirable event or loss.

- The definition of risk implies threats and vulnerabilities: A risk is only here if we have an existing vulnerability, threat, and threat vector!
- Risk = Vulnerability (Value & Exposure) + Threat (Threat Actor & Threat vector)

At what cost are we willing to accept what risk? The answer to that question gives us risk management.

## 6.12. RISK MANAGEMENT

The process of identifying, assessing, prioritizing and mitigating threats to an asset from an organisation.

### *Risk management framework*

Structure of the strategic planning and design of the entirety of the risk management efforts (planning).

### *Risk management process*

Implementation, analysis, evaluation of the risk management framework (doing).

**TODO:**

slides 17

### 6.12.1. RM Framework

- 1) **Executive Governance & Support:** Support from management and users.
- 2) **Framework Design:** Defining the methods and risk appetite strategy.
- 3) **Framework Implementation:** Rollout of the plan (through → RM process).
- 4) **Monitoring & Review:** How effective is the entire system?

5) **Continuous Improvement**: Continuous adaption to new , or existing threats.

#### 6.12.1.1. Executive Governance and Support

**TODO:**

slides 19

#### 6.12.1.2. Framework Design

Defining the methods and risk appetite strategy

| <b>Term</b>               | <b>Definition</b>                                                                      |
|---------------------------|----------------------------------------------------------------------------------------|
| Risk appetite (strategic) | The quantity of risk that organizations are willing to accept, to achieve their goals. |
| Risk tolerance (specific) | The acceptable risk organizations are willing to accept for a specific asset.          |
| Residual risk             | The risk that still remains after all controls have been applied.                      |

#### 6.12.1.3. Framework Implementation

Framework Implementation starts after:

- The RM framework and process is finished designing.
- The structure of the RM process & framework is defined.

The methodologies are dependent on the risk appetite:

- Direct rollout
- Pilot-test
- Phased approach

#### 6.12.1.4. Monitoring & Review

- How successful was the framework in the last cycle?
  - Designing
  - Implementing
- What issues require adjustments to the plan?

#### 6.12.2. Risk Management Process

**Risk assessment**: The identification, analysis, and evaluation of risk as initial parts of risk management.

**Risk treatment & Risk Owner**: The application of safeguards or controls to reduce the risks to an organization's information assets to an acceptable level.

- 1) **Risk identification**: Where and what is the risk?
- 2) **Risk analysis**: How severe is the current level of risk?
- 3) **Risk evaluation**: Is the current level of risk acceptable?
- 4) **Risk treatment**: What do I need to do to bring the risk to an acceptable level?

##### 6.12.2.1. Risk Identification

The recognition, enumeration, and documentation of risks to an organization's information assets.

Where and what is the risk?

- What are the assets of the organisation? (Internal Asset Register, Weighted Asset Table)
  - Data, Software, Hardware, Networks, Employees, procedures, ...
- What are the threats of the organisation? ( [ATT&CK](#) is a globally-accessible knowledge base).
  - Human error, Attacks from hackers, forces of nature, day zero attacks ...
- What are the vulnerabilities? ( [CVE](#) and [CVSS](#) helps with that question).

- Lack of training, known bugs in the system, day zero exploit
- Precision is key: If THIS then THAT, because OF ...

### 6.12.3. CVE & CVSS

- A Common Vulnerabilities and Exposures (CVE) is an industry-wide standard identification number for vulnerabilities.
- The Common Vulnerability Scoring System (CVSS) uses the CIA triad principles within the metrics used to calculate the CVSS base score and assigns severity scores to a vulnerability

### 6.12.4. Risk Analysis

A determination of the extent to which an organization's information assets are exposed to risk.

Identify the severity of every identified threat and vulnerability.

- What is the probability of an attack?
- What would be the impact of an attack?
  - Quantitative risk analysis assigns real dollar figures to the loss of an asset.
  - Qualitative risk analysis assigns subjective and intangible values to the loss of an asset.
- Existing Security Controls shall be considered

### 6.12.5. Quantitative Risk Analysis

- 1) Assign Asset Value (AV)
- 2) Calculate Exposure Factor (EF)
- 3) Calculate single loss expectancy (SLE)
- 4) Assess the annualized rate of occurrence (ARO)
- 5) Derive the annualized loss expectancy (ALE)
- 6) Perform cost/benefit analysis of countermeasures

#### 6.12.5.1. AV

- 1) Identify the organization's information assets.
- 2) Classify them.
- 3) Categorize them into useful groups.
- 4) Prioritize them by overall importance.

**Example 1 : Weighted Asset Table**

|   |                                        | <i>Impact on<br/>Revenue</i> | <i>Impact on<br/>Profitability</i> | <i>Impact on<br/>Reputation</i> |                |                         |
|---|----------------------------------------|------------------------------|------------------------------------|---------------------------------|----------------|-------------------------|
| # |                                        | 0.3                          | 0.4                                | 0.3                             | TOTAL<br>(1.0) | Importance              |
| 1 | Customer order via SSL                 | 5                            | 5                                  | 5                               | 5              | Critically<br>Important |
| 2 | Customer service request via<br>e-mail | 3                            | 3                                  | 5                               | 3.6            | Important               |
| ⋮ | ⋮                                      | ⋮                            | ⋮                                  | ⋮                               | ⋮              | ⋮                       |

#### 6.12.5.2. EF

**Exposure factor (EF):** Represents the percentage of loss that an organization would experience if a specific asset is violated by a realized risk.

- In most cases, a realized risk does not result in the total loss of an asset. The EF simply indicates the expect.

#### 6.12.5.3. SLE

**Single loss expectancy (SLE):** The cost associated with a single realized risk against a specific asset. It indicates the exact amount of loss an organization would experience if an asset were harmed by a specific threat occurring.

- $SLE = \text{asset value (AV)} \times \text{exposure factor (EF)}$
- Example: if an asset is valued at \$200,000 and it has an EF of 45 % for a specific threat, then the SLE of the threat for that asset is \$90,000.

#### 6.12.5.4. ARO

**Annualized rate of occurrence (ARO):** The expected frequency with which a specific threat or risk will occur within a single year.

- Example: The ARO of an earthquake in Paris may be .00001, whereas the ARO of an earthquake in San Francisco may be .03 (for a 6.7+ magnitude).

#### 6.12.5.5. ALE

**Annualized loss expectancy (ALE):** The possible yearly cost of all instances of a specific realized threat against a specific asset.

- $ALE = \text{single loss expectancy (SLE)} \cdot \text{annualized rate of occurrence (ARO)}$
- If the SLE of an asset is \$90,000 and the ARO for a specific threat (such as total power loss) is .5, then the ALE is \$45,000.

On the other hand, if the ARO for a specific threat (such as compromised user account) is 15, then the ALE would be \$1,350,00

#### 6.12.5.6. ALE with Safeguards

- You must calculate the ALE for the asset if the safeguard is implemented.
  - This requires a new EF and ARO specific to the safeguard.
  - The whole point of a safeguard is to reduce the ARO and/or reduce the SLE. The best of all possible safeguards would reduce the ARO to zero.
  - In most cases, the EF to an asset remains the same even with an applied safeguard because if the safeguard fails, the loss on the asset is usually the same as when there is no safeguard.
- Safeguard Costs
  - You must first compile a list of safeguards for each threat. Then you assign each safeguard a deployment value = ACS (Annual cost of the safeguard).

#### 6.12.5.7. Value of a Safeguard

Net Value or Cost/Benefit of a safeguard:

- Negative value: not a responsible choice.
- Positive value: Then the value represents the yearly savings in cost that you CAN have (because the rate of occurrence is just an expected value).

Safety needs to be cost effective. Do not use more resources or money for the protection of an asset as the value of the asset itself!

#### 6.12.6. Risk Evaluation

The process of comparing an information asset's risk rating to the numerical representation of the organization's risk appetite or risk threshold to determine if risk treatment is required.

Risk Evaluation: Compare the risk with the risk appetite of the organization.

- Can the company live with the analysed level of risk (From the CVSS, the quantitative risk analysis, qualitative risk analysis)?
- Levels: Expansionary, Conservative or Neutral

The Risk appetite from the RM Framework must be translated into a value so it can be compared to each analysed risk.

- For the quantitative risk analysis, the risk appetite can be translated into a numerical value!

Goal: The risk must be smaller or equal as the risk appetite.

- Important Indicators for Business Impact:
  - Maximum Tolerable Downtime (MTD)
  - Recovery Point Objective (RPO)
  - Recovery Time Objective (RTO) & Work Recovery Time (WRT)

#### 6.12.7. Risk Treatment

Mitigation risk treatment strategy: The risk treatment strategy that attempts to eliminate or reduce any remaining uncontrolled risk through the application of additional controls and safeguards in an effort to change the likelihood of a successful attack on an information asset; also known as the defense strategy.

The company now has a list of information assets with unacceptable levels of risk.

- The appropriate strategy must be selected and applied.

Four basic strategies to treat risk:

- 1) Mitigation: Apply safeguards that eliminate or reduce the remaining uncontrolled risk.
  - Example: Firewall, Training, ...
- 2) Transfer: Shift risks to other areas or outside entities.
  - Example: Outsourcing
- 3) Acceptance: Understand the consequences of choosing to leave an information assets vulnerability facing the current risk level (after formal evaluation).
- 4) Termination: Remove or discontinue the asset from the organization's operating environment.

##### 6.12.7.1. Mitigation

- Fix vulnerabilities
- Applying controls (tools, processes, rules to mitigate risk)
  - Endpoint Hardening (preventive Control): Secure a "endpoint" (device: laptop, server, ...) by reducing its vulnerabilities and shut down potential threat vectors!
- Reduce final impact (If zero-day attacks, unknown vulnerabilities, or a taken risk happen)
  - EDR (Endpoint Detection and Response): Software that watches for suspicious behaviour and responds with certain measures.
  - XDR (Extended Detection and Response): Watching everywhere (not just on endpoints) and respond with certain measures (shut down infected laptop, ...)

#### 6.12.8. Other RM Frameworks

- OCTAVE (Operationally Critical Threat, Asset and Vulnerability Evaluation) by the Carnegie Mellon University.
- FAIR (Factor Analysis of Information Risk) by Jack A. Jones.
- ISO Standards: ISO 27005 and ISO 31000: (explanation: [https://en.wikipedia.org/wiki/ISO/IEC\\_27005](https://en.wikipedia.org/wiki/ISO/IEC_27005) ).
- NIST Risk Management Framework (RMF): <https://csrc.nist.gov/publications/sp>

## 7. IDENTITY & ACCESS MANAGEMENT (IAM)

IAM deals with provisioning and protecting digital identities and user access permissions. Or in other words: The right people can access the right resources for the right reasons at the right time. To ensure this we need Access Controls.


### 7.1. ACCESS CONTROL

Any hardware, software, or administrative policy or procedure that controls access to resources. The selective method by which systems specify who may use a particular resource and how they may use it.

The goal is to:


- PROVIDE access to authorized subjects
- PREVENT access to unauthorized access attempts and unauthorized subjects

| Term    | Definition                                                                                                                                                               |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Subject | Active entity that accesses a passive object.<br>– Anything that can access a resource can be a subject: users, programs, processes, services, computers,...             |
| Object  | Passive entity that provides information to subjects<br>– Anything that can provide resources: files, databases, computers, programs, processes, services, printers, ... |




#### 7.1.1. Control methods

| Term                          | Definition                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Physical controls             | Items that you can physically touch. Included are physical mechanisms deployed to prevent, monitor, or detect direct contact with systems or areas within a facility<br>– Examples: guards, fences, motion detectors, locked doors, sealed windows, lights, cable protection, laptop locks, badges, swipe cards, guard dogs, video cameras, mantraps, and alarms |
| Technical or logical controls | Hardware or software mechanisms used to manage access and to provide protection for resources and systems<br>– Examples: authentication methods (username, passwords, biometrics,...), encryption, access control lists, protocols,...                                                                                                                           |
| Administrative controls       | Policies and procedures defined by an organization's security policy or other regulations or requirements<br>– Examples: policies, procedures, hiring practices, background checks, data classifications and labeling, security training,...                                                                                                                     |

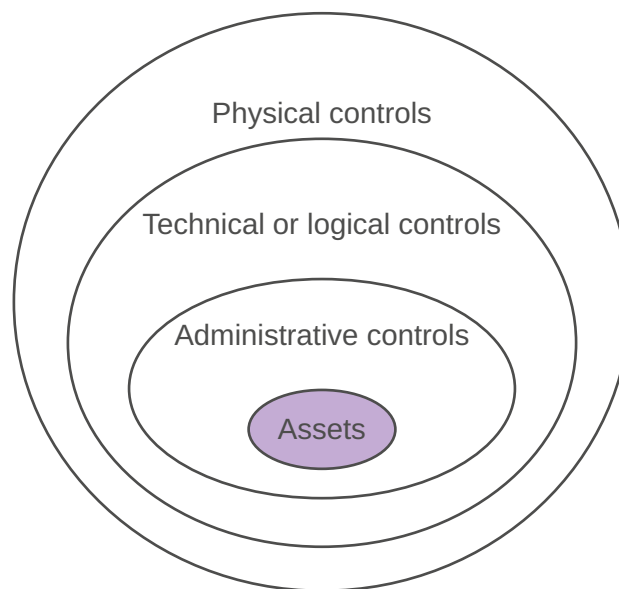

## 7.2. MECHANISMS

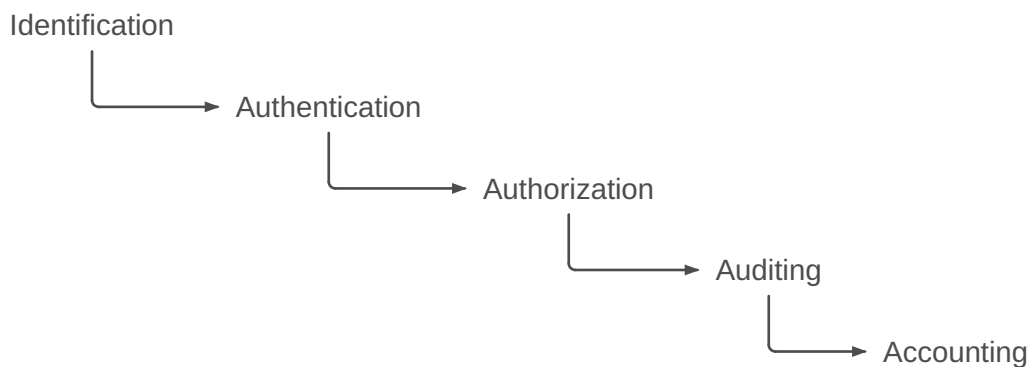

### 7.2.1. Identification

The subject is claiming an identity.

- Example: Typing a username, swiping a smartcard, waving a token device, speaking a phrase, or positioning your face, hand, or finger in front of a camera or in proximity to a scanning device

**Important:** All subjects must have unique identities

- IT systems track activity by identities, not by the subjects themselves
- A subject's identity is typically labeled as, or considered to be, public information

A subject must provide an identity to a system to start the other processes (authentication, authorization, and accountability)

### 7.2.2. Authentication

The process of verifying that the claimed identity (from identification) is valid

- Example: password
- Identification and authentication are often used together as a single two-step process

Authentication information used to verify identity is private information and needs to be protected

To authenticate the claimed identity it is common to use multiple factors These factors are often categorized in three different categories:

1) Type 1



- **Something you know.** Passwords, PINs, ...
- 2) Type 2
  - **Something you have.** Physical devices that a user possesses can help them provide authentication
- 3) Type 3
  - **Something you are or something you do.** It is a physical characteristic of a person identified with different types of biometrics

#### 7.2.2.1. Authentication Schemes

- 1) Basic Authentication: Classical username / password pair transmitted in the clear
- 2) One Time Passwords: Transmitted in the clear but used only once
- 3) Challenge / Response: Response is a function of password and one-time challenge
- 4) Anonymous Key Exchange: Exchange credentials over unauthenticated secure channel
- 5) Zero-Knowledge Password Proofs: Does not permit offline-based password attacks
- 6) Server Certificates plus User Authentication: Transmit user password over unilaterally authenticated secure channel
- 7) Mutual Public Key Authentication: Bilateral use of public key signatures

#### Attack vulnerability Matrix

| Attack                              | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|-------------------------------------|---|---|---|---|---|---|---|
| Passive Password Sniffing           | x |   |   |   |   |   |   |
| Offline Brute Force Password Attack | x |   | x | x |   |   |   |
| Active Man-in-the-Middle Attack     | x | x | x | x |   |   |   |
| Identity Theft on Server            | x | x | x | x | x | x |   |
| CA Compromise                       |   |   |   |   |   | x | x |

#### 7.2.2.2. Type 1 Factor: Passwords

Passwords are typically static. They are the weakest form of authentication

- Users often choose passwords that are easy to remember and therefore easy to guess or crack
- Randomly generated passwords are hard to remember, and many users write them down
- Users often share their passwords, or forget them
- Passwords are rarely stored in plaintext.
  - A system will create a hash of a password using a hashing algorithm
- Best practices and policies
  - Enforce a minimum length
  - Complexity rules (uppercase/lowercase, non-alphanumeric, etc...)
  - Ageing and expiration
  - Reuse and history
- Password managers mitigate the risk of poor credential management

#### 7.2.2.3. Type 2 Factor: Tokens

A token device, or hardware token, is a device that users can carry with them

- An authentication server stores the details of the token, so at any moment, the server knows what number is displayed on the user's token

Hard Authentication Tokens

- No transmission of the token itself e.g. Smartcards, Hardware OTP Token

Soft Authentication Tokens

- Software token transmitted to the user e.g. via Authenticator App, SMS, Email or phone

### Dynamic Password Tokens

- Synchronous dynamic passwords are time-based and synchronized with an authentication server (TOTP)
- Asynchronous dynamic password is based on a Challenge-Response principle. Passwords are generated based on an algorithm and an incrementing counter, which remains valid until used (HOTP)

#### 7.2.2.4. Type 2 Factor: Smartcard

A smartcard is a credit card-sized ID or badge and has an integrated circuit chip embedded in it

- Smartcards store information about the authorized user that is used for identification and/or authentication purposes
- Implements certificate-based authentication (private key and sometimes a PIN to activate the card)
- Most current smartcards include a microprocessor and one or more certificates. The certificates are used for asymmetric cryptography such as encrypting data or digitally signing email
- Smartcards are tamper-resistant and provide users with an easy way to carry and use complex encryption keys

#### 7.2.2.5. Type 2 Factor: One-Time Passwords

Onetime passwords are dynamic passwords that change every time they are used

- Onetime password generators are token devices that create passwords
- The PIN can be provided via a software application running on the user's device (e.g., smartphone)

TOTP (Time-based One-Time Password)

- Uses a timestamp and remains valid for a certain timeframe, such as 30 seconds
- This is similar to the synchronous dynamic passwords used by tokens

HOTP (HMAC-based One-Time Password)

- Includes a hash function to create onetime passwords. It creates HOTP values of six to eight numbers
- This is similar to the asynchronous dynamic passwords created by tokens. The HOTP value remains valid until used

#### 7.2.2.6. Type 3 Factor: Biometrics

Biometric authentication uses physiological characteristics to provide authentication for a provided identification.

Biometrics make measurements and compare them with unique points of reference. This may lead to these errors:

- False reject rate (FRR) (Type 1 Error): percentage of authorized users who are denied access
- False accept rate (FAR) (Type 2 Error): percentage of unauthorized users who are granted access
- Crossover error rate (CER): The point at which the rate of false rejections equals the rate of false acceptances

#### 7.2.2.7. Multifactor Authentication

Multifactor authentication is any authentication using two or more factors

- For a positive authentication, elements from at least two, and preferably three factors should be verified
  - When two authentication methods of the same factor are used together, the strength of the authentication is no greater than it would be if just one method were used
  - Using more types or factors results in more secure authentication

#### 7.2.2.8. Authentication factors

Numbered from weak to strong

1) Type 1: Something you know

- 2) Type 2: Something you have
- 3) Type 3: Something you are/ you do
- 4) Multi-Factor: 2 types
- 5) Multi-Factor: 3 types

#### 7.2.2.9. Secondary Authentication Factors


In addition to the three primary authentication factors, there are some others

- Somewhere You Are
  - The somewhere-you-are factor identifies a subject's location based on a specific computer, a geographic location identified by an Internet Protocol (IP) address, or a phone number identified by caller ID
- Somewhere You Aren't
  - Many IAM systems use geolocation technologies to identify suspicious activity
  - For example, imagine that a user typically logs on with an IP address in Switzerland. If a user is trying to log on from a location in India, it can block the access even if the user has the correct username and password

#### 7.2.2.10. Authentication Frameworks

- Kerberos: Create Authentication through a trusted third party.
- RADIUS: Provide centralized authentication, authorization, and accounting (AAA) for network access.

##### 7.2.2.10.1. Kerberos

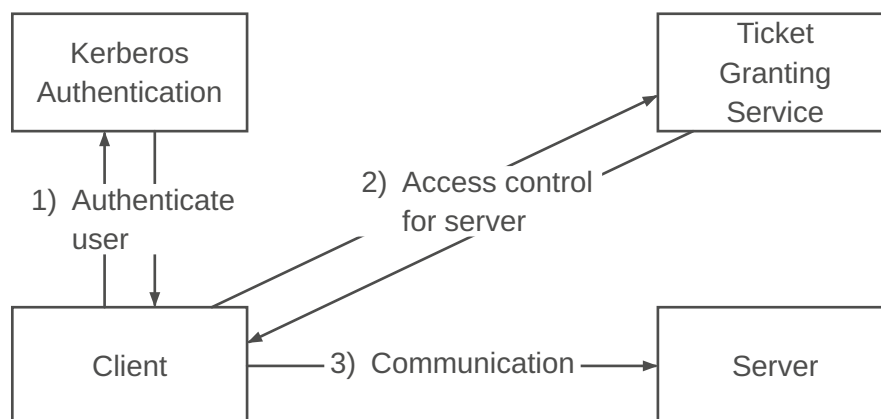

An authentication system that uses symmetric key encryption to validate an individual user's access to various network resources by keeping a database containing the private keys of clients and servers that are in the authentication domain it supervises.

- Authentication in UNIX-based TCP/IP networks
- Use of symmetrical cryptography (DES)
- Relies on the mediation services of a trusted referee or notary
- Based on the work by Needham and Schroeder on trusted third-party protocols as well as Denning and Sacco's modifications of these
- Current release is Kerberos v5 ( [RFC 1510](#) , September 1993)
- V5 supports additional encryption ciphers besides DES

| Term      | Definition             |
|-----------|------------------------|
| Principal | A Kerberos participant |

| <i>Term</i>                                 | <i>Definition</i>                                                                                                                                                                                                                      |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Principal's Master Key (MKey <sub>p</sub> ) | A long-term secret shared between the principal (user, service, or host) and the Key Distribution Center (KDC). This key is typically derived from the principal's password and is used to encrypt and decrypt authentication tickets. |
| Kerberos Ticket                             | Temporary credential that allows a user to access specific network services                                                                                                                                                            |
| Authentication Server (AS)                  | Verifies who the client is, gives TGT                                                                                                                                                                                                  |
| Ticket Granting Server (TGS)                | Grants access to specific services, gives ST                                                                                                                                                                                           |
| Ticket Granting Ticket (TGT)                | Given by the AS                                                                                                                                                                                                                        |
| Service Ticket (ST)                         | Given by the TGS                                                                                                                                                                                                                       |
| Key Distribution Center (KDC)               | A server that verifies and manages authentication credentials and distributes session keys to users and services within a network                                                                                                      |

#### Kerberos Step-By-Step

- 1) The user wants to get authenticated at a Service.
- 2) The user sends a request to the Authentication Server (KDC) asking for a Ticket Granting Ticket (TGT). This request is encrypted with the hash of the user's password.
- 3) The Authentication Server looks up the user, authenticates him using the hashed password and sends back the TGT. (notice, the password itself never travels across the network)
- 4) The user wants to access a specific service. He sends the TGT to the Ticket Granting Server (TGS)
- 5) The TGS verifies the TGT and issues a Service Ticket to the client
- 6) The client presents this Service Ticket directly to the Service he wants to use.
- 7) The Service decrypts the ticket, verifies the client and grants access. He can also send a message back to the client to prove its own identity.

#### **TODO:**

diagrams (slides 20)

#### 7.2.2.10.2. Remote Authentication Dial-In User Service (RADIUS)

A networking protocol that provides centralized Authentication, Authorization and Accounting (AAA) management for users who use a network service.

Used to secure network nodes: Enterprise Wi-Fi (802.1x), VPNs, Switches

#### AAA

- Authentication: Verifying the user's identity
- Authorization: Granting specific network privileges (assigning specific IP, ...)
- Accounting: Tracking network resource for auditing, billing, ...

#### RADIUS Architecture

- 1) User requests network access from the Network Access Server (NAS)
- 2) NAS prompts the RADIUS server for credentials (username / password, or certificate)
- 3) RADIUS server evaluates the request and returns one of three responses:
  - Access-Accept: User is authenticated, NAS grants network access
  - Access-Reject: Invalid credentials, NAS denies access
  - Access-Challenge: Server requires more information (MFA, or Token)
- 4) When connected, NAS sends Accounting-Request to log the session.

### 7.2.2.10.3. RADIUS vs Kerberos Vulnerability Matrix

| <i>Attack</i>                       | <i>Kerberos</i> | <i>RADIUS</i> |
|-------------------------------------|-----------------|---------------|
| Passive Password Sniffing           |                 |               |
| Offline Brute Force Password Attack | ×               | ×             |
| Active Man-in-the-Middle Attack     |                 | ×             |
| Identity Theft on Server            |                 |               |
| CA Compromise                       |                 | ×             |

### 7.2.3. Authorization

The process of authorization ensures that the requested activity or access to an object is possible given the rights and privileges assigned to the authenticated identity


Or in other words: Once a subject is authenticated, access must be authorized

- Just because a subject has been identified and authenticated does not mean they have been authorized to perform any function or access all resources within the controlled environment

Identification and authentication are all-or-nothing aspects of access control. This is NOT the case with authorization:

- Authorization has a wide range of variations between all or nothing for each object within the environment

#### 7.2.3.1. DAC and NDAC

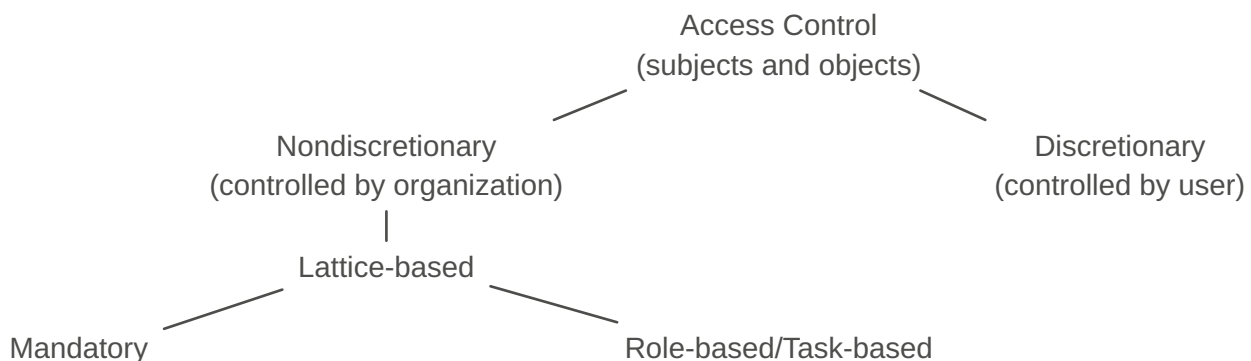

#### 7.2.3.1.1. Discretionary access control (DAC)

Access controls that are implemented at the judgment or option of the data owner. Every object has an owner, and the owner can grant or deny access to any other subjects → The owner (or user) chooses who has access!

- Most flexible and widely used e.g. file system security
- Data owner can modify access control list (ACL)
- Example: User has a hard drive and wants to share it with coworkers. He decides who he shares it with.

#### 7.2.3.1.2. Nondiscretionary access control (NDAC)

Access controls that are implemented by a central authority.

- Example: US-Hospital where access is based on rules and regulations like HIPAA (DSG covers that in Switzerland)

#### 7.2.3.1.2.1. Lattice-based access control (LBAC)

A variation on mandatory access controls that assigns users a matrix of authorizations for particular areas of access, incorporating the information assets of subjects such as users and objects.

- Mandatory access control (MAC):

Use of labels applied to both subjects and objects. This means each collection of information is rated, and all users are rated to specify the level of access.

- Example: Information are labelled as top secret → only users that are labelled top secret are granted access to this information!

- Role-based (RBAC) / Task-based (TBAC) access control:

privileges are tied to a role or a job (role-based) or to a task or assignment (task-based).

- Example: Project manager has access to corresponding information about his project. (role-based)
- Example: A technician is only allowed into a server room in his planned maintenance timeslot (task-based)

#### 7.2.3.2. Least privilege design principle

Access rights should be limited in scope, time, and function

- “Just enough access” is usually better than broad permanent access

Users and systems should only get the permissions they actually need

- Reduces attack surface and limits damage after account compromise
- Helps prevent misuse of admin accounts and service accounts
- Supports separation of duties and stronger compliance

Requires regular access reviews and removal of unused permissions

#### 7.2.4. Auditing

A subject's actions are tracked and recorded

Purpose: Hold the subjects accountable for their actions while authenticated on a system

#### 7.2.5. Accounting

The consumption of resources by a subject is measured, metered, and collected.

Purpose: Provide a record of resource usage for billing, capacity planning, and trend analysis.

---

### 7.3. ESTABLISHING ACCOUNTABILITY AND NON-REPUDIATION

Accountability means actions can be traced to a specific identity

- Proving to regulators that your data is secure
- Link a human to the activities of an identity
- Requires unique user identities, no shared accounts and strong authentication
- Support your security decisions and their implementation
- Supports incident investigation, compliance, and trust in transactions

Non-repudiation means a user cannot credibly deny a performed action

- Logging and audit trails must be complete, accurate, and protected
- Digital signatures are a key mechanism for non-repudiation

---

### 7.4. COMMON ACCESS CONTROL ATTACKS

#### 7.4.1. Access Aggregation Attacks (passive attack)

- Access aggregation refers to collecting multiple pieces of nonsensitive information and aggregating them to learn sensitive information.

- Reconnaissance attacks are access aggregation attacks that combine multiple tools to identify multiple elements of a system, such as Internet Protocol (IP) addresses, open ports, running services, operating systems.

#### 7.4.2. Password Attacks (brute-force attack)

- Online: Attacks against online accounts
- Offline: to steal an account database and then crack the passwords.

#### 7.4.3. Dictionary Attack (brute-force attack)

An attempt to discover passwords by using every possible password in a predefined database or list of common or expected passwords also called a password-cracking dictionaries

- Dictionary attack databases also include character combinations commonly used as passwords, but not found in dictionaries
- Dictionary attacks often scan for one-upped-constructed passwords. A one-upped-constructed password is a previously used password, but with one character different.
- For example, password1 is one-upped from password, as are Password, 1password, and passXword

#### 7.4.4. Birthday Attack (brute-force attack)

A birthday attack focuses on finding collisions. Its name comes from a statistical phenomenon known as the birthday paradox

- The birthday paradox states that if there are 23 people in a room, there is a 50 percent chance that any two of them will have the same birthday. (This is not the same year, but instead the same month and day, such as March 30)
- With February 29 in a leap year, there are only 366 possible days in a year. With 367 people in a room, you have a 99.99 percent chance of getting at least two people with the same birthdays. Reduce this to only 23 people in the room, and you still have a 50 percent chance that any two have the same birthday

You can reduce the success of birthday attacks by using hashing algorithms with enough bits to make collisions computationally infeasible, and by using salts.

- MD5 is not collision free
- SHA-3 (short for Secure Hash Algorithm version 3) can use as many as 512 bits and is considered safe against birthday attacks and collisions – at least for now

#### 7.4.5. Rainbow Table Attacks

A rainbow table reduces the time by using large databases of precomputed hashes

- It takes a long time to find a password by guessing it, hashing it, and then comparing it with a valid password hash

A password cracker can then compare every hash in the rainbow table against the hash in a stolen password database file

- When using the rainbow table, the password cracker doesn't spend any time guessing and calculating hashes. It simply compares the hashes until it finds a match
- This can significantly reduce the time it takes to crack a password

Salting

- adds a unique random value to each password before hashing
- prevents identical passwords from producing identical hash values

#### 7.4.6. Sniffer Attacks

A sniffer (also called a packet analyzer or protocol analyzer) is a software application that captures traffic traveling over the network



- A sniffer attack (also called eavesdropping attack) occurs when an attacker uses a sniffer to capture information transmitted over a network

The following techniques can prevent successful sniffing attacks:

- Encrypt all sensitive data (including passwords) sent over a network. Attackers cannot easily read encrypted data with a sniffer
- Use onetime passwords (OTP) when encryption is not possible or feasible. OTPs prevent the success of sniffing attacks, because they are used only once, also see next chapter Kerberos
- Protect network devices with physical security. Controlling physical access to routers and switches prevents attackers from installing sniffers on these devices

## 8. CRYPTOGRAPHY

| <i>Term</i>                | <i>Definition</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Plaintext/Cleartext        | Before a message is put into a coded form, it is known as a plaintext or cleartext                                                                                                                                                                                                                                                                                                                                                                                                          |
| Ciphertext/Cryptogram      | The sender of a message uses a cryptographic algorithm to encrypt the plaintext and produce a ciphertext or cryptogram                                                                                                                                                                                                                                                                                                                                                                      |
| Cipher                     | Encryption algorithm<br><br>An algorithm is a set of rules, usually mathematical, that dictates how enciphering and deciphering processes are to take place                                                                                                                                                                                                                                                                                                                                 |
| Key/Cryptovvariable        | A key is nothing more than a number (usually a very large binary number)                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Key space                  | <ul style="list-style-type: none"> <li>– Every algorithm has a specific key space. A key space is defined by its bit size</li> <li>– The key space is the range of numbers from 0 to <math>2^n</math>, where <math>n</math> is the bit size of the key</li> <li>– A 128-bit key can have a value from 0 to <math>2^{128}</math></li> </ul>                                                                                                                                                  |
| One-Way Functions          | <p>A one-way function is a mathematical operation that easily produces output values for each possible combination of inputs but makes it impossible to retrieve the input values</p> <ul style="list-style-type: none"> <li>– In practice, it's never been proven that any specific known function is truly one way</li> <li>– Cryptographers rely on functions that they believe are one way</li> <li>– It's always possible that they might be broken by future cryptanalysts</li> </ul> |
| Reversability              | Being able to undo the operation of encryption                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Nonce                      | <p>The nonce must be a unique number each time it is used</p> <ul style="list-style-type: none"> <li>– Used to make sure that a key is not re-used twice</li> <li>– The main feature of a nonce is that it is a number that is only used once (nonce)</li> <li>– It can be a counter (for example)</li> <li>– The nonce is public, whereas the (shared) key is private</li> </ul>                                                                                                           |
| Initialization vector (IV) | <p>An IV is a random bit string</p> <ul style="list-style-type: none"> <li>– It is the same length as the block size and is XORed (<math>\oplus</math>) with the message</li> <li>– IVs are used to create unique ciphertext every time the same message is encrypted using the same key</li> </ul>                                                                                                                                                                                         |



| <i>Term</i>   | <i>Definition</i>                                                                                                                                                                                                                            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Steganography | Steganography is the art of using cryptographic techniques to embed secret messages within other content. Some steganographic algorithms work by making alterations to the least significant bits of the many bits that make up image files. |

## 8.1. OBJECTIVES

- Confidentiality (Privacy)
  - Only authorized persons should read a message, get to know sener/receiver, know about the existence of a message
- Integrity
  - Data should be demonstrably unaltered from sender to recipient
- Authentication
  - The identity of an author of a message should be clearly verifiable
- Non-repudiation
  - The sender of a message should not be able to deny authorship or having performed an action.
- Procedures do not necessarily have to fulfill every objective

## 8.2. KERCKHOFF'S PRINCIPLES

| <i>Term</i>                                         | <i>Definition</i>                                                                                                          |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Security through obscurity                          | The security of a system or process depends on the confidentiality of its secrecy of its functioning                       |
| Kerckhoff's Principle<br>(Auguste Kerckhoffs, 1883) | The security of an encryption method is based on the secrecy of the key and not on the secrecy of the encryption algorithm |

A cryptographic system should be secure even if everything about the system, except the key, is public knowledge

- This principle makes algorithms known and public, allowing anyone to examine and test them
- The principle can be summed up as "The enemy knows the system"
- Public exposure may expose weaknesses more quickly, leading to the abandonment of insufficiently strong algorithms and quicker adoption of suitable ones
- A large number of cryptographers adhere to this principle, but not all agree
- Some believe that better overall security can be maintained by keeping both the algorithm and the key private

## 8.3. SHANNON'S PRINCIPLES

| <i>Term</i> | <i>Definition</i>                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Confusion   | Confusion occurs when the relationship between the plaintext and the key is so complicated that an attacker can't merely continue altering the plaintext and analyzing the resulting ciphertext to determine the key <ul style="list-style-type: none"> <li>– The mapping between input and output is very confusing</li> <li>– Substitution of bytes adds confusion</li> <li>– Example: S-Box</li> </ul> |

| Term      | Definition                                                                                                                                                                                                                                                                                                                                      |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Diffusion | <p>Diffusion occurs when a change in the plaintext results in multiple changes spread throughout the ciphertext</p> <ul style="list-style-type: none"> <li>– A small change in the input leads to a big change on the output</li> <li>– Permutation of bytes adds diffusion; also known as a transposition</li> <li>– Example: P-Box</li> </ul> |

## 8.4. CAESAR CIPHER

One of the earliest known cipher systems was used by Julius Caesar to communicate with Cicero in Rome while he was conquering Europe

- To encrypt a message, you simply shift each letter of the alphabet three places to the right
- The Caesar cipher became known as the ROT3 (or Rotate 3) cipher
- The Caesar cipher is a substitution cipher that is mono-alphabetic

## 8.5. SP-NETWORK

An SP-Network (Substitution-Permutation Network) is an algorithm that uses repeated substitution and permutation operations

- Substitution: Replacing bytes with others
- Permutation: Swapping bytes around
- The substitutions and permutations are combined into a round.
- Rounds are then repeated many times

## 8.6. XOR

XOR is a binary operator between two values that returns true if either input or the other is true but not both

- Extremely useful in cryptography
- $x$  is deciding whether  $y$  will change
- Applying XOR twice reverses its effect
  - Think of  $x$  as encrypting  $y$ , and then decrypting it again

| $x$ | $y$ | $x \oplus y$ |
|-----|-----|--------------|
| 0   | 0   | 0            |
| 0   | 1   | 1            |
| 1   | 0   | 1            |
| 1   | 1   | 0            |

## 8.7. ONE-TIME PAD (OTP)

We can design a cipher that uses XOR to encrypt and decrypt a message

- Use a key that's the same length as the message
- XOR each message bit with each key bit

If you take away the key, there is no way to find the message because there is no static mapping between the input and the output

But

- The OTP is not practical
- A 1 GB file would need a 1 GB key!
- If you ever reuse a key, the entire cipher is broken

```

M 01011010 00110101
      ^
K 01001011 10111001
      =
C 00010001 10001100
  
```

## 8.8. HASHING

- A hash function maps data of any size to a fixed-size output in a deterministic and hard-to-reverse way
- A 128 bit hash function will return a 128 bit string, regardless of how much bits have been hashed in
- Hash functions are used everywhere. Message authentication, integrity, passwords etc.
  - For example, SHA-256 can be used to verify data integrity
- A good hash algorithm should perform quickly but it shouldn't be too quick because if it's too quick, it is easy to break

### 8.8.1. How it works

- Usually hash functions iteratively jumble blocks of a message after another
  - This is a one-way function
  - There is no way to revert back and restore the initial message
- A hash function is kind of like a washing machine for bits
  - The initial hash is usually defined in the spec
  - A new current hash is created every round
  - We loop for every block of the message
- When we run out of message, we use the current hash as the final hash

### 8.8.2. Strong hash functions

The output must be indistinguishable from random noise

- It should look like you have just generated random numbers
- It shouldn't look like the output is based on the input
- With SHA-256, the output is pretty much undistinguishable from random noise

Bit changes must diffuse through the entire output

- This is called the avalanche effect
- With SHA-256, a small change in the message makes a big change in the hash

### 8.8.3. Important properties

It shall to be quick but not too quick

It shall introduce diffusion

- Most hash functions, even MD5, adhere to that

Given a hash, we can't reverse it

- Most hash functions, even MD5, adhere to that

Given a message and its hash, we can't find another message that hashes to the same thing

- That's a collision
- That is problematic because we use hashes to verify that things hasn't been changed. So finding collision undermines the whole idea
- MD5 is broken in that sense
- shattered.io: two different PDFs that have the exact same SHA-1 hash

### 8.8.4. Current standards in cryptographic hash functions

The current standard is the SHA-2 family with 256-bit and 512-bit variants

SHA-3 is not better or worse than SHA-2

- SHA-3 is a completely different function (Keccak algorithm)
- SHA-3 was designed in case something happens to SHA-2

#### 8.8.4.1. KMAC 128/256

KMAC 128/256 is a new SHA-3 based KECCAK MAC

- standardized in Dec 2016, NIST SP 800-185
- alternative method to SHA-2
- permutation-based hash algorithm (sponge construction)
- very strong resistance to the pre-image

Optimized for parallel processing; efficient on various platforms

#### 8.8.5. Hash functions for Password Storage

Hash functions such as SHA-256 are not good to store passwords because there are too fast

- They are designed to be quick to summarize data
- Vulnerable to brute-force attacks. The attackers hash the passwords and compare with the hashes to see if there are any matches

The hashes are iterated to slow them down on purpose

- Argon2 is memory-hard and designed to resist brute-force attacks
- Configurable parameters for memory usage, iterations, and parallelism.
- Slows down attackers – makes massive guessing attempts significantly harder.
- This is exclusively good for login and passwords and not suitable for general-purpose hashing
- It is totally useless for any kind of other hash function usage

#### 8.8.6. Comparison of hash families

| Type/<br>Family | Output<br>Length   | Rounds | Security                                                            | Use /<br>Application                      | Examples /<br>Libraries      |
|-----------------|--------------------|--------|---------------------------------------------------------------------|-------------------------------------------|------------------------------|
| MD5             | 128-bit            | 4      | 128-bit, fast, insecure                                             | Legacy systems, checksums                 | OpenSSL, hashlib (Python)    |
| SHA-1           | 160                | 80     | 160-bit, insecure                                                   | Legacy signatures, integrity checks       | OpenSSL, hashlib (Python)    |
| SHA-2           | 224, 256, 384, 512 | 64, 80 | Secure, widely used                                                 | Digital signatures, certificates          | OpenSSL, hashlib (Python)    |
| SHA-3 (Keccak)  | 224, 256, 384, 512 | 24     | Resistant to certain attacks, flexible                              | Modern crypto applications                | hashlib (Python ≥3.6)        |
| bcrypt          | 184-bit            |        | Adaptive, salted, GPU-resistant                                     | Password storage                          | bcrypt (Python)              |
| Argon2          | 256                |        | Winner of Password Hashing Competition, highly secure, configurable | Password storage, key derivation function | argon2-cffi (Python)         |
| PBKDF2          | Varies             |        | Iterative, widely supported, configurable iterations                | Password storage                          | hashlib.pbkdf2_hmac (Python) |

#### 8.8.7. Where are hashes used?

Hashing lets us ensure that a message hasn't been altered

- 1) Digital signatures
- 2) Message Authentication Codes (MAC)
  - A short piece of information used for authenticating and integrity-checking a message.

#### 8.8.8. HMAC

- MAC approaches may have issues due to the structure of common hash functions like SHA-256
  - MAC with SHA-1 and SHA-2: possibility of length extension attack
- Hash based MAC (HMAC) is a standardized form and the most common approach, it splits a key in two and hashes twice
  - We hash two times to be safer.
  - We split the key into two and we hash twice with each key
  - Then not vulnerable to length extension attack

### 8.9. SYMMETRIC CRYPTOGRAPHY

Symmetric key algorithms rely on a shared secret key that is distributed to all members who participate in the communications.

- This key is used by all parties to both encrypt and decrypt messages
- The sender encrypts with the shared secret key and the receiver decrypts with it.
- When large-sized keys are used, symmetric encryption is very difficult to break.

It provides for the security service of confidentiality

#### 8.9.1. Stream ciphers

We can approximate a one-time pad by generating an infinite pseudo-random keystream

- Stream ciphers work on messages of any length
- The nonce guarantees that each keystream is unique, even if the same key is reused

##### 8.9.1.1. Pros and cons

| <i>Pros</i>                                                             | <i>Cons</i>                                                              |
|-------------------------------------------------------------------------|--------------------------------------------------------------------------|
| Encryption of long continuous streams, possibly of unknown length       | The keystream must appear statistically random                           |
| Extremely fast with a low memory footprint, ideal for low-power devices | You must never reuse a key + nonce                                       |
| If designed well, it can seek to any location in the stream             | Stream ciphers do not protect the ciphertext (= no guaranteed integrity) |

#### 8.9.2. Block ciphers

Block ciphers take an input of a fixed size and return an output of the same size

- Block ciphers attempt to hide the transformation from message to ciphertext through confusion and diffusion
- Most block ciphers are SP-Networks

The Advanced Encryption Standard (AES) is an SP-Network


- Almost everything uses AES
- There are others (e.g. Feistel Ciphers)

##### 8.9.2.1. S-Box

Provides Confusion

Visualization


Lookup Table

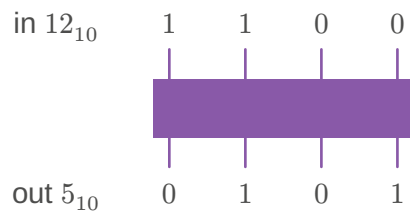

|            |   |    |     |    |     |    |
|------------|---|----|-----|----|-----|----|
| <i>in</i>  | 0 | 1  | ... | 12 | ... | 15 |
| <i>out</i> | 6 | 13 | ... | 5  | ... | 4  |


#### 8.9.2.2. P-Box

Provides Diffusion

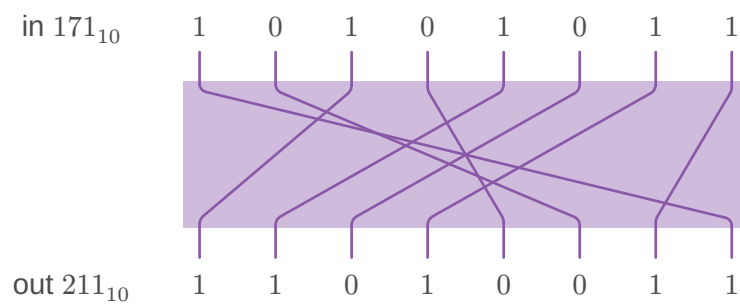

#### 8.9.2.3. Encryption and decryption in a basic SP-Network

Combines S-Box and P-Box

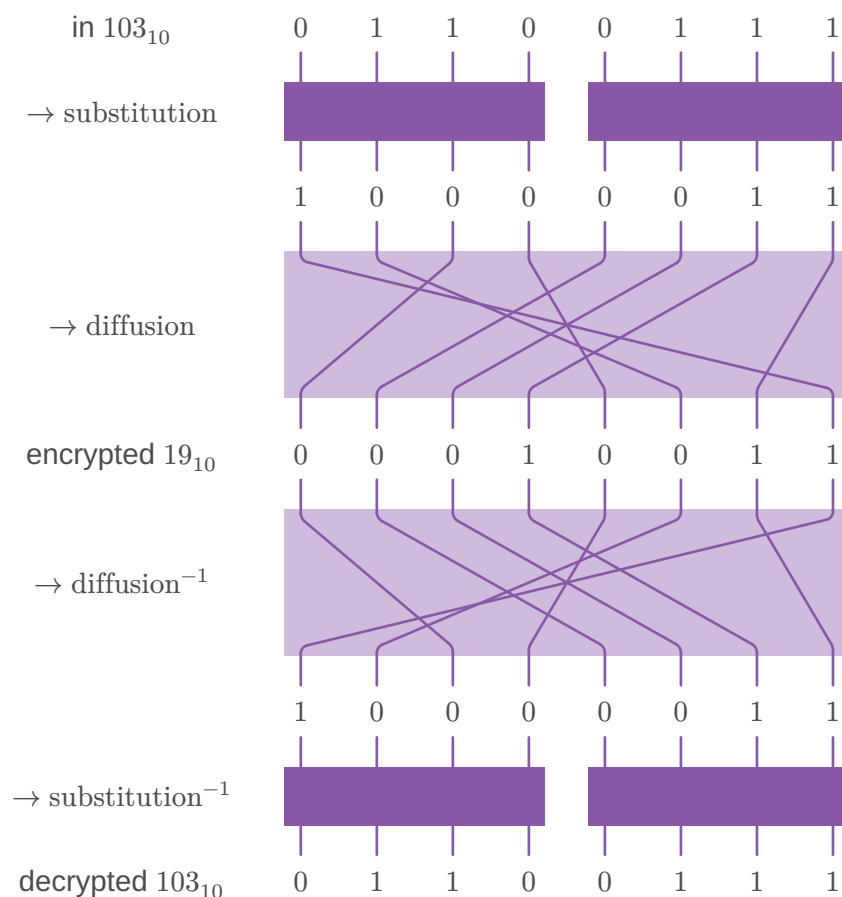


#### 8.9.2.4. Advanced Encryption Standard (AES)

- A standard built around the Rijndael algorithm
  - Superseded DES as a standard in 2002
- SP-Network with a 128-bit block size
  - Key length of 128, 192 or 256-bits

- 10, 12 or 14 rounds
- Each Round:
  - SubBytes
  - ShiftRows
  - MixColumns
  - Key Addition

### Round Structure

|           |           |           |           |
|-----------|-----------|-----------|-----------|
| $a_{0,0}$ | $a_{0,1}$ | $a_{0,2}$ | $a_{0,3}$ |
| $a_{1,0}$ | $a_{1,1}$ | $a_{1,2}$ | $a_{1,3}$ |
| $a_{2,0}$ | $a_{2,1}$ | $a_{2,2}$ | $a_{2,3}$ |
| $a_{3,0}$ | $a_{3,1}$ | $a_{3,2}$ | $a_{3,3}$ |

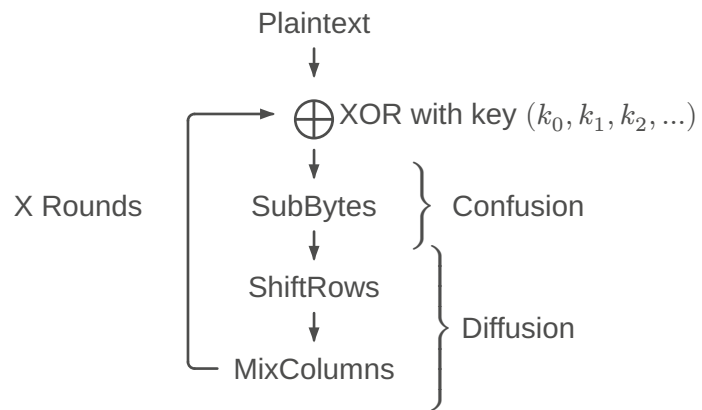

### Key addition to a Block / XOR

128 bits block after XOR with the extended key

|          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| $b_{00}$ | $b_{01}$ | $b_{02}$ | $b_{03}$ | $b_{04}$ | $b_{05}$ | $b_{06}$ | $b_{07}$ | $b_{08}$ | $b_{09}$ | $b_{10}$ | $b_{11}$ | $b_{12}$ | $b_{13}$ | $b_{14}$ | $b_{15}$ |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|

|          |          |          |          |
|----------|----------|----------|----------|
| $b_{00}$ | $b_{04}$ | $b_{08}$ | $b_{12}$ |
| $b_{01}$ | $b_{05}$ | $b_{09}$ | $b_{13}$ |
| $b_{02}$ | $b_{06}$ | $b_{10}$ | $b_{14}$ |
| $b_{03}$ | $b_{07}$ | $b_{11}$ | $b_{15}$ |

### SubBytes

It is a lookup table, there is no fixed point (byte 15 doesn't end up byte 15)

There is no opposite bit flap (10101010 didn't become 01010101)

|             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| $S(b_{00})$ | $S(b_{01})$ | $S(b_{02})$ | $S(b_{03})$ | $S(b_{04})$ | $S(b_{05})$ | $S(b_{06})$ | $S(b_{07})$ | $S(b_{08})$ | $S(b_{09})$ | $S(b_{10})$ | $S(b_{11})$ | $S(b_{12})$ | $S(b_{13})$ | $S(b_{14})$ | $S(b_{15})$ |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| $S(b_{00})$ | $S(b_{04})$ | $S(b_{08})$ | $S(b_{12})$ |
| $S(b_{01})$ | $S(b_{05})$ | $S(b_{09})$ | $S(b_{13})$ |
| $S(b_{02})$ | $S(b_{06})$ | $S(b_{10})$ | $S(b_{14})$ |

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| $S(b_{03})$ | $S(b_{07})$ | $S(b_{11})$ | $S(b_{15})$ |
|-------------|-------------|-------------|-------------|

### ShiftRows

|             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |             |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| $S(b_{00})$ | $S(b_{05})$ | $S(b_{10})$ | $S(b_{15})$ | $S(b_{04})$ | $S(b_{09})$ | $S(b_{14})$ | $S(b_{03})$ | $S(b_{08})$ | $S(b_{13})$ | $S(b_{02})$ | $S(b_{07})$ | $S(b_{12})$ | $S(b_{01})$ | $S(b_{06})$ | $S(b_{11})$ |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

|             |             |             |             |               |
|-------------|-------------|-------------|-------------|---------------|
| $S(b_{00})$ | $S(b_{04})$ | $S(b_{08})$ | $S(b_{12})$ | No changes    |
| $S(b_{05})$ | $S(b_{09})$ | $S(b_{13})$ | $S(b_{01})$ | 1 to the left |
| $S(b_{10})$ | $S(b_{14})$ | $S(b_{02})$ | $S(b_{06})$ | 2 to the left |
| $S(b_{15})$ | $S(b_{03})$ | $S(b_{07})$ | $S(b_{11})$ | 3 to the left |

### MixColumns

MixColumns is done using a matrix multiplication

- Add operation is an XOR
- Multiplication operation is a multiplication within that finite field (modular polynomial)

$$\begin{pmatrix} 2 & 3 & 1 & 1 \\ 1 & 2 & 3 & 1 \\ 1 & 1 & 2 & 3 \\ 3 & 1 & 1 & 2 \end{pmatrix} \cdot \begin{pmatrix} b_{00} \\ b_{05} \\ b_{10} \\ b_{15} \end{pmatrix} = \begin{pmatrix} 2b_{00} + 3b_{05} + b_{10} + b_{15} \\ b_{00} + 2b_{05} + 3b_{10} + b_{15} \\ b_{00} + b_{05} + 2b_{10} + 3b_{15} \\ 3b_{00} + b_{05} + b_{10} + 2b_{15} \end{pmatrix}$$


#### 8.9.2.5. Modes of operation for block ciphers

- Realistically, messages of exactly 128-bits are pretty unlikely
  - We need some mechanism to encrypt messages that are longer or shorter
- A mode of operation is the combination of multiple instances of block encryption into a usable protocol
- There are several modes of operations, in this lecture we only cover the following:
  - Electronic Code Book (ECB)
  - Cipher Block Chaining (CBC)
  - Counter Mode (CTR)


#### 8.9.2.6. Electronic Code Block (ECB)

- Just encrypt each block one after another with same key
- Weak to redundant data divulging patterns
- Electronic codebook is not recommended!



#### Encryption

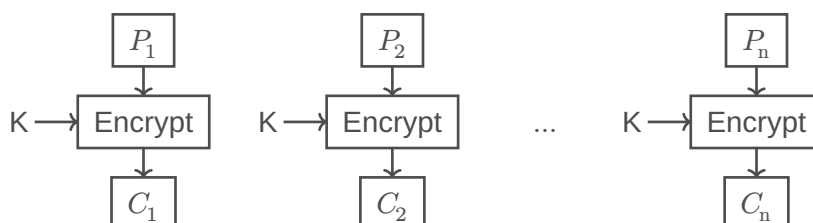

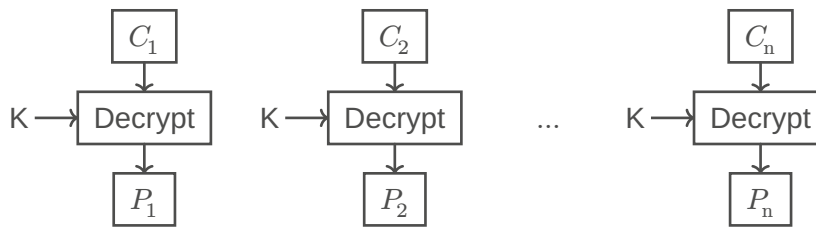



**Decryption****8.9.2.7. Cipher Block Chaining (CBC)**

- XOR the IV with the first input, then XOR the output of each cipher block with the next input
- Not parallelizable
- It is better than ECB but not perfect

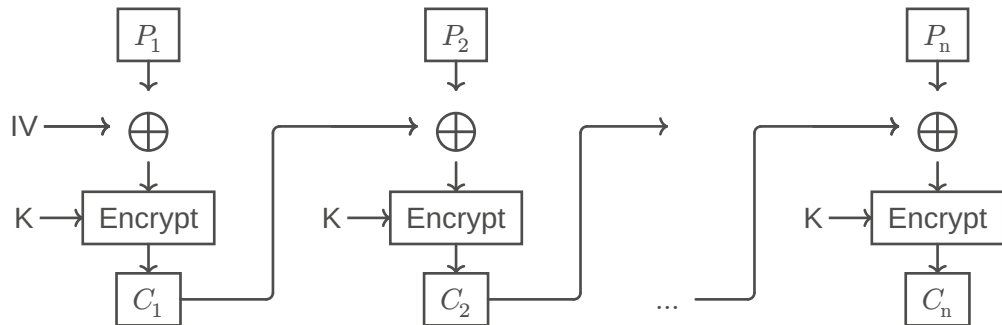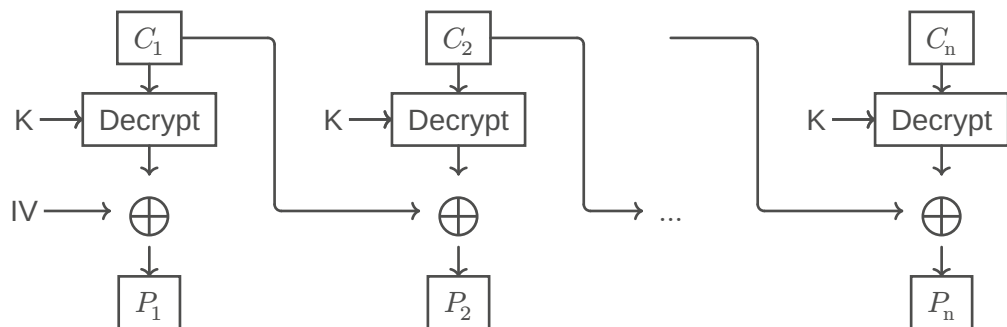**Encryption****Decryption****8.9.2.8. Counter Mode (CTR)**

- Encrypting a counter to produce a stream cipher
- Pretty good - can also be parallelized!
- Convert a block cipher into a stream
- We don't encrypt the message
- We encrypt a number and use the random number that comes out to XOR the message
- Standard mode for all type of encryption cipher (AES)

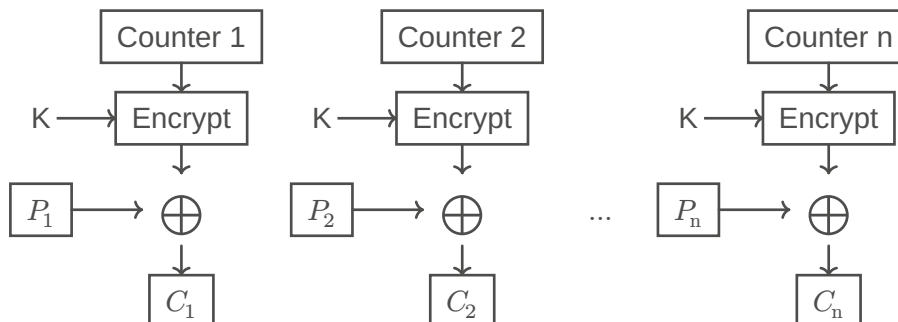**Encryption**

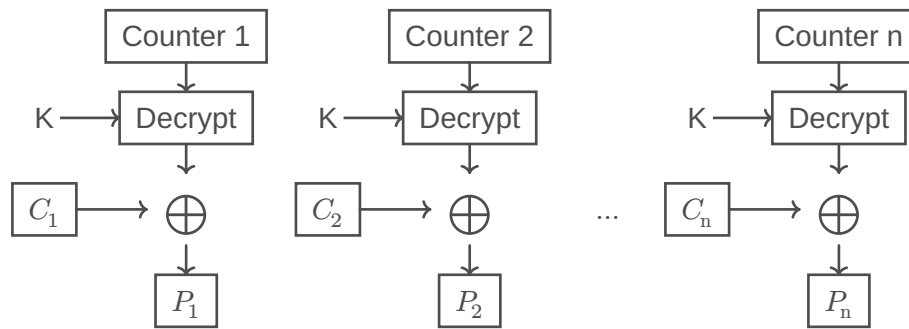**Decryption****8.9.3. Remarks**

Key distribution

- Parties must have a secure method of exchanging the secret key before establishing communications with a symmetric key protocol

Symmetric key cryptography does not implement non-repudiation

- Because any communicating party can encrypt and decrypt messages with the shared secret key, there is no way to prove where a given message originated

Symmetric key cryptography does not implement message integrity

The major strength of symmetric key cryptography is the great speed at which it can operate

- Symmetric key encryption is very fast, often 1'000 to 10'000 times faster than asymmetric algorithms
- Lots of the processor have an AES instruction set
- Alternative to AES: the Chacha20 cipher (for devices that don't have a CPU with an AEC instruction set)

**8.10. ASYMMETRIC CRYPTOGRAPHY**

- Asymmetric encryption is a cryptographic method that relies on mathematically linked key pairs.
- While public-key encryption uses the public key ( $e, n$ ) to encrypt and the private key ( $d$ ) to decrypt, digital signing reverses this process – the private key ( $d$ ) signs the message and the public key ( $e, n$ ) verifies the signature, ensuring authenticity and integrity.
- RSA (Rivest–Shamir–Adleman) algorithm was the first public-key encryption algorithm developed/published for commercial use.

**8.10.1. Rivest – Shamir – Adleman (RSA) Algorithm**

RSA is It is widely used for secure data transmission. There are two very useful use cases for RSA:

- 1) Encryption that only the owner of the public key can read
- 2) Signing that must have been performed by the owner of the private key

It provides both encryption and/or authentication.

| Term               | Definition                                                        |
|--------------------|-------------------------------------------------------------------|
| Discrete logarithm | $f(g, a, p) = g^a \bmod p$ (Diffie-Hellman, Elliptic Curves, DSA) |
| Factoring          | $f(p, q) = p \cdot q$ (RSA)                                       |

**8.10.2. Euler's Theorem**

Let  $n \in \mathbb{N} \setminus \{0\}$  and  $z \in \mathbb{Z}$  with  $\gcd(z, n) = 1$ . Then  $z^{\varphi(n)} \equiv 1 \bmod n$ .

**8.10.2.1. Euler's  $\varphi$ -Function (Totient)**

Let  $n \in \mathbb{N} \setminus \{0\}$  and  $\mathbb{Z}_n^* = \{x \in \mathbb{Z}_n \mid x \text{ has a multiplicative inverse in } \mathbb{Z}_n\}$ .

Then  $\varphi(n)$  defines:

$$\begin{aligned}
 \varphi(n) &= \text{Nr. of elements in } \mathbb{Z}_n \text{ with mult. inv.} \\
 &= \text{Amount of Numbers } 1 \leq q \leq n \text{ with } \gcd(q, n) = 1 \\
 &= |\mathbb{Z}_n^*|
 \end{aligned}$$

We also call those numbers *relatively prime with  $n$* .

### Rules

- 1) Let  $n \in \mathbb{N}$  a prime number, then  $\varphi(n) = n - 1$
- 2) Let  $n \in \mathbb{N}$  a prime number and  $p \in \mathbb{N} \setminus \{0\}$ , then  $\varphi(n^p) = n^{p-1} \cdot (n - 1)$
- 3) Let  $m, n \in \mathbb{N} \setminus \{0\}$  and  $\gcd(m, n) = 1$ , then  $\varphi(n \cdot m) = \varphi(n) \cdot \varphi(m)$

#### 8.10.2.2. Computation

- 1) Choose two prime numbers  $p, q$
- 2) Calculate  $n = p \cdot q$
- 3) Calculate  $\varphi(n) = (p - 1)(q - 1)$
- 4) Choose  $a, b$ , so that  $a \cdot b \equiv 1 \pmod{\varphi(n)}$
- 5) Forget  $p, q, \varphi(p \cdot q)$

Public key is now  $n, b$ , private key is  $n, a$

- Encrypt:  $z = c^a \pmod n$
- Decrypt:  $c = z^b \pmod n = c^{a \cdot b} \pmod n$

#### 8.10.2.3. Weaknesses

- RSA is very weak if you encrypt short messages
  - OAEP is added in short messages
- It is not common to see encryption done using RSA
  - Encryption with RSA was used by TLS to send shared keys around but is not anymore. (DH instead)
  - Signing is being done by using RSA
- RSA is 1000x slower than symmetric crypto systems

#### 8.10.2.4. Optimal Asymmetric Encryption Padding (OAEP)

Standard padding for encryption using RSA. It is a pseudo random padding that introduces an IV to the process and then hashes it. The server that receives the ciphertext will decrypt it and will have to do the exact same padding to make sure that the messages match up.

- Adds random bits (salt) and pads short messages to proper length.
- Optional hash over additional data (ad) for authenticity.
- Uses Mask Generating Functions (MGF1/MGF2, e.g., SHA3).
- Structure: 0x00 | maskedSalt | maskedDB
  - encrypted with RSA trapdoor permutation.

#### 8.10.2.5. Message integrity verification

- 1) Signer's side
  - The message is first hashed
  - Hashing generates a unique digest for message integrity verification
  - The hash is signed and sent with the message
- 2) Verifier's side
  - The receiver computes the hash of the received message, applies the sender's public key to the signature, and verifies that both hashes match.

#### 8.10.2.6. Signing

- A message is sent as a challenge to prove the server's identity.

- The client sends to the server a message that it has to sign.
  - The server is going to use PSS padding and sign it with its private key
  - The client verifies the signature using the public key.
  - If the signature is valid for the original message, the server has successfully proved itself.
- A similar challenge-response mechanism is used in TLS to authenticate the server during the handshake, where RSA-PSS is used as the signature scheme.

#### 8.10.2.7. Probabilistic Signature Scheme (PSS)

- Message is hashed before applying the RSA signature function.
- A randomly chosen salt is added to the hash value.
- Padding is applied to match the required length based on the key size.
- Uses a hash function  $H$  and random salt for security and unpredictability
- Provides strong resistance against attacks compared to deterministic signatures.

#### 8.10.2.8. From RSA to DSA and Elliptic Curves

Within a few years, RSA is going to become too slow because always bigger keys will have to be used. The main alternative to RSA for signature is the Digital Signature Algorithm (DSA)

- ECDSA (or DSS) is much faster than RSA and it will become a standard very soon
  - Elliptic Curve Digital Signature Algorithm (ECDSA) or Digital Signature Standard (DSS)
- Ed448 and Ed25519 are various types of DSA with different curves

DSA can't be used for encryption. It only works one way, for the signing part. It acts a lot like RSA, but uses mathematics similar to Diffie Hellman. It can also make use of Elliptic Curves.

#### 8.10.3. Discrete Logarithm Problem

When operating  $\text{mod } n$ , we call the operation a discrete logarithm:

- $a^b \text{ mod } n \equiv c$
- $b \equiv \log_a(c) \text{ mod } n$
- Discrete logarithms are much harder to compute

#### 8.10.4. Primitive roots of prime numbers

$g$  is said to be a **primitive root** of the prime number  $p$ , if  $g \text{ mod } p, g^2 \text{ mod } p, g^3 \text{ mod } p, \dots, g^{p-1} \text{ mod } p$  are distinct

If the multiplicative order of a number  $g \text{ mod } p$  is equal to Euler Totient Function  $\varphi(p)$ , then it is a primitive root

#### Example 2

**TODO:**


#### 8.10.5. Diffie-Hellman (DH)

- With Diffie-Hellman, two parties can jointly agree a shared secret over an insecure channel
- Every communication handshake on the internet is powered by DH
- We are exchanging some parts of the mathematical key and then we secretly create the key ourselves

Process:

- $p$  is usually 4096 or 6144 bits
- $g$  is a primitive root of  $p$
- **private keys** are values between 1 and  $p$

- The **shared secret** (often called the pre-master secret) serves as the foundation for deriving all subsequent session keys.
  - The raw shared secret is not used directly for encryption, as it is typically a very large integer (e.g., 4096 bits in RSA or DH) and may not have uniform entropy.
  - We derive a master secret using a hashed-key derivation function (HKDF), for example the SHA-256 hash function
- The only way to find **a** or **b** is to solve the Discrete Logarithm Problem.

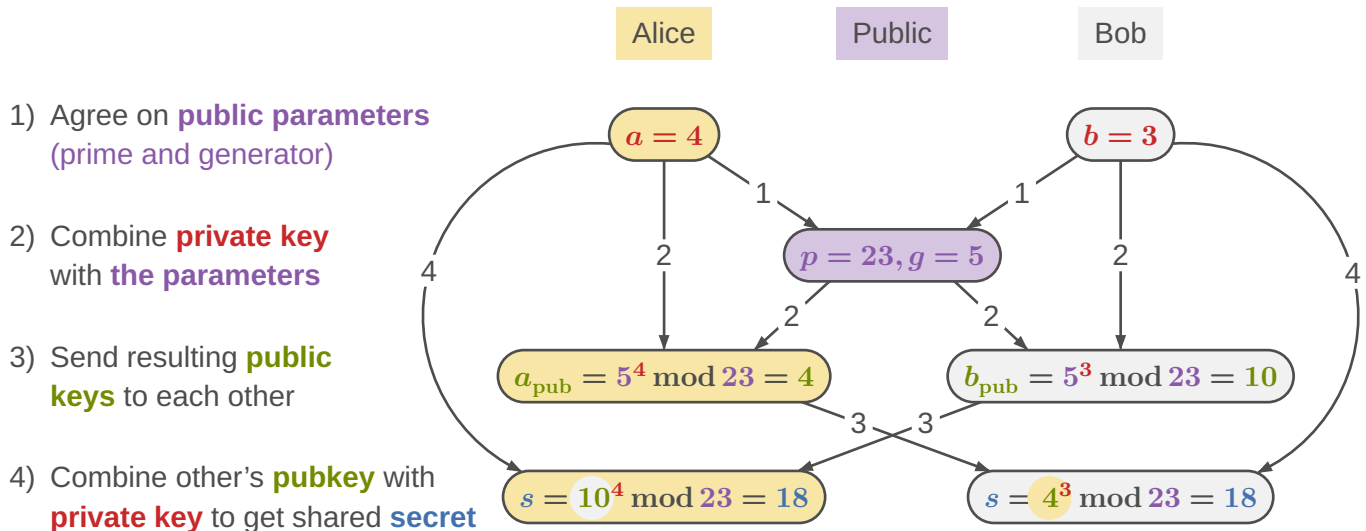

Elliptic-Curve Diffie Hellman (ECDH) is becoming the standard nowadays due to shorter keys.

#### 8.10.6. Elliptic Curve Cryptography (ECC)

- Elliptic curves are a drop-in replacement for the mathematics underpinning regular Diffie-Hellman
- ECDHE = Elliptic Curve Diffie-Hellmann Ephemeral
- Elliptic curve is a two-dimension curve
  - $y^2 = x^3 + ax + b$
  - The private key is a number
  - The public key is composed of two numbers  $(x, y)$
- The elliptic curve discrete logarithm problem (ECDLP) is slightly more difficult to solve than the discrete logarithm problem
- Elliptic curves are much stronger than traditional public-key schemes for the same key length in bits

#### 8.10.7. Perfect Forward Secrecy in Ephemeral DH KEX

- In most protocols, running Diffie-Hellman in ephemeral mode forces a new key exchange for every new session
  - This is called PERFECT FORWARD SECRECY
- DH in ephemeral mode means a new DH every time, not necessarily every message
  - Refreshing a webpage would generate a new secret every time
  - If anyone is sniffing our traffic and is breaking our keys, they don't get any of the previous messages.

Ephemeral session keys should be used for communication and long-term public keys for authentication.

## 9. TRANSPORT LAYER SECURITY (TLS)

TLS is a transport layer protocol and supports:

- Confidentiality (AES)
- Integrity (MAC / HMAC)

- Authentication (Server, optional Client, RSA Certificate)

TLS can encrypt communication over the internet with any protocol. Secure Socket Layer (SSL) was the original name, which after version 3.0 became Transport Layer Security (TLS), which currently exists as version 1.3

- TLS < 1.2 is insecure
- TLS 1.2 is secure if configured correctly
  - It supports cipher suites that are considered insecure

### TODO:


header (slides 61,62)

## 9.1. HANDSHAKE

Allows server and client to:


- 1) Authenticate each other
- 2) Negotiate encryption and MAC algorithms
- 3) Negotiate cryptographic keys to be used

In the diagram the 0RTT Handshake is shown.

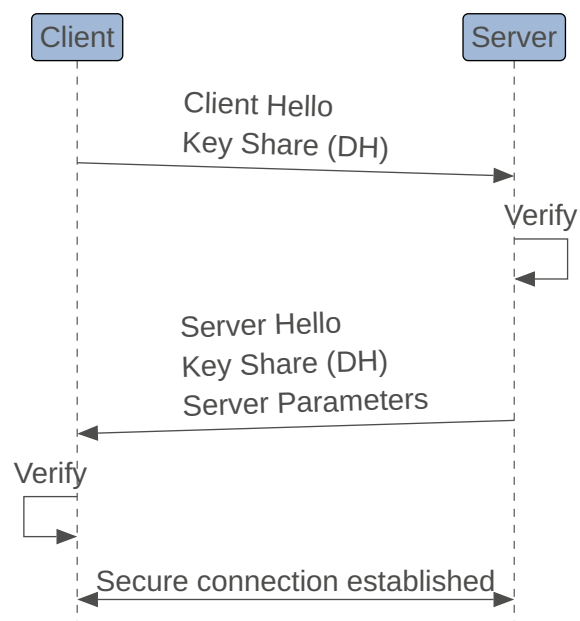

## 9.2. AUTHENTICATED ENCRYPTION WITH ASSOCIATED DATA (AEAD)

AEAD is a technique used in cryptography which provides both the encryption and authentication and also additional Associate Data (AD) along with the encrypted message. It allows the recipient to check integrity of both encrypted and unencrypted information and provides confidentiality.



### 9.2.1. AES Galois Counter Mode (GCM)

AES is a block cipher in CTR mode and GCM is the Message Authentication Code (MAC). GCM computes a Galois Message Authentication Code (GMAC) over the ciphertext and the additional data.

## 10. PUBLIC KEY INFRASTRUCTURE (PKI)

A set of roles, policies, hardware, software and procedures needed to create, manage, distribute, use, store and revoke digital certificates and manage public-key encryption.

A PKI is used to bind a public key to an identity of a person or an organization. The binding is performed with a registration process by a Registration authority (RA) (based on Certificate Policies (CP) and Certification Practice Statements (CPS)) and an issuance of a certificate by a Certificate Authority (CA). The CA itself can be validated to be able to perform this service by an independent Validation Authority (VA).


| Term | Definition           |
|------|----------------------|
| TSA  | Time Stamp Authority |

– Certificate Lifecycle

## 10.1. DIGITAL CERTIFICATE

A digital certificate enables i.a. identification, document signing, non-repudiation and data integrity through encryption and authentication.

Process of certificate creation:

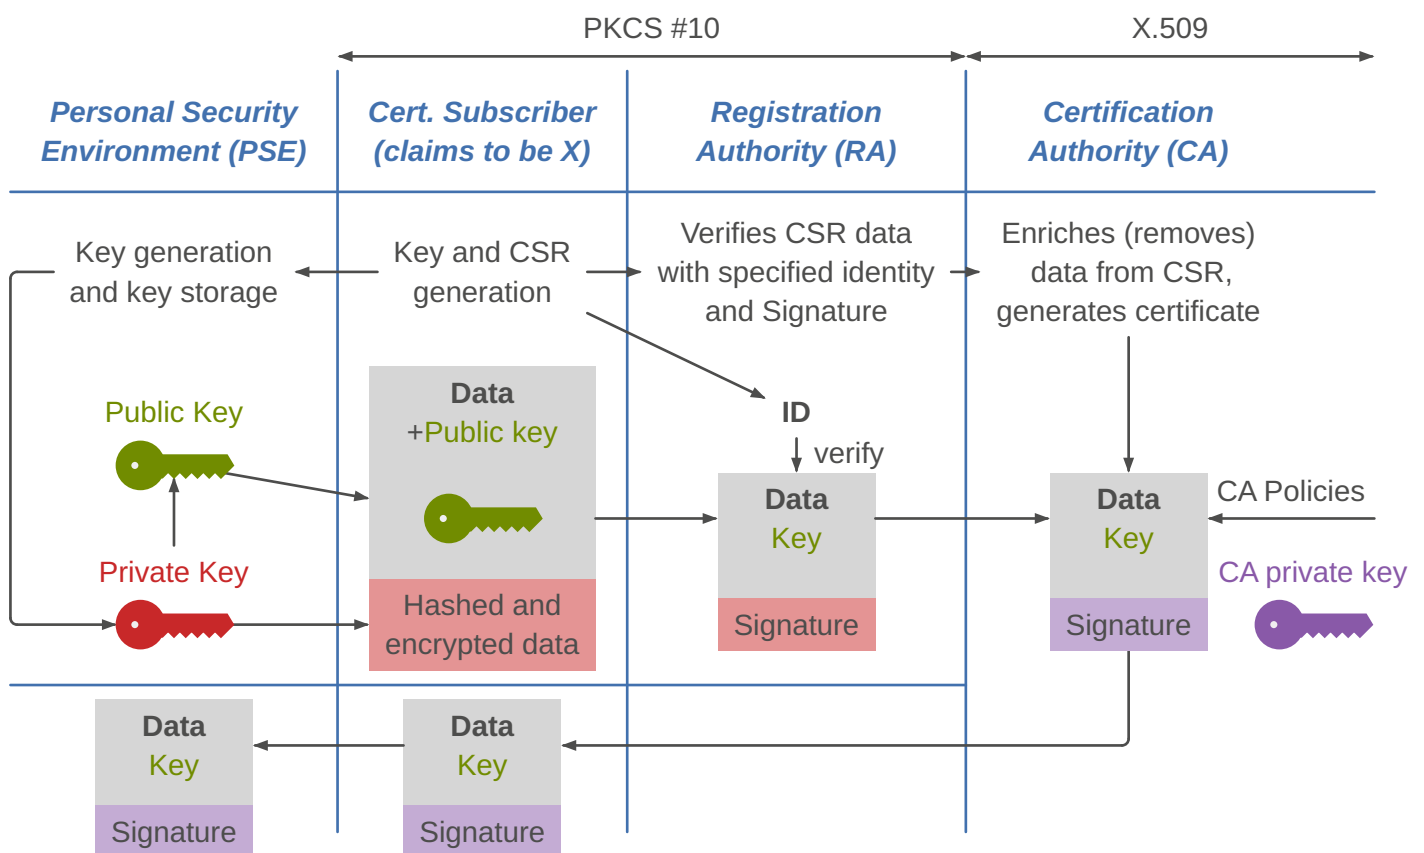

**Hybrid cryptosystem:** Combining different methods (hashing, encrypting) for optimal use-cases.

- Hashing: Digital fingerprint
- Symmetric cryptography: Bulk encryption
- Asymmetric cryptography: Signing or exchanging symmetric keys

**TODO:**

slides 27, 28, 29

### 10.1.1. Certificate pinning (HPKP)

Certificate pinning explicitly trusts only one certificate, all other root anchors are ignored. There are 3 different pinning models: root pinning, intermediate CA pinning and end entity pinning. Pinning poses a big risk if the HPKP is hacked, because certificates are no longer fully validated. Legacy since 2017.

### 10.1.2. X.509

#### TODO:

diagram (slides 57)

#### 10.1.2.1. Encoding

ASN.1 (Abstract Syntax Notation 1) Object Representation

- Distinguished Encoding Rules
  - DER-encoded binary X.509 (.der)
  - Base64-encoded X.509 (.cer,crt)

#### 10.1.2.2. Formats

- .csr PKCS#10 - Certificate Signing Request
- .p7b PKCS#7 - *Format for exchanging certificate chains*
- .cms Cryptographic Message Syntax (deprecated PKCS#7)
- .crl Certificate Revocation List

Container formats

- .pfx, .p12, .pkcs12
  - identical formats
  - include private key and certificate
- .pem
  - base64 encoded DER data
  - private key or certificate

## 10.2. CIPHER SUITES

TLS\_ECDHE\_RSA\_WITH\_AES\_128\_GCM\_SHA256

TLS\_ECDHE\_RSA\_WITH\_AES\_256\_GCM\_SHA384

TLS\_ECDHE\_RSA\_WITH\_CHACHA20\_POLY1305\_SHA256

TLS\_DHE\_RSA\_WITH\_AES\_128\_GCM\_SHA256

TLS\_DHE\_RSA\_WITH\_AES\_256\_GCM\_SHA384

|            | Key        | Signature  | Bulk            | Message        |
|------------|------------|------------|-----------------|----------------|
| Encryption | exchange   |            | encryption      | Authentication |
| protocol   | _algorithm | _algorithm | _WITH_algorithm | _Code (MAC)    |

### 10.2.1. Recommended HTTPS Cipher suites (TLS 1.2)

- Should support PFS (Perfect Forward Secrecy).
- Diffie–Hellman key exchange-based PFSs
  - DHE-DSA, DHE-RSA
- Elliptic Curve Diffie–Hellman-based PFSs
  - ECDHE-ECDSA, ECDHE-RSA
- GCM > CBC
- ECDHE\_ECDSA > ECDHE\_RSA > DHE\_RSA (over RSA)
- P521 > P384 > P256
- 256-bit > 128-bit



- **SHA512** > SHA384 > SHA256 (SHA-1 should no longer be used)

---

## 10.3. PKI COMPONENTS

### **TODO:**

diagram (slides 47)

### 10.3.1. Certificate Authority (CA)

- Trusted issuer for digital certificates
- Creates digital certificates from Certificate Signing Requests (CSRs)
- Guarantees the content of the certificates
- Signs Certificate Revocation Lists (CRLs)

### **TODO:**

CA hierarchy (slides 51 - 54)

### 10.3.2. Subscriber

- End-Entity / Certificate Holder / Client
- Creates keys, CSR and sends it to RA for authenticity verification

### 10.3.3. Trust- and keystore

### **TODO:**

diagram (slides 63)

#### 10.3.3.1. Truststore

Central storage for certificates from trusted entities.

- Implemented in OSES, applications or middleware and includes
  - Certificates for trusted entities
  - Trust-Chains and public keys
- Ideally only limited amount of certificates
- Should be verified after each update
- Content usually decided by Business/IT

#### 10.3.3.2. Keystore

Central storage for private keys and certificates.

Neither Truststores nor Keystores should leak to the public.

### 10.3.4. Registration Authority (RA)

- Intermediary between Subscriber and CA
- Validates the CSRs and ensures that subscriber is authorized to receive that certificate
- Forwards validated CSRs to CAs
- Revokes certificates when they expire

### 10.3.5. Validation Authority (VA)

- Provides the means to verify the integrity of digital certificates
- Enables remote real-time certificate validation
- Makes sure that information regarding revoked certificates is available and up-to-date
- CA sends updates to VA regarding the state of a certificate, which in turn delivers then to clients
- VA can be a separate entity or included in the CA

## [RFC 5280](#)

**TODO:**

diagram (slides 75)

### 10.3.6. Certificate Revocation List (CRL)

Blocklist of revoked X.509 certificates. Includes serial numbers and timestamps for certificates and is signed by the CA. [RFC 5280](#) [RFC 6818](#)

**Revoked:** Irreversibly revoked

**Hold:** Temporarily revoked

### 10.3.7. Certificate Status Protocol (OCSP)

Alternative to CRL for validating the state of certificates. [RFC 6960](#)

Pros:

- OCSP-Responder can deliver near real-time up-to-date information
- Non-revoked certificates can be differentiated from faked certificates?

### 10.3.8. OCSP Stapling

Alternative to CSP (the alternative to CRL). I love my field of research. [RFC 6961](#)

**TODO:**

slides 79 + diagram (slides 80)

### 10.3.9. Certificate Transparency (CT)

**TODO:**

slides 81

---

## 11. E-MAIL

---

### 11.1. MIME

[RFC 1521](#) [RFC 1522](#)

**TODO:**

slides 10-12

---

### 11.2. S/MIME

[RFC 2046](#) [RFC 8551](#)

#### 11.2.1. Signed S/MIME with Multiple Signatures

- Theoretically, each signer may use a different digest algorithm.
- In practice, SHA-256 is used throughout.

#### 11.2.2. Encapsulated S/MIME Signatures

MIME content carried within a CMS *SignedData* object. [RFC 5652](#)

**TODO:**  
example

### *Pro*

The MIME content is protected against modifications caused by transfer encoding changes enforced by intermediate mail transfer agents.

### *Contra*

The message cannot be read unless the recipient's mail client supports S/MIME.

### 11.2.3. Encrypted S/MIME Messages

MIME content carried within a CMS *EnvelopedData* object. [RFC 5652](#)

**TODO:**  
example

### *Pro*

Protected against transfer encoding changes by intermediate mail transfer agents (MTAs)

### *Contra*

Encrypted content is opaque; requires S/MIME support to read

### 11.2.4. Encrypted S/MIME Messages with Multiple Recipients

The MIME entity is encrypted once using a symmetric content-encryption key, which is then individually encrypted for each recipient using their respective public keys.

**TODO:**  
diagram (slides 16)

### 11.2.5. Storage of Signature and Encryption Keys

#### *Signature Key*

- The private signature key represents the signer's digital identity and must not be copied.
- Best stored on a tamper-proof smart card. Mandated by digital signature legislation.

#### *Encryption Key*

- Backup copy protects against information loss. If the private encryption key gets lost or damaged, all encrypted communication received in the past cannot be accessed and read any more.
- In a corporate environment, a deputy should be able to access the encrypted email of an employee who is absent due to vacation, accident, sickness or even death. **the corporate overlords must be mightier than any privacy concerns**

## 11.3. PGP

- Describes how existing algorithms can be used to exchange data securely on the Internet
- Uses
  - Asymmetric encryption
  - Symmetric encryption
  - Hash functions
  - Compression
- Key pairs (public & private) are used
- GnuPG is an **open-source (goated)** implementation of this standard [www.gnupg.org](http://www.gnupg.org)

### 11.3.1. Web of Trust in PGP

- There is no central authority that manages all the keys, but each participant decides for themselves who they trust (Decentralized trust model)
- Direct trust
  - Keys of persons who have been personally checked
- Indirect Trust
  - Keys from people who have been checked by people who in turn have been personally checked
- This creates chains of trust that become less trustworthy depending on the number of trustworthy ???

---

## 11.4. CRYPTOGRAPHY IN DETAIL

### **TODO:**

diagrams (slides 24)

### 11.4.1. Sign-then-Encrypt

- Default in S/MIME
- Advantages:
  - Signer knows the message
  - Signature is hidden
- Disadvantages (Naïve Implementation):
  - Recipient could re-encrypt to someone else
- Disadvantages (Less Naïve Implementation)
  - Ciphertext integrity not protected → Oracle attacks possible

### 11.4.2. Encrypt-then-Sign

- Default in PGP
- Similar to Encrypt-Then-MAC
- Advantages:
  - Signature ensures integrity of the encrypted message
- Disadvantages (Naïve Implementation):
  - Signer might not know message
  - Recipient could re-sign ciphertext

### **TODO:**

diagram (slides 28)

---

## 11.5. SENDER AUTHENTICATION

- Mechanism to verify the legitimacy of the sending domain.
- Prevents email spoofing (falsified sender address) and impersonation attacks (posing as a trusted person).
- Core building block against phishing and spam.
- SMTP does not authenticate the sender by default.
- Anyone can falsify the “From” address without protection.
- The Core mechanisms of e-mail sender authentication include:

### 11.5.1. Sender Policy Framework (SPF)

[RFC 7208](#)

- SPF specifies which servers may send email for a domain.

- A mail server or spam filter that supports SPF checks the sender address in the SMTP MAIL FROM command via a DNS TXT query.
- Example: strongsec.net TXT "v=spf1 a mx a:lists.strongswan.org -all"

### 11.5.2. DomainKeys Identified Mail (DKIM)

#### [RFC 6376](#)

For verifying sender domain & message integrity

**TODO:**

slides 32

### 11.5.3. Domain-based Message Authentication, Reporting, and Conformance (DMARC)

#### [RFC 7489](#)

Combines SPF and DKIM, defining actions for failed checks.

- Ensures that emails align with the domain's SPF & DKIM policies.
- Domain owner publishes DMARC policy in DNS.
- Receiving server verifies email against SPF & DKIM.
- Policy determines handling of failed emails like none, quarantine, or reject.
- It provides aggregate and forensic reports to help monitor compliance and detect abuse.

---

## 12. WEB

---

### 12.1. COMMON WEAKNESS ENUMERATIONS (CWE)

- Classification of vulnerabilities
- Standardized list of software weaknesses
- Helps developers identify and communicate risks
- Example: CWE-79: Cross-Site Scripting (XSS), CWE-89: SQL Injection

---

### 12.2. OPEN WEB APPLICATION SECURITY PROJECT (OWASP)

- Community-driven project for web application security
- Known for OWASP Top 10 – the most critical web security risks
- Examples: Injection, Broken Authentication, Security Misconfiguration
- Practical security guidance for web apps

---

### 12.3. APPLICATION SECURITY RISKS

#### 12.3.1. Broken Access Control

Example: Accessing another user's invoice by changing a URL ID.

- Avoidance Insecure Direct Object References (IDOR)
  - Prevent users from accessing other objects by manipulating IDs
  - Use random UUIDs or hashes instead of numeric IDs
  - Implement server-side checks to verify whether the user is authorized to access the
- Centralized Access Control Logic
  - Implement access control centrally in the backend – not in the frontend

- Use frameworks or middleware to enforce permissions consistently

### 12.3.2. Injection

- SQL Injections
- Cross-site Scripting (XSS)
  - Reflected: The malicious code is sent to the server via a request and is immediately “reflected” back to the user’s browser.
  - Stored or Persistent: The malicious code is permanently stored on the target server.
  - DOM-based: The vulnerability exists entirely within the client-side JavaScript, which processes data from an untrusted source (e.g., the URL fragment #) and writes it to the Document Object Model (DOM) in an unsafe way.
- Directory and Query Injection
  - LDAP, XPath statements
  - XML and SOAP
- Operating System commands (Shell Injection)

#### 12.3.2.1. Mitigation SQL Injection

- 1) Secure Programming
  - Prepared Statements
  - Stored Procedures
- 2) Infrastructure Security
  - DB Least Privileges
  - Web Application Firewall (WAF)
- 3) Secure Programming
  - Do not disclose SQL errors to the user
  - Anonymous error messages instead

#### 12.3.2.2. XSS

##### 12.3.2.2.1. Reflected XSS

**TODO:**  
slides 50

##### 12.3.2.2.2. Stored XSS

**TODO:**  
slides 51

##### 12.3.2.2.3. DOM-based XSS

**TODO:**  
slides 52,53

##### 12.3.2.2.4. Mitigation

**TODO:**  
slides 54

**TODO:**  
slides 39+

---

## 13. CYBER KILL CHAIN

A model developed by Lockheed Martin in 2011, adapted from a military concept.

- 1) Reconnaissance: Gather information on the target.
- 2) Weaponization: Construct a custom weapon to attack the target.
- 3) Delivery: Transmit the weapon to the target.
- 4) Exploitation: The vulnerability is triggered or the target tricked.
- 5) Installation: Establish persistence, install backdoors or services.
- 6) Command & Control: The compromised host connects to the attacker.
- 7) Actions on Objectives: Execute required tasks. Exfiltration, encryption, sabotage, etc.



---

### 13.1. WHY START WITH THE ATTACKER?

Defenders who understand how an attack unfolds are the ones who spot it early. Thinking like an attacker is the starting point for every detection strategy.

You can only detect what you understand.

**Shared language:** A model of attacker behaviour gives the whole team a common vocabulary for alerts, playbooks and post-mortems.

**Events rarely look dangerous alone:** A login at 2 a.m., a PowerShell script, an outbound connection. Individually noise, together a pattern.

**Every control has a counter:** Attackers adapt. Defenders who know the phases know where to push back when one control fails.

**The leverage point:** Breaking any single step in the attack sequence causes the whole intrusion to fail.

---

### 13.2. PHASE 1: RECONNAISSANCE

The attacker gathers information about the target. No systems are touched in a way that looks malicious yet.

#### **Possible Information Sources**

- Public profiles such as LinkedIn, GitHub or other social media.
- DNS lookup, WHOIS, IP scanning or Shodan research.
- Find potentially leaked credentials of target or people related to the target.
- Legal information through Handelsregister / Zefix.
- Physical information from Google Maps, Street view or other geo software.

---

### 13.3. PHASE 2: WEAPONIZATION

The attacker constructs a bespoke weapon to attack the target. Typically combining an exploit with a payload.

**Exploit:** Office Macro Execution, Unpatched Software, Malicious PDF File

**Payload:** Remote Access Tool, Ransomware, Spyware / Data Stealer

**Weapon:** Targeted Phishing Email, Crafted Network Request, Login Attempt on Service

---

### 13.4. PHASES 3 & 4: DELIVERY AND EXPLOITATION

The first moment the attacker touches the defender's environment. This is also the defender's best realistic chance to stop the attack.

**Delivery:** How the weapon reaches the victim: phishing email (still the #1 vector), drive-by downloads, USB drops, exploitation of exposed services, supply-chain compromises.

**Exploitation:** The payload runs. Either a vulnerability is triggered (browser, Office, VPN appliance) or the user executes the code voluntarily, tricked by social engineering.

**Controls that work here:** Email filtering, web gateways, EDR, patching, application allow-listing, user awareness training. This is where most security budget gets spent.

**Why does SOC care?:** Alerts at this stage are common and actionable. Blocking a phishing wave is cheap, cleaning up ransomware is expensive.

---

### 13.5. PHASES 5 & 6: INSTALLATION AND C2

The attacker has code running and now wants to keep it that way and talk to it remotely.

**Installation:** Establish persistence so that the attacker survives reboots and user log-offs. Typical techniques: scheduled tasks, services, registry run keys, WMI subscriptions, startup folders.

**Command & Control (C2):** A communication channel back to the attacker. Usually HTTPS to a legitimate-looking domain, sometimes DNS tunnelling, increasingly cloud services (Dropbox, Azure blobs, Telegram).

**Beaconing:** Most C2 traffic beacons: small periodic check-ins, often jittered, that are tiny in volume but constant in rhythm.

**What defenders look for:** Unusual outbound connections, new persistence mechanisms, EDR process-tree anomalies, DNS to newly registered domains, certificate oddities.

---

### 13.6. PHASE 7: ACTIONS ON OBJECTIVES

The attacker does what they came to do. By this point the defender has lost all initiative and is in damage-control mode.

**Exfiltration:** Steal sensitive data (e.g., customer data, source code, intellectual property)

**Destruction or Encryption:** Ransomware, deliberate sabotage, deletion of files or database records.

**Lateral Movement:** Moving to other hosts from inside the compromised network.

**Economic Damages:** Cost and reputational damage by leaking sensitive data or disrupting availability.

---

### 13.7. BREAKING THE CHAIN

Defenders do not need to be perfect. They just need to be earlier than the attacker's next step.

**Defense-in-depth mapping:** Each control (email filter, EDR, network IDS, identity protection, backup) maps to specific phases. Gaps are visible as phases no control covers.

**Dwell time matters:** Mandiant M-Trends 2024 reports a global median dwell time of 10 days. That is 10 days for an attacker to move between phases, undetected.



**Metric you can measure:** Time from phase-1 artefact entering your environment to phase-7 impact. Any additional day you take away from the attacker reduces damage.

**Detections, not tools:** Buying another appliance without knowing which phase it improves coverage on is expensive theatre.

---

## 13.8. KILL CHAIN VS. MITRE ATT&CK

MITRE ATT&CK is a knowledge base of real-world adversary tactics, techniques, and procedures (TTPs), maintained by the MITRE Corporation since 2013. The Kill Chain explains the story. ATT&CK provides the dictionary.

**Kill Chain:** Seven linear phases, strategic view, great for explaining intrusions and for mapping controls to gaps.

**ATT&CK:** Matrix of 14 tactics and hundreds of techniques. Every technique is linked to real-world threat groups and malware.

**Tactics:** Initial Access, Execution, Persistence, Privilege Escalation, Defence Evasion, Lateral Movement, Exfiltration, Impact, and more.

---

## 14. INCIDENT RESPONSE

---

### 14.1. EVENT VS INCIDENT

| Term           | Definition                                                                                                                      |
|----------------|---------------------------------------------------------------------------------------------------------------------------------|
| event          | any observable occurrence in a system or network. A user logs in, a file is created, a packet arrives. Most events are routine. |
| alert          | an automated notification from a security tool that an event matched a detection rule and may warrant investigation.            |
| false positive | an alert or suspected adverse event that turns out to be benign.                                                                |
| adverse event  | an event with possibly negative consequences, worth investigating.                                                              |
| incident       | a confirmed adverse event that threatens the confidentiality, integrity, or availability of information assets.                 |
| data breach    | an incident resulting in unauthorised access to or disclosure of protected data.                                                |

---

### 14.2. ESCALATION PATH

**Raw Events (Millions per day):** Every log line, packet, and API call. Collected and stored, very rarely looked at individually.

**Alerts (Thousands per day):** Subset of events that matched a rule, anomaly model, or signature. Mostly noise, misconfiguration or suspicious looking benign activity.

**Adverse Events (Dozens per day):** Alerts that survived triage and deserve individual investigation. An analyst looks at the context and decides what to do next.

**Incidents (A few per year):** Classified as actual incidents. IR plan activates, roles are assigned, and the clock starts on containment and recovery.

**Breaches (One every few years):** Large scale incidents involving data disclosure. IR plan activates and notification obligations apply.

---

## 14.3. CLASSIFYING INCIDENTS

### 14.3.1. Pipkin's Indicators

Donald Pipkin's three-level framework for deciding whether an adverse event is an actual incident. Escalating too early burns the SOC and its analysts out. Escalating too late lets the attacker finish the chain. The framework forces a deliberate, evidence-based call.

**Possible Indicators:** Weak signals, worth logging but not acting on alone.

Unfamiliar files in user directories, unusual CPU or disk consumption, unexplained system crashes.

**Probable Indicators:** Strong signals, typically trigger investigation.

Activity at unexpected hours from unusual locations, new accounts, sudden privilege changes, repeated phishing-reaching-inbox reports.

**Definite Indicators:** Confirmed incidents, activate the IR plan.

Documented malware presence, data exfiltration observed, ransomware encryption in progress, attacker logged in and moving laterally.

### 14.3.2. Classifier's Dilemma

Every detection rule is a trade-off between missing real attacks (false negatives) and burying the team in noise (false positives).

**True Positive:** Real malicious activity, alert is raised, and incident is investigated.

Incident contained early, damage minimized.

**True Negative:** Benign activity correctly ignored. Not measurable in practice.

Nothing happens.

**False Positive:** Benign activity mis-flagged as malicious.

Analyst wasted time investigating issue.

**False Negative:** Real attack missed. Often only visible after a post-mortem.

Incident is discovered too late, potentially irreversible damage has been done.

---

## 14.4. DETECT AND RESPOND

### 14.4.1. From "Prevent Everything" to "Assume Breach"

The philosophical shift that created modern Detect & Response. Prevention is still essential, but no longer sufficient on its own.

**"Prevent Everything" Mindset (until ~2010):** Perimeter firewall, AV on endpoints, patching. Assumption: if the perimeter holds, we are safe.

Why It Broke: Laptops leave the office. Attackers live inside trusted networks. Insiders exist. Supply chains are compromised. The perimeter is everywhere and nowhere.

**"Assume Breach" Mindset (today):** Assume the attacker is already inside some part of the environment.

Design for fast detection and fast containment, not just for prevention.

Consequence: Equal investment across Identify, Protect, Detect, Respond and Recover. Resilience is the goal, not impenetrability.

### 14.4.2. The Metrics That Matter

Detect & Respond is one of the few security domains with good, measurable metrics.

"If you cannot measure it, you cannot improve it."

**MTTD (Mean Time to Detect):** From initial compromise to first alert. Today's global median is about 10 days A decade ago; it was over 200. (M-Trends Report 2026)

**MTTR (Mean Time to Respond):** From first alert to incident contained. Good SOC's are in the hours-to-days range, not weeks or days.

**Dwell Time (MTTD + MTTR):** Total time an attacker was active in the environment. This represents the defender's and attacker's running clock.

#### 14.4.3. Who Actually Does What? SOC, CSIRT, CERT

**SOC (Security Operations Centre):** The always-on monitoring function. Runs the SIEM, triages alerts, drives day-to-day detection. Typically tiered (T1 triage, T2 investigation, T3 engineering).

**CSIRT (Computer Security Incident Response Team):** Handles confirmed incidents end-to-end. Often virtual, pulled together when needed, includes IT, legal, communications, management.

**CERT (Computer Emergency Response Team):** Originally the name of the Carnegie Mellon team. Today used for national or sector-level coordination bodies (e.g., GovCERT.ch, NCSC-CH, US-CERT, ENISA).

**In-House vs. Managed:** Many organisations outsource SOC functions to an MSSP (Managed Security Service Provider). CSIRT responsibilities usually stay in-house.

#### 14.4.4. The NIST IR Process

- 1) Preparation  
Policy, plan, team, tools, training. Everything that must be ready before the first alarm fires.
- 2) Detection & Analysis  
Spot signals, classify them, decide whether to trigger the IR plan.
- 3) Containment, Eradication & Recovery  
Stop the bleeding, remove the attacker, restore services.
- 4) Post-Incident Activity  
After-action review, lessons learned, feed back into Preparation.

##### 14.4.4.1. Phase 1: Preparation

All the work that must happen before the first real incident. Unglamorous, easily neglected, always the single biggest factor in how well an IR goes.

**People:** Named CSIRT roles and on-call rotation. Executive sponsor. Legal and communications liaisons. Clear chain of command.

**Process:** IR policy approved by management. IR plan with playbooks. Incident categories and severity scoring. Alert roster and escalation paths.

**Technology:** Logging enabled and centralized. IDS / EDR / SIEM deployed and tuned. Forensic tooling, evidence kits.

**Practice:** Tabletop exercises at least annually. Technical purple-team exercises. Test the backups (actually restore them).

##### 14.4.5. Phase 2: Detection & Analysis

The phase where Detect & Respond happens. The SOC sees alerts, classifies them, and decides what to do and whether the IR plan fires.

**Detection Sources:** IDS and IPS and often forgotten direct alerts from users and the helpdesk. Anti-virus on endpoint devices. SIEM correlation rules. Threat intelligence feeds. External reports from peers or regulators.

**Triage:** For each alert: enrich (asset owner, user context), classify (event vs. incident candidate), score severity, decide to escalate or dismiss.

**Key questions during triage:** What exactly happened? Which hosts, users, time range? Is this a false positive? Does this match any known indicator of an active campaign?

**Handover point:** Once an alert is classified as a confirmed incident, it moves from SOC operations to full CSIRT activation.

#### 14.4.6. Phase 3a: Containment

##### **Short-Term Containment**

- Isolate affected hosts
- Block malicious IPs through firewall rules
- Disable compromised accounts
- Apply temporary filtering rules

##### **Long-Term Containment**

- Network segmentation of affected zone
- Rebuild bastion hosts
- Rotate credentials / keys at scale
- Deploy additional monitoring

#### 14.4.7. Phase 3b & 3c: Eradication and Recovery

Remove the attacker's presence and get the business back online. Carefully, because rushing either step is how organizations get re-compromised.

"If rebuilding is cheaper than investigating, rebuild."

**Eradication: Identify Root Cause:** How did the attacker get in? Which vulnerability, credential, or misconfiguration was used?

**Eradication: Remove Persistence:** Possible services, scheduled tasks, registry run keys, malicious OAuth apps, rogue forwarding rules.

**Eradication: Rebuild and Patch:** Rebuild from stable images / snapshots, patch the root-cause vulnerability, rotate all credentials that could have been exposed, including API keys and certificates.

**Recovery:** Bring affected systems back in stages. Validate integrity. Monitor closely for reinfection for at least 30 days.

#### 14.4.8. Phase 4: Post-Incident Activity

The step most often skipped, and the most valuable one. An incident you do not learn from is one that will happen again.

**After-Action Review (AAR):** Everyone involved sits down and walks through what happened. No blame, no finger-pointing. What worked, what did not, what should change. The AAR is written up and shared.

**Outputs feed back into Preparation:** Updated IR plan and playbooks. New detection rules and signatures. Hardening changes and patches. Training material.

**Indicators of Compromise (IOCs):** Technical artefacts observed during the incident (hashes, domains, IPs) are documented and often shared with CERTs and peer organizations.

**If it is not written down, it did not happen:** Documentation is also a legal protection for the organization and its staff.

#### 14.4.9. Common IR Mistakes

Most of these are process and communication problems, not technical ones.

**Unclear Chain of Command:** Nobody is sure who has the authority to isolate a production system at 3 a.m. The attacker uses the confusion.

**No Central operations center.:** Incident runs out of a chat thread; half the decisions are undocumented. Two weeks later nobody remembers.

**Containing too slowly.:** Fear of “making it worse” means the attacker keeps moving. Damage compounds.

**Wiping evidence before Forensics.:** Rebuilding the affected server before the forensic image is taken. Root cause is now unknowable.

**Skipping the after-action Review.:** Same incident next year. Same surprise. Same mistakes.

**No tested Backups.:** Everyone assumed the backups worked. Ransomware just proved they did not.

---

### 14.5. INTRUSION DETECTION SYSTEMS

#### 14.5.1. Intrusion Detection System (IDS)

An Intrusion Detection System (IDS) monitors systems or network traffic, flags suspicious activity, and raises alerts. A burglar alarm, not a lock.

##### **Firewall**

- Enforces access-control policies within a network.
- Decides which traffic is allowed to pass between network zones and which isn't.
- Operates on basic allow / deny rules.
- Usually operated by network teams or admins.

##### **Intrusion Detection System**

- Detective / monitoring device that inspects traffic or host activity.
- Raises alerts when unusual or potentially malicious behavior is detected.
- It does not block anything; human action is required when an alert is raised.
- Usually operated by the SOC or security analysts.

#### 14.5.2. Intrusion Prevention System (IPS)

When an IDS is placed inline with the traffic and is given the authority to actively block or modify malicious activity it becomes an Intrusion Prevention System (IPS).

- Sits inline in the data path in the network.
- Can automatically interrupt or block malicious traffic.
- Acts faster / instantly but a false positive now means downtime for real users.
- Usually operated by the SOC and networking teams together.

#### 14.5.3. Signature-Based Detection

Match traffic or behavior against a known pattern. The classical approach, still the backbone of most commercial IDS products.

**How it works:** Each known attack has a fingerprint; a byte sequence, a URL pattern, a command string. The IDS compares every packet or event against a predefined rule set and alerts on matches.

| <i>Pro</i>                                                                                                                                                                                                              | <i>Contra</i>                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>– Low false-positive rate.</li> <li>– Alerts are precise and actionable.</li> <li>– Rule feeds are easy to share and update (Emerging Threats, ET Pro, vendor feeds).</li> </ul> | <ul style="list-style-type: none"> <li>– Blind to zero-days and unknown new threat variants.</li> <li>– Easily bypassed by small mutations (obfuscation, packing, custom protocols).</li> <li>– Rule sets grow large, performance and maintenance cost rises.</li> </ul> |

#### 14.5.4. Anomaly-Based Detection

Learn what “normal” looks like, then alert on deviations. The only technique that has any chance of catching truly novel attacks.

**How it works:** Build a baseline of normal behavior; typical volumes, login times, process trees, DNS query patterns. Statistical or ML models flag observations that fall outside the baseline.

| <i>Pro</i>                                                                                                                                                                                                               | <i>Contra</i>                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>– Can detect novel attacks and zero-days.</li> <li>– Catches insider threats and credential abuse that signatures miss.</li> <li>– Adapts to the specific environment.</li> </ul> | <ul style="list-style-type: none"> <li>– High false-positive rate during training and after legitimate changes (new software, new users, seasonal patterns, etc.).</li> <li>– Hard to explain alerts. “The model says so” is rarely convincing at 03:00 in the morning.</li> </ul> |

#### 14.5.5. Intrusion Detection in Practice

Real-world IDS products usually blend approaches. Nobody ships a pure-signature or pure- anomaly product anymore.

**Stateful Protocol Analysis:** An IDS understands networking protocols (SMB, HTTP, DNS, TLS). It alerts when a session violates the specification, even without a specific signature.

**Heuristic and Behavioral Rules:** Rules that describe suspicious sequences (e.g., MS Word spawning PowerShell that writes to AppData folder).

**AI-Assisted Classification:** Supervised models trained on labelled samples (phishing URLs, beacon profiles), often bolted onto signature engines.

**Hybrid in Practice:** Most real-world products blend all the above. Suricata does signatures and protocol analysis. An EDR does behavior as well as AI and telemetry.

## 14.6. SECURITY INFORMATION AND EVENT MANAGEMENT (SIEM)

### 14.6.1. Why Do We Need a SIEM?

Every device, service and app produces logs. Someone must read them.

**The Volume Problem:** A mid-size company easily produces 20+ GB of logs per day from 40+ distinct sources. No human reads all of that.

**The Correlation Problem:** Interesting attacks touch several systems in sequence. Looking at any single system misses the pattern.

**The Retention Problem:** Forensics often needs logs from 90+ days ago. Most systems rotate logs out in days.

**The Compliance Problem:** PCI-DSS, ISO 27001, FINMA, NIS2 and friends all demand that security logs exist, are reviewed, and are retained.



### 14.6.2. SIEM Architecture

- 1) Sources: Endpoints, firewalls, servers, identity providers, cloud platforms, SaaS applications, IDS / IPS, EDR.
- 2) Collectors: Agents, syslog receivers, API-pull connectors, log forwarders. Responsible for getting data off the source and into the SIEM reliably.
- 3) Parse & Normalize: Map every log into a common schema (CIM for Splunk, ECS for Elastic). A Windows login and a Cisco login become comparable.
- 4) Correlate & Store: Detection rules, ML models, search index, long-term data lake. The core of the product.
- 5) Consume: Alerts to the SOC, dashboards for leadership, search for analysts, reports for auditors.

### 14.6.3. Correlation: Turning Noise Into a Story

Correlation rules express the attacker's behavior across sources and time. One event is a log line. Three in the right order might be an incident.

**Example scenario:** Possible account compromise: 10 failed VPN logins for user X, followed by a successful VPN login, followed by a login from a foreign IP, followed by a large SharePoint download within 15 minutes.

**The rule encodes the sequence:** Nothing here would fire a useful alert alone. Every event is common. Chained in that order, within that window, the pattern is suspicious.

**Written in the SIEM's query language:** Splunk SPL, Kusto (Microsoft Sentinel), Elasticsearch DSL, Sigma (open, vendor-agnostic).

**Detection engineering is its own discipline:** Writing, tuning, and retiring correlation rules is a full-time job. Good detection engineers are the scarce resource, not the tool.

### 14.6.4. What SOCs use a SIEM for

Detection is the headline, but the other uses are what usually pays for the tool.

**Threat Detection:** Real-time alerts on known and learned attack patterns. The reason SIEMs exist.

**Incident Investigation:** When an alert fires, the SIEM is where analysts pivot across logs to reconstruct what happened.

**Threat Hunting:** Hypothesis-driven search through historical data. "Have we seen this IOC anywhere in the last 90 days?"

**Compliance Reporting:** Proof that logs exist, are reviewed, and are retained. Auditors love canned SIEM reports.

**UEBA (User & Entity Behavior Analytics):** Baselines "normal" per user and flags outliers. Often a paid add-on module.

**Fraud & Insider Risk:** Finance, HR and legal teams are sometimes internal customers of the SIEM too.

### 14.6.5. SIEM vs. SOAR vs. XDR

**SIEM:** Collect, normalize, correlate, alert. Broad scope across all log sources. Detection-heavy. Human response.

**SOAR (Security Orchestration, Automation and Response):** Sits on top of the SIEM. Runs playbooks: isolate host, disable account, open a ticket, enrich indicators, notify legal.

**XDR (Extended Detection and Response):** Vendor-bundled detection across endpoint, network, identity, email and cloud. Often sold as a lighter alternative to SIEM+SOAR, at the cost of vendor lock-in.

**In real enterprises:** SIEM + SOAR is the classic stack. XDR is popular in smaller organizations and in vendor-aligned ones that have standardized on one provider.

#### 14.6.6. Where SIEM Projects Fail

**Alert Fatigue:** Too many low-quality alerts. Analysts stop reading. The one that mattered was in there, somewhere.

**Garbage In / Garbage Out:** If logs are incomplete, mis-parsed, or missing timestamps, no correlation rule can save you. Log quality is the foundation.

**Ingestion Cost:** Most commercial SIEMs price per GB per day. “Log everything” quickly becomes unaffordable, so you have to be deliberate about what to collect.

**Tuning Debt:** Rules that fit last year’s environment do not fit this year’s. Someone has to own them and retire what is no longer useful.

**Skills Gap:** Running a SIEM well needs detection engineers and threat hunters, not just “log admins”. That is a scarce role.