

- Less mutations in array
- Same performance even if list almost sorted

```
public static void selectionSort(int[] a) {
    int n = a.length;
    for (int i = 0; i < n - 1; i++) {
        int minimum = i;
        for (int j = i + 1; j < n; j++)
            if (a[j] < a[minimum])
                minimum = j;
        swap(a, i, minimum);
    }
}
```

$$(n-1) + (n-2) + \dots + 1 = \sum_{i=1}^{n-1} i = \frac{n(n-1)}{2} = \frac{n^2-n}{2} \sim O(n^2)$$

- INSERTION SORT**
- Take elem and put into correct place in sorted part
 - Good for already partially sorted arrays

```
public static void insertionSort(int[] a) {
    int n = a.length;
    for (int i = 1; i < n; i++)
        for (int j = i; j > 0 && a[j] < a[j - 1]; j--)
            swap(a, j, j - 1);
}
```

$$1 + \dots + (n-1) + n = \sum_{i=1}^n i = \frac{n(n+1)}{2} = \frac{n^2+n}{2} \sim O(n^2)$$

- BUBBLE SORT**
- Compare neighboring elems and swap if needed

```
public static void bubbleSort(int[] a) {
    for (n = a.length; n > 1; n--)
        for (i = 0; i < n - 1; i++)
            if (a[i] > a[i + 1])
                swap(a, i, i + 1);
}
```

$$(n-1) + (n-2) + \dots + 1 = \sum_{i=1}^{n-1} i = \frac{n(n-1)}{2} = \frac{n^2-n}{2} \sim O(n^2)$$

```
public static void countingSort(int[] a) {
    int k = Arrays.stream(arr).max().getAsInt();
    int[] c = new int[k + 1];
    for (int i : a) c[i] += 1;
    int pos = 0;
    for (int i = 0; i < k; i++)
        for (int j = 0; j < c[i]; j++) {
            a[pos] = i;
            pos++;
        }
}
```

$$n + n + k + n = 3n + k \sim O(n + k)$$

- SHELL SORT**
- Sort pairs of far away elems
 - Sort the partially sorted array through insertion sort

```
public static void shellSort(int[] a) {
    int n = a.length;
    int h = 1;
    while (h < n/3) h = 3 * h + 1;
    while (h >= 1) {
        for (int i = h; i < n; i++)
            for (int j = i; j >= h && a[j] < a[j - h]; j = j - h) swap(a, j, j - h);
        h /= 3;
    }
}
```

BINARY SEARCH

```
public static <T extends Comparable<T>> boolean bs(
    List<T> data, T target, int low, int high) {
    if (low > high) return false;
    int pivot = low + ((high - low) / 2);
    if (target.equals(data.get(pivot)))
        return true;
    else if (target.compareTo(data.get(pivot)) < 0)
        return searchBinary(data, target, low, pivot - 1);
    else
        return searchBinary(data, target, pivot + 1, high);
}
```

```
return searchBinary(data, target, pivot + 1, high);
}
```

$$O(\log n)$$

RECURSION

When a function calls itself

LINEAR RECURSION

Recursive call starts **at most one** further recursive call

TODO:

recursive → iterative (slides 61)

TAIL RECURSION

Linear recursion where the recursive call is **last**

TODO:

recursive → iterative (slides 69 – nice)

BINARY RECURSION

All non-terminal calls have **two** recursive calls

TODO:

example (slides 76,77,78)

TODO:

$O(n)$ (slides 84)

DATA STRUCTURES

ADT: Abstract Data Type (e.g. Interface)

TODO:

diagram



PRIORITY QUEUE




Method	Unsorted List	Sorted List
insert	$O(1)$	$O(n)$
min	$O(n)$	$O(1)$
removeMin	$O(n)$	$O(1)$

HEAP

- Binary tree
- Layers 0, ..., $h-1$ fully populated, layer h filled from left
- Operations always lowest RHS so that tree stays consistent

Min-Heap: Keys of nodes are **smaller** or equal than children's

Max-Heap: Keys of nodes are **larger** or equal than children's

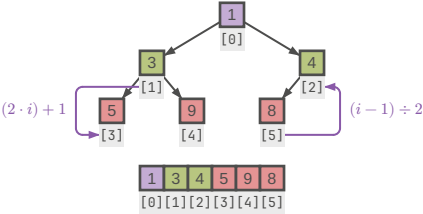

HEAP SORT

Dequeue elems from head into list, resorting tree on each iter

TODO: