

**TODO:**  
Record

GENERIC

```
// class
class Box<T> { }
// variable
Box<String> b = new Box<String>();
// method
public <T> void doStuff(T value) { }
// Full Example
class OrderedPair<T, U> {
    T first;
    U second;
    public OrderedPair(T t, U u) {
        this.first = f;
        this.second = s;
    }
    public T getFirst() { return first; }
    public U getSecond() { return second; }
    @Override
    public int hashCode() {
        return Objects.hash(first.hashCode(),
                               second.hashCode());
    }
    @Override
    public boolean equals(Object obj) {
        if (obj == null ||
            obj.getClass() != getClass()) return false;
        @SuppressWarnings("unchecked")
        var other = (OrderedPair<T, U>)obj;
        return Objects.equals(first, other.first) &&
            Objects.equals(second, other.second);
    }
}

public class Employee implements Comparable<Employee> {
    // ...
    @Override
    public int compareTo(Employee other) {
        return Double.compare(this.salary, other.salary);
    }
}

// JAVA BEING STUPID
T obj = new T(); // error
obj instanceof T; // error
T heh = (T) "asdf"; // no typechecking
var s = Stack<int>(); // no primitive types
private static T x; // static no worky
Node<Number> s = new Node<Integer>; // error
class IThrowAnErrorBecauseWhyNot {
    void m(List<String> list) { }
    void m(List<Integer> list) { }
} // error because of type erasure & identifiability

// ITERATOR
for (String s : stringList) { } // ==
for (Iterator<String> i = stringList.iterator();
    i.hasNext()) String s = i.next();

// ITERABLE
interface Iterable<T> {
    Iterator<T> iterator();
}

interface Iterator<E> {
    boolean hasNext();
    E next();
}

// COMPARABLE
// TODO:
Type signature?

static <T extends Comparable> T doStuff(T a, T b) {
    // compareTo is possible with all types
    return a.compareTo("b") > 0 ? a : b;
}

static <T extends Comparable<T>> T doStuff(T a,T b) {
    // compareTo is possible only with T
    return a.compareTo(b) > 0 ? a : b;
}
```

**EXAMPLE**

```
class Graphic {
    public void draw() { }
}

class Rectangle extends Graphic { }
class Circle extends Graphic { }
class GraphicStack<T extends Graphic>
    extends Stack<T> {
    public void drawAll() {
        for (T item : this) item.draw();
    }
}

// BYTECODE
// TODO:
// TYPE ERASURE
-- Introduced because of "bAcKwArDs CoMpAtAbIlITy"
-- No type information at runtime (Non-Reifiable Type)

class MyStack<T> {
    Entry<T> top;
    int push(T value) { }
}

// becomes
class MyStack {
    Entry top;
    int push(Object value) { }
}

/* with bounds */
class MyStack<T extends Comparable<T>> {
    Entry<T> top;
    int push(T value) { }
}

// becomes
class MyStack {
    Entry top;
    int push(Comparable value) { }
}

/* what happens at/before runtime */
MyStack<String> s = new MyStack<String>();
s.push("Eh");
String x = (String) s.pop();
// becomes
MyStack s = new MyStack();
s.push("Eh");
String x = (String) s.pop();
```

BYTECODE

TOD:

TYPE ERASURE

– Introduced because of "bAcKwArDs CoMpAtAbIlITy"  
– No type information at runtime (Non-Reifiable Type)

```
class MyStack<T> {
    Entry<T> top;
    int push(T value) { }
}

// becomes
class MyStack {
    Entry top;
    int push(Object value) { }
}

/* with bounds */
class MyStack<T extends Comparable<T>> {
    Entry<T> top;
    int push(T value) { }
}

// becomes
class MyStack {
    Entry top;
    int push(Comparable value) { }
}

/* what happens at/before runtime */
MyStack<String> s = new MyStack<String>();
s.push("Eh");
String x = (String) s.pop();
// becomes
MyStack s = new MyStack();
s.push("Eh");
String x = (String) s.pop();

// WILDCARDS
void printGs(List<Graphic> gs) { }
List<Graphic> gs1 = new ArrayList<>();
printGs(gs1); // ok
List<Circle> gs2 = new ArrayList<>();
printGs(gs2); // error
/* solution */
void printGs(List<? extends Graphic> gs) { }

// GENERIC VARIANCE


|                | Type           | Compatible Type-Args | R | W |
|----------------|----------------|----------------------|---|---|
| Invariance     | C<T>           | T                    | ✓ | ✓ |
| Covariance     | C<? extends T> | T and sub-types      | ✓ | x |
| Contravariance | C<? super T>   | T and basis-types    | x | ✓ |
| Bivariance     | C<?>           | All                  | x | x |



// INVARIANCE
static <T> void move(Stack<T>, from, Stack<T> to) {
    while(!from.isEmpty()) to.push(from.pop());
}

var rectS = new Stack<Rectangle>();
var graphS = new Stack<Graphic>();
graphS.push(new Rectangle()); // ok
move(rectS, graphS); // error
Stack<Object> objS = graphS; // error
/* anotherone */
String[] strA = new String[10];
Object[] objA = strA; // ok
objA[0] = Integer.valueOf(2); // runtime err

// TODO:
// compiles?
List<Graphic> list = new ArrayList<Rectangle>();
```

```
// compiles?
Rectangle[] rectangleStack = new Rectangle[10];
Graphic[] graphicStack = new Graphic[10];
graphicStack = rectangleStack;
// compiles?
Stack<Rectangle> rectangleStack = new Stack<>();
Stack<Graphic> graphicStack = new Stack<>();
graphicStack = rectangleStack;
// compiles?
Stack<Rectangle> rectangleStack = new Stack<>();
Stack<Graphic> graphicStack = new Stack<>();
for (Rectangle r : rectangleStack) {
    graphicStack.push(r);
}
```

COVARIANCE

```
public class Stack<E> {
    public void pushAll(Iterable<? extends E> src) { }
}

Stack<? extends Graphic> graphS;
graphS = new Stack<Rectangle>(); // ok
graphS = new Stack<Circle>(); // ok
graphS = new Stack<Object>(); // error (duh)
/* read only */
graphS.push(new Graphic()); // error
graphS.push(new Rectangle()); // error
graphS.push(new Triangle()); // error

// CONTRAVARIANCE
static <T> void addToC(List<? super T> list, T e) {
    list.add(e);
}

addToC(new ArrayList<Number>(), 3); // ok
addToC(new ArrayList<Object>(), 3); // ok
/* shenanigans */
Stack<? super Graphic> s = new Stack<Object>();
s.add(new Graphic()); // ok
s.add(new Rectangle()); // ok
Graphic g = s.pop(); // error
Object g = s.pop(); // ok

// BIVARIANCE
static void printList(List<?> list) {
    for (Object elem : list)
        System.out.print(elem + " ");
}

/* more shenanigans */
static void appendNewObject(List<?> list) {
    list.add(new Object()); // error
}

// TODO:
more examples
```

BIVARIANCE

```
static void printList(List<?> list) {
    for (Object elem : list)
        System.out.print(elem + " ");
}

/* more shenanigans */
static void appendNewObject(List<?> list) {
    list.add(new Object()); // error
}

// TODO:
more examples
```

TOD:

more examples

ANOTHERONE

```
public class VarianceExamples {
    public static double sum(
        Collection<? extends Number> numbers) {
        double sum = 0;
        for (Number num : numbers)
            sum += num.doubleValue();
        return sum;
    }

    public static void addNumbers(List<? super Integer>
        list, Collection<? extends Integer> source) {
        list.addAll(source);
    }

    public static <T extends Comparable<T>> T
        findMax(Collection<T> coll) {
        return coll.stream()
            .max(Comparator.naturalOrder())
            .orElse(null);
    }

    public static <T> List<T> filterByType(
        Collection<?> source, Class<T> clazz) {
        List<T> result = new ArrayList<>();
        for (Object obj : source)
            if (clazz.isInstance(obj))
                result.add(clazz.cast(obj));
        return result;
    }
}
```

**TOD:**  
// compiles?  
List<Graphic> list = new ArrayList<Rectangle>();

PRODUCER / CONSUMER

**TOD:**

**MISC**

<T extends Comparable & Collection> // multiple type bounds

Set<Integer> set = new Set<>();  
Integer[] c = set.toArray(new Integer[0]);

**GENERIC** **STREAM** **TOMFOOLERY**

List<? extends Media> mediaList;  
public <S extends T> List<S>  
 filterBySubtype(Class<S> subtype) {  
 return mediaList.stream()  
 .filter(subtype::isInstance)  
 .map(subtype::cast)  
 .collect(Collectors.toList());  
}

**ANNOTATIONS**

– Metadata  
– Not actually part of the code

**TOD:**  
slides 10

– @Override  
– @Test  
– @Json...

**DEFINING**

@Target(ElementType.TYPE)  
@Retention(RetentionPolicy.RUNTIME)  
public @interface Author {  
 String name();  
 String date() default "N/A";  
}

@Author(name = "Uwu", date = "idon'tvalidateinput")  
public class Wee0oo { }

**TOD:**  
Examples Woche03

**REFLECTION**

– Information of Class (private and public): Methods, Attributes, Parent class, Implemented interfaces  
– Calling methods possible  
– Usages: Debugger, Serialization, Frameworks, Remote Procedure Call, ORM

// all of these `throws SecurityException`  
public Field[] getDeclaredFields()  
public Method[] getDeclaredMethods()  
public Constructor<?>[] getDeclaredConstructors()

System.out.println(dump(new Student("a", "b", 0));  
// {  
// firstName = a  
// lastName = b  
// }  
Class c = "s".getClass(); // java.lang.String

**METHOD**

@Retention(RetentionPolicy.RUNTIME)  
@Target(ElementType.METHOD)  
public @interface Init { }

// ...  
public class User {  
 private String needsInit;  
 @Init  
 private void initObj() {  
 this.needsInit = "wowie";  
 }  
}

**CLASS**

**TOD:**  
getDeclaredConstructor().newInstance()

@Retention(RetentionPolicy.RUNTIME)  
@Target(ElementType.TYPE)

```
public @interface JsonSerializerizable { }
// ...
@JsonSerializable
public class User { }

// ATTRIBUTE
@Retention(RetentionPolicy.RUNTIME)
@Target({ ElementType.FIELD })
public @interface JsonElement {
    public String key() default "";
}

// ...
public class User {
    @JsonElement
    private String firstName;
}

// VALIDATION
@Min(value = 18, message = "Age must be ≥ 18")
@Max(value = 99, message = "Age must be ≤ 99")
private int age;
@NotNull(message = "Name cannot be null")
private String name;

// EXAMPLE
@Target(ElementType.TYPE)
@Retention(RetentionPolicy.RUNTIME)
public @interface WebController { }
// ...
@Retention(RetentionPolicy.RUNTIME)
@Target(ElementType.METHOD)
public @interface Get {
    String path();
    String contentType() default "application/json";
}
// ...
@WebController
public class Controller {
    private User user = new User("frank", "meier");
    @Get(path = "/user")
    public String user() {
        return new ObjectToJsonConverter()
            .convertToJson(user);
    }
}
// ...
public class WebFramework {
    public void addController(Class<?> controllerClass)
        throws Exception {
        if (!controllerClass
            .isAnnotationPresent(WebController.class))
            throw new Exception("Is not a WebController");

        for (Method method : controllerClass
            .getDeclaredMethods())
            if (method.isAnnotationPresent(Get.class)) {
                method.setAccessible(true); // best practice or
                // Not necessarily global optimum
                var annot = method.getAnnotation(Get.class);
                routeHandlers.put(
                    annot.path(),
                    new WebHandler<>(method,
                        controllerClass
                            .getDeclaredConstructor()
                            .newInstance(),
                            annot.contentType())
                );
            }
    }
}

// ALGORITHMS
Brute-force: slow, stupid, go shame yourself
Greedy: Take best option each step (optimize locally). Fast.
Not necessarily global optimum
Backtracking: Trial and error. Best overall option. Higher compute costs
Divide and conquer: Binary search
Dynamic programming: Recursion optimization? Tabulation. Iterative reuse of previous results

// BACKTRACKING
// TOD:
slides 87
```

TODO:  
example

KNIGHTSTOUR

TODO:  
diagram

```
boolean tour(int[][] visited, int x,int y, int pos) {
    visited[x][y] = pos;
    if (pos >= N * N) return true;
    for (int k = 0; k < 8; k++) {
        int newX = x + row[k];
        int newY = y + col[k];
        if (isValid(newX, newY)
            && visited[newX][newY] == 0
            && tour(visited, newX, newY, pos + 1))
            return true;
    }
    visited[x][y] = 0;
    return false;
}
```

BIG O NOTATION

– Worst case scenario

– Atomic operations = constant time

– Runtime measured as sum of primitive operations

Notation

*f* Algorithm                      *n* Size of Problem

*g* Complexity Class              *c* > 0


*n*<sub>0</sub> ≥ 1

*f*(*n*) = Number of steps

*g* = complexity class

TODO:

diagram *f* ≤ *c**g*, asymptotic, count primops, recursion, summary (slides 52)

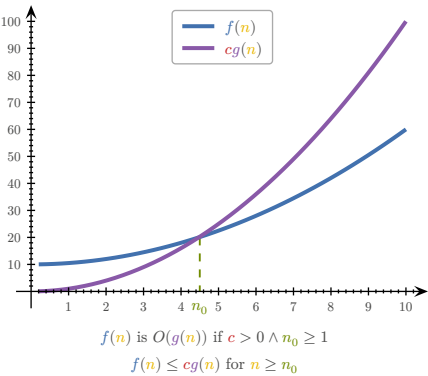

*f* in order *g*:

*f*, *g*: ℕ → ℕ

*n*<sub>0</sub>, *c* ∈ ℕ ∧ ∀ *n* ≥ *n*<sub>0</sub>. (*f*(*n*) ≤ *c* · *g*(*n*))

⇒ *f* ∈ *O*(*g*) ⇔ *f* = *O*(*g*)

*O*(*n*) = Complexity class

RULES

If *f*(*n*) is polynomial of degree *d*, then *f*(*n*) ∈ *O*(*n*<sup>*d*</sup>)

– ignore lower powers

– ignore constants


Use most optimal function (lowest power)

– 2*n* is *O*(*n*) better than 2*n* is *O*(*n*<sup>2</sup>)

Simplify as far as possible

– 3*n* + 5 is *O*(*n*) instead of 3*n* + 5 is *O*(3*n*)

| COMPLEXITY CLASSES |                              |                            |
|--------------------|------------------------------|----------------------------|
| Name               | Class                        | Example                    |
| Constant           | 1                            | Array read                 |
| Logarithmic        | log <i>n</i>                 | Binary search              |
| Linear             | <i>n</i>                     | Linear search              |
| Log-linear         | <i>n</i> log <i>n</i>        | Merge+Quick sort           |
| Quadratic          | <i>n</i> <sup>2</sup>        | Bubble+Insertion sort      |
| Cubic              | <i>n</i> <sup>3</sup>        | Solve equation             |
| Polynomial         | <i>n</i> <sup><i>k</i></sup> | Various algorithms         |
| Exponential        | 2 <sup><i>n</i></sup>        | Calculate all subsets      |
| Factorial          | <i>n</i> !                   | Calculate all permutations |

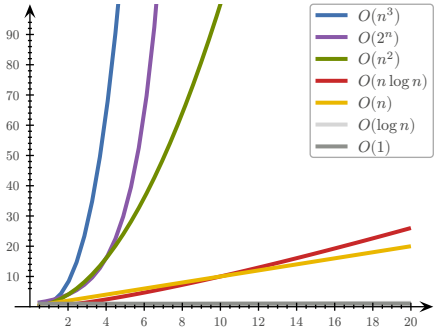

TODO:

Counting primitive operations (slides 55)

MAFS

$$1 + 2 + \dots + n = \sum_{k=1}^n k = \frac{n(n+1)}{2}$$
$$1 + q + q^2 + \dots + q^n = \sum_{k=0}^n q^k = \frac{1 - q^{n+1}}{1 - q}$$
$$q=2, n=\log_2(n) \Rightarrow 2n-1$$

SORTING ALGORITHMS

TODO:

Sorting diagrams

BOGOSORT

The best sorting algorithm

STALINSORT

The most efficient sorting algorithm

SELECTION SORT

– Search for smallest elem in unsorted part and move in front

– Less mutations in array

– Same performance even if list almost sorted

```
public static void selectionSort(int[] a) {
    int n = a.length;
    for (int i = 0; i < n - 1; i++) {
        int minimum = i;
        for (int j = i + 1; j < n; j++)
            if (a[j] < a[minimum])
                minimum = j;
        swap(a, i, minimum);
    }
}
```

$$(n-1) + (n-2) + \dots + 1 = \sum_{i=1}^{n-1} i = \frac{n(n-1)}{2} = \frac{n^2-n}{2} \sim O(n^2)$$

INSERTION SORT

– Take elem and put into correct place in sorted part

– Good for already partially sorted arrays

```
public static void insertionSort(int[] a) {
    int n = a.length;
    for (int i = 1; i < n; i++)
        for (int j = i; j > 0 && a[j] < a[j - 1]; j--)
            swap(a, j, j - 1);
}
```

$$1 + \dots + (n-1) + n = \sum_{i=1}^n i = \frac{n(n+1)}{2} = \frac{n^2+n}{2} \sim O(n^2)$$

BUBBLE SORT

– Compare neighboring elems and swap if needed

```
public static void bubbleSort(int[] a) {
    for (n = a.length; n > 1; n--)
        for (i = 0; i < n - 1; i++)
            if (a[i] > a[i + 1])
                swap(a, i, i + 1);
}
```

$$(n-1) + (n-2) + \dots + 1 = \sum_{i=1}^{n-1} i = \frac{n(n-1)}{2} = \frac{n^2-n}{2} \sim O(n^2)$$

COUNTING SORT

public static void countingSort(int[] a) {
 int k = Arrays.stream(arr).max().getAsInt();
 int[] c = new int[k + 1];
 for (int i : a) c[i] += 1;
 int pos = 0;
 for (int i = 0; i < k; i++)
 for (int j = 0; j < c[i]; j++) {
 a[pos] = i;
 pos++;
 }
}

$$n + n + k + n = 3n + k \sim O(n + k)$$

SHELL SORT

– Sort pairs of far away elems

– Sort the partially sorted array through insertion sort

```
public static void shellSort(int[] a) {
    int n = a.length;
    int h = 1;
    while (h < n/3) h = 3 * h + 1;
    while (h >= 1) {
        for (int i = h; i < n; i++)
            for (int j = i; j >= h && a[j] < a[j - h]; j = j - h) swap(a, j, j - h);
        h /= 3;
    }
}
```

BINARY SEARCH

TODO:

iterative vs recursive (Woche04 Aufgabe3)

```
public static <T extends Comparable<T>> boolean bs(
    List<T> data, T target, int low, int high) {
    if (low > high) return false;
    int pivot = low + ((high - low) / 2);
    if (target.equals(data.get(pivot)))
        return true;
    else if (target.compareTo(data.get(pivot)) < 0)
        return searchBinary(data, target, low, pivot - 1);
    else
        return searchBinary(data, target, pivot + 1, high);
}
```

$$O(\log n)$$

RECURSION

When a function calls itself. FP <3

LINEAR RECURSION

Recursive call starts **at most one** further recursive call

RECURSIVE → ITERATIVE

```
static int[] reverseArrRec(int[] a, int i, int j) {
    if (i < j) {
        int temp = a[j];
        a[j] = a[i];
        a[i] = temp;
        reverseArray(a, i + 1, j - 1);
    }
    return a;
}

static int[] reverseArrIter(int[] a, int i, int j) {
    while (i < j) {
        int temp = a[j];
        a[j] = a[i];
        a[i] = temp;
    }
}
```

```
i = i + 1;
j = j - 1;
return a;
}
```

TAIL RECURSION

Linear recursion where the recursive call is **last**

```
static int recsum(int x) {
    if (x == 0) return 0;
    else return x + recsum(x - 1);
}
// no tail recursion because "+" is evaluated last

static int tailrecsum(int x, int total) {
    if (x == 0) return total;
    else return tailrecsum(x - 1, total + x);
}
```

BINARY RECURSION

All non-terminal calls have **two** recursive calls

TODO:

example (slides 76,77,78)

TODO:

*O*(*n*) (slides 84)

DATA STRUCTURES


TODO:

code examples


ADT: Abstract Data Type (e.g. Interface). “What”, not “How”



ARRAY




LINKED LIST



DOUBLY LINKED LIST



STACK




QUEUE



TREE



RING BUFFER



```
class RingBuffer {
    private int[] buffer;
    private int size;
    private int start;
    private int end;
    private boolean isFull;

    public RingBuffer(int size) {
        if (size <= 0)
            throw new IllegalArgumentException("Size must be greater than 0");
        this.size = size;
        this.buffer = new int[size];
        this.start = 0;
        this.end = 0;
        this.isFull = false;
    }
}
```

```
public RingBuffer(int size) {
    if (size <= 0)
        throw new IllegalArgumentException("Size must be greater than 0");
    this.size = size;
    this.buffer = new int[size];
    this.start = 0;
    this.end = 0;
    this.isFull = false;
}
```

```
public void append(int item) {
    buffer[end] = item;
    end = (end + 1) % size;
    if (isFull)
        start = (start + 1) % size;
    if (end == start)
        isFull = true;
}
```

```
public List<Integer> getData() {
    List<Integer> items = new ArrayList<>();
    if (!isFull) {
        for (int i = 0; i < end; i++)
            items.add(buffer[i]);
    } else {
        for (int i = start; i < size; i++)
            items.add(buffer[i]);
        for (int i = 0; i < end; i++)
            items.add(buffer[i]);
    }
    return items;
}
```

PRIORITY QUEUE


| Method    | Unsorted List         | Sorted List           |
|-----------|-----------------------|-----------------------|
| insert    | <i>O</i> (1)          | <i>O</i> ( <i>n</i> ) |
| min       | <i>O</i> ( <i>n</i> ) | <i>O</i> (1)          |
| removeMin | <i>O</i> ( <i>n</i> ) | <i>O</i> (1)          |

HEAP


- Binary tree
- Layers 0, ..., *h* – 1 fully populated, layer *h* filled from left
- Operations always lowest RHS so that tree stays consistent

Min-Heap: Keys of nodes are **smaller** or equal than children's

Max-Heap: Keys of nodes are **larger** or equal than children's

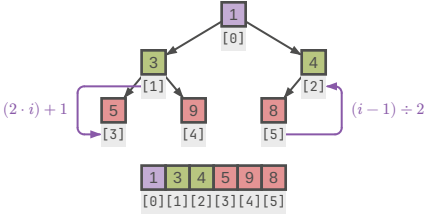

ENQUEUE



DEQUEUE



HEAP SORT

Dequeue elems from head into list, resorting tree on each iter

TODO:

TODO:

Woche09 Aufgabe4

BINARY SEARCH TREE (BST)

– All subnodes of **left** subtree are **smaller** than root

– All subnodes of **right** subtree are **larger** than root

TODO:

Woche10 Aufgabe1

