

SQL Cheat Sheet: Views, Stored Procedures and Transactions



Views

Topic	Syntax	Description	Example
Create View	<code>CREATE VIEW view_name AS SELECT column1, column2, ... FROM table_name WHERE condition;</code>	A CREATE VIEW is an alternative way of representing data that exists in one or more tables.	<code>CREATE VIEW EMPSALARY AS SELECT EMP_ID, F_NAME, L_NAME, B_DATE, SEX, SALARY FROM EMPLOYEES;</code>
Update a View	<code>CREATE OR REPLACE VIEW view_name AS SELECT column1, column2, ... FROM table_name WHERE condition;</code>	The CREATE OR REPLACE VIEW command updates a view.	<code>CREATE OR REPLACE VIEW EMPSALARY AS SELECT EMP_ID, F_NAME, L_NAME, B_DATE, SEX, JOB_TITLE, MIN_SALARY, MAX_SALARY FROM EMPLOYEES, JOBS WHERE EMPLOYEES.JOB_ID = JOBS.JOB_IDENT;</code>
Drop a View	<code>DROP VIEW view_name;</code>	Use the DROP VIEW statement to remove a view from the database.	<code>DROP VIEW EMPSALARY;</code>

Stored Procedures in IBM Db2 using SQL


Stored Procedures	<pre>--#SET TERMINATOR @ CREATE PROCEDURE PROCEDURE_NAME LANGUAGE BEGIN END @</pre>	<p>A stored procedure is a prepared SQL code that you can save, so the code can be reused over and over again.</p> <p>The default terminator for a stored procedure is semicolon(;). To set a different terminator we use SET TERMINATOR clause followed by the terminator such as '@'.</p>	<pre>--#SET TERMINATOR @ CREATE PROCEDURE RETRIEVE_ALL LANGUAGE SQL READS SQL DATA DYNAMIC RESULT SETS 1 BEGIN DECLARE C1 CURSOR WITH RETURN FOR SELECT * FROM PETSAL; OPEN C1; END @</pre>
-------------------	--	---	--

Stored Procedures in MySQL using phpMyAdmin

Stored Procedures	DELIMITER //	A stored procedure is a prepared SQL code that you can save, so the code can be reused over and over again. The default terminator for a stored procedure is semicolon (;). To set a different terminator we use DELIMITER clause followed by the terminator such as \$\$ or //.	DELIMITER //
	CREATE PROCEDURE PROCEDURE_NAME		CREATE PROCEDURE RETRIEVE_ALL()
	BEGIN		BEGIN
	END //		SELECT * FROM PETSale;
	DELIMITER ;		END //
			DELIMITER ;

Transactions with Db2

Commit command	<p>A COMMIT command is used to persist the changes in the database.</p> <p>COMMIT;</p> <p>The default terminator for a COMMIT command is semicolon (;).</p>	<pre>CREATE TABLE employee(ID INT, Name VARCHAR(20), City VARCHAR(20), Salary INT, Age INT); INSERT INTO employee(ID, Name, City, Salary, Age) VALUES(1, 'Priyanka pal', 'Nasik', 36000, 21), (2, 'Riya chowdary', 'Bangalore', 82000, 29); SELECT *FROM employee; COMMIT;</pre>
Rollback command	<p>ROLLBACK; A ROLLBACK command is used to rollback the transactions which are not saved in the database.</p> <p>The default terminator for a ROLLBACK command is semicolon (;).</p>	<p>As auto-commit is enabled by default, all transactions will be committed. We need to disable this option to see how rollback works.</p> <p>For db2, we have to disable auto-commit manually. Click the gear icon located on the right side of the SQL Assistant window. Next, select the "On Success" drop-down and choose "commit after the last statement in the script" Remember to save your changes!</p>

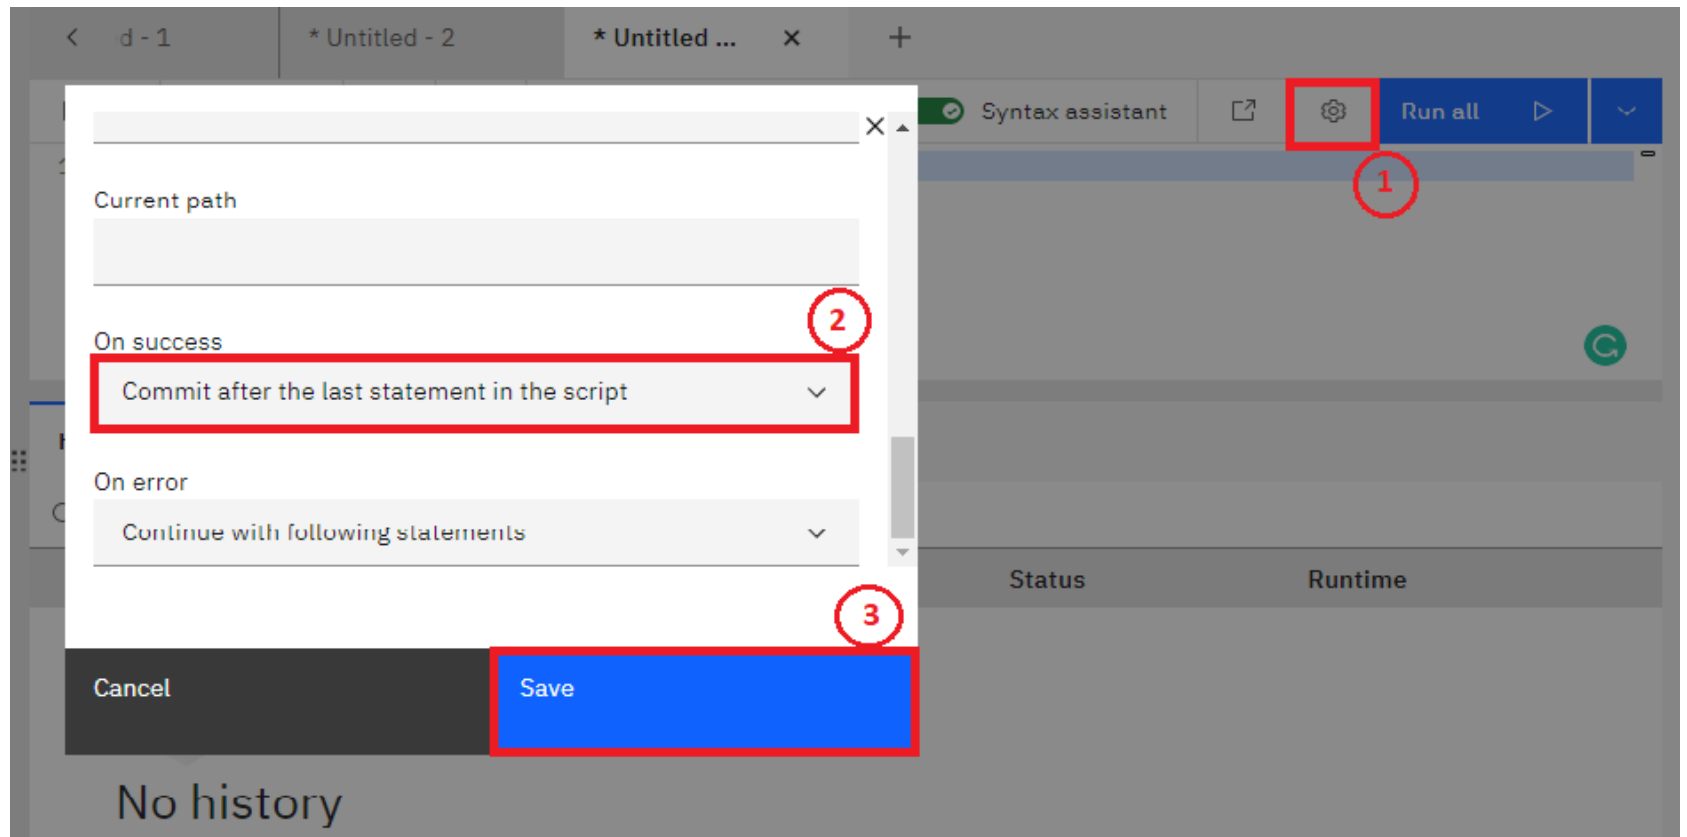

```
INSERT INTO employee VALUES (3, 'Swetha Tiwari', 'Kanpur', 38000, 38);
```

```
SELECT *FROM employee;
ROLLBACK;
SELECT *FROM employee;
```

Transactions with MySQL

```
CREATE TABLE employee(ID INT, Name VARCHAR(20),
City VARCHAR(20), Salary INT, Age INT);
```

Commit
command

```
COMMIT;
```

A **COMMIT** command is used to persist the changes in the database.

The default terminator for a **COMMIT** command is semicolon (;).

Rollback
command

ROLLBACK;

A ROLLBACK command is used to rollback the transactions which are not saved in the database.

The default terminator for a ROLLBACK command is semicolon (;).

START TRANSACTION;

INSERT INTO employee(ID, Name, City, Salary, Age) VALUES(1, 'Priyanka pal', 'Nasik', 36000, 21), (2, 'Riya chowdary', 'Bangalor', 82000, 29);

SELECT *FROM employee;
COMMIT;

As auto-commit is enabled by default, all transactions will be committed. We need to disable this option to see how rollback works. For MySQL use the command "SET autocommit = 0;"

INSERT INTO employee VALUES (3, 'Swetha Tiwari', 'Kanpur', 38000, 38);

SELECT *FROM employee;
ROLLBACK;
SELECT *FROM employee;

Db2 Transactions using Stored Procedure

Commit
command

--#SET TERMINATOR @

CREATE PROCEDURE PROCEDURE_NAME

BEGIN

COMMIT;

END

@

A COMMIT command is used to persist the changes in the database.

The default terminator for a COMMIT command is semicolon (;).

--#SET TERMINATOR @ CREATE PROCEDURE
TRANSACTION_ROSE LANGUAGE SQL MODIFIES SQL DATA

BEGIN

DECLARE SQLCODE INTEGER DEFAULT 0;
DECLARE retcode INTEGER DEFAULT 0;
DECLARE CONTINUE HANDLER FOR SQLEXCEPTION
SET retcode = SQLCODE;

UPDATE BankAccounts
SET Balance = Balance-200
WHERE AccountName = 'Rose';

UPDATE BankAccounts
SET Balance = Balance-300
WHERE AccountName = 'Rose';

IF retcode < 0 THEN
ROLLBACK WORK;

ELSE
COMMIT WORK;

END IF;

END
@

Rollback
command

```
--#SET TERMINATOR @
CREATE PROCEDURE PROCEDURE_NAME
BEGIN
ROLLBACK;
COMMIT;
END
@
```

A ROLLBACK command is used to rollback the transactions which are not saved in the database.

The default terminator for a ROLLBACK command is semicolon (;).

```
--#SET TERMINATOR @ CREATE PROCEDURE
TRANSACTION_ROSE LANGUAGE SQL MODIFIES SQL DATA
BEGIN

DECLARE SQLCODE INTEGER DEFAULT 0;
DECLARE retcode INTEGER DEFAULT 0;
DECLARE CONTINUE HANDLER FOR SQLEXCEPTION
SET retcode = SQLCODE;

UPDATE BankAccounts
SET Balance = Balance-200
WHERE AccountName = 'Rose';

UPDATE BankAccounts
SET Balance = Balance-300
WHERE AccountName = 'Rose';

IF retcode < 0 THEN
ROLLBACK WORK;

ELSE
COMMIT WORK;

END IF;

END
@
```

MySQL Transactions using Stored Procedure

Commit
command

```
DELIMITER //
CREATE PROCEDURE PROCEDURE_NAME
BEGIN
COMMIT;
END //
DELIMITER ;
```

A COMMIT command is used to persist the changes in the database.

The default terminator for a COMMIT command is semicolon (;).

```
CREATE PROCEDURE TRANSACTION_ROSE()
BEGIN

DECLARE EXIT HANDLER FOR SQLEXCEPTION
BEGIN
ROLLBACK;
RESIGNAL;
END;

START TRANSACTION;
UPDATE BankAccounts
SET Balance = Balance-200
WHERE AccountName = 'Rose';

UPDATE BankAccounts
SET Balance = Balance-300
WHERE AccountName = 'Rose';

COMMIT;
```

Rollback
command

```
DELIMITER //
CREATE PROCEDURE PROCEDURE_NAME
BEGIN
ROLLBACK;
COMMIT;
END //
DELIMITER ;
```

A ROLLBACK command is used to rollback the transactions which are not saved in the database.

The default terminator for a ROLLBACK command is semicolon (;).

```
END //

DELIMITER ;
DELIMITER //

CREATE PROCEDURE TRANSACTION_ROSE()
BEGIN
DECLARE EXIT HANDLER FOR SQLEXCEPTION
BEGIN
ROLLBACK;
RESIGNAL;
END;

START TRANSACTION;
UPDATE BankAccounts
SET Balance = Balance-200
WHERE AccountName = 'Rose';

UPDATE BankAccounts
SET Balance = Balance-300
WHERE AccountName = 'Rose';

COMMIT;

END //

DELIMITER ;
```

Author(s)

[D.M Naidu](#)

Changelog

Date	Version	Changed by	Change Description
2022-10-04	1.0	D.M.Naidu	Initial Version