


Tasks on Monitoring Services

1. Enable CloudTrail monitoring and store the events in S3 and CloudWatch log events.

Purpose: Enabling CloudTrail monitoring and storing events in S3 and CloudWatch Logs provides centralized, auditable logs for security analysis, compliance tracking, and real-time operational visibility across your AWS environment.

STEPS TO ENABLE CLOUDTRAIL MONITORING AND STORING THE EVENTS IN S3 AND CLOUDWATCH:

Step 1: Create an S3 Bucket for CloudTrail

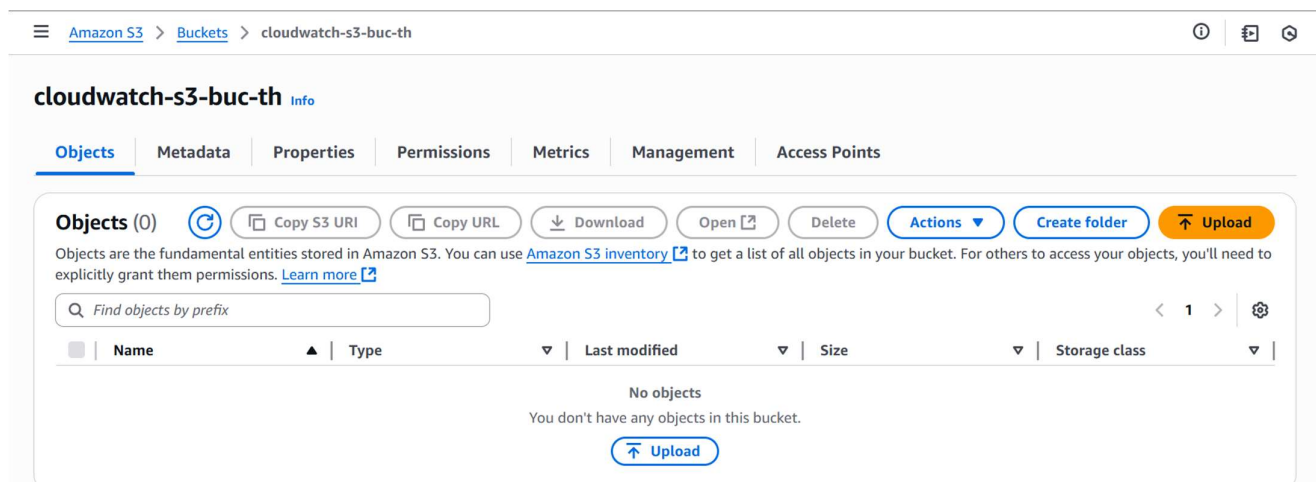

- Navigate to the S3 console and click "**Create bucket.**"
- Enter a bucket name
- Leave other settings as default and click "Create bucket."
- Once created, select the bucket and go to the "**Permissions**" tab
- Click "**Bucket Policy**" and paste the following policy (replace ACCOUNT_ID and BUCKET_NAME):

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Sid": "AWSCloudTrailAcICheck",
```

```
"Effect": "Allow",
"Principal": {
  "Service": "cloudtrail.amazonaws.com"
},
"Action": "s3:GetBucketAcl",
"Resource": "arn:aws:s3:::BUCKET_NAME"
},
{
  "Sid": "AWSCloudTrailWrite",
  "Effect": "Allow",
  "Principal": {
    "Service": "cloudtrail.amazonaws.com"
  },
  "Action": "s3:PutObject",
  "Resource": "arn:aws:s3:::BUCKET_NAME/*",
  "Condition": {
    "StringEquals": {
      "s3:x-amz-acl": "bucket-owner-full-control"
    }
  }
}
]
```

CloudTrailCloudWatchLogsRole [Info](#)

[Delete](#)

To store logs in S3 and CW with CT

Summary

[Edit](#)

Creation date

October 21, 2025, 06:40 (UTC+05:30)

ARN

[arn:aws:iam::734846753465:role/CloudTrailCloudWatchLogsRole](#)

Last activity

-

Maximum session duration

1 hour

Permissions

[Trust relationships](#)[Tags](#)[Last Accessed](#)[Revoke sessions](#)

Permissions policies (1) [Info](#)

You can attach up to 10 managed policies.

[Simulate](#)[Remove](#)[Add permissions](#)[Filter by Type](#)

All types

<

1

>

[Policy name](#)

Type



Attached entities

[CloudTrailCloudWatchLogsPo...](#)

Customer managed

1

Step 2: Create an IAM Role for CloudWatch Logs Integration

- Navigate to IAM console and select "Roles."
- Click "Create role" and choose "CloudTrail" as the trusted entity.
- Add the inline policy below and name the role **CloudTrailCloudWatchLogsRole**:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Principal": {
        "Service": "cloudtrail.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "StringEquals": {
          "aws:SourceAccount": "ACCOUNT_ID"
        }
      }
    }
  ]
}
```

Step 3: Create CloudWatch Logs Group for Real-Time Analysis

This log group will receive CloudTrail events in near real-time for alerting and analysis.

- Navigate to the CloudWatch console and select "**Log groups.**"
- Click "**Create log group.**"
- **Name it:** CloudTrail-Activity
- For "**Retention setting,**" select "30 days."
- Click "**Create log group.** "
- Once created, select the log group and click on the "**Details**" tab
- Note the ARN (Amazon Resource Name) for reference in CloudTrail configuration

The screenshot shows the 'Create log group' page in the AWS CloudWatch console. The breadcrumb navigation at the top reads 'CloudWatch > Log groups > Create log group'. On the left, a sidebar contains navigation links: 'Favorites and recents', 'Logs' (with sub-links for 'Log groups', 'Log Anomalies', 'Live Tail', 'Logs Insights', and 'Contributor Insights'), 'Metrics', 'Application Signals (APM)', 'GenAI Observability', 'Network Monitoring', and 'Insights'. The main content area has a blue informational banner at the top stating 'CloudWatch Logs offers two log classes: Standard and Infrequent Access. Learn more about the features offered by each log class.' Below this, there are four sections: 'Log group name' with a text input field containing 'CloudTrail-Activity'; 'Retention setting' with a dropdown menu set to '1 month (30 days)'; 'Log class' with a dropdown menu set to 'Standard'; and 'KMS key ARN - optional' with an empty text input field. At the bottom of the main area is a 'Tags' section with a description of tags and an 'Add new tag' button. At the very bottom right are 'Cancel' and 'Create' buttons.

The screenshot shows the 'CloudTrail-Activity-Group' details page in the AWS CloudWatch console. The breadcrumb navigation at the top reads 'CloudWatch > Log groups > CloudTrail-Activity-Group'. On the left, the sidebar is similar to the previous screenshot but includes 'Dashboards' and 'AI Operations' links. The main content area has a header with the group name 'CloudTrail-Activity-Group' and three buttons: 'Actions', 'View in Logs Insights', and 'Start tailing'. Below the header is a 'Log group details' section. It is divided into three columns. The first column contains: 'Log class' (Standard), 'ARN' (arn:aws:logs:us-east-1:734846753465:log-group:CloudTrail-Activity-Group:*), 'Creation time' (4 minutes ago), 'Retention' (1 week), and 'Stored bytes' (-). The second column contains: 'Metric filters' (0), 'Subscription filters' (0), 'Contributor Insights rules' (-), 'KMS key ID' (-), and 'Anomaly detection' (with a 'Configure' link). The third column contains: 'Data protection' (-), 'Sensitive data count' (-), 'Custom field indexes' (with a 'Configure' link), and 'Transformer' (with a 'Configure' link).

Step 4: Enable CloudTrail

- Navigate to CloudTrail console and click "**Create trail**"
- Enter trail name: Activity-Logs
- Choose "**Create a new S3 bucket**" or "**Use existing bucket**". I have selected the existing one which I created in the Step 1.
- Enable "**CloudWatch Logs**" and select the log group created in Step 3.
- Select the **IAM role** created in Step 2.

Step 1

④ Choose trail attributes

Step 2

● Choose log events

Step 3

○ Review and create

Choose trail attributes

General details

A trail created in the console is a multi-region trail. [Learn more](#)

Trial name
Enter a display name for your trail.

Activity-Logs

3-128 characters. Only letters, numbers, periods, underscores, and dashes are allowed.

☐ Enable for all accounts in my organization
To review accounts in your organization, open AWS Organizations. [See all accounts](#)

Storage location [Info](#)

☐ Create new S3 bucket
Create a bucket to store logs for this trail.

☒ Use existing S3 bucket
Choose an existing bucket to store logs for this trail.

Trial log bucket name
Enter a new S3 bucket name and folder (prefix) to store your logs. Bucket names must be globally unique.

cloudwatch-s3-buc-th

[Browse](#)

Prefix - optional

prefix

Logs will be stored in cloudwatch-s3-buc-th/805/Logs/734846753465

Log file SSE-KMS encryption [Info](#)

☐ Enabled

Additional settings

Log file validation [Info](#)

☐ Enabled

SNS notification delivery [Info](#)

☒ Enabled

Create a new SNS topic

☐ New

☒ Existing

SNS topic

arn:aws:sns:us-east-1:734846753465:CloudTrail-Activity-Logs

CloudWatch Logs - optional

Configure CloudWatch Logs to monitor your trail logs and notify you when specific activity occurs. Standard CloudWatch and CloudWatch Logs charges apply. [Learn more](#)

CloudWatch Logs [Info](#)

☒ Enabled

Log group [Info](#)

☐ New

☒ Existing

Log group name

CloudTrail-Activity-Group

1-512 characters. Only letters, numbers, dashes, underscores, forward slashes, and periods are allowed.

IAM Role [Info](#)

AWS CloudTrail assumes this role to send CloudTrail events to your CloudWatch Logs log group.

☐ New

☒ Existing

Role name

CloudTrailCloudWatchLogsRole

[Policy document](#)

Tags - optional [Info](#)

You can add one or more tags to help you manage and organize your resources, including trails.

Key	Value - optional	
Enter key	Enter value	Remove
Add tag		

You can add 49 more tags

[Cancel](#) [Next](#)

- Under "Event selectors" enable "Management events" with "API activity – Read and Write"
- Click "Create trail"
- Once created, click the trail name and select "Start logging"

Step 1

Choose trail attributes

Step 2

Choose log events

Step 3

Review and create

Choose log events

Events info

Record API activity for individual resources, or for all current and future resources in AWS account. [Additional charges apply](#)

Event type

Choose the type of events that you want to log.

☒ Management events
Capture management operations performed on your AWS resources.
 ☐ Data events
Log the resource operations performed on or within a resource.
 ☐ Insights events
Identify unusual activity, errors, or user behavior in your account.
 ☐ Network activity events
Network activity events provide information about resource operations performed on a resource within a virtual private cloud endpoint.

Management events info

Management events show information about management operations performed on resources in your AWS account.

No additional charges apply to log management events on this trail because this is your first copy of management events.

API activity

Choose the activities you want to log.

☒ Read
 ☒ Write

☐ Exclude AWS KMS events
 ☐ Exclude Amazon RDS Data API events

Cancel

Previous

Next

CloudTrail > Trails > arn:aws:cloudtrail:us-east-1:734846753465:trail/Activity-Logs

Activity-Logs

Delete

Stop logging

General details

Trail logging

Logging

Trail name

Activity-Logs

Multi-region trail

Yes

Apply trail to my organization

Not enabled

Trail log location

cloudwatch-s3-buc-th/AWSLogs/734846753465

Last log file delivered

October 21, 2025, 07:49:22 (UTC+05:30)

Log file SSE-KMS encryption

Not enabled

Log file validation

Enabled

Last file validation delivered

-

SNS notification delivery

arn:aws:sns:us-east-1:734846753465:CloudTrail-Activity-Logs

Last SNS notification

October 21, 2025, 07:49:22 (UTC+05:30)

Edit

Objects (5)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

1

☐	Name	Type	Last modified	Size	Storage class
☐	nnHLBqh.json.gz				
☐	734846753465_CloudTrail_us-east-1_20251021T0230Z_Ln1HrctUUGT8mXFj.json.gz	gz	October 21, 2025, 07:59:04 (UTC+05:30)	3.2 KB	Standard
☐	734846753465_CloudTrail_us-east-1_20251021T0235Z_j5yztBWYRklKyGYT.json.gz	gz	October 21, 2025, 08:02:30 (UTC+05:30)	942.0 B	Standard
☐	734846753465_CloudTrail_us-east-1_20251021T0235Z_suYdCJQINqDfPLIN.json.gz	gz	October 21, 2025, 08:03:54 (UTC+05:30)	9.4 KB	Standard

CloudTrail

> Event history

CloudTrail

<

Dashboard

Event history

Insights

Lake

- Dashboards
- Query
- Event data stores
- Integrations

Trails

Settings

Pricing

Documentation

Forums

Event history (50+) Info

Download events

Query in Lake

Create Athena table

Event history shows you the last 90 days of management events.

Lookup attributes

Read-only Q false Filter by date and time Clear filter < 1 2 ... > ⚙

☐	Event name	Event time	User name	Event source	Resource type	
☐	DeleteLogStream	October 21, 2025, 08:06:24 (UT...	root	logs.amazonaws.com	-	
☐	CreateLogStream	October 21, 2025, 08:06:07 (UT...	root	logs.amazonaws.com	-	
☐	CreateUser	October 21, 2025, 07:59:59 (UT...	root	iam.amazonaws.com	AWS::IAM::User, AWS::I...	
☐	CreateLoginProfile	October 21, 2025, 07:59:59 (UT...	root	iam.amazonaws.com	AWS::IAM::User	
☐	AttachUserPolicy	October 21, 2025, 07:59:59 (UT...	root	iam.amazonaws.com	AWS::IAM::User, AWS::I...	
☐	StartLogging	October 21, 2025, 07:57:53 (UT...	root	cloudtrail.amazonaws.c om	AWS::CloudTrail::Trail	
☐	CreateLogGroup	October 21, 2025, 07:57:52 (UT...	root	logs.amazonaws.com	-	
☐	CreateTrail	October 21, 2025, 07:57:51 (UT...	root	cloudtrail.amazonaws.c om	AWS::CloudTrail::Trail, ...	

2. Enable SNS for CloudTrail to send an alert via email.

Purpose: Configure Amazon Simple Notification Service (SNS) to automatically detect critical CloudTrail events (such as unauthorized API calls, root account usage, security group modifications) and send immediate email notifications to your security and operations teams. Email alerts provide immediate notification when security-relevant events occur, enabling rapid response to potential incidents before damage occurs. By automating alert generation, you eliminate delays inherent in manual log review.

Steps to enable SNS for CloudTrail and send an alert via Email:

Step 1: Create SNS Topic

1. Navigate to the SNS console and click "**Create topic.**"
2. Choose "**Standard**" topic type
3. Enter name: **CloudTrail-Critical-Events**
4. Click "**Create topic.**"
5. Copy the topic ARN for later use

The screenshot shows the 'Create topic' page in the Amazon SNS console. The breadcrumb navigation at the top reads 'Amazon SNS > Topics > Create topic'. The page title is 'Create topic'. Under the 'Details' section, the 'Type' is set to 'Standard' (selected with a radio button). The 'Name' field contains 'CloudTrail-Critical-Events'. The 'Display name - optional' field contains 'My Topic'. The 'Encryption - optional' section is partially visible at the bottom.

Amazon SNS > Topics > Create topic

Create topic

Details

Type [Info](#)
Topic type cannot be modified after topic is created

☐ FIFO (first-in, first-out)

- Strictly-preserved message ordering
- Exactly-once message delivery
- Subscription protocols: SQS

☒ Standard

- Best-effort message ordering
- At-least once message delivery
- Subscription protocols: SQS, Lambda, Data Firehose, HTTP, SMS, email, mobile application endpoints

Name

CloudTrail-Critical-Events

Maximum 256 characters. Can include alphanumeric characters, hyphens (-) and underscores (_).

Display name - optional [Info](#)
To use this topic with SMS subscriptions, enter a display name. Only the first 10 characters are displayed in an SMS message.

My Topic

Maximum 100 characters.

► **Encryption - optional**

Step 2: Create SNS Subscription

1. In the topic details, click "**Create subscription.**"
2. Select "**Email**" as the protocol
3. Enter your email address in the "**Endpoint**" field
4. Click "**Create subscription.**"
5. Check your email inbox and click the confirmation link

Amazon SNS > Subscriptions > Create subscription

Create subscription

Details

Topic ARN
arn:aws:sns:us-east-1:392841146215:CloudTrail-Critical-Events

Protocol
The type of endpoint to subscribe
Email

Endpoint
An email address that can receive notifications from Amazon SNS.
iamshaikomerfarooq@gmail.com

After your subscription is created, you must confirm it. [Info](#)

► **Subscription filter policy - optional** [Info](#)
This policy filters the messages that a subscriber receives.

► **Redrive policy (dead-letter queue) - optional** [Info](#)
Send undeliverable messages to a dead-letter queue.

[Cancel](#) [Create subscription](#)

2 of 812

AWS Notification - Subscription Confirmation Inbox x

AWS Notifications <no-reply@sns.amazonaws.com> 18:00 (2 minutes ago) ☆ 😊 ↩ ⋮
to me ▾

You have chosen to subscribe to the topic:
arn:aws:sns:us-east-1:392841146215:CloudTrail-Critical-Events

To confirm this subscription, click or visit the link below (If this was in error no action is necessary):
[Confirm subscription](#)

Please do not reply directly to this email. If you wish to remove yourself from receiving all future SNS subscription confirmation requests please send an email to [sns-opt-out](#)

3. Configure CloudWatch monitoring and record the CPU utilization and other metrics of an EC2.

Purpose:

Install and configure the CloudWatch Agent on an EC2 instance to collect detailed system-level metrics, including CPU utilization, memory usage, disk I/O, network throughput, and application-specific metrics. These metrics are then sent to CloudWatch for centralized monitoring, visualization, and alerting.

Steps to configure CloudWatch and record CPU Utilization and other metrics of an EC2:

Step 1: Create an IAM Role for CloudWatch Agent

The CloudWatch Agent requires IAM permissions to publish metrics to CloudWatch.

1. Navigate to the IAM console and click "Roles."
2. Click "Create role."
3. For "Trusted entity type," select "AWS service."
4. Select "EC2" service
5. Click "Next."
6. Search for managed policy: CloudWatchAgentServerPolicy
7. Check the checkbox to attach this policy
8. Click "Next."
9. Name the role: EC2-CloudWatch-Agent-Role
10. Click "Create role."

EC2-CloudWatch-Agent-Role [Info](#) [Delete](#)

Allows EC2 instances to call AWS services on your behalf.

Summary

Creation date
December 30, 2025, 12:11 (UTC+05:30)

Last activity
-

ARN
[arn:aws:iam::392841146215:role/EC2-CloudWatch-Agent-Role](#)

Maximum session duration
1 hour

Instance profile ARN
[arn:aws:iam::392841146215:instance-profile/EC2-CloudWatch-Agent-Role](#)

[Edit](#)

Permissions | Trust relationships | Tags | Last Accessed | Revoke sessions

Permissions policies (1) [Info](#) [Simulate](#) [Remove](#) [Add permissions](#)

You can attach up to 10 managed policies.

Search Filter by Type

☐	Policy name ↗	Type	Attached entities
☐	CloudWatchAgentServerP...	AWS managed	1

Step 2: Attach IAM Role to EC2 Instance

Associate the IAM role with your EC2 instance so it can publish metrics.

1. Navigate to EC2 console
2. Select the running instance that will have the CloudWatch Agent
3. Click "Actions" → "Security" → "Modify IAM role"
4. Select EC2-CloudWatch-Agent-Role from dropdown
5. Click "Update IAM role"
6. Wait 30 seconds for role attachment to complete
7. Verify role is attached by checking instance details (IAM role field should show the role name)
- 8.

EC2 > **Instances** > **i-01fbf811bedee799b** > **Modify IAM role**

Successfully initiated starting of i-01fbf811bedee799b

Modify IAM role [Info](#)

Attach an IAM role to your instance.

Instance ID
[i-01fbf811bedee799b](#) (my-server)

IAM role
Select an IAM role to attach to your instance or create a new role if you haven't created any. The role you select replaces any roles that are currently attached to your instance.

[EC2-CloudWatch-Agent-Role](#) [Create new IAM role](#)

[Cancel](#) [Update IAM role](#)

Step 3: Install CloudWatch Agent on Linux EC2 Instance

Download and install the CloudWatch Agent package.

1. SSH into the EC2 instance using your connection method (SSH key, Session Manager, etc.)

Download the agent

```
# wget https://s3.amazonaws.com/amazoncloudwatch-agent/ubuntu/amd64/latest/amazon-cloudwatch-agent.deb
```

Install the agent

```
# sudo dpkg -i -E ./amazon-cloudwatch-agent.deb
```

2. Verify installation by checking the agent version:



```
# /opt/aws/amazon-cloudwatch-agent/bin/amazon-cloudwatch-agent-ctl \
-a version
```

4. Create one alarm to send an alert to email if the CPU utilization is more than 70 percent.

Purpose: CPU saturation directly impacts application performance and user experience. When CPU utilization stays above 70% for extended periods, it indicates the workload exceeds the current instance capacity. Immediate notification enables rapid response: scaling up the instance, distributing load to other instances, or investigating runaway processes consuming CPU. Without alerting, performance degradation goes unnoticed until users complain or a revenue impact occurs.

Steps to create an email alert for the CPU Utilization:

- Go to CloudWatch
- Click on the Alarm option
- Create a new alarm

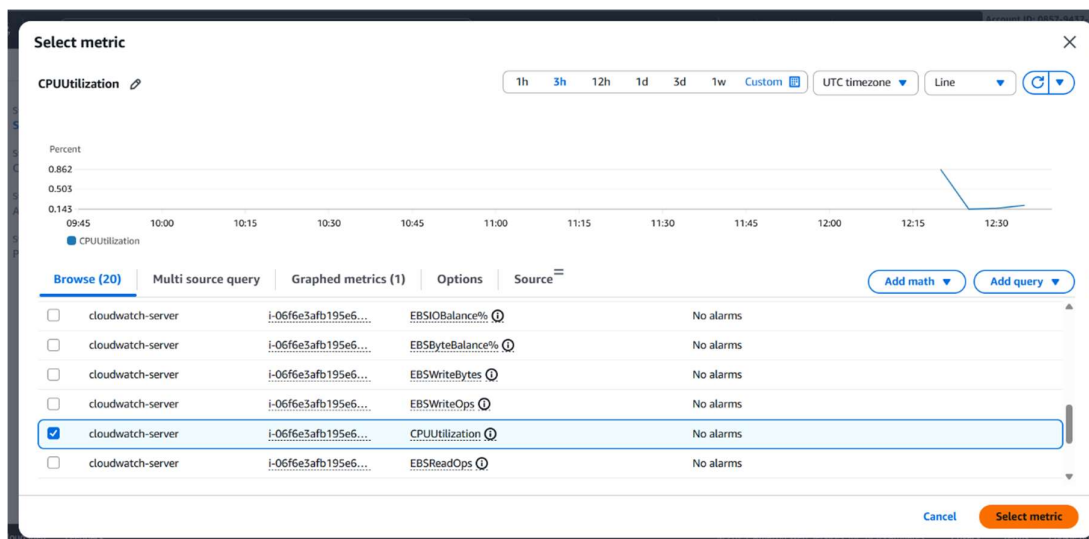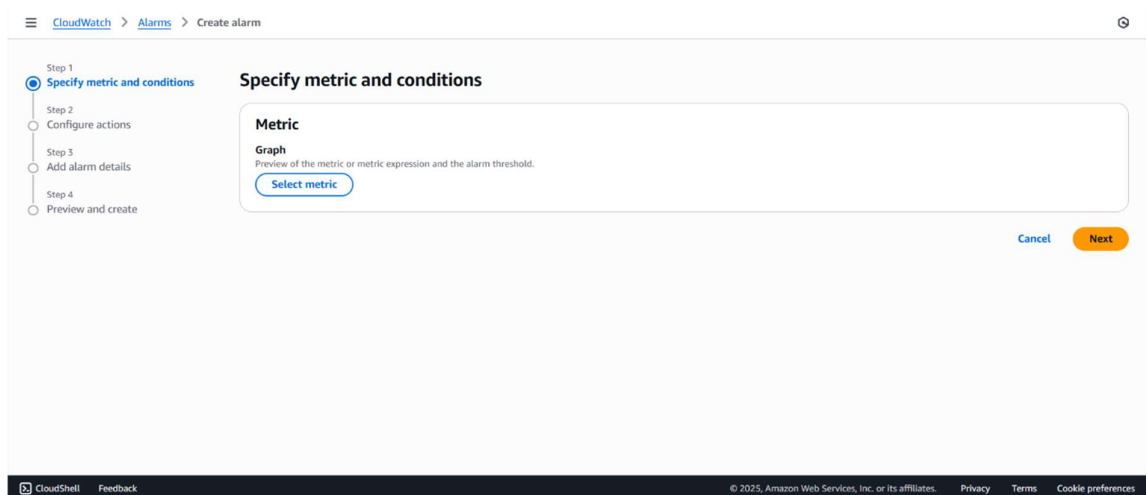

- Specify the condition
- Select the metric CPU utilization
- Select the condition -static and define the condition

CloudWatch > Alarms > Create alarm

Conditions

Threshold type

☒ **Static**
Use a value as a threshold

☐ **Anomaly detection**
Use a band as a threshold

Whenever CPUUtilization is...
Define the alarm condition.

☐ Greater
> threshold

☒ **Greater/Equal**
≥ threshold

☐ Lower/Equal
≤ threshold

☐ Lower
< threshold

than...
Define the threshold value.

70

Must be a number.

Additional configuration

Datapoints to alarm
Define the number of datapoints within the evaluation period that must be breaching to cause the alarm to go to ALARM state.

1 out of 1

CloudWatch > Alarms > Create alarm

Alarm recommendations available
Turn on Recommendations to pre-populate the wizard with the recommended alarms.

Step 1: Specify metric and conditions
Step 2: **Configure actions**
Step 3: Add alarm details
Step 4: Preview and create

Configure actions

Notification

Alarm state trigger
Define the alarm state that will trigger this action.

☒ **In alarm**
The metric or expression is outside of the defined threshold.

☐ OK
The metric or expression is within the defined threshold.

☐ Insufficient data
The alarm has just started or not enough data is available.

Send a notification to the following SNS topic
Define the SNS (Simple Notification Service) topic that will receive the notification.

☒ **Select an existing SNS topic**

☐ Create new topic

☐ Use topic ARN to notify other accounts

Send a notification to...

Q: Aws-Alert

Only topics belonging to this account are listed here. All persons and applications subscribed to the selected topic will receive notifications.

CloudWatch > Alarms

CloudWatch

Favorites and reents

Dashboards

AI Operations New

Alarms 1

In alarm

All alarms New

Billing

Alarms (1)

☐ Hide Auto Scaling alarms

Clear selection

Create composite alarm

Actions

Create alarm

Search

Alarm state: Any

Alarm type: Any

Actions status: Any

☐	Name	State	Last state update (UTC)	Conditions	Actions
☐	Over-utilization-cpu	Insufficient data	2025-10-03 12:48:17	CPUUtilization ≥ 70 for 1 datapoints within 5 minutes	Actions enabled

5. Create a Dashboard and monitor the Tomcat service whether it is running or not, and send an alert.

Purpose: Tomcat availability directly impacts application availability to end users. Manual log checking delays incident response. Dashboard provides at-a-glance visibility into Tomcat health without requiring log access. Automated alerts enable response within minutes rather than hours after service failure. JVM memory metrics indicate memory leaks or configuration problems before out-of-memory errors crash the service.

Steps to create a Dashboard to monitor the Tomcat service:


- Install Java - `yum install java-11 -y`
- `wget https://dlcdn.apache.org/tomcat/tomcat-9/v9.0.109/bin/apache-tomcat-9.0.109.tar.gz`

```
complete!  
root@ip-172-31-23-211 ~]# ./tomcat/bin/startup.sh  
sing CATALINA_BASE: /root/tomcat  
sing CATALINA_HOME: /root/tomcat  
sing CATALINA_TMPDIR: /root/tomcat/temp  
sing JRE_HOME: /usr  
sing CLASSPATH: /root/tomcat/bin/bootstrap.jar:/root/tomcat/bin/tomcat-juli.jar  
sing CATALINA_OPTS:  
omcat started.  
root@ip-172-31-23-211 ~]#
```

- `# vi monitoring.sh`

```
#!/bin/bash  
# Check if Tomcat service is active  
if systemctl is-active --quiet tomcat; then  
    STATUS=1  
else  
    STATUS=0  
fi  
# Push custom metric to CloudWatch  
aws cloudwatch put-metric-data \  
    --namespace "TomcatMonitoring" \  
    --metric-name "TomcatStatus" \  
    --value $STATUS \  
    --region us-east-1
```

- `# chmod 777 monitoring.sh`
- aws configure (paste your access id and secret key)
- `crontab -e` paste these in crontab editor (`* * * * * /monitoring.sh`)
- `# sh monitoring.sh`

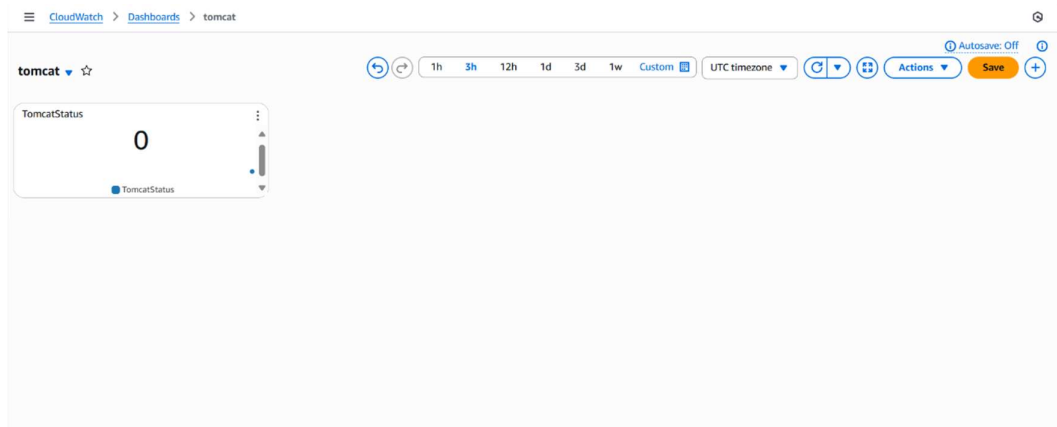

6. Create a Dashboard and monitor the nginx service to send an alert if the Nginx is not running.

Purpose: The Nginx serves web traffic critical to the user experience. Service downtime directly impacts revenue and customer satisfaction. Request and error metrics reveal configuration problems, traffic pattern changes, or external attacks. Response time metrics indicate performance issues requiring optimization. Request throughput helps with capacity planning. Without real-time monitoring, performance problems and service issues go undetected until customers are impacted.

Steps to create a Dashboard to monitor Nginx Service:

- `# yum install nginx -y`
- `# systemctl start nginx`

```
Installed:
  generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch
  gperftools-libs-2.9.1-1.amzn2023.0.3.x86_64
  libunwind-1.4.0-5.amzn2023.0.3.x86_64
  nginx-1:1.28.0-1.amzn2023.0.2.x86_64
  nginx-core-1:1.28.0-1.amzn2023.0.2.x86_64
  nginx-filesystem-1:1.28.0-1.amzn2023.0.2.noarch
  nginx-mimetypes-2.1.49-3.amzn2023.0.3.noarch

Complete!
ec2-user@ip-172-31-16-126 ~]$ sudo systemctl start nginx
ec2-user@ip-172-31-16-126 ~]$
```

- `# vi monitoring.sh`

```
#!/bin/bash
# Check if nginx service is active
if systemctl is-active --quiet nginx; then
    STATUS=1
else
    STATUS=0
fi
# Push custom metric to CloudWatch
aws cloudwatch put-metric-data \
  --namespace "NginxMonitoring" \
  --metric-name "NginxStatus" \
  --value $STATUS \
  --region us-east-1|
~
~
~
~
~
```

- `# chmod 777 monitoring.sh`
- `# aws configure` (paste your access id and secret key)
- `# crontab -e`
Paste these in crontab editor (`* * * * * /monitoring.sh`)
- `# sh monitoring.sh`

