

Tasks on R53 and CloudFront

1. Configure VPC peering in cross-regions.

Purpose: VPC peering enables private, low-latency communication between resources in different regions, provides enhanced security by avoiding internet exposure, and allows centralized management of multi-region infrastructure while maintaining network isolation.

STEPS TO CONFIGURE CROSS REGION VPC PEERING:

Step 1: Navigate to VPC Dashboard

- Open the AWS Management Console and go to the **VPC** service
- Select the region where your first VPC resides (us-east-1)

Step 2: Create Peering Connection

- In the left menu, click "**Peering Connections**" → "**Create Peering Connection**"
- Name the connection (e.g., "us-east-1-to-eu-west-1-peer")
- Select your local VPC (the VPC in us-east-1)
- Choose "**Another region**" as the target and select the destination region (eu-west-1)
- Enter the **AWS account ID** and **VPC ID** of the destination VPC
- Click "**Create Peering Connection**"

Step 3: Accept the Peering Request

- Switch to the destination region (eu-west-1) in the AWS Console
- Navigate to **VPC** → **Peering Connections**
- Find the pending peering connection request
- Select it and click "**Accept Request**" → "**Accept Peering Connection**"

☰ VPC > Peering connections > Create peering connection 🔍 ⌂ 🖨

Create peering connection

A VPC peering connection is a networking connection between two VPCs that enables you to route traffic between them privately. [Info](#)

Peering connection settings

Name - optional
Create a tag with a key of 'Name' and a value that you specify.

Peering-NV-NC

Select a local VPC to peer with

VPC ID (Requester)
vpc-04fdb0575983942f4 (VPC-NV) ▼

VPC CIDRs for vpc-04fdb0575983942f4 (VPC-NV)

CIDR	Status	Status reason
192.168.1.0/24	Associated	-

Select another VPC to peer with

Account
☒ My account
☐ Another account

Region
☐ This Region (us-east-1)
☒ Another Region

United States (N. California) (us-west-1) ▼

VPC ID (Acceptor)
vpc-00be7dfca5d8facd0

aws 🔍 Search [Alt+S] United States (N. California) Account ID: 7348-4675-3465 omerfaroq257

Billing and Cost Manage... EC2 VPC IAM S3 Route 53 CloudFront CloudTrail CloudWatch Simple Notification Service

☰ VPC > Peering connections 🔍 ⌂ 🖨

Subnets

Route tables

Internet gateways

Egress-only internet gateways

DHCP option sets

Elastic IPs

Managed prefix lists

NAT gateways

Peering connections

Route servers [New](#)

▼ **Security**

Network ACLs

Security groups

▼ **PrivateLink and Lattice**

Getting started

Endpoints

Endpoint services

Peering connections (1/1) [Info](#)

Find peering connections by attribute or tag

Name	Peering connection ID	Status	Requester VPC
pcx-0368e772ac13a513c			vpc-04fdb0575983942f4

Accept VPC peering connection request [Info](#)

Are you sure you want to accept this VPC peering connection request? (pcx-0368e772ac13a513c / Peering-NC-NV)

Requester VPC vpc-04fdb0575983942f4	Acceptor VPC vpc-00be7dfca5d8facd0 / VPC-NC	Requester CIDRs 192.168.1.0/24
Acceptor CIDRs -	Requester Region N. Virginia (us-east-1)	Acceptor Region N. California (us-west-1)
Requester owner ID 734846753465(This account)	Acceptor owner ID 734846753465(This account)	

[Cancel](#) [Accept request](#)

Step 4: Update Route Tables

- In the **us-east-1 VPC**, navigate to **Route Tables**
- Select the route table associated with your subnets
- Click **"Edit Routes" → "Add Route"**
- Destination: Enter the CIDR block of the eu-west-1 VPC (e.g., 192.168.2.0/24)
- Target: Select the peering connection you created
- Click **"Save Routes"**

Edit routes

Destination	Target	Status	Propagated	Route Origin
192.168.1.0/24	local	Active	No	CreateRouteTable
0.0.0.0/0	Internet Gateway	Active	No	CreateRoute
192.168.2.0/24	Peering Connection	-	No	CreateRoute

[Add route](#) [Remove](#) [Remove](#) [Cancel](#) [Preview](#) [Save changes](#)

Step 5: Repeat for Destination VPC

- Switch to **eu-west-1** and repeat Step 4
- Destination: **Enter the CIDR block of the us-east-1 VPC** (e.g., 192.168.1.0/24)
- Target: Select the same peering connection

Edit routes

Destination	Target	Status	Propagated	Route Origin
192.168.2.0/24	local	Active	No	CreateRouteTable
0.0.0.0/0	Internet Gateway	Active	No	CreateRoute
192.168.1.0/24	Peering Connection	-	No	CreateRoute

[Add route](#) [Remove](#) [Remove](#) [Cancel](#) [Preview](#) [Save changes](#)

Step 6: Configure Security Groups

- Update security group ingress rules in both regions to allow traffic from the peer VPC's CIDR blocks
- For each VPC, add an inbound rule allowing traffic from the other VPC's CIDR range on necessary ports

aws [Search] [Alt+S] United States (N. Virginia) Account ID: 7348-4675-3465 omerfarooq257

EC2 > Security Groups > sg-07b51bf0d1bc95fd3 - default > Edit inbound rules

Edit inbound rules [Info](#)

Inbound rules control the incoming traffic that's allowed to reach the instance.

Security group rule ID	Type Info	Protocol Info	Port range Info	Source Info	Description - optional Info	
sgr-0f4d8775e68ef4177	All ICMP - IPv4	ICMP	All	Cu... 192.168.2.0/24		Delete
sgr-03221bfcde21addcb	SSH	TCP	22	Cu... 0.0.0.0		Delete
sgr-0b7052e51028297e4	All traffic	All	All	Cu... sg-07b51bf0d1bc95fd3		Delete

[Add rule](#)

aws [Search] [Alt+S] United States (N. California) Account ID: 7348-4675-3465 omerfarooq257

EC2 > Security Groups > sg-082351400091caba2 - default > Edit inbound rules

Edit inbound rules [Info](#)

Inbound rules control the incoming traffic that's allowed to reach the instance.

Security group rule ID	Type Info	Protocol Info	Port range Info	Source Info	Description - optional Info	
sgr-05aa09438fac5dbcd	All traffic	All	All	Cu... sg-082351400091caba2		Delete
sgr-05695a73122319bb3	All ICMP - IPv4	ICMP	All	Cu... 192.168.1.0/24		Delete
sgr-0fac029cf5533d707	SSH	TCP	22	Cu... 0.0.0.0		Delete

[Add rule](#)

Step 7: Check the peering connection

```

root@ip-192-168-1-6:/home/ec2-user
4.9 ms
64 bytes from 192.168.2.4: icmp_seq=233 ttl=127 time=6
4.8 ms
64 bytes from 192.168.2.4: icmp_seq=234 ttl=127 time=6
5.2 ms
64 bytes from 192.168.2.4: icmp_seq=235 ttl=127 time=6
5.0 ms
64 bytes from 192.168.2.4: icmp_seq=236 ttl=127 time=6
4.9 ms
64 bytes from 192.168.2.4: icmp_seq=237 ttl=127 time=6
5.0 ms
64 bytes from 192.168.2.4: icmp_seq=238 ttl=127 time=6
4.8 ms
64 bytes from 192.168.2.4: icmp_seq=239 ttl=127 time=6
4.9 ms

root@ip-192-168-2-4:/home/ec2-user
4.8 ms
64 bytes from 192.168.1.6: icmp_seq=126 ttl=127 time=6
4.7 ms
64 bytes from 192.168.1.6: icmp_seq=127 ttl=127 time=6
5.0 ms
64 bytes from 192.168.1.6: icmp_seq=128 ttl=127 time=6
4.9 ms
64 bytes from 192.168.1.6: icmp_seq=129 ttl=127 time=6
5.0 ms
64 bytes from 192.168.1.6: icmp_seq=130 ttl=127 time=6
4.7 ms
64 bytes from 192.168.1.6: icmp_seq=131 ttl=127 time=6
5.2 ms
64 bytes from 192.168.1.6: icmp_seq=132 ttl=127 time=6
6.0 ms
  
```

2. Purchase one domain from any Domain Vendor.

Purpose: A custom domain provides professional branding, improves discoverability through search engines, establishes trust with visitors, and enables you to direct traffic to your AWS infrastructure using a memorable address instead of an IP address.

STEPS TO PURCHASE A DOMAIN FROM A VENDOR:

Step 1: Navigate to Namecheap


- Open a web browser and go to www.namecheap.com
- Click the "**Domain**" tab or search for "**Domain Search**"

Step 2: Search for Your Domain

- Enter your desired domain name in the search box (e.g., "guzelindia")
- Select the appropriate TLD (.com, .io, .org, etc.)
- Click "**Search**"

Step 3: Check Availability and Add to Cart

- Review search results to find your preferred domain
- If available, click "**Add to Cart**"
- If unavailable, try alternative variations or TLDs

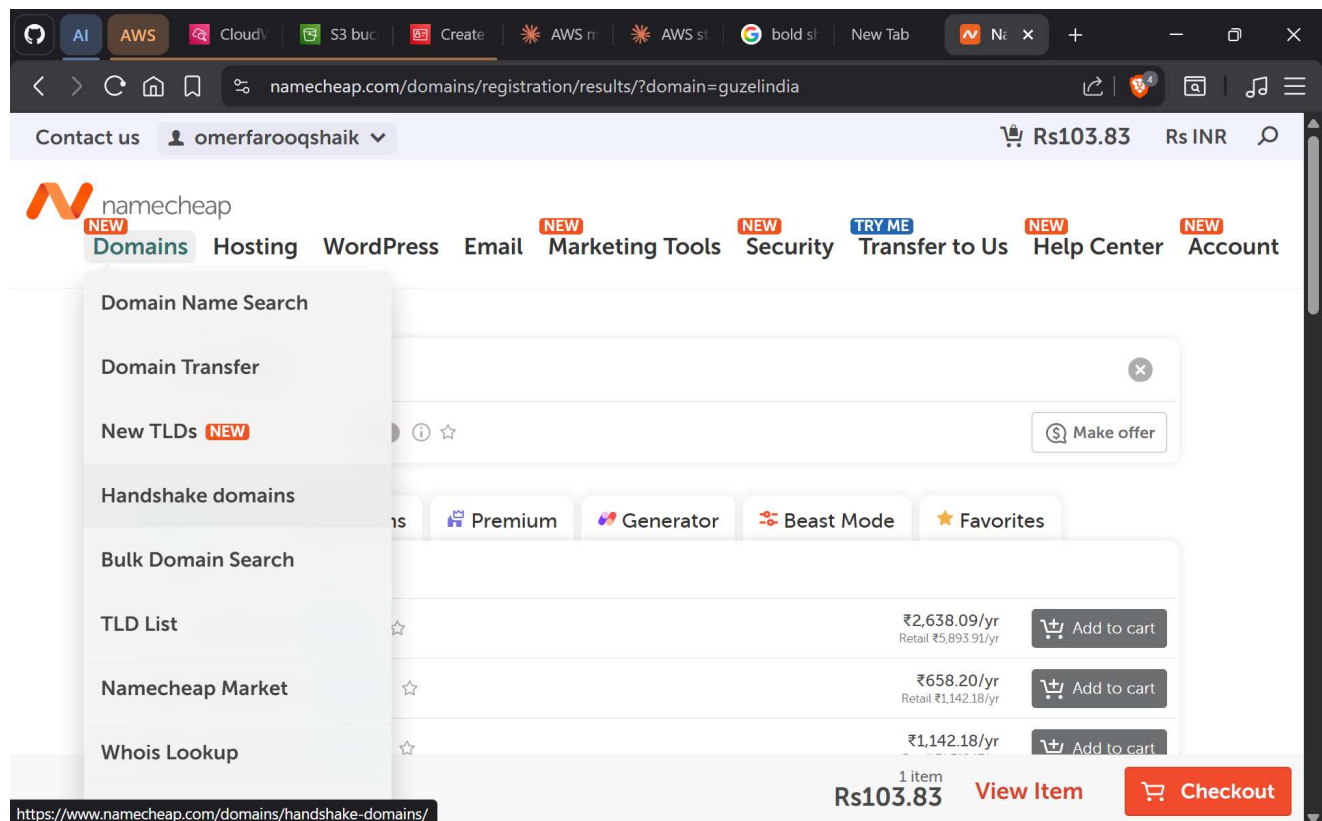

Step 4: Proceed to Checkout

- Click "**View Cart**" or proceed to checkout
- Choose the registration period (1-10 years)
- Review renewal pricing
- Click "**Continue to Checkout**"

Step 5: Complete Purchase

- Enter or confirm your contact information (required for ICANN registration)
- Select DNS hosting (you can keep GoDaddy's DNS or use custom nameservers)
- Review the order summary
- Complete payment with your preferred payment method
- Click "Place Order"

[Contact us](#) [omerfarooqshaik](#)



 Account  Setup  Billing  Order  Done

Account Contact Information

First Name	Omer
Last Name	Farooq
Company Name	Guzel India
Job Title	CTO
☒ I'm registering on behalf of a company	
Address Line 1	19-16/1 Badichowdi
Address Line 2	Sultan Bazar PS Lane

Your Cart

EDIT

guzelindia.shop	
1 year registration	RS86.24
ICANN fee	RS17.60
Subtotal	Rs103.83
Continue	



We are using your default domain configuration (be sure to not provide personal information for Technical contacts) and previously selected payment method. If this is okay, simply continue reviewing your order. To change something, select from these options: [Review domain configuration](#) or [Review payment settings](#)

View

Edit Order Details

Your Subtotal

\$1.18

Pay Now

Order Review

 EDIT CART

Domain Registration	1 year	\$38.98 \$0.98	
guzelindia.shop	registration		
ICANN fee		\$0.20	
Free Domain Privacy	1 year	\$0.00	
for guzelindia.shop	subscription		
FREE Forever!			



What's next?

Now is a good time to [set up the DNS for your domain](#).

Thank you for your purchase!

Your order **184236494**, placed on Oct 19, 2025 09:08 PM is completed. Use the order number if you contact our support. Below you find your order summary and next steps to help you get started.

 Search Again

Purchase Summary

Domain Registration	1 year	\$38.98 \$0.98	MANAGE
guzelindia.shop			
ICANN fee		\$0.20	
Free Domain Privacy	1 year	\$0.00	MANAGE
Initial Charged		\$1.18	
Total Charged		\$1.18	

Customer

Omer Farooq
Guzel India
CTO
19-16/1 Badichowdi
Sultan Bazar PS Lane
Hyderabad, Telangana 500059
IN
tel: +91 9030898785
fax:
iamomerfarooq257@gmail.com

Payment Details

Payment Method

Credit Card
 **** * 0479

Order

184236494

Transaction

223988432

Initial Amount

\$1.18

Total Charged

\$1.18

Payment Reference

0b1a29a9-511b-4b10-a6db-e3f2d60ebfa4

 Download receipt

Step 6: Retrieve Domain Information

- After purchase, log in to your Namecheap account
- Navigate to **"My Products" → "Domains"**
- Note your domain's nameserver information (you'll need this for Route 53 later)
- Record the domain name for later configuration steps

The screenshot displays the Namecheap account dashboard. At the top, there is a navigation bar with links for Domains, Hosting, WordPress, Email, Marketing Tools, Security, Transfer to Us, Help Center, and Account. A search bar is also present. The left sidebar contains a menu with options: Dashboard, Expiring / Expired, Domain List (highlighted), Hosting List, Private Email, SSL Certificates, Apps, and My Offers. The main content area shows the 'Domain List' section with a search bar and a 'Beast Mode' toggle. Below this is a table of domains. The table has columns for Domains, Status, Auto-Renew, and Expiration. One domain, 'guzelindia.shop', is listed with a status of 'ACTIVE' and an expiration date of 'Oct 20, 2026'. Below the table, there is a 'Recommended for you' section showing 'guzelindia.online' for \$2.88 /yr.

Contact us omerfarooqshaik

Rs INR

namecheap

NEW Domains NEW Hosting WordPress Email NEW Marketing Tools NEW Security TRY ME Transfer to Us NEW Help Center NEW Account

Dashboard

Expiring / Expired

Domain List

Hosting List

Private Email

SSL Certificates

Apps

My Offers

Search for your next domain Beast Mode

Domain List REFRESH Domains

Actions

Domains	Status	Auto-Renew	Expiration
☐ guzelindia.shop Domain Privacy protection is ON	ACTIVE	☐	Oct 20, 2026

MANAGE

Recommended for you Hide

guzelindia.online \$2.88 /yr


3. Deploy a static website using S3.

Purpose: S3 provides cost-effective static website hosting, offers high availability and scalability, integrates seamlessly with CloudFront for CDN acceleration, requires no server maintenance, and charges only for storage and data transfer.

STEPS TO DEPLOY A STATIC WEBSITE ON S3:

Step 1: Create an S3 Bucket

- Open the AWS Management Console and navigate to S3
- Click "**Create Bucket**"
- Enter a bucket name. Note: bucket names must be globally unique
- Select your **region**
- Uncheck "**Block all public access**"
- Acknowledge the public access warning
- Click "**Create Bucket**"

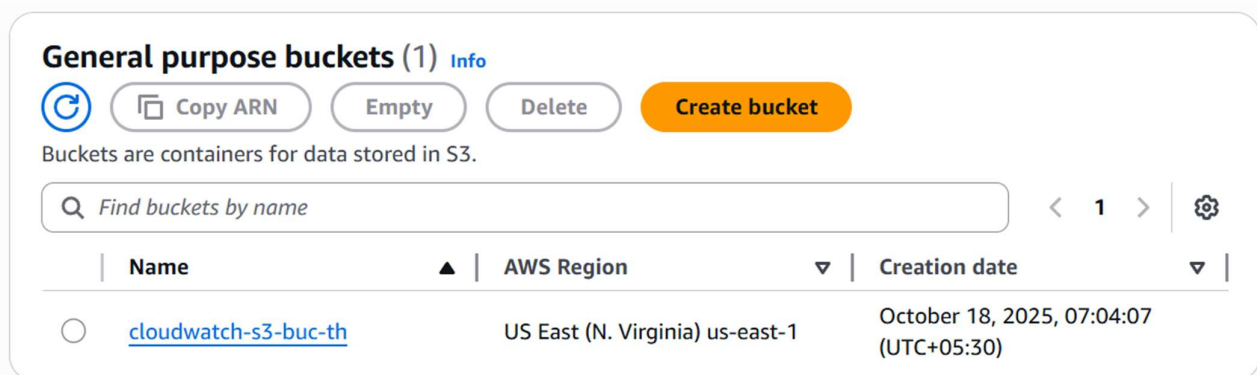

Step 2: Upload Website Files

- Click on your newly created bucket
- Click "**Upload**"
- Drag and drop or select your website files (index.html, CSS, JavaScript, images, etc.)
- **Ensure index.html is in the root directory**
- Click "**Upload**"

Summary

Destination

s3://cloudwatch-s3-buc-th

Succeeded

✔ 2 files, 3.1 KB (100.00%)

Failed

⊖ 0 files, 0 B (0%)

Files and folders

Configuration

Files and folders (2 total, 3.1 KB)

<

1

>

Name	Folder	Type	Size	Status	Error
error.html	-	text/html	615.0 B	✔ Succeeded	-
index.html	-	text/html	2.5 KB	✔ Succeeded	-

Step 3: Enable Static Website Hosting

- Select your bucket from the S3 dashboard
- Click the "Properties" tab
- Scroll to "Static Website Hosting"
- Click "Edit"
- Select "Enable"
- For "Index Document", enter "index.html"
- For "Error Document", enter "error.html"
- Click "Save Changes"

Amazon S3 > Buckets > cloudwatch-s3-buc-th > Edit static website hosting

Info Help Refresh

Edit static website hosting Info

Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)

Static website hosting

- ☐ Disable
- ☒ Enable

Hosting type

- ☒ Host a static website
Use the bucket endpoint as the web address. [Learn more](#)
- ☐ Redirect requests for an object
Redirect requests to another bucket or domain. [Learn more](#)

For your customers to access content at the website endpoint, you must make all your content publicly readable. To do so, you can edit the S3 Block Public Access settings for the bucket. For more information, see [Using Amazon S3 Block Public Access](#)

Index document

Specify the home or default page of the website.

index.html

Error document - optional

This is returned when an error occurs.

error.html

Step 4: Configure Bucket Policy for Public Read Access

- Navigate to the "**Permissions**" tab of your bucket
- Click "**Bucket Policy**" (under "Permissions")
- Click "**Edit**"
- Paste the following policy, replacing "mywebsite-bucket" with your actual bucket name:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "PublicReadGetObject",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3:::mywebsite-bucket/*"
    }
  ]
}
```

Step 5: Configure ACLs (Alternative Method)

- Navigate to "**Access Control List**" in the **Permissions** tab
- Under "**Public Access**", select "**Grant public read access to this object**"
- This provides an alternative or additional layer of public access configuration

 **Successfully edited public access**
View details below. 


Make public: status 

 After you navigate away from this page, the following information is no longer available.

Summary		
Source s3://cloudwatch-s3-buc-th	Successfully edited public access  2 objects, 3.1 KB	Failed to edit public access 0 objects

Step 6: Verify S3 Website Endpoint

- Return to "**Properties**" → "**Static Website Hosting**"
- Copy the "**Bucket Website Endpoint**" URL (e.g., <http://mywebsite-bucket.s3-website-us-east-1.amazonaws.com>)
- Test this URL in a browser to confirm your website is accessible (note: it uses HTTP, not HTTPS)

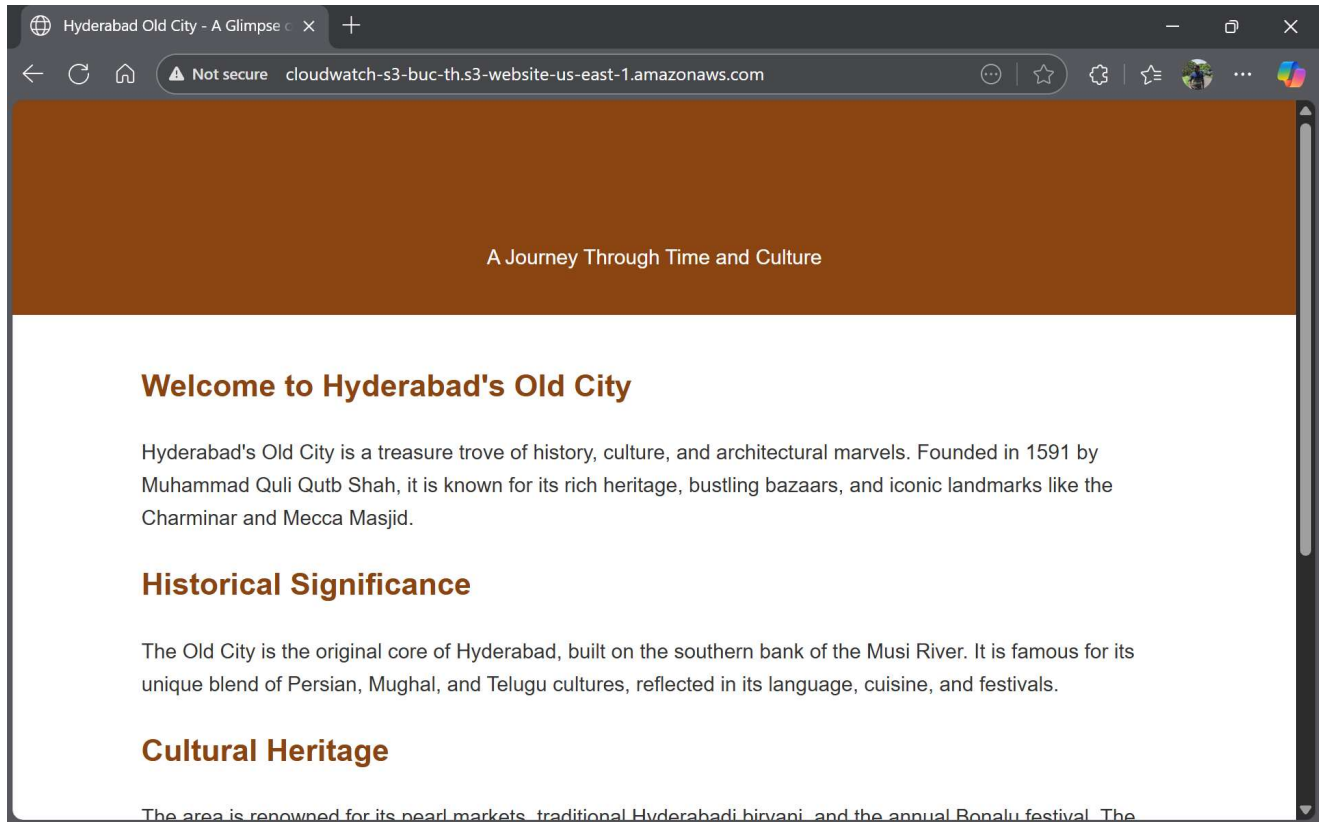



4. Create a CDN and attach one SSL certificate.

Purpose: CloudFront reduces latency by serving content from locations closer to users, provides DDoS protection and security features, enables HTTPS for secure communications, improves website performance, and adds caching intelligence to reduce S3 bandwidth costs.

STEPS TO CREATE A CDN AND ATTACH AN SSL CERTIFICATE:

Step 1: Create an SSL Certificate in ACM

- Navigate to AWS Certificate Manager (ensure you're in the us-east-1 region—critical for CloudFront)
- Click "**Request a Certificate**"
- Select "**Request a Public Certificate**"
- Click "**Next**"
- Enter your domain name (e.g., guzelindia.shop)
- Add subject alternative names if needed.
- Select "**DNS Validation**" for validation method
- Click "**Request**"

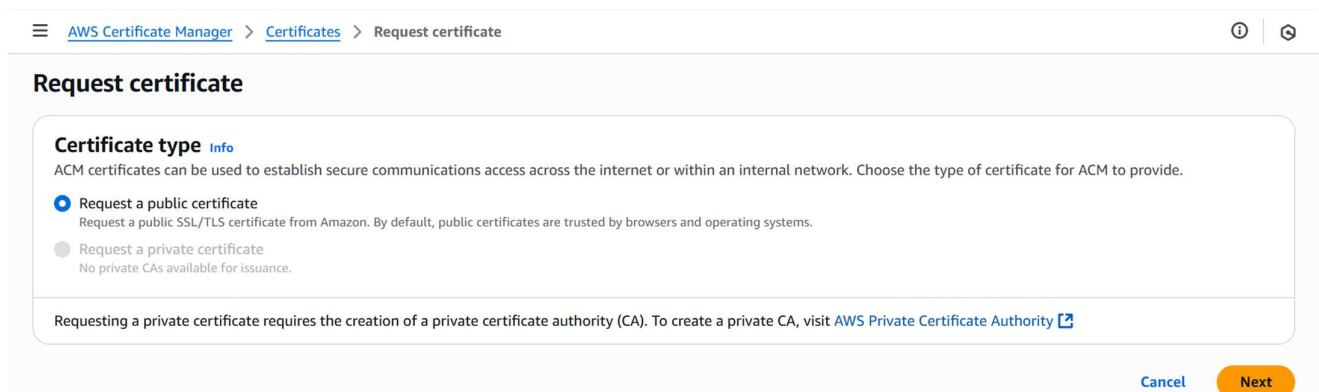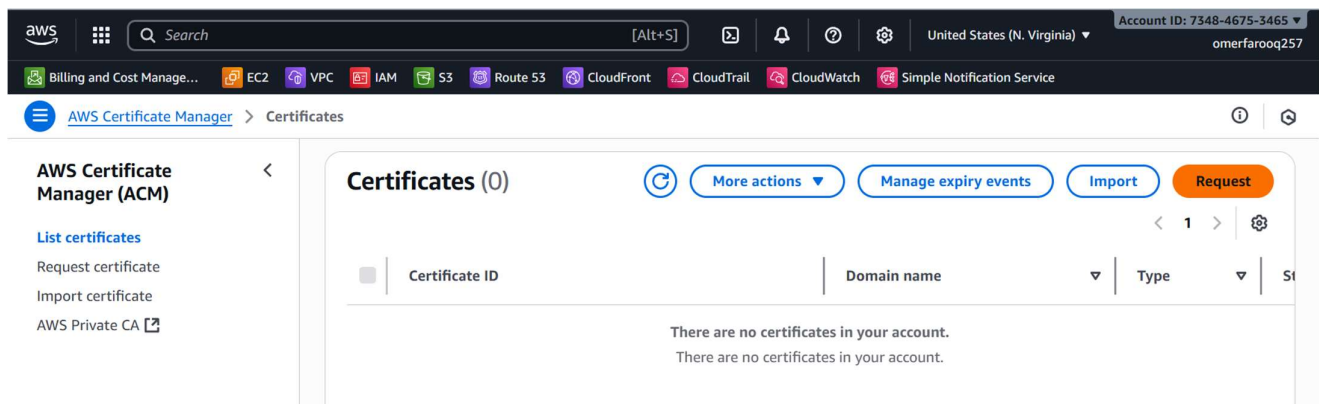

AWS Certificate Manager (ACM)

List certificates
Request certificate
Import certificate
AWS Private CA

55a7a32c-55f0-4904-8364-98383143a99d

Successfully requested certificate with ID 55a7a32c-55f0-4904-8364-98383143a99d
A certificate request with a status of pending validation has been created. Further action is needed to complete the validation and approval of the certificate.

55a7a32c-55f0-4904-8364-98383143a99d

Certificate status

Identifier
55a7a32c-55f0-4904-8364-98383143a99d

ARN
arn:aws:acm:us-east-1:734846753465:certificate/55a7a32c-55f0-4904-8364-98383143a99d

Type
Amazon Issued

Status
Pending validation

Domains (1)

Domain	Status	Renewal status	Registered owners
guzelindia.shop	Pending validation	-	admin@guzelindia.shop, administrator@guzelindia.shop, hostmaster@guzelindia.shop, postmaster@guzelindia.shop, webmaster@guzelindia.shop

Step 2: Validate the Certificate

- In the certificate details, find the DNS validation records
- For each domain, copy the CNAME record information
- You'll add these records to Route 53 later (Task 5); for now, note the values
- AWS will automatically validate once you add the DNS records

AWS Certificate Manager (ACM)

List certificates
Request certificate
Import certificate
AWS Private CA

73e10268-c271-45f3-9151-9d8130d510dc

Domains (1)

Create records in Route 53 **Export to CSV**

CNAME name	CNAME value
_49eb0b063f17e2715a86382c564e7510.guzelindia.shop.	_b11d33ac5cb64b0c28491962fcec8cde.xlfgmrvlj.acm-validations.aws.

Step 3: Create a CloudFront Distribution

- Navigate to **CloudFront** in AWS Management Console
- Click **"Create Distribution"**
- Under **"Origin Domain Name"**, select your **S3 bucket** (e.g., http://cloudfront-r53-tasks-th.s3-website-us-east-1.amazonaws.com)
- Set **"S3 Bucket Access"** to **"Yes, use OAI"** (or create an Origin Access Identity for secure S3 access)
- Click **"Create OAI"** if needed and **"Add a Bucket Policy"** to automatically configure permissions
- Under **"Viewer Protocol Policy"**, select **"Redirect HTTP to HTTPS"**

- Step 1
☒ **Get started**
- Step 2
☐ Specify origin
- Step 3
☐ Enable security
- Step 4
☐ Review and create

Get started

Connect your websites, apps, files, video streams, and other content to CloudFront. We optimize the performance, reliability, and security for your web traffic.

Distribution options [Info](#)

Distribution name

Name will be stored as a tag on the resource. You can add a name, or more tags, later.

Description - optional

Distribution type

☒ Single website or app

Choose if each website or application will have a unique configuration.

☐ Multi-tenant architecture - *New*

Choose when you have multiple domains that need to share configurations. This is a common architecture for SaaS providers.

Custom domain [Info](#)

Domain - optional

Use your own custom domain with free HTTPS to provide a secure, friendly URL for your app. You can add a custom domain later if you do not have a Route 53 zone in this account.

► Tags - optional

- Step 1
☐ Get started
- Step 2
☒ **Specify origin**
- Step 3
☐ Enable security
- Step 4
☐ Review and create

Specify origin

Origin type

Your origin is where your content (such as a website or app) lives. CloudFront works with AWS-based origins and origins hosted on other cloud providers.

☒ Amazon S3

Deliver static assets like files and images, statically generated websites or single page applications (SPA).

☐ Elastic Load Balancer

Deliver applications hosted behind ELB such as dynamic websites, web services, and APIs.

☐ API Gateway

Deliver API endpoints for REST APIs hosted on API Gateway.

☐ Elemental MediaPackage

Deliver end-to-end live events or video on demand (VOD).

☐ VPC origin

Deliver applications and content hosted within private VPCs, such as EC2 instances and Application Load Balancers.

☐ Other

Refer to any AWS or non-AWS origin through its publicly resolvable URL.

Origin

S3 origin

Choose an AWS origin, or enter your origin's domain name. [Learn more](#)

Origin path - optional

The directory path within your origin where your content is stored. [Learn more](#)

Settings [Info](#)

CloudFront provides default origin and cache settings based on what origin you selected. [View default settings for S3](#)

Origin settings

Origin settings control how CloudFront connects to the specified origin.

☒ Use recommended origin settings

☐ Customize origin settings

Cache settings

Cache settings determine when CloudFront serves cached content and when it fetches new content from the origin.

☒ Use recommended cache settings tailored to serving S3 content

☐ Customize cache settings

Step 4: Configure Distribution Settings

- In "**Alternate Domain Names (CNAME)**", add your custom domain (e.g., *guzelindia.shop*)
- Under "**Custom SSL Certificate**", select the certificate you created in Step 1
- Under "**Default Root Object**", enter "**index.html**"
- Set "Compress Objects Automatically" to "Yes" (improves performance)
- Leave other settings as defaults unless you have specific requirements

Edit settings

Settings

Anycast static IP list

Deliver traffic from a small set of IP addresses

There are no Anycast static IP lists available

There are no Anycast static IP lists available

[Create an Anycast static IP list](#)

Price class [Info](#)

Choose the price class associated with the maximum price that you want to pay.

- ☒ Use all edge locations (best performance)
- ☐ Use only North America and Europe
- ☐ Use North America, Europe, Asia, Middle East, and Africa

Alternate domain name (CNAME) - optional

Add the custom domain names that you use in URLs for the files served by this distribution.

guzelindia.shop

Remove

Add item

To add a list of items, use the [bulk editor](#).

Custom SSL certificate - optional

Associate a certificate from AWS Certificate Manager. The certificate must be in the US East (N. Virginia) Region (us-east-1).

guzelindia.shop (d1f300ea-ae2f-41f7-a4d9-27d464f9ca5a)

[guzelindia.shop](#) [Request certificate](#)

- Click "Create Distribution"

- Step 1
Get started
- Step 2
Specify origin
- Step 3
Enable security
- Step 4
Review and create

Review and create

General configuration

Edit

Distribution name
Test-CDN

Description
-

Origin

Edit

S3 origin
cloudfront-r53-tasks-th.s3-website-us-east-1.amazonaws.com

Origin path
-

Enable Origin Shield
No

Connection attempts
3

Connection timeout
10

Cache settings

Edit

CloudFront will apply default cache settings tailored to serving content from a S3 origin. You can customize settings after you create your distribution.

Security

Edit

Security protections
None

Use monitor mode
No

Use existing WAF configuration
No

Cancel

Previous

Create distribution

Step 5: Wait for Distribution Deployment

- CloudFront displays your distribution with a status of "In Progress"
- Deployment typically takes **5-15 minutes**
- Once status changes to "Deployed", note the Distribution Domain Name (e.g., `d2f0zts44w0mnt.cloudfront.net`)

CloudFront > Distributions > E18HVOLXN9AURG

Successfully updated distribution settings.

Test-CDN Standard

[View metrics](#)

[General](#) | [Security](#) | [Origins](#) | [Behaviors](#) | [Error pages](#) | [Invalidations](#) | [Tags](#) | [Logging](#)

Details

Name Test-CDN ✎	Distribution domain name d2f0zts44w0mnt.cloudfront.net	ARN arn:aws:cloudfront::734846753465:distribution/E18HVOLXN9AURG	Last modified October 22, 2025 at 1:23:36 AM UTC
---	--	--	--


Settings

[Edit](#)

Description -	Alternate domain names guzelindia.shop ✎ Route domains to CloudFront	Standard logging Off
Price class Use all edge locations (best performance)	Custom SSL certificate ✓ guzelindia.shop ✎	Cookie logging Off
Supported HTTP versions HTTP/3, HTTP/2, HTTP/1.1, HTTP/1.0	Security policy TLSv1.2_2021	Default root object index.html

Step 6: Verify CloudFront Access

- Once deployed, **test** accessing your content via the CloudFront **domain name**
- Test both HTTP (should redirect to HTTPS) and HTTPS
- Verify your website loads correctly with HTTPS security

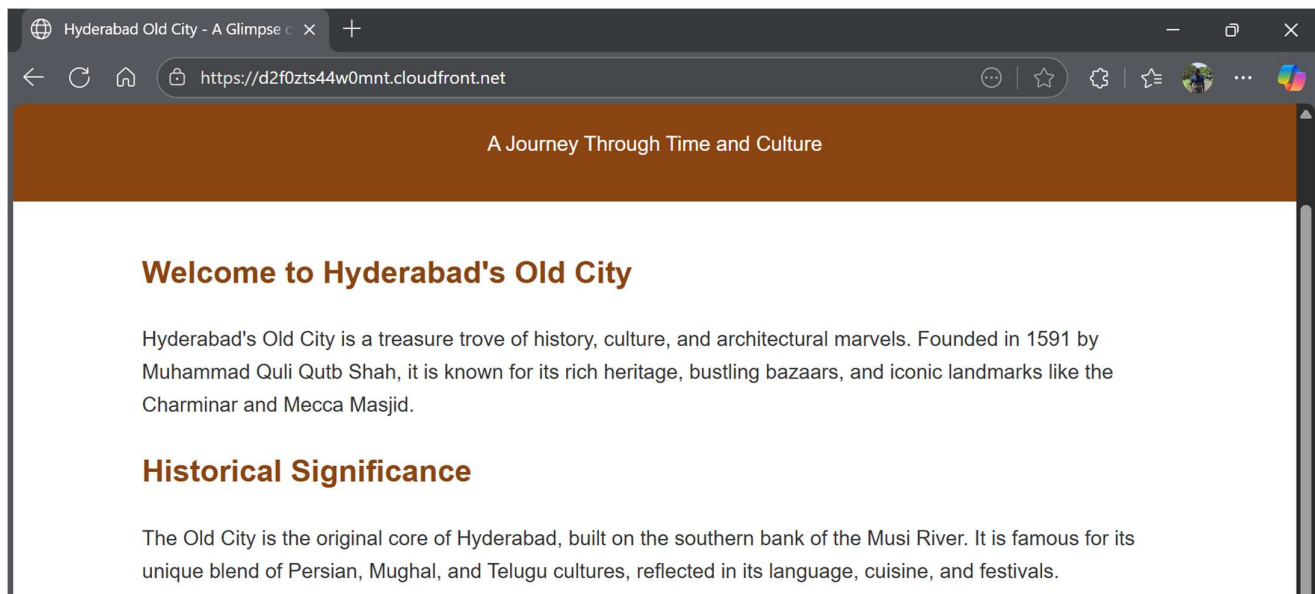


5. Create a Route53 hosted zone and MAP the domain with CDN.

Purpose: Route 53 is AWS's DNS service that translates human-readable domain names into IP addresses and CloudFront domain names. A hosted zone is a Route 53 resource that manages DNS records for a specific domain. Route 53 provides reliable DNS resolution with high availability, integrates seamlessly with AWS services, enables traffic routing policies, supports DNS failover, and allows centralized management of all DNS records for your domain.

STEPS TO CREATE A HOSTED ZONE IN R53 AND MAP THE PURCHASED DOMAIN WITH CDN:

Step 1: Create a Route 53 Hosted Zone

- Navigate to **Route 53** in AWS Management Console
- Click "**Hosted Zones**"
- Click "**Create Hosted Zone**"
- Enter your domain name (e.g., *guzelindia.shop*)
- Leave "**Type**" as "**Public Hosted Zone**"
- Click "**Create Hosted Zone**"

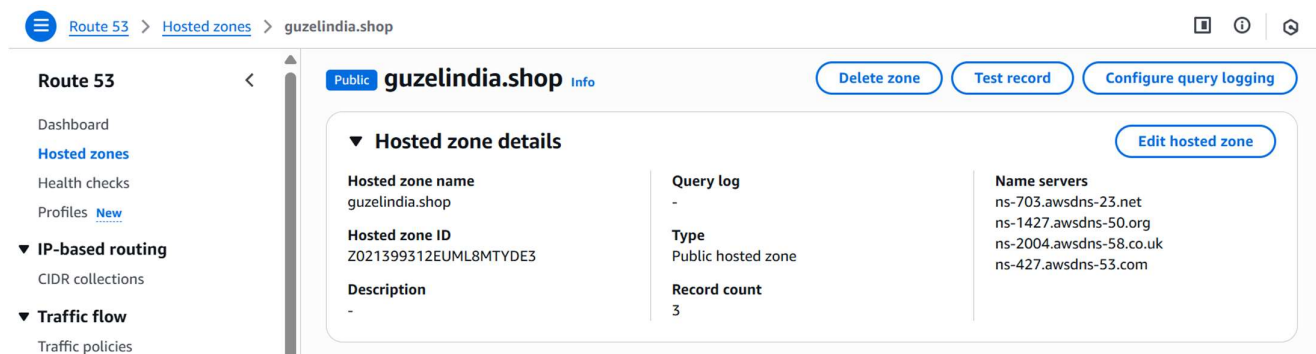

Step 2: Note the Nameservers

- **Route 53** automatically creates **NS (nameserver) records**
- **Copy** the four **nameserver addresses** (e.g., ns-123.awsdns-45.com)
- You'll use these to **update** your domain at **Namecheap**
- Search on the browser – "*How to update nameserver records in Namecheap*" and follow the instructions.

Dashboard
Expiring / Expired
Domain List
Hosting List
Private Email
SSL Certificates
Apps
My Offers
Profile

Domains → Details

guzelindia.shop

Domain
Products
Sharing & Transfer
Advanced DNS

STATUS & VALIDITY
ACTIVE
Oct 19, 2025 - Oct 20, 2026
AUTO-RENEW
ADD YEARS

Withhold Privacy
PROTECTION
Oct 19, 2025 - Oct 19, 2026
AUTO-RENEW
ADD YEARS
SHOW DETAILS

PremiumDNS
Enable PremiumDNS protection in order to switch your domain to our PremiumDNS platform. With our PremiumDNS platform, you get 100% DNS uptime and DDoS protection at the DNS level.
BUY NOW

NAMESERVERS
Custom DNS
ns-703.awsdns-23.net
ns-1427.awsdns-50.org
ns-2004.awsdns-58.co.uk
ns-427.awsdns-53.com
ADD NAMESERVER

Step 4: Validate ACM Certificate (from Task 4)

- Return to **AWS Certificate Manager (us-east-1)**
- Select your certificate (should show "Pending Validation")
- In the ACM certificate details, locate the **DNS validation CNAME** records
- Go to **Route 53 → Your Hosted Zone**
- Click **"Create Record"**
- For each ACM validation record, add it as a **CNAME record in Route 53**:
 - Enter the **Name** and **Value** from ACM's validation record
 - Click **"Create Records"**
- AWS typically validates within a few minutes; status changes to **"Issued"**

AWS Certificate Manager
Certificates
73e10268-c271-45f3-9151-9d8130d510dc
Delete

AWS Certificate Manager (ACM)
List certificates
Request certificate
Import certificate
AWS Private CA

73e10268-c271-45f3-9151-9d8130d510dc
Certificate status
Identifier: 73e10268-c271-45f3-9151-9d8130d510dc
Status: Issued
ARN: arn:aws:acm:us-east-1:734846753465:certificate/73e10268-c271-45f3-9151-9d8130d510dc
Type: Amazon Issued

Domains (1)
Create records in Route 53
Export to CSV

Status	Renewal status	Type	CNAME name	CNAME value
Success	-	CNAME	_49eb0b063f17e2715a86382c564e7510.guzelindia.shop.	_b11d33ac5cb64b0c28491962fcec8cde.xlfgmrvvlj.acm-validations.aws.

Step 5: Create an A Record for Your Domain

- In the **Route 53 Hosted Zone**, click **"Create Record"**
- Leave **"Record Name"** blank (for the root domain) or enter **"www"** for the www subdomain
- Select **"Alias"** as the record type option (toggle **"Alias"** on)
- Choose **"A"** for IPv4
- Under **"Route Traffic To"**, select **"CloudFront Distribution"**
- Select your CloudFront distribution from the dropdown
- Click **"Create Records"**

Route 53 > Hosted zones > guzelindia.shop > Create record

Create record [Info](#)

[Switch to wizard](#)

▼ Record 1 [Delete](#)

Record name [Info](#) guzelindia.shop

Keep blank to create a record for the root domain.

Record type [Info](#)

☒ Alias

Route traffic to [Info](#)

An alias to a CloudFront distribution and another record in the same hosted zone are global and available only in US East (N. Virginia).

Routing policy [Info](#)

Evaluate target health ☐ No

[Add another record](#)

[Cancel](#) [Create records](#)

Step 6: Create Additional Records (Optional)

- Create an additional AAAA record for **"www.guzelindia.shop"** if desired
- Or create an ALIAS record for the root domain (guzelindia.shop) pointing to CloudFront
- Repeat the process, ensuring both www and non-www versions route to CloudFront

Billing and Cost Manage... EC2 VPC IAM S3 Route 53 CloudFront CloudTrail CloudWatch Simple Notification Service

CloudFront > Distributions > E18HVOLXN9AURG



✔ Successfully updated distribution settings.

Settings [Edit](#)

Description -	Alternate domain names guzelindia.shop Route domains to CloudFront	Standard logging Off
Price class Use all edge locations (best performance)	Custom SSL certificate guzelindia.shop	Cookie logging Off
Supported HTTP versions HTTP/3, HTTP/2, HTTP/1.1, HTTP/1.0	Security policy TLSv1.2_2021	Default root object -

Step 7: Verify DNS Resolution

- Wait a few minutes for DNS propagation
- Test DNS resolution using command line: ***nslookup guzelindia.shop***
- Verify that the returned IP corresponds to your CloudFront distribution
- Test accessing your domain in a browser (both `guzelindia.shop` and www.guzelindia.shop)
- Confirm the SSL certificate is valid (green lock icon in browser)

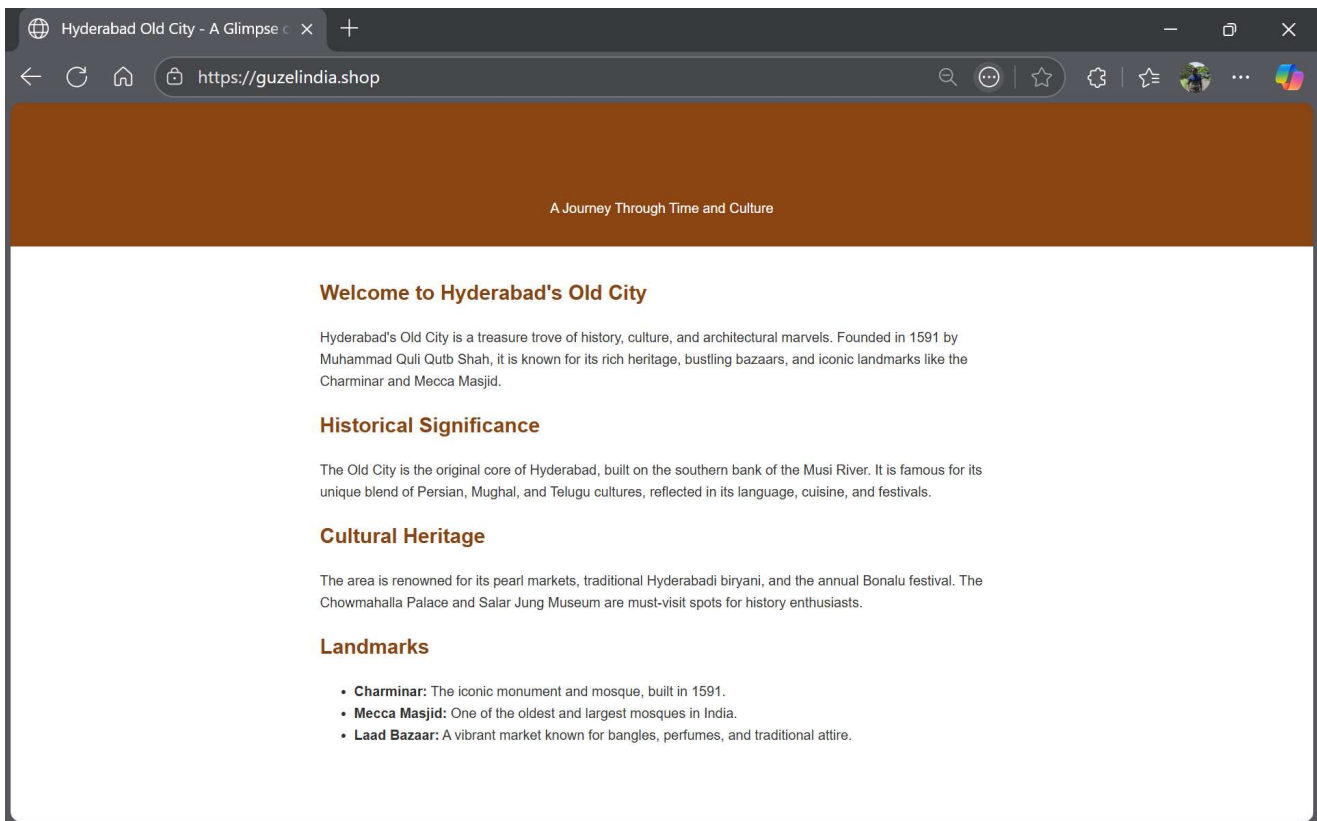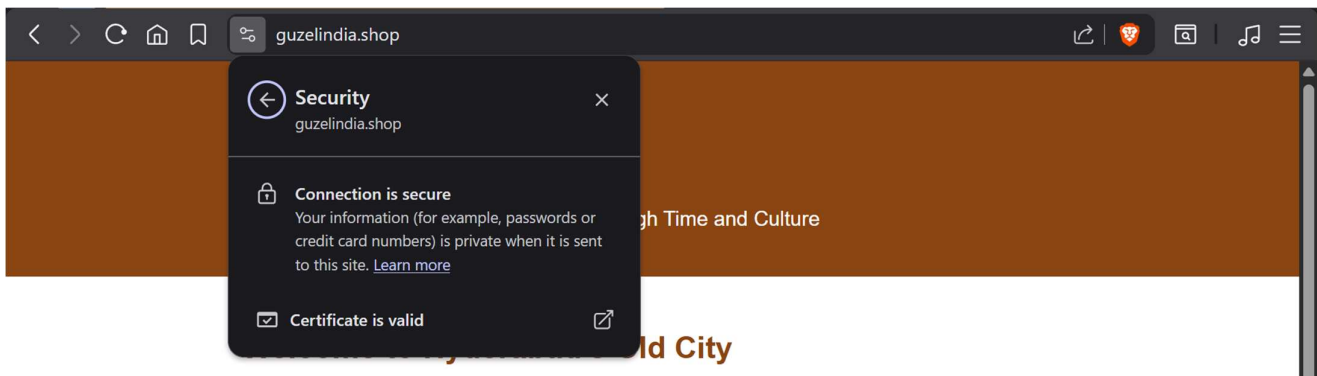

6. Update the index.html in the S3 bucket, and the updated file should be accessible by using the domain name.

Purpose: This process involves updating the index.html file in the S3 bucket and managing CloudFront cache invalidation to ensure users see the latest version of your website immediately. While S3 stores your files permanently, CloudFront caches content at edge locations for performance. Cache invalidation ensures users receive updated content immediately rather than waiting for cache TTL (Time To Live) to expire, which could take hours or days.

STEPS TO UPDATE INDEX.HTML IN S3 BUCKET AND UPDATE

Step 1: Update the index.html File in S3


- Navigate to your **S3 bucket** in AWS Management Console
- Locate the **index.html** and **error.html** files
- Click "**Upload**" → select your updated index.html and error.html files
- Choose "**Upload**" or drag and drop the new file
- AWS will replace the existing file
- **Confirm** the upload completes successfully

The screenshot shows the AWS Management Console interface for an S3 bucket named 'cloudfront-r53-tasks-th'. The 'Objects' tab is selected, displaying a list of two objects: 'error.html' and 'index.html'. Both files are of type 'html' and are stored in the 'Standard' storage class. The 'index.html' file is 5.3 KB, while 'error.html' is 633.0 B. Both files were last modified on October 22, 2025, at 08:00:58 (UTC+05:30). The interface includes a search bar, a 'Show versions' toggle, and various action buttons like 'Copy S3 URI', 'Copy URL', 'Download', 'Open', 'Delete', 'Actions', 'Create folder', and 'Upload'.

☐	Name	Type	Last modified	Size	Storage class
☐	error.html	html	October 22, 2025, 08:00:58 (UTC+05:30)	633.0 B	Standard
☐	index.html	html	October 22, 2025, 08:00:59 (UTC+05:30)	5.3 KB	Standard

Step 2: Verify File Update in S3

- Navigate to your S3 bucket's static website endpoint (from Task 3)
- Access the S3 URL directly (not through your domain yet)
- Verify that your changes appear (you may need to hard refresh or clear browser cache)

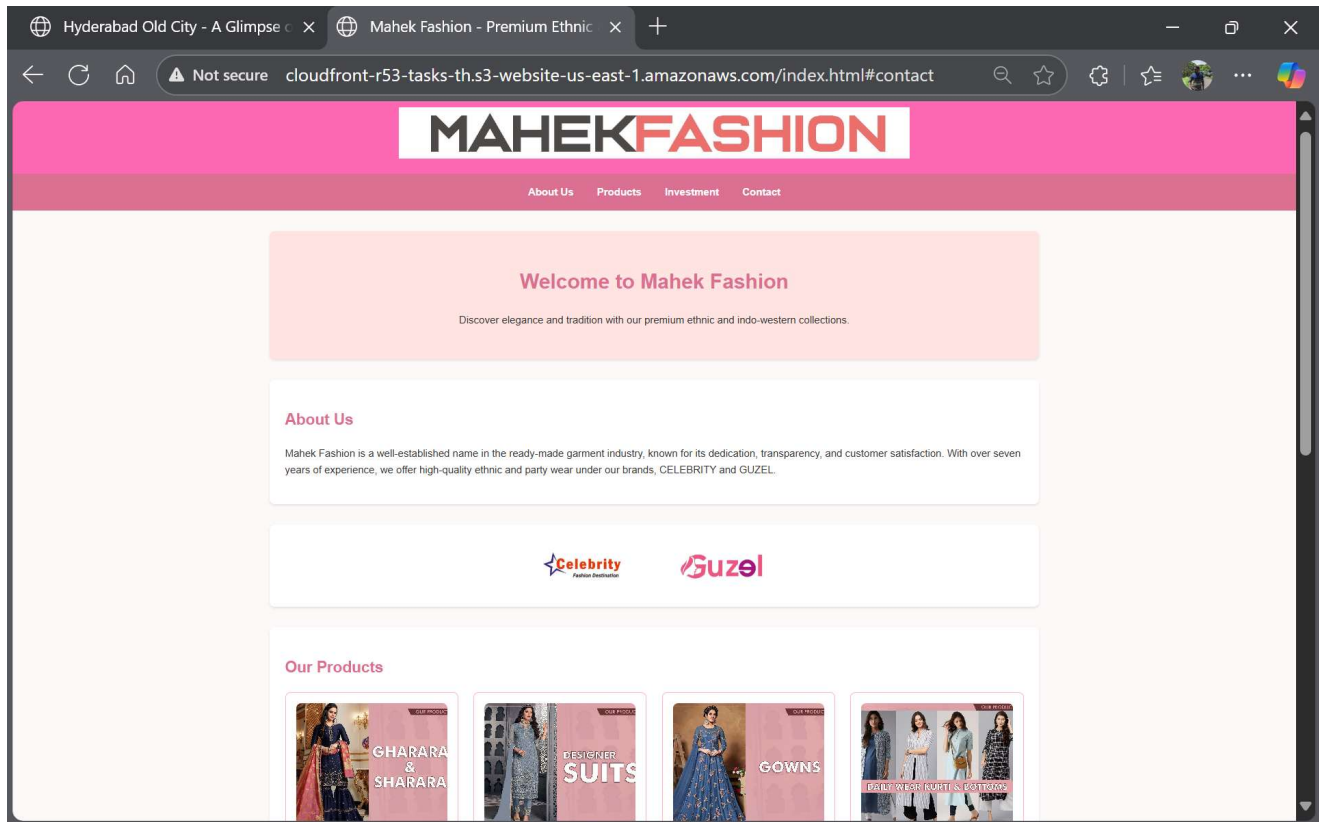

Step 3: Create a CloudFront Cache Invalidation

- Navigate to CloudFront in AWS Management Console
- Select your distribution
- Click the "Invalidations" tab
- Click "Create Invalidation"
- In the "Object Paths" field, enter the paths you want to invalidate:
 - For the entire website: /* (invalidates all objects)
 - For specific files: /index.html, /css/style.css, etc.

CloudFront > Distributions > E18HVOLXN9AURG > Create invalidation

Create invalidation

Object paths [Info](#)

Add object paths
Add each object path to remove from the CloudFront cache. To use wildcards (*) in the invalidation, you must put the wildcard at the end of the path.

/*

ⓘ To add object paths individually, use the [standard editor](#).

[Cancel](#) [Create invalidation](#)

Step 4: Monitor Invalidation Progress

- CloudFront displays the invalidation with a status
- Status "In Progress" indicates the cache is being cleared
- Once status changes to "Completed", the cache invalidation is finished (typically 1-5 minutes)

CloudFront > Distributions > E18HVOLXN9AURG > IC9BX60X1P4JTQSPF6DUJFZS4

Invalidation details

Date created
October 22, 2025 at 3:28:46 AM UTC

Status
✔ Completed

Object paths
/*

Copy to new

Step 5: Verify Changes on Your Domain

- Access your domain (mywebsite.com) in a web browser
- Perform a hard refresh (Ctrl+Shift+R on Windows/Linux, Cmd+Shift+R on Mac) to bypass local browser cache
- Verify that your updated content displays correctly
- Test on multiple devices or browsers if possible

