

final_project_draft

Omer Shasman

5/3/2022

Introduction

On Time Performance analysis of an airline network - This is an important metric for the airline that is calculated as the percentage of flights which are delayed by more than 14 minutes while the aircraft arrives at the gate. There are multiple reasons which contribute to the variation in OTP. An analysis of the OTP metric breaking it down into its individual components namely different delay and historical delays can provide insights into how the OTP for an airline can be managed by operational/process changes. The Department of Transport releases the flight level, On Time Performance data. This dataset also has various other factors which affect the Arrival Delay of a flight. An exploratory analysis of this data with the Arrival Delay as the response variable analyzed against different dimensions provided in the dataset can reveal several insights to improve the OTP of an Airline.

What

As part of my Final Project, I am planning to use a subset of OTP data to perform analysis of delays on actual file arrivals focusing on one particular Station and Airline. Since airline operations are very complex, the arrival delays itself can be due to varying factors, like weather delay, carrier delays, security delays, Late aircraft delay...etc or any combinations of any of these in general. My focus is only on 2 types of delays so that I can minimize the complexities in data structures and limit any repeating processes or steps, and rather focus on how to manipulate and do analysis/inference with few variables. Hence I will be considering only 5 years data ranging from year 2014 till 2019 two types of delays "Weather Delays" and "Carrier Delays"

Why

I thought airline is an interesting business with lot of complex operation/data and business itself is most of us are familiar with. Also, with the time constraint we have, there were few sites like Kaggle and DOT On-Time_performance

This data is presented as yearly file in csv format, I have to merge different years data using dplyr bind command to append rows at the end and build one file.

How

Use RMarkdown and explore Rfunctions that can integrate some of the topics we learned in the class for flight arrival delay analysis. The following are steps which will be followed as part of the project

- Load data into R Markdown using R chunks
- Merge Data using dplyr

- Filter/melt/massage data using Tidy Data approach
- Use sampling strategy for identifying sample observations.
- Use Stats function to determine mean, median, IQR,...
- Regression - Find any co-relation between total flights arriving at a particular airport and delays to identify if it's the airport operational/capacity issue or not.
- Could hosted data and R Markdown interface. Pull data from AWS S3 buckets than loading from local machine.

Body

This project perform analysis of flight arrival delays focusing on one particular Station and Airline. Since airline delays are unavoidable there is always a chance that a particular flight will be delayed. I think this analysis can be used to further study on why a particular delay happens and if the process/schedule/operations can be enhanced or refined to minimize the delay risk in future flights.

Packages Required

```
library(knitr) ##for printing tables in R Markdown
library(dplyr) ##for data munging
```

```
##
## Attaching package: 'dplyr'

## The following objects are masked from 'package:stats':
##
##   filter, lag

## The following objects are masked from 'package:base':
##
##   intersect, setdiff, setequal, union
```

```
library(ggplot2) ## for charts
library(infer) ## for rep_sample_n used for clustered sampling
```

```
library(readr)
flight.data.y2014 <- read_csv("Data/2014.csv")
# head(flight.data.y2014)

flight.data.y2015 <- read_csv("Data/2015.csv")
# head(flight.data.y2015)

flight.data.y2016 <- read_csv("Data/2016.csv")
# head(flight.data.y2016)

flight.data.y2017 <- read_csv("Data/2017.csv")
# head(flight.data.y2017)

flight.data.y2018 <- read_csv("Data/2018.csv")
```

```

# head(flight.data.y2018)

# Since this is a large dataset, sampling/manipulating on all the observations
# is throwing memory error in my machine. So for ease of processing, I am
# considering a subset of data with arrival station as MSP.

flight.data.y2014 <- flight.data.y2014[flight.data.y2014$DEST %in% 'MSP', ]
flight.data.y2015 <- flight.data.y2015[flight.data.y2015$DEST %in% 'MSP', ]
flight.data.y2016 <- flight.data.y2016[flight.data.y2016$DEST %in% 'MSP', ]
flight.data.y2017 <- flight.data.y2017[flight.data.y2017$DEST %in% 'MSP', ]
flight.data.y2018 <- flight.data.y2018[flight.data.y2018$DEST %in% 'MSP', ]

# Combine the 5 vectors(for each files) to a single vector
flight.data.y2014.y2018 <-
  dplyr::bind_rows(flight.data.y2014,
                   flight.data.y2015,
                   flight.data.y2016,
                   flight.data.y2017,
                   flight.data.y2018,
                   )

# replace all na in valriables which we interested in to 0 for summary calculations.
flight.data.y2014.y2018$ARR_DELAY <-
  flight.data.y2014.y2018$ARR_DELAY %>%
  replace(is.na(.), 0)

flight.data.y2014.y2018$LATE_AIRCRAFT_DELAY <-
  flight.data.y2014.y2018$LATE_AIRCRAFT_DELAY %>%
  replace(is.na(.), 0)


flight.data.y2014.y2018$SECURITY_DELAY <-
  flight.data.y2014.y2018$SECURITY_DELAY %>%
  replace(is.na(.), 0)

flight.data.y2014.y2018$WEATHER_DELAY <-
  flight.data.y2014.y2018$WEATHER_DELAY %>%
  replace(is.na(.), 0)

flight.data.y2014.y2018$CARRIER_DELAY <-
  flight.data.y2014.y2018$CARRIER_DELAY %>%
  replace(is.na(.), 0)

hist(flight.data.y2014.y2018$FL_DATE,
     flight.data.y2014.y2018$ARR_DELAY,
     breaks = 100,
     col='lightsteelblue3')

```

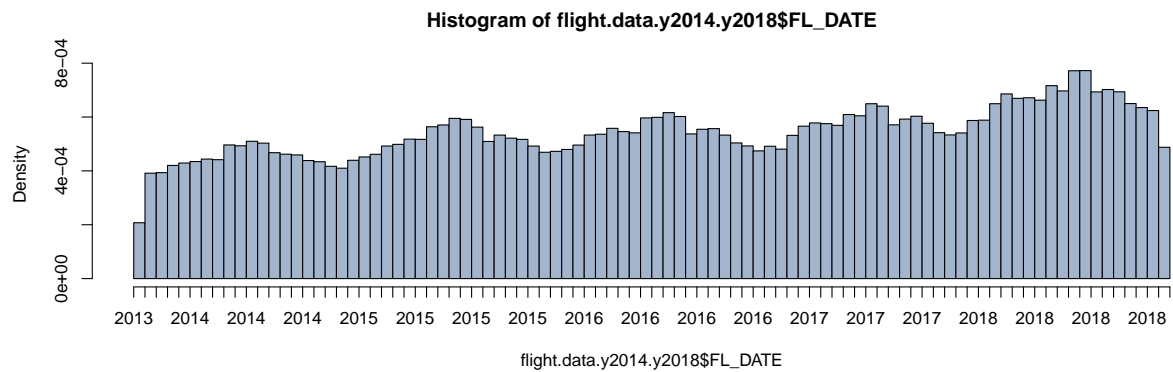

```
summary(flight.data.y2014.y2018$ARR_DELAY)
```


```
##      Min.   1st Qu.   Median     Mean 3rd Qu.     Max.
## -119.000  -16.000   -7.000    1.781   4.000  1668.000
```

```
flight.data.y2014.y2018.delay <-
  flight.data.y2014.y2018[flight.data.y2014.y2018$CARRIER_DELAY > 60, ]
```

```
summary(flight.data.y2014.y2018.delay$CARRIER_DELAY)
```

```
##      Min.   1st Qu.   Median     Mean 3rd Qu.     Max.
##   61.0    81.0    120.0   189.4   218.0   1668.0
```

```
plot(flight.data.y2014.y2018.delay$AIR_TIME,
     flight.data.y2014.y2018.delay$CARRIER_DELAY,
     col = "darkgreen")
```

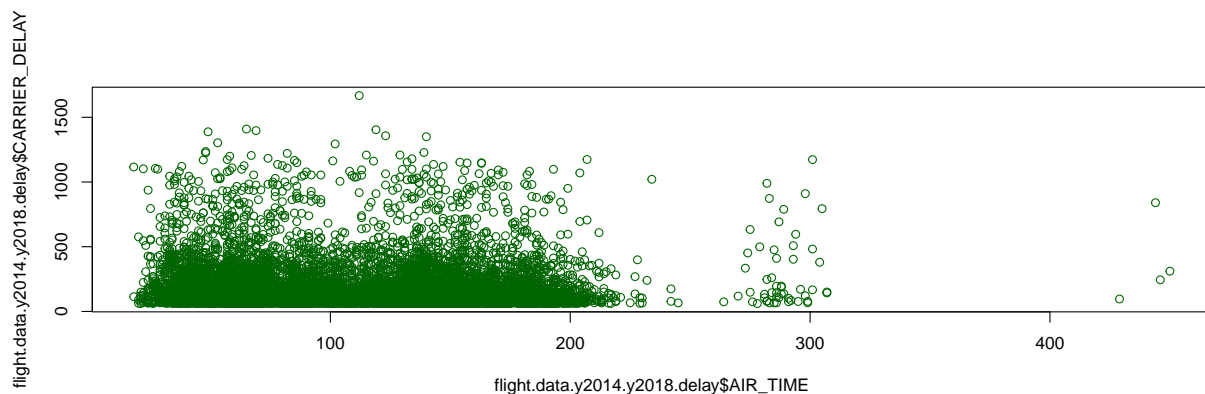

Topics From Class

Topic 1:

R Markdown - I will be presenting the project in R Markdown and knit the file to a pdf document. Will be using R chunks to demonstrate and build the project components.

Topic 2:

GitHub - Will host the project in github repository for others to view my project components.

Topic 3:

Sampling strategies for an Observational study - Will be using sampling strategies - Simple random sampling, Strtified sampling, Cluster sampling and multistage sampling to group the data together by using different variables from the dataset and then use one of the sampling result to build topic#4 and 5.

```
simple.sampling <- dplyr::sample_n(flight.data.y2014.y2018, 1000, replace=FALSE)
# View(simple.sampling)
simple.sampling
```

```
## # A tibble: 1,000 x 28
##   FL_DATE    OP_CARRIER OP_CARRIER_FL_NUM ORIGIN DEST CRS_DEP_TIME DEP_TIME
##   <date>      <chr>          <dbl> <chr> <chr>      <dbl>    <dbl>
## 1 2014-07-07 US              713 CLT   MSP          955    1059
## 2 2016-08-12 DL             2848 MCO   MSP         1209    1200
## 3 2016-12-12 DL             2063 DCA   MSP          835    2333
## 4 2018-10-11 OO             4520 PIA   MSP          635     624
## 5 2015-01-08 WN              893 DEN   MSP         1610    1605
## 6 2017-12-07 OO            4535 SDF   MSP          640     656
## 7 2017-07-17 DL              713 LAX   MSP          730     727
## 8 2018-02-16 OO            3606 ICT   MSP          610     600
## 9 2018-04-10 WN             1740 DEN   MSP          615     609
## 10 2015-04-07 UA              573 DEN   MSP         1021    1023
## # ... with 990 more rows, and 21 more variables: DEP_DELAY <dbl>,
## # TAXI_OUT <dbl>, WHEELS_OFF <dbl>, WHEELS_ON <dbl>, TAXI_IN <dbl>,
## # CRS_ARR_TIME <dbl>, ARR_TIME <dbl>, ARR_DELAY <dbl>, CANCELLED <dbl>,
## # CANCELLATION_CODE <chr>, DIVERTED <dbl>, CRS_ELAPSED_TIME <dbl>,
## # ACTUAL_ELAPSED_TIME <dbl>, AIR_TIME <dbl>, DISTANCE <dbl>,
## # CARRIER_DELAY <dbl>, WEATHER_DELAY <dbl>, NAS_DELAY <dbl>,
## # SECURITY_DELAY <dbl>, LATE_AIRCRAFT_DELAY <dbl>, 'Unnamed: 27' <lgl>
```

```
# Here I am making a cluster of where Airline code is the strata
DL <- flight.data.y2014.y2018[flight.data.y2014.y2018$OP_CARRIER %in% 'DL', ]
UA <- flight.data.y2014.y2018[flight.data.y2014.y2018$OP_CARRIER %in% 'UA', ]
AA <- flight.data.y2014.y2018[flight.data.y2014.y2018$OP_CARRIER %in% 'AA', ]
WN <- flight.data.y2014.y2018[flight.data.y2014.y2018$OP_CARRIER %in% 'WN', ]
```

```
stratified.sampling <- dplyr::sample_n((UA), 1000, replace=FALSE)
dim(stratified.sampling)
```

```
## [1] 1000 28
```

```
#randomly choose 4 10 groups out of the n
clusters <-
  sample(unique(flight.data.y2014.y2018$OP_CARRIER), size=10, replace=FALSE)

#define sample as all members who belong to one of the 10 operated carriers
clustered_by_op_carrier <-
```

```
flight.data.y2014.y2018[flight.data.y2014.y2018$OP_CARRIER %in% clusters, ]

#view how many observations came from each tour
table(clustered_by_op_carrier$OP_CARRIER)
```

```
##
##      9E      AA      DL      F9      MQ      OH      OO      UA      US      YX
## 11576 33675 315560   7233   1169    94 166057 16793   6319   5196
```

```
clustered_by_op_carrier
```

```
## # A tibble: 563,672 x 28
##   FL_DATE      OP_CARRIER OP_CARRIER_FL_NUM ORIGIN DEST CRS_DEP_TIME DEP_TIME
##   <date>      <chr>          <dbl> <chr> <chr>      <dbl>    <dbl>
## 1 2014-01-01 F9              112 DEN  MSP        1130    1128
## 2 2014-01-01 F9              114 DEN  MSP        1459    1516
## 3 2014-01-01 F9              110 DEN  MSP         645    641
## 4 2014-01-01 F9              116 DEN  MSP        1905    2119
## 5 2014-01-01 MQ             3616 LGA  MSP        1155    1148
## 6 2014-01-01 MQ             3588 LGA  MSP        1425    1825
## 7 2014-01-01 MQ             3349 LGA  MSP        1845    2052
## 8 2014-01-01 OO             4694 HIB  MSP        1238    1331
## 9 2014-01-01 OO             4685 LSE  MSP        1515    1518
## 10 2014-01-01 OO             4531 MCI  MSP        1120    1559
## # ... with 563,662 more rows, and 21 more variables: DEP_DELAY <dbl>,
## #   TAXI_OUT <dbl>, WHEELS_OFF <dbl>, WHEELS_ON <dbl>, TAXI_IN <dbl>,
## #   CRS_ARR_TIME <dbl>, ARR_TIME <dbl>, ARR_DELAY <dbl>, CANCELLED <dbl>,
## #   CANCELLATION_CODE <chr>, DIVERTED <dbl>, CRS_ELAPSED_TIME <dbl>,
## #   ACTUAL_ELAPSED_TIME <dbl>, AIR_TIME <dbl>, DISTANCE <dbl>,
## #   CARRIER_DELAY <dbl>, WEATHER_DELAY <dbl>, NAS_DELAY <dbl>,
## #   SECURITY_DELAY <dbl>, LATE_AIRCRAFT_DELAY <dbl>, 'Unnamed: 27' <lgl>
```

Topic 4:


Detailing Summary statistics (Min. , 1st Qu., Median, Mean, 3rd Qu., Max.) of a variable and plotting graphs using ggplot2

```
carrier_delay_by_op_carrier <-
  clustered_by_op_carrier %>%
  select(c(FL_DATE, OP_CARRIER, CARRIER_DELAY)) %>%
  filter(OP_CARRIER == 'DL') %>% filter(CARRIER_DELAY > 0)

summary(carrier_delay_by_op_carrier$CARRIER_DELAY)
```

```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.00   7.00   18.00   56.36  48.00 1199.00
```

```
hist(carrier_delay_by_op_carrier$FL_DATE,
     carrier_delay_by_op_carrier$CARRIER_DELAY,
     breaks = 100,
     col = "lightblue")
```

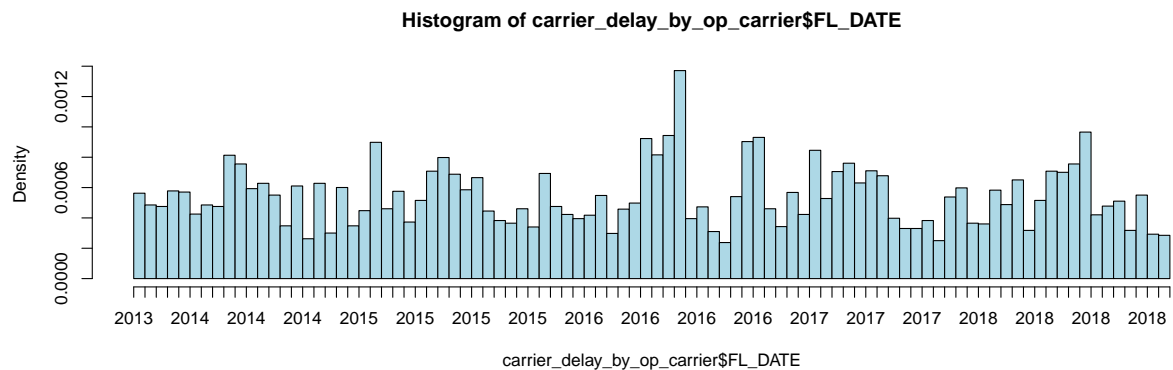


```
carrier_delay_by_op_carrier_2016 <-
  carrier_delay_by_op_carrier

carrier_delay_by_op_carrier_2016$YEAR <-
  format(carrier_delay_by_op_carrier$FL_DATE, "%Y")

carrier_delay_by_op_carrier_2016 <-
  carrier_delay_by_op_carrier_2016 %>%
  filter(YEAR == '2016')

carrier_delay_by_op_carrier_2016$MONTH <-
  format(carrier_delay_by_op_carrier_2016$FL_DATE, "%m")

hist(carrier_delay_by_op_carrier_2016$FL_DATE,
     carrier_delay_by_op_carrier_2016$CARRIER_DELAY,
     breaks = 200,
     col = "lightgreen")
```

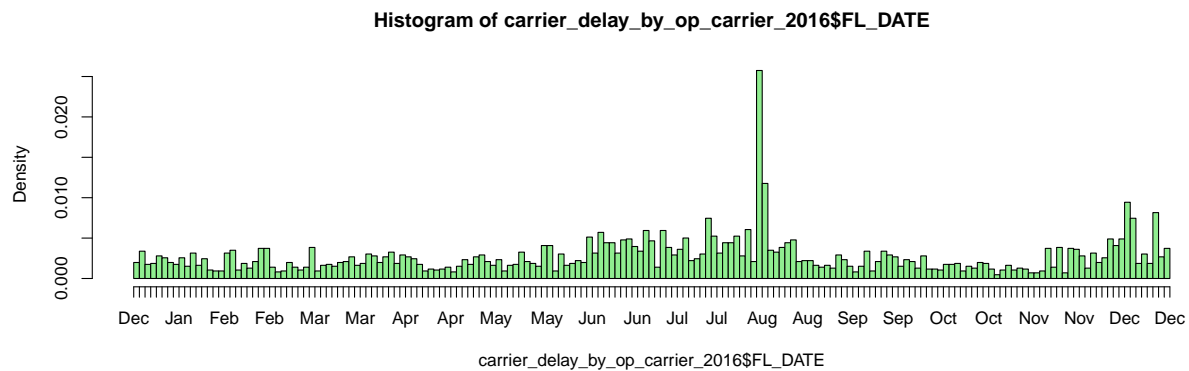

```
# From the above plot it has been determined that August 2016 has an increase in carrier delay. The foll
carrier_delay_by_op_carrier_2016_AUG <-
  carrier_delay_by_op_carrier_2016


carrier_delay_by_op_carrier_2016_AUG <-
  carrier_delay_by_op_carrier_2016_AUG %>%
  filter(MONTH == '08')
```

```

carrier_delay_by_op_carrier_2016_AUG$DAY <-
  format(carrier_delay_by_op_carrier_2016_AUG$FL_DATE,
         "%d")

hist(carrier_delay_by_op_carrier_2016_AUG$FL_DATE,
     carrier_delay_by_op_carrier_2016_AUG$CARRIER_DELAY,
     breaks = 40,
     col = "orange")

```

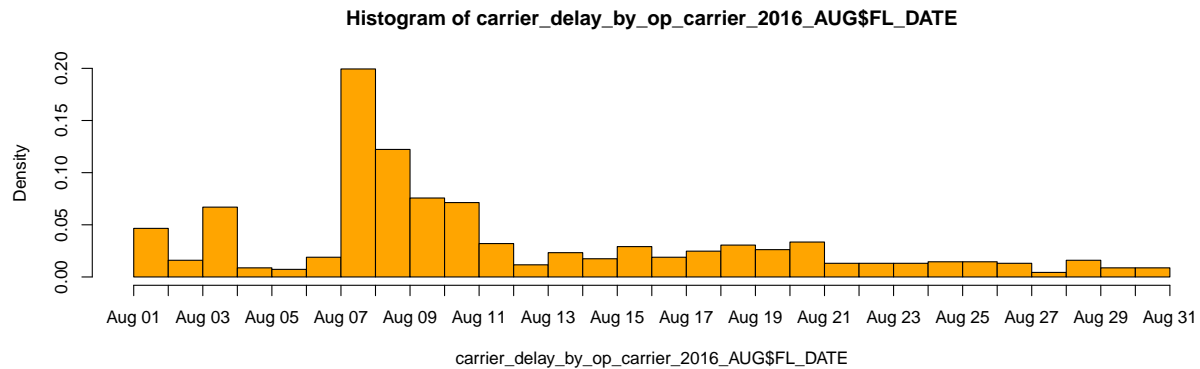

```
summary(carrier_delay_by_op_carrier_2016_AUG$CARRIER_DELAY)
```

```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.00    9.00   22.00   70.74   76.00 1167.00
```

From the news during those days there was a system outage which caused this massive delay/cancellations.
Delta System Outage - Aug2016


WEATHER DELAY

```

# First select the sub-vectors which contains only the columns we are interested in
weather_delay_by_op_carrier <-
  clustered_by_op_carrier %>%
  select(c(FL_DATE,
           OP_CARRIER,
           WEATHER_DELAY)) %>%
  filter(OP_CARRIER == 'DL') %>%
  filter(WEATHER_DELAY > 0
  )

hist(weather_delay_by_op_carrier$FL_DATE,
     weather_delay_by_op_carrier$WEATHER_DELAY,
     breaks = 100,
     col = "lightblue")

```

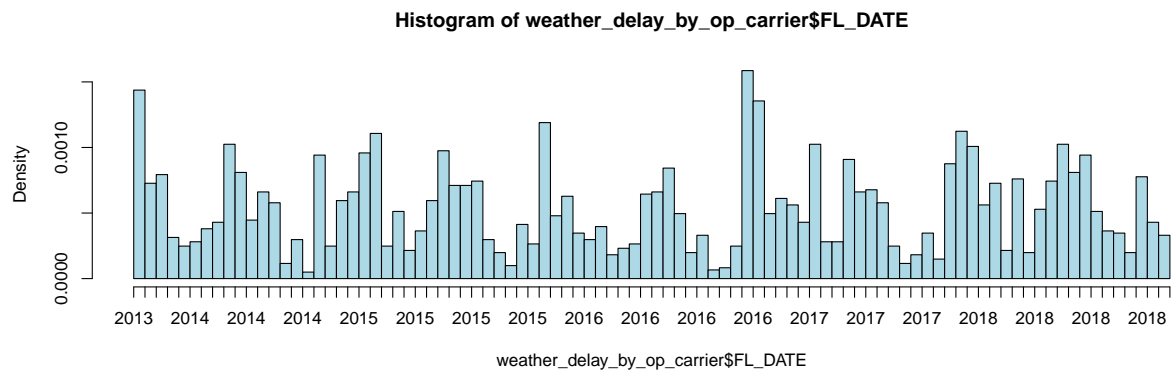In 2016 we have a increase in delay. Let's find out month by analysis to approximate on which month i

```
weather_delay_by_op_carrier_2016 <-
  weather_delay_by_op_carrier


weather_delay_by_op_carrier_2016$YEAR <-
  format(weather_delay_by_op_carrier$FL_DATE, "%Y")

weather_delay_by_op_carrier_2016 <-
  weather_delay_by_op_carrier_2016 %>%
  filter(YEAR == '2016')

weather_delay_by_op_carrier_2016$MONTH <-
  format(weather_delay_by_op_carrier_2016$FL_DATE, "%m")

hist(weather_delay_by_op_carrier_2016$FL_DATE,
      weather_delay_by_op_carrier_2016$weather_delay,
      breaks = 200, col = "lightgreen")
```

Warning: Unknown or uninitialised column: 'weather_delay'.

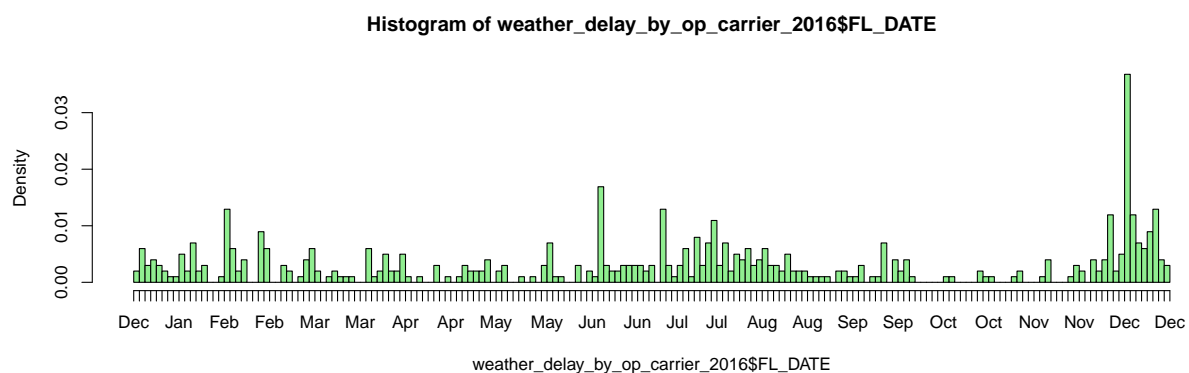

The above histogram shows that whether delays are massive in December month in MSP airport. This could be explained by winter storms related delays.

```
weather_delay_by_op_carrier_2016
```

A tibble: 503 x 5

```
##   FL_DATE    OP_CARRIER WEATHER_DELAY YEAR  MONTH
##   <date>     <chr>         <dbl> <chr> <chr>
## 1 2016-01-01 DL              8 2016   01
## 2 2016-01-02 DL              4 2016   01
## 3 2016-01-03 DL             20 2016   01
## 4 2016-01-03 DL             17 2016   01
## 5 2016-01-03 DL             59 2016   01
## 6 2016-01-03 DL             12 2016   01
## 7 2016-01-03 DL            108 2016   01
## 8 2016-01-04 DL             28 2016   01
## 9 2016-01-06 DL             33 2016   01
##10 2016-01-06 DL             23 2016   01
## # ... with 493 more rows
```


```
weather_delay_by_op_carrier_2016_DEC <-
  weather_delay_by_op_carrier_2016 %>%
  filter(MONTH == '12')

weather_delay_by_op_carrier_2016_DEC$DAY <-
  format(weather_delay_by_op_carrier_2016_DEC$FL_DATE, "%d")

# weather_delay_by_op_carrier_2016_DEC

hist(as.numeric(weather_delay_by_op_carrier_2016_DEC$DAY),
     weather_delay_by_op_carrier_2016_DEC$weather_delay,
     breaks = 30, col = "orange")
```

```
## Warning: Unknown or uninitialised column: 'weather_delay'.
```

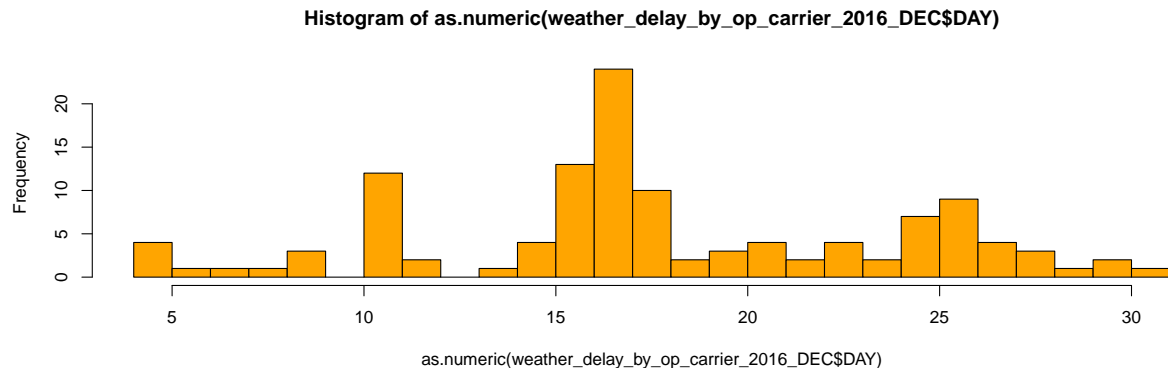

```
summary(weather_delay_by_op_carrier_2016_DEC$weather_delay)
```

```
## Warning: Unknown or uninitialised column: 'weather_delay'.
```

```
## Length Class Mode
##      0   NULL  NULL
```

```

weather_delay_by_op_carrier_2014.gorupby <-
  flight.data.y2014 %>%
  select(c(FL_DATE, OP_CARRIER, WEATHER_DELAY)) %>%
  filter(OP_CARRIER == 'DL') %>%
  filter(WEATHER_DELAY > 0) %>%
  group_by(as.numeric(format(FL_DATE, "%m"))) %>%
  summarize(total_delayed=sum(WEATHER_DELAY)) %>%
  mutate(year=2014)

weather_delay_by_op_carrier_2015.gorupby <-
  flight.data.y2015 %>%
  select(c(FL_DATE, OP_CARRIER, WEATHER_DELAY)) %>%
  filter(OP_CARRIER == 'DL') %>%
  filter(WEATHER_DELAY > 0) %>%
  group_by(as.numeric(format(FL_DATE, "%m"))) %>%
  summarize(total_delayed=sum(WEATHER_DELAY)) %>%
  mutate(year=2015)

weather_delay_by_op_carrier_2016.gorupby <-
  flight.data.y2016 %>%
  select(c(FL_DATE, OP_CARRIER, WEATHER_DELAY)) %>%
  filter(OP_CARRIER == 'DL') %>%
  filter(WEATHER_DELAY > 0) %>%
  group_by(as.numeric(format(FL_DATE, "%m"))) %>%
  summarize(total_delayed=sum(WEATHER_DELAY)) %>%
  mutate(year=2016)

weather_delay_by_op_carrier_2017.gorupby <-
  flight.data.y2017 %>%
  select(c(FL_DATE, OP_CARRIER, WEATHER_DELAY)) %>%
  filter(OP_CARRIER == 'DL') %>%
  filter(WEATHER_DELAY > 0) %>%
  group_by(as.numeric(format(FL_DATE, "%m"))) %>%
  summarize(total_delayed=sum(WEATHER_DELAY)) %>%
  mutate(year=2017)

weather_delay_by_op_carrier_2018.gorupby <-
  flight.data.y2018 %>%
  select(c(FL_DATE, OP_CARRIER, WEATHER_DELAY)) %>%
  filter(OP_CARRIER == 'DL') %>%
  filter(WEATHER_DELAY > 0) %>%
  group_by(as.numeric(format(FL_DATE, "%m"))) %>%
  summarize(total_delayed=sum(WEATHER_DELAY)) %>%
  mutate(year=2018)

month_Delay<-rbind(weather_delay_by_op_carrier_2014.gorupby,
  weather_delay_by_op_carrier_2015.gorupby,
  weather_delay_by_op_carrier_2016.gorupby,
  weather_delay_by_op_carrier_2017.gorupby,
  weather_delay_by_op_carrier_2018.gorupby)


ggplot(month_Delay,
  aes(x = `as.numeric(format(FL_DATE, "%m"))`,

```

```

    y = total_delayed,
    color = factor(year), group = factor(year))) +
geom_line(linetype = 1) +
  labs(title="Total Flights Delayed across Months",y = 'Number of Delays',x = 'Months', fill='YEAR')

```

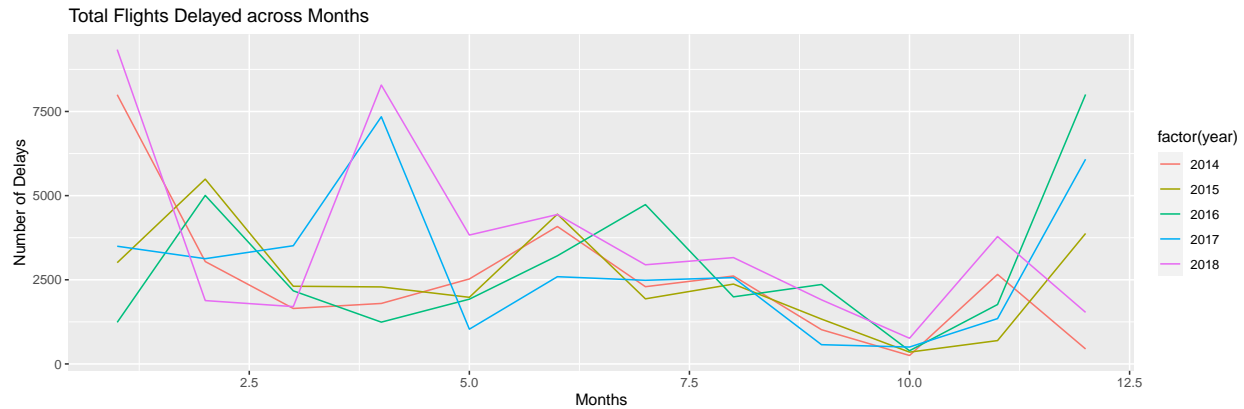

The above plot shows weather delays during 2014-2018 and it's clear that most of the weather related delays happens during year start/end.

Topic 5:

Regression (if an increase in number of schedules has any impact/variance on carrier delays).

```
flight.data.y2018
```

```

## # A tibble: 159,365 x 28
##   FL_DATE      OP_CARRIER OP_CARRIER_FL_NUM ORIGIN DEST  CRS_DEP_TIME DEP_TIME
##   <date>      <chr>          <dbl> <chr> <chr>      <dbl>    <dbl>
## 1 2018-01-01 UA              2118 DEN  MSP        1245     1239
## 2 2018-01-01 UA              1728 SFO  MSP        2320     2319
## 3 2018-01-01 UA              878 IAH  MSP        1955     2032
## 4 2018-01-01 UA              774 ORD  MSP        2245     2244
## 5 2018-01-01 UA              669 DEN  MSP        2027     2026
## 6 2018-01-01 UA              573 DEN  MSP         945     944
## 7 2018-01-01 UA              215 DEN  MSP         756     746
## 8 2018-01-01 AS              28 SEA  MSP        1750     1748
## 9 2018-01-01 AS              36 SEA  MSP        1000     951
## 10 2018-01-01 9E             3615 GFK  MSP        1310     1302
## # ... with 159,355 more rows, and 21 more variables: DEP_DELAY <dbl>,
## #   TAXI_OUT <dbl>, WHEELS_OFF <dbl>, WHEELS_ON <dbl>, TAXI_IN <dbl>,
## #   CRS_ARR_TIME <dbl>, ARR_TIME <dbl>, ARR_DELAY <dbl>, CANCELLED <dbl>,
## #   CANCELLATION_CODE <chr>, DIVERTED <dbl>, CRS_ELAPSED_TIME <dbl>,
## #   ACTUAL_ELAPSED_TIME <dbl>, AIR_TIME <dbl>, DISTANCE <dbl>,
## #   CARRIER_DELAY <dbl>, WEATHER_DELAY <dbl>, NAS_DELAY <dbl>,
## #   SECURITY_DELAY <dbl>, LATE_AIRCRAFT_DELAY <dbl>, 'Unnamed: 27' <lgl>

```

```

carrier_delay_by_op_carrier_2018.totalFlights <-
  flight.data.y2018 %>%
  select(c(FL_DATE, OP_CARRIER, CARRIER_DELAY)) %>%

```

```

filter(OP_CARRIER == 'DL') %>%
group_by(FL_DATE) %>% count() %>% mutate(year=2018)

carrier_delay_by_op_carrier_2018.carrierDelay <-
  flight.data.y2018 %>%
  select(c(FL_DATE, OP_CARRIER, CARRIER_DELAY)) %>%
  filter(OP_CARRIER == 'DL') %>%
  filter(CARRIER_DELAY >= 0) %>%
  group_by(FL_DATE) %>%
  summarize(total_delayed=sum(CARRIER_DELAY > 0)) %>%
  mutate(year=2018)

dataset <- bind_cols(carrier_delay_by_op_carrier_2018.totalFlights,
                     carrier_delay_by_op_carrier_2018.carrierDelay)

```

```

## New names:
## * 'FL_DATE' -> 'FL_DATE...1'
## * 'year' -> 'year...3'
## * 'FL_DATE' -> 'FL_DATE...4'
## * 'year' -> 'year...6'

```

```

linear_model <- lm(total_delayed ~ n,
                   data=dataset)
summary(linear_model)

```

```

##
## Call:
## lm(formula = total_delayed ~ n, data = dataset)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -13.1745  -3.8807  -0.8355   3.1588  29.7973
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept) -9.08524    1.89497  -4.794 2.38e-06 ***
## n             0.10734    0.01031  10.412 < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 6.017 on 363 degrees of freedom
## Multiple R-squared:  0.23, Adjusted R-squared:  0.2278
## F-statistic: 108.4 on 1 and 363 DF, p-value: < 2.2e-16

```

```


ggplot(dataset, aes(x=n,
                    y=total_delayed)) +
  geom_point() +
  geom_smooth(method='lm', se=FALSE, col="red", size=1)

```

```

## 'geom_smooth()' using formula 'y ~ x'

```

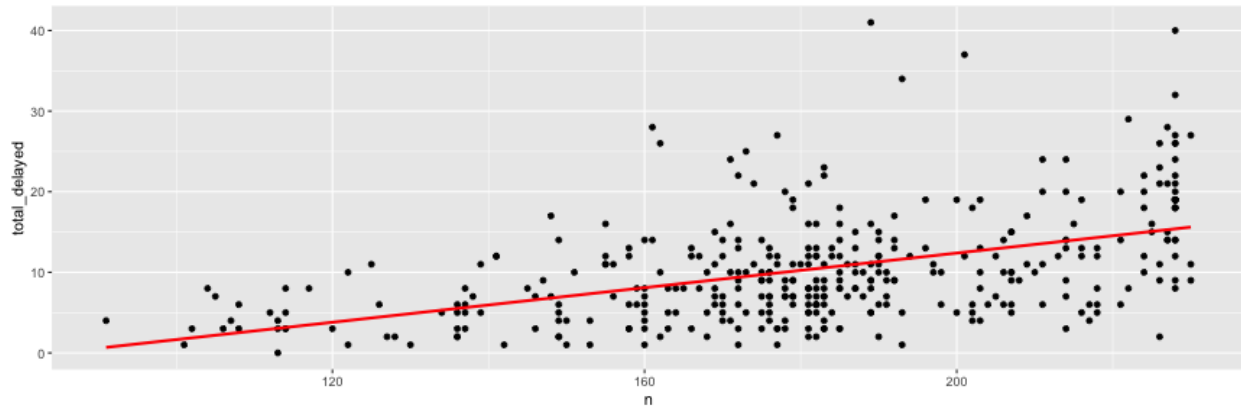

There appears to be a linear relation between carrier delay and total flights. Since there is a linear relation between number of flights arrived and carrier delay, it could be due to airline related issue (like crew/pilot scheduling issue or some other operational issues.)

Additional topic: Access to aws s3 bucket in RMarkdown. As a fun experiment I am trying to store the generated file or plots by a chunk into aws s3. Still this work is in progress

```
library("aws.s3")
Sys.setenv(
  "AWS_ACCESS_KEY_ID" = "AKIAUTK5NLVJF67UNMH5",
  "AWS_SECRET_ACCESS_KEY" = "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",
  "AWS_DEFAULT_REGION" = "us-east-1"
)
```

```
bucketlist()
```

```
##                               Bucket      CreationDate
## 1 cdktoolkit-stagingbucket-6sv7c0egjh8n 2021-08-15T01:22:10.000Z
## 2   cf-templates-bynsb0fei3oj-us-east-1 2021-05-11T00:41:05.000Z
## 3                               s3lab-seis61501 2021-05-05T23:22:16.000Z
## 4                               seis61501json 2021-05-10T20:41:02.000Z
## 5                               seis631-finalproject 2022-05-09T03:12:44.000Z
```

```
tempdir()
```

```
## [1] "/var/folders/mh/rsqncfcs2lj5vxxkprghf86d00000gn/T//RtmpJgMNdM"
```

```
tempfile()
```

```
## [1] "/var/folders/mh/rsqncfcs2lj5vxxkprghf86d00000gn/T//RtmpJgMNdM/file63e8346ded41"
```

```
write.csv('writeup.pdf', file.path(tempdir(),"writeup.pdf"))
```

```
# put_object(  
#   file = file.path(tempdir(), writeup.pdf),  
#   object = 'writeup.pdf',  
#   bucket = 'seis631-finalproject'  
# )
```

Conclusion

I designed this project as a way to review some of the topics we learned in the class/homework/assignments to reinforce some topics learned and also as an opportunity to refer back some of the materials. Hence I thought of picking a variety of topics like sampling strategies, summary statistics, ANOVA and regressions will be the best approach and most I can get from this project. If I have more time, I would have included some more topics (like binom, dbinom, geom...etc distributions) and see if my dataset have variables that can fit these distributions. Given only a academic background in statistics almost 20 years ago, I think this subject has given me much learning experience in statistics and I appreciate how these topics are applicable to find solutions in reality.