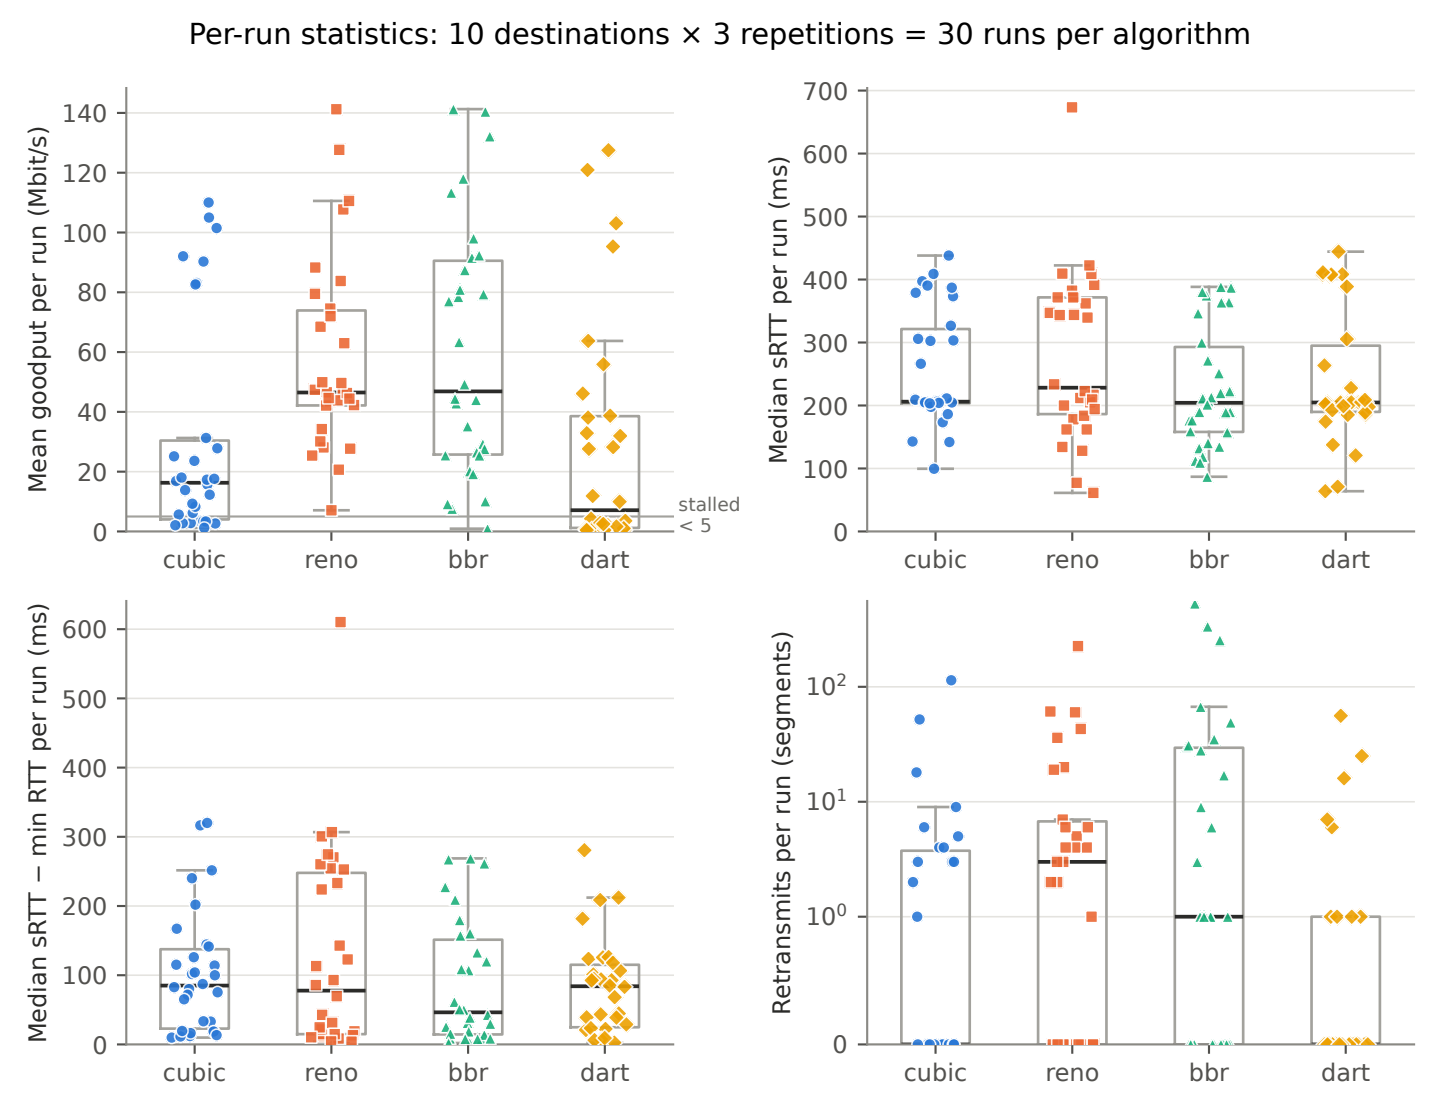
Per-run statistics: 10 destinations × 3 repetitions = 30 runs per algorithm
Mean goodput per run (Mbit/s)
0
20
40
60
80
100
120
140
stalled
< 5
cubic
reno
bbr
dart
Median sRTT per run (ms)
0
100
200
300
400
500
600
700
Median sRTT − min RTT per run (ms)
Retransmits per run (segments)
10^0
10^1
10^2