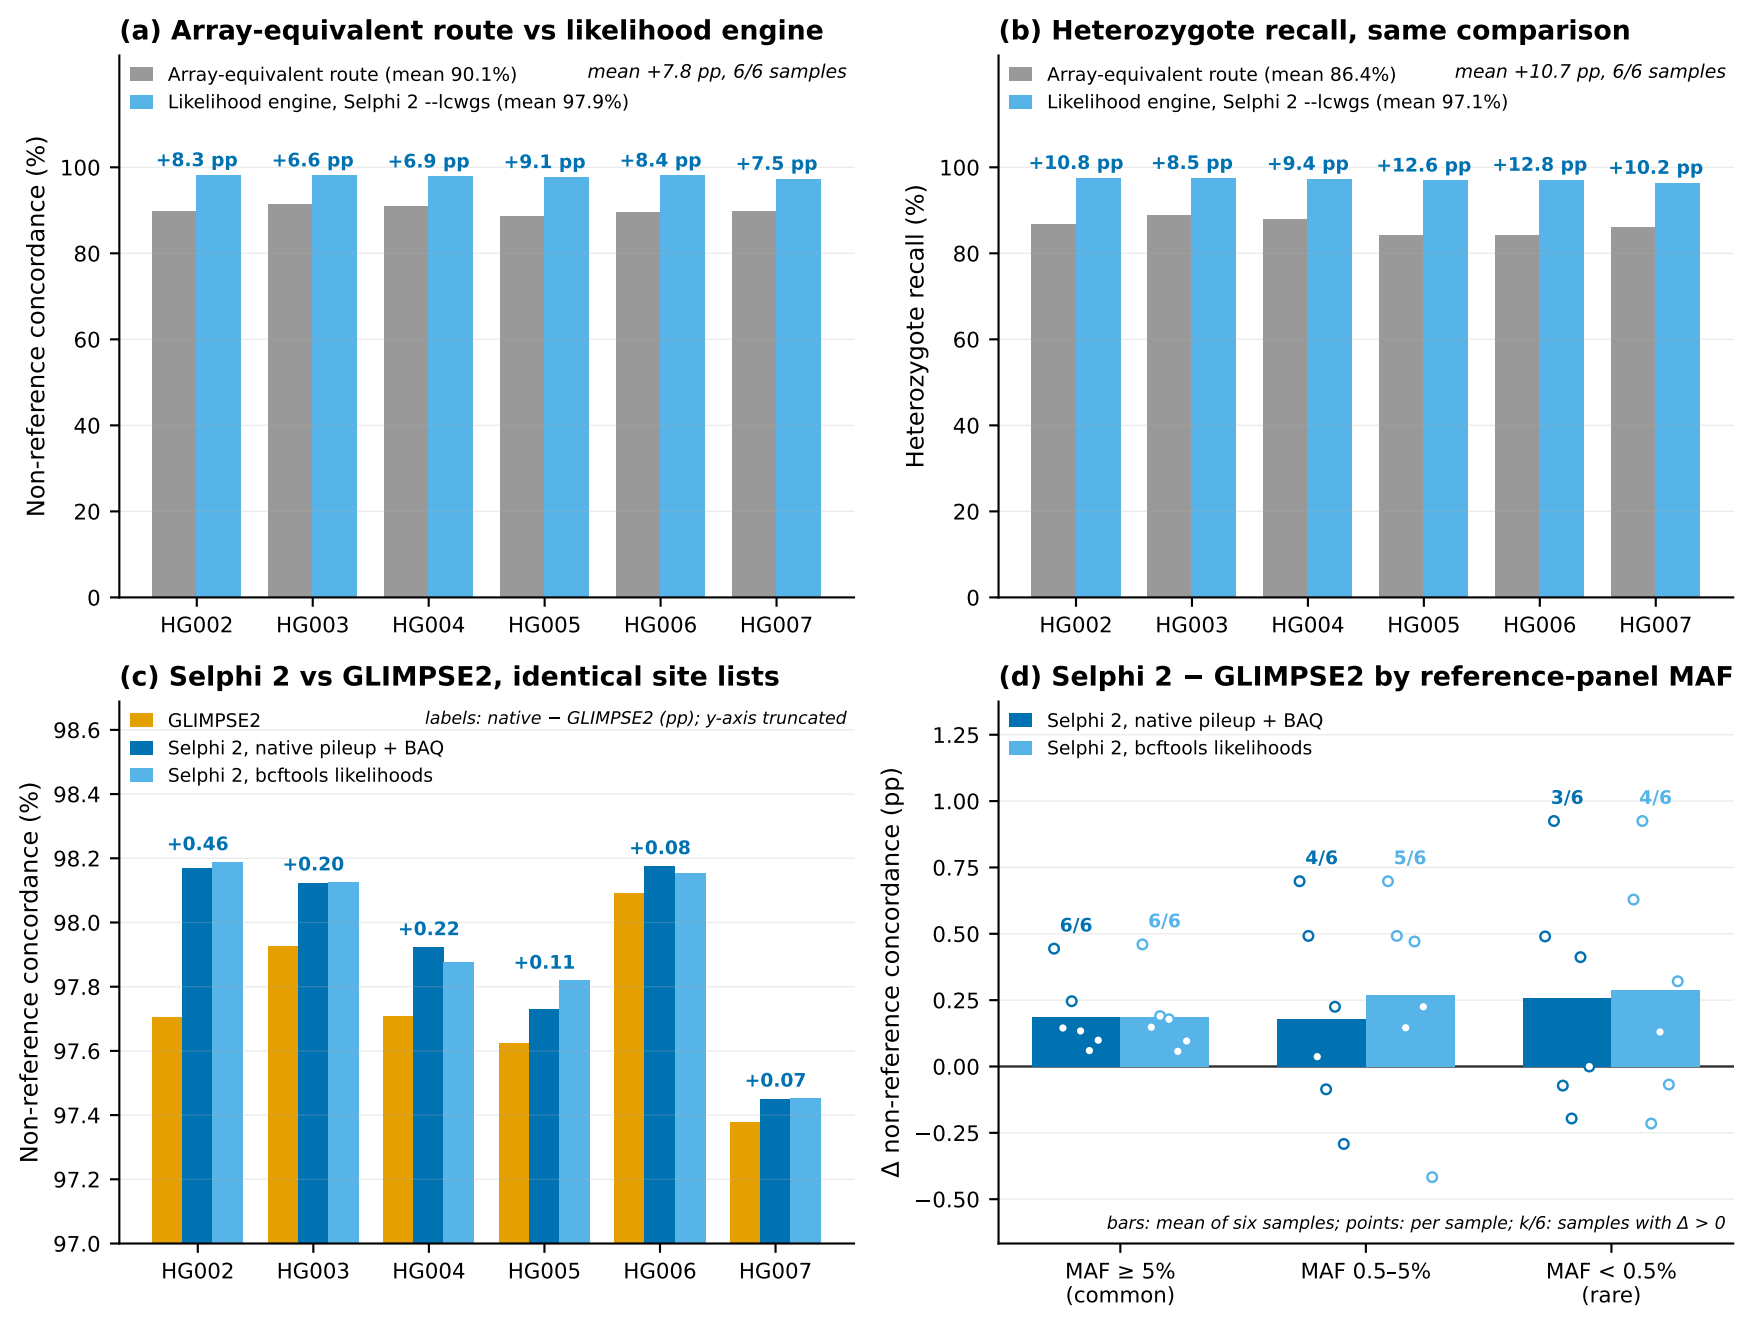

(a) Array-equivalent route vs likelihood engine
Array-equivalent route (mean 90.1%)
Likelihood engine, Selphi 2 --lcwgs (mean 97.9%)
mean +7.8 pp, 6/6 samples
Non-reference concordance (%)
+8.3 pp
+6.6 pp
+6.9 pp
+9.1 pp
+8.4 pp
+7.5 pp
HG002
HG003
HG004
HG005
HG006
HG007
(b) Heterozygote recall, same comparison
Array-equivalent route (mean 86.4%)
Likelihood engine, Selphi 2 --lcwgs (mean 97.1%)
mean +10.7 pp, 6/6 samples
Heterozygote recall (%)
+10.8 pp
+8.5 pp
+9.4 pp
+12.6 pp
+12.8 pp
+10.2 pp
(c) Selphi 2 vs GLIMPSE2, identical site lists
GLIMPSE2
Selphi 2, native pileup + BAQ
Selphi 2, bcftools likelihoods
labels: native − GLIMPSE2 (pp); y-axis truncated
Non-reference concordance (%)
+0.46
+0.20
+0.22
+0.11
+0.08
+0.07
(d) Selphi 2 − GLIMPSE2 by reference-panel MAF
Selphi 2, native pileup + BAQ
Selphi 2, bcftools likelihoods
Δ non-reference concordance (pp)
6/6
6/6
4/6
5/6
3/6
4/6
bars: mean of six samples; points: per sample; k/6: samples with Δ > 0
MAF ≥ 5% (common)
MAF 0.5–5%
MAF < 0.5% (rare)