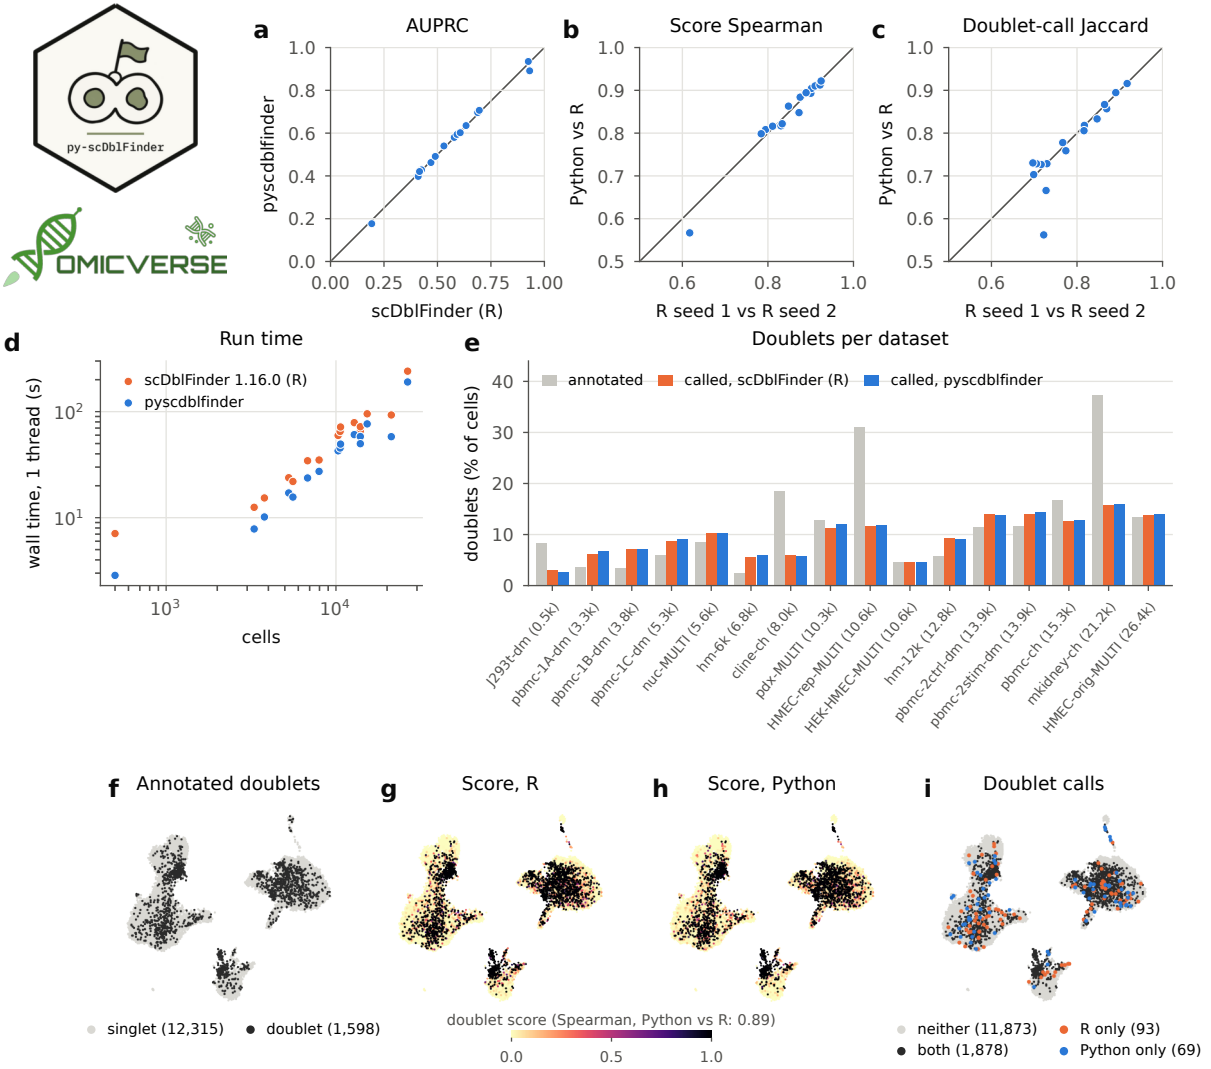

py-scDblFinder
OMICVERSE
a
AUPRC
pyscdblfinder
scDblFinder (R)
b
Score Spearman
Python vs R
R seed 1 vs R seed 2
c
Doublet-call Jaccard
Python vs R
R seed 1 vs R seed 2
d
Run time
scDblFinder 1.16.0 (R)
pyscdblfinder
wall time, 1 thread (s)
cells
e
Doublets per dataset
annotated
called, scDblFinder (R)
called, pyscdblfinder
doublets (% of cells)
J293t-dm (0.5k)
pbmc-1A-dm (3.3k)
pbmc-1B-dm (3.8k)
pbmc-1C-dm (5.3k)
nuc-MULTI (5.6k)
hm-6k (6.8k)
cline-ch (8.0k)
pdx-MULTI (10.3k)
HMEC-rep-MULTI (10.6k)
HEK-HMEC-MULTI (10.6k)
hm-12k (12.8k)
pbmc-2ctrl-dm (13.9k)
pbmc-2stim-dm (13.9k)
pbmc-ch (15.3k)
mkidney-ch (21.2k)
HMEC-orig-MULTI (26.4k)
f
Annotated doublets
singlet (12,315)
doublet (1,598)
g
Score, R
h
Score, Python
doublet score (Spearman, Python vs R: 0.89)
i
Doublet calls
neither (11,873)
R only (93)
both (1,878)
Python only (69)