

MVPS's RAJARSHI SHAHU MAHARAJ POLYTECHNIC, NASHIK.

DEPARTMENT OF COMPUTER TECHNOLOGY.

ACADEMIC YEAR 2020-21

DATABASE MANAGEMENT SYSTEM (22319)

MICRO-PROJECT ON

"Design E-R diagram for Blood Bank"

SUBMITTED BY

SR. NO	ENROLLMENT NO	EXAM SEAT NO	STUDENT NAME
1	1910020362	240630	Savant Omkar Vitthal
2	1910020360	240628	Raut Atharva Satish
3	1610020163	240586	Wani Pushpak Shrikant



MAHARASHTRA STATE BOARD OF TECHNICAL EDUCATION

CERTIFICATE

This is to certify that N	Ms./Mr	Savant Oml	kar Vitthal	
Roll No45 of	3 rd semester of	Diploma in	Computer	Technology of
Institute MVPS's Raj	jarshi Shahu M	Iaharaj Polyt	echnic, Nas	ik (Code: 1002)
has successfully comp	pleted micro-pr	oject in DAT	'ABASE M	ANAGEMENT
SYSTEM (22319) for	academic yea	r 2020-21 as	prescribed i	n curriculum of
MSBTE, Mumbai.				

Place: Nashik Enrollment no.: 1910020362

Date: 11/02/21 Exam seat no: 240630

Mr. R. S. Derle Course Teacher/Guide Mr. P. D. Boraste H.O.D Prof. Dr. D. B. Uphade Principal





MVPS's RAJARSHI SHAHU MAHARAJ POLYTECHNIC,NASIK

Institute Code: 1002

COMPUTER TECHNOLOGY DEPARTMENT Log Book for Micro Project

Academic Year : 2020-21 Scheme: I
Semester : III Class: SYCM

Name of Course: Database Management System (DMS) Course Code: 22319

Title of the project: Design E-R diagram for Blood Bank

Group Members:

Sr. No.	Roll No.	Enrollment Number	Exam Seat No.	Name of the Student	Signature of student
1	45	1910020362	240630	Savant Omkar Vitthal	
2	43	1910020360	240628	Raut Atharva Satish	
3	1	1610020163	240586	Wani Pushpak Shrikant	

Project Reporting:

Sr. No.	Date	Discussion & details	Group members present	Teacher's comment/ remark	Signature of teacher
1		Formation of groups			
2		Discussion on concept of Micro Project			
3		Topic selection for the Micro Project			
4		Preliminary discussion with guide			
5		Submission of Micro Project proposal			
6		Information Gathered			
7		Literature survey (Introduction)			
8		Discussion with guide			
9		Design of GUI and output			
10		Code generation of modules			
11		Error Evaluation			
12		Merging of all individual modules into one single module			
13		Draft copy of report.			
14		Final report writing			
15		Presentation & oral			
16		Final submission			



MVPS's RAJARSHI SHAHU MAHARAJ POLYTECHNIC,NASIK

Institute Code: 1002

COMPUTER TECHNOLOGY DEPARTMENT

Rubrics for Evaluation of Micro Project

Academic Year: 2020-21 Scheme: I
Semester: III Class: SYCM

Name of Course: Database Management System (DMS) Course Code: 22319

Group Members:

Sr. No.	Roll No.	Enrollment Number	Exam Seat No.	Name of the Student	Signature of student
1	45	1910020362	240630	Savant Omkar Vitthal	
2	43	1910020360	240628	Raut Atharva Satish	
3	1	1610020163	240586	Wani Pushpak Shrikant	

		Indicators of different levels of performance				rmance		
Sr. No.	Criteria	Poor (01)	Satisfactory (02)	Good (03)	Very Good (04)	Excellent (05)	Marks obtained	
1	Selection Of Application (Programming Elements)							
2	Concept/ Content/ Function Descriptions							
3	Coding							
4	Error solving							
5	5 Timely Submission							
_		Total ma	arks Out of 25			_	-	
		Marl	ks Out of 6					

Mr. R. S. Derle Name & Signature of Course Teacher/Guide



MVPS's RAJARSHI SHAHU MAHARAJ POLYTECHNIC,NASIK

Institute Code: 1002

COMPUTER TECHNOLOGY DEPARTMENT ANNEXTURE II

Academic Year: 2020-21 Name of Faculty: Mr. R.S. Derle

Course: Database Management System (DMS) Course code: 22319 Semester: III

Title of the project: Design E-R diagram for Blood Bank

COs addressed by the Micro Project:

CO-319.1 Design Normalized Database on given data.

CO-319.2 Create & manage database using SQL command.

CO-319.3 Write PL/SQL code for given database.

CO-319.4 Apply trigger on database also create procedure & function according to condition.

CO-319.5 Apply security & confidentiality on given database.

Major learning Outcomes achieved by students by doing the Project:

a)	Practical Outcomes
b)	Unit outcomes in cognitive domain
c)	Outcomes in affective domain
~	
	ent/Suggestions about team work/leadership/inter-personal communication (if any)

Roll. No.	Enrollment no	Exam seat no	Student Name	Marks out of 6 for performance in group activity	Marks out of 4 for performance oral/ presentation	Total out of 10
45	1910020362	240630	Savant Omkar Vitthal			
43	1910020360	240628	Raut Atharva Satish			
1	1610020163	240586	Wani Pushpak Shrikant			

Mr. R. S. Derle Course Teacher/Guide Mr. P. D. Boraste H.O.D

INDEX

1. Abstract	2
2. Introduction	3
3. History	6
4. E-R Diagram	9
5. Queries with Output	10
6. Final Database	16
7. Applications	18
8. Conclusion.	19

Abstract

This paper is scrutinizes the use of different terms and syntaxes in Database Management System, enabling viewer to get the complete concept of different aspects of Database Management System. To satisfy this we created a database managed for Blood Bank System. Use of various syntaxes was used as a reference to the output, satisfying every need of a perfect Database Management.

Introduction

1. Database Management System:

A database is an organized collection of data, generally stored and accessed electronically from a computer system. Where databases are more complex they are often developed using formal design and modeling techniques. The database management system (DBMS) is the software that interacts with end users, applications, and the database itself to capture and analyze the data. The DBMS software additionally encompasses the core facilities provided to administer the database. The sum total of the database, the DBMS and the associated applications can be referred to as a "database system". Often the term "database" is also used to loosely refer to any of the DBMS, the database system or an application associated with the database.

Computer scientists may classify database-management systems according to the database models that they support. Relational databases became dominant in the 1980s. These model data as rows and columns in a series of tables, and the vast majority use SQL for writing and querying data. In the 2000s, non-relational databases became popular, referred to as NoSQL because they use different query languages.

<pre>dvdrental=# select title, release_year, length, replacement_cost from film dvdrental-# where length > 120 and replacement_cost > 29.50</pre>					
dvdrental-# where tength		tacement_c	29.50		
title		l length	replacement_cost		
	+	+	+		
West Lion	2006	159	29.99		
Virgin Daisy	2006	179	29.99		
Uncut Suicides	2006	172	29.99		
Tracy Cider	2006	142	29.99		
Song Hedwig	2006	165	29.99		
Slacker Liaisons	2006	179	29.99		
Sassy Packer	2006	154	29.99		
River Outlaw	2006	149	29.99		
Right Cranes	2006	153	29.99		
Quest Mussolini	2006	177	29.99		
Poseidon Forever	2006	159	29.99		
Loathing Legally	2006	140	29.99		
Lawless Vision	2006	181	29.99		
Jingle Sagebrush	2006	124	29.99		
Jericho Mulan	2006	171	29.99		
Japanese Run	2006	135	29.99		
Gilmore Boiled	2006	163	29.99		
Floats Garden	2006	145	29.99		
Fantasia Park	2006	131	29.99		
Extraordinary Conquerer	2006	122	29.99		
Everyone Craft	2006	163	29.99		
Dirty Ace	2006	147	29.99		
Clyde Theory	2006	139	29.99		
Clockwork Paradise	2006	143	29.99		
Ballroom Mockingbird	2006	173	29.99		
(25 rows)					

Fig.1. A Database

2. SQL:

SQL (Structured Query Language) is a domain-specific language used in programming and designed for managing data held in a relational database management system (RDBMS), or for stream processing in a relational data stream management system (RDSMS). It is particularly useful in handling structured data, i.e. data incorporating relations among entities and variables. SQL offers two main advantages over older read—write APIs such as ISAM or VSAM. Firstly, it introduced the concept of accessing many records with one single command. Secondly, it eliminates the need to specify how to reach a record, e.g. with or without an index.

Originally based upon relational algebra and tuple relational calculus, SQL consists of many types of statements, which may be informally classed as sublanguages, commonly: a data query language (DQL), a data definition language (DDL), a data control language (DCL), and a data manipulation language (DML). The scope of SQL includes data query, data manipulation (insert, update and delete), data definition (schema creation and modification), and data access control. Although SQL is essentially a declarative language (4GL), it also includes procedural elements.



Fig.2. Structured Query Language (SQL)

3. RDBMS:

A relational database (RDBMS) is a digital database based on the relational model of data, as proposed by **E. F. Codd** in 1970. A software system used to maintain relational databases is a relational database management system (RDBMS). Many relational database systems have an option of using the SQL (Structured Query Language) for querying and maintaining the database. The most common definition of an RDBMS is a product that presents a view of data as a collection of rows and columns, even if it is not based strictly upon relational theory. By this definition, RDBMS products typically implement some but not all of Codd's 12 rules.

A second school of thought argues that if a database does not implement all of Codd's rules it is not relational. This view, shared by many theorists and other strict adherents to Codd's principles, would disqualify most DBMSs as not relational. For clarification, they often refer to some RDBMSs as truly-relational database management systems (TRDBMS), naming others pseudo-relational database management systems (PRDBMS). As of 2009, most commercial relational DBMSs employ SQL as their query language. Alternative query languages have been proposed and implemented, notably the pre-1996 implementation of Ingres QUEL.

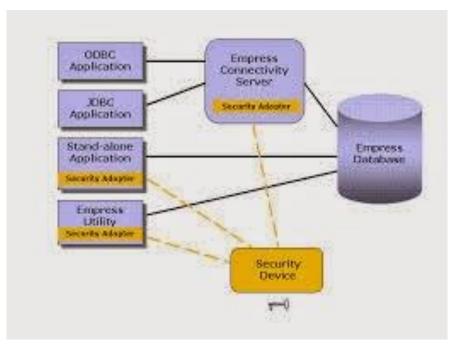



Fig.3. A RDBMS Structure

History

1. DBMS:

The sizes, capabilities, and performance of databases and their respective DBMSs have grown in orders of magnitude. These performance increases were enabled by the technology progress in the areas of processors, computer memory, computer storage, and computer networks. The concept of a database was made possible by the emergence of direct access storage media such as magnetic disks, which became widely available in the mid 1960s; earlier systems relied on sequential storage of data on magnetic tape. The relational model, first proposed in 1970 by Edgar F. Codd, departed from this tradition by insisting that applications should search for data by content, rather than by following links. By the early 1990s, however, relational systems dominated in all large-scale data processing applications, and as of 2018 they remain dominant: IBM DB2, Oracle, MySQL, and Microsoft SQL Server are the most searched DBMS. The dominant database language, standardised SQL for the relational model, has influenced database languages for other data models.

The next generation of post-relational databases in the late 2000s became known as NoSQL databases, introducing fast key-value stores and document-oriented databases. A competing "next generation" known as NewSQL databases attempted new implementations that retained the relational/SQL model while aiming to match the high performance of NoSQL compared to commercially available relational DBMSs.

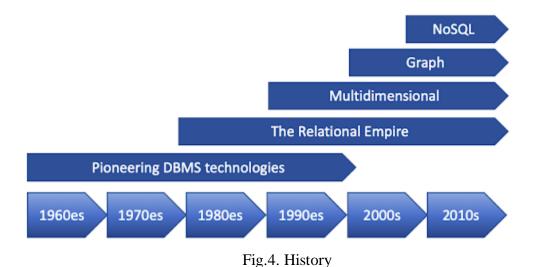

2. SOL:

SQL was initially developed at IBM by Donald D. Chamberlin and Raymond F. Boyce after learning about the relational model from Edgar F. Codd in the early 1970s. This version, initially called SEQUEL (Structured English Query Language), was designed to manipulate and retrieve data stored in IBM's original quasi-relational database management system, System R, which a group at IBM San Jose Research Laboratory had developed during the 1970s. Chamberlin and Boyce's first attempt at a relational database language was Square, but it was difficult to use due to subscript notation. After moving to the San Jose Research Laboratory in 1973, they began work on SEQUEL.

In the late 1970s, Relational Software, Inc. (now Oracle Corporation) saw the potential of the concepts described by Codd, Chamberlin, and Boyce, and developed their own SQL-based RDBMS with aspirations of selling it to the U.S. Navy, Central Intelligence Agency, and other U.S. government agencies. In June 1979, Relational Software, Inc. introduced the first commercially available implementation of SQL, Oracle V2 (Version2) for VAX computers.

By 1986, ANSI and ISO standard groups officially adopted the standard "Database Language SQL" language definition. New versions of the standard were published in 1989, 1992, 1996, 1999, 2003, 2006, 2008, 2011 and, most recently, 2016.



Fig.5. Oracle Corporations

3. RDBMS:

The term "relational database" was invented by E. F. Codd at IBM in 1970. Codd introduced the term in his research paper "A Relational Model of Data for Large Shared Data Banks". In this paper and later papers, he defined what he meant by "relational". One well-known definition of what constitutes a relational database system is composed of Codd's 12 rules. However, no commercial implementations of the relational model conform to all of Codd's rules, so the term has gradually come to describe a broader class of database systems, which at a minimum.

The most common definition of an RDBMS is a product that presents a view of data as a collection of rows and columns, even if it is not based strictly upon relational theory. By this definition, RDBMS products typically implement some but not all of Codd's 12 rules.

As of 2009, most commercial relational DBMSs employ SQL as their query language.

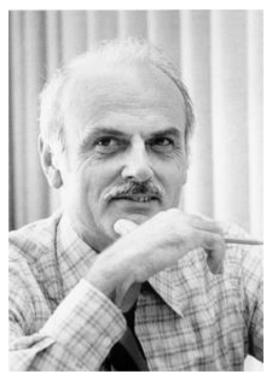


Fig.6. E.F. Codd

E-R Diagram

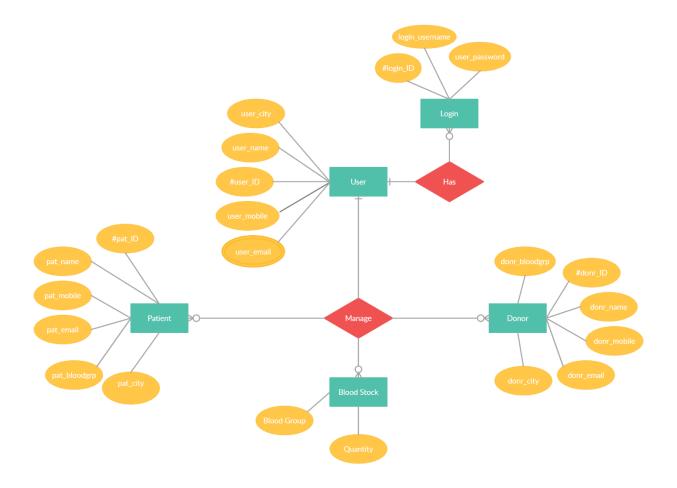



Fig. 7. E-R Diagram

|.

Queries With Output

```
CREATE TABLE Login (
     login_ID int,
     login_username varchar(255),
     user_password varchar(255)
);
INSERT INTO Login (login ID, login username, user password)
VALUES ('100', 'Joseph75', 'joseph699');
         SQL Statement:
          CREATE TABLE Login (
             login_ID int,
             login_username varchar(255),
             user_password varchar(255)
         Edit the SQL Statement, and click "Run SQL" to see the result.
          Run SQL »
         Result:
          Number of Records: 1
            login_ID
                                    login_username
                                                                           user_password
                                    Joseph75
                                                                           joseph699
```

/* After 5 statements */
Select * from Login

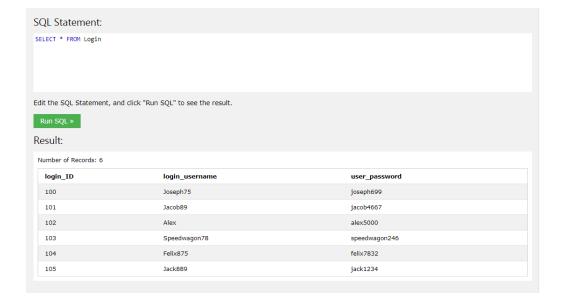

```
CREATE TABLE User (
      user_ID int,
      user_name varchar(255),
      user_mobile int,
      user email varchar(255),
      user_city varchar(255)
);
                           SQL Statement:
                          CREATE TABLE User (
user_ID int,
user_name varchar(255),
user_mobile int,
user_email varchar(255),
user_city varchar(255)
                           Edit the SQL Statement, and click "Run SQL" to see the result.
                           Run SQL »
                           Result:
                           You have made changes to the database.
INSERT INTO User (user_ID, user_name, user_mobile, user_email, user_city)
VALUES ('200', 'Joseph Joestar', '45236781', 'joseph699@gmail.com', 'Amasterdam');
                      SQL Statement:
                      INSERT INTO User (user_ID,user_name,user_mobile,user_email,user_city)
VALUES ('200','Joseph Joestar','45236781','joseph69@gmail.com','Amasterdam');
                      Edit the SQL Statement, and click "Run SQL" to see the result.
                      Run SQL »
                      Result:
                                                               user_mobile
                        user_ID
                                        user_name
                                                                                     user_email
                                                                                                                       user_city
                        200
                                    Joseph Joestar 45236781
                                                                                     joseph699@gmail.com
/* After 5 statements */
SELECT * FROM [User]
                       SQL Statement:
                       SELECT * FROM [User]
                      Edit the SQL Statement, and click "Run SQL" to see the result.
                      Run SQL »
                       Result:
                       Number of Records: 6
                                                                  user_mobile
                        200 Joseph Joestar 45236781 joseph699@gmail.com
                                                                                                                         Amasterdam
                         201
                                       Jacob Desanta
                                                                  645234264
                                                                                     iacob431@gmail.com
                                                                                                                         Ohio
                        202 Alex Scott
                                                              47675212
                                                                                 mralex492@gmail.com
                                                                                                                         New York
                         203
                                       Robert Speedwagon
                                                                  23427348
                                  Felix Kjellberg
                                                                675427453
                        204
                                                                                  subtopewdiepie@gmail.com
                                                                                                                         Sweden
                         205
                                      Jack Scepticeye
                                                                  677539842
                                                                                     jackscepticeye@gmail.com
                                                                                                                         Italy
```

```
CREATE TABLE Patient (
      pat_ID int,
      pat_name varchar(255),
      pat_mobile int,
      pat email varchar(255),
      pat_bloodgrp varchar(255),
      pat_city varchar(255)
);
                              SQL Statement:
                              CREATE TABLE Patient (
                                 pat_ID int,
pat_name varchar(255),
pat_mobile int,
pat_email varchar(255),
pat_bloodgrp varchar(255),
                              Edit the SQL Statement, and click "Run SQL" to see the result.
                              Run SQL »
                              Result:
                               You have made changes to the database.
INSERT INTO Patient (pat_ID,pat_name,pat_mobile,pat_email,pat_bloodgrp,pat_city)
VALUES ('300', 'Tommy Simons', '7654579238', 'tommyinit45@gmail.com', 'B+ve', 'London');
                            SQL Statement:
                            INSERT INTO Patient (pat_ID,pat_name,pat_mobile,pat_email,pat_bloodgrp,pat_city)
VALUES ('300','Tommy Simons','7654579238','tommyinit45@gmail.com','8+ve','London');
                            Edit the SQL Statement, and click "Run SQL" to see the result.
                            Run SQL »
                            Result:
                             Number of Records: 1
                                                           pat_mobile
                                                                           pat_email
                              pat_ID
                                         pat_name
                                                                                                       pat_bloodgrp
                                                                                                                         pat_city
                             300 Tommy Simons 7654579238 tommy/init45@gmail.com B+ve
/* After 5 statements */
SELECT * FROM [Patient]
                             SQL Statement:
                             SELECT * FROM [Patient]
                             Edit the SQL Statement, and click "Run SQL" to see the result.
                             Run SQL »
                             Result:
                              Number of Records: 6
                                                     pat_mobile
                              300 Tommy Simons 7654579238 tommyinit45@gmail.com
                                                                                                                      London
                                                                                                      B+ve
                                                          3462758345
                              302 Toby Smith
                                                     374627821 tubbo23@gmail.com
                                                                                                      O+ve
                                                                                                                      Netherland
                                                         4573845942
                                                                      dreamwastaken657@gmail.com
                              304 Dave B 895873539 technobladethepig@gmail.com
                                                                                                  B+ve
                                                                                                                      Las Vegas
```

4354534532

Jonathan Schlatt

305

```
CREATE TABLE Donor (
       donr_ID int,
       donr_name varchar(255),
       donr_mobile int,
       donr email varchar(255),
       donr_bloodgrp varchar(255),
       donr_city_varchar(255)
);
                                SQL Statement:
                                CREATE TABLE Donor (
donr_TO int,
donr_name varchar(255),
donr_mobile int,
donr_email varchar(255),
donr_bloodgrp varchar(255),
                                Edit the SQL Statement, and click "Run SQL" to see the result.
                                Run SQL »
                                 You have made changes to the database.
INSERT INTO Donor(donr_ID,donr_name,donr_mobile,donr_email,donr_bloodgrp,donr_city)
VALUES ('400','Nick Armstrong','8746387','sapnap23@gmail.com','AB-ve','California');
                              SOL Statement:
                               INSERT INTO Donor(donr_ID,donr_name,donr_mobile,donr_email,donr_bloodgrp,donr_city)
                               VALUES ('400', 'Nick Armstrong', '8746387', 'sapnap23@gmail.com', 'AB-ve', 'California');
                              Edit the SQL Statement, and click "Run SQL" to see the result.
                               Run SQL »
                               Result:
                               Number of Records: 1
                                             donr_name
                                                                    donr_mobile
                                                                                                                   donr_bloodgrp
                                                                                                                                         donr_city

        400
        Nick Armstrong
        8746387
        sapnap23@gmail.com
        AB-ve

                                                                                                                                        California
/* After 5 statements */
SELECT * FROM [Donor]
                                    SQL Statement:
                                    SELECT * FROM [Donor]
                                    Edit the SQL Statement, and click "Run SQL" to see the result.
                                    Run SQL »
                                    Result:
                                     Number of Records: 6

        donr_ID
        donr_name
        donr_mobile
        donr_enall
        donr_bloodgrp
        donr_city

        400
        Nick Armstrong
        8746387
        sapnap23@gmail.com
        AB-ve
        California

                                                  Kamla Harris
                                       401
                                                                   732278482
                                                                                   kamlapanner@gmail.com
                                       402 Donald Trump 1657823 realdonaldtrump@gmail.com 0-ve
                                                                                                                                   New York
```

Lemmino

405

57857423

3456278

404 Boffy 3456278 boffy@gmail.com AB+ve

persidentofusa@gmail.com

Texas

lemmino@gmail.com

```
CREATE TABLE BloodStock (
      blood_grp varchar(255),
      quantity int,
      avaiblity varchar(255)
);
                       SQL Statement:
                       CREATE TABLE BloodStock (

blood_grp varchar(255),
quantity int,
avaiblity varchar(255)
                       );
                       Edit the SQL Statement, and click "Run SQL" to see the result.
                       Run SQL »
                       Result:
                       You have made changes to the database.
INSERT INTO BloodStock(blood_grp,quantity,avaiblity)
VALUES ('A+ve','50 L','Vast');
                        SQL Statement:
                         INSERT INTO BloodStock(blood_grp,quantity,avaiblity)
VALUES ('A+ve','50 L','Vast');
                         Edit the SQL Statement, and click "Run SQL" to see the result.
                         Run SQL »
                         Result:
                         Number of Records: 1
                                                                                                             avaiblity
                           blood_grp
                                                                         quantity
                           A+ve
/* After 5 statements */
SELECT * FROM [BloodStock]
                         SQL Statement:
                         SELECT * FROM [BloodStock]
                         Edit the SQL Statement, and click "Run SQL" to see the result.
                         Result:
                          Number of Records: 5
                                                                                                           avaiblity
                           blood_grp
                                                                        quantity
                           A+ve
                                                                        50 L
                                                                                                           Vast
                                                                        75 L
                                                                                                            Vast
                           AB+ve
                                                                        25 L
                                                                        10 L
```

10 L

Low

O+ve

Final Database

1. Login Table:

Number of Records: 6

login_ID	login_username	user_password
100	Joseph75	joseph699
101	Jacob89	jacob4667
102	Alex	alex5000
103	Speedwagon78	speedwagon246
104	Felix875	felix7832
105	Jack889	jack1234

2. User Table:

Number of Records: 6

user_ID	user_name	user_mobile	user_email	user_city
200	Joseph Joestar	45236781	joseph699@gmail.com	Amasterdam
201	Jacob Desanta	645234264	jacob431@gmail.com	Ohio
202	Alex Scott	47675212	mralex492@gmail.com	New York
203	Robert Speedwagon	23427348	robertspeed08@gmail.com	London
204	Felix Kjellberg	675427453	subtopewdiepie@gmail.com	Sweden
205	Jack Scepticeye	677539842	jackscepticeye@gmail.com	Italy

3. Patient Table:

pat_ID	pat_name	pat_mobile	pat_email	pat_bloodgrp	pat_city
300	Tommy Simons	7654579238	tommyinit45@gmail.com	B+ve	London
301	Wilbur Soot	3462758345	wilbursoot56@gmail.com	AB+ve	London
302	Toby Smith	374627821	tubbo23@gmail.com	O+ve	Netherlands
303	Clay Dream	4573845942	dreamwastaken657@gmail.com	A+ve	New York
304	Dave B	895873539	technobladethepig@gmail.com	B+ve	Las Vegas
305	Jonathan Schlatt	4354534532	jschalttdictator@gmail.com	AB+ve	California

4. Donor Table:

donr_ID	donr_name	donr_mobile	donr_email	donr_bloodgrp	donr_city
400	Nick Armstrong	8746387	sapnap23@gmail.com	AB-ve	California
401	Kamla Harris	732278482	kamlapanner@gmail.com	A+ve	Berlin
402	Donald Trump	1657823	realdonaldtrump@gmail.com	O-ve	New York
403	Joe Biden	57857423	persidentofusa@gmail.com	B+ve	New York
404	Boffy	3456278	boffy@gmail.com	AB+ve	Washington
405	Lemmino	3456278	lemmino@gmail.com	A+ve	Texas

5. Blood Stock

Number of Records: 5					
blood_grp	quantity	avaiblity			
A+ve	50 L	Vast			
B+ve	75 L	Vast			
AB+ve	25 L	Medium			
O+ve	10 L	Low			
O+ve	10 L	Low			

Applications

Application of DBMS:

Sector Use

Banking	For customer information, account activities, payments, deposits, loans, etc.
Airlines	For reservations and schedule information.
Universities	For student information, course registrations, colleges and grades.
Telecommunication	It helps to keep call records, monthly bills, maintaining balances, etc.
Finance	For storing information about stock, sales, and purchases of financial instruments like stocks and bonds.
Sales	Use for storing customer, product & sales information.
Manufacturing	It is used for the management of supply chain and for tracking production of items. Inventories status in warehouses.
HR Management	For information about employees, salaries, payroll, deduction, generation of paychecks, etc.

Conclusion

Database Management System (DBMS) is a software for storing and retrieving users' data while considering appropriate security measures. It consists of a group of programs which manipulate the database. The DBMS accepts the request for data from an application and instructs the operating system to provide the specific data. In large systems, a DBMS helps users and other third-party software to store and retrieve data. DBMS allows users to create their own databases as per their requirement. The term "DBMS" includes the user of the database and other application programs. It provides an interface between the data and the software application. Traditionally, data was organized in file formats. DBMS was a new concept then, and all the research was done to make it overcome the deficiencies in traditional style of data management.

Database is a collection of related data and data is a collection of facts and figures that can be processed to produce information. Mostly data represents recordable facts. Data aids in producing information, which is based on facts. For example, if we have data about marks obtained by all students, we can then conclude about toppers and average marks. A database management system stores data in such a way that it becomes easier to retrieve, manipulate, and produce information.

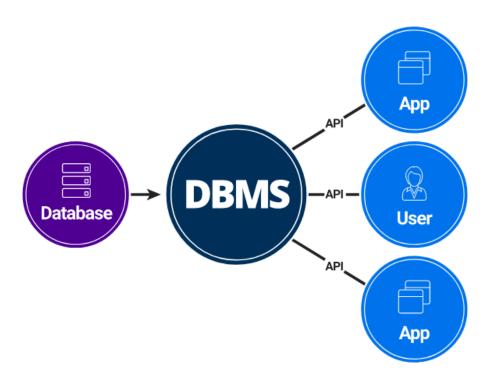


Fig.8. DBMS