



THE
baap company
BUSINESS APPLICATIONS AND PLATFORM

BOOTSTRAP

WELCOME

TO THE WORLD OF BOOTSTRAP !



Table of Contents

1. INTRODUCTION
2. CONTAINERS
3. GRID BASIC
4. TYPHOGRAPHY
5. COLORS
6. TABLES
7. IMAGES
8. JUMBOTRON
9. ALERTS
10. BUTTON
11. BUTTON GROUPS
12. BADGES
13. PROGRESS BARS
14. SPINNERS
15. PAGINATION
16. LIST GROUPS
17. CARDS
18. DROPDOWNS
19. COLLAPSE
20. NOVES
21. NAVBAR
22. CAROUSEL
23. MODAL
24. TOOLTIP
25. TOAST
26. UTILITIES

1. Introduction

What is Bootstrap?

1. Bootstrap is a free front-end framework for faster and easier web development
2. Bootstrap includes HTML and CSS based design templates for typography, forms, buttons, tables, navigation, modals, image carousels and many other, as well as optional JavaScript plugins
3. Bootstrap also gives you the ability to easily create responsive designs.

Code:

```
<div class="container-fluid p-5 bg-primary text-white text-center">
  <h1>My First Bootstrap Page</h1>
  <p>Resize this responsive page to see the effect!</p>
</div>

<div class="container mt-5">
  <div class="row">
    <div class="col-sm-4">
      <h3>Column 1</h3>
      <p>Lorem ipsum dolor sit amet, consectetur adipisicing elit...</p>
    <p>Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris...</p>
    </div>
    <div class="col-sm-4">
      <h3>Column 2</h3>
      <p>Lorem ipsum dolor sit amet, consectetur adipisicing elit...</p>
    <p>Ut enim ad minim veniam, quis nostrud exercitation
      ullamco laboris...</p>
    </div>
    <div class="col-sm-4">
      <h3>Column 3</h3>
      <p>Lorem ipsum dolor sit amet, consectetur adipisicing elit...</p>
      <p>Ut enim ad minim veniam, quis nostrud exercitation
        Ullamco laboris...</p>
    </div>
  </div>
</div>
```

Why Use Bootstrap?

Advantages of Bootstrap:

- **Easy to use:** Anybody with just basic knowledge of HTML and CSS can start using Bootstrap
- **Responsive design:** Bootstrap's responsive CSS adjusts to Desktops, Tablets and Mobiles. More about the responsive design is in the chapter **Bootstrap Responsive Design**.



- **Mobile first approach:** In Bootstrap, mobile-first styles are part of the core framework
- **Browser Support:** It is supported by all popular browsers.



Where to Get Bootstrap 5?

There are two ways to start using Bootstrap 5 on your own web site.

You can:

- Include Bootstrap 5 from a CDN
- Download Bootstrap 5 from getbootstrap.com

Bootstrap 5 CDN.

```
<!-- Latest compiled and minified CSS -->  
<link  
  href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bootstrap.min.css"  
  rel="stylesheet">
```

```
<!-- Latest compiled JavaScript -->
```

```
<script  
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/js/bootstrap.bundle.min  
.js"></script>
```

Create Your First Web Page With Bootstrap 5

1. Add the HTML5 doctype

Bootstrap 5 uses HTML elements and CSS properties that require the HTML5 doctype.

Always include the HTML5 doctype at the beginning of the page, along with the lang attribute and the correct title and character set:

```
<!DOCTYPE html>  
<html lang="en">  
<head>  
<title>Bootstrap 5 Example</title>  
  <meta charset="utf-8">  
</head>  
</html>
```

2. Bootstrap 5 is mobile-first

Bootstrap 5 is designed to be responsive to mobile devices. Mobile-first styles are part of the core framework.

To ensure proper rendering and touch zooming, add the following `<meta>` tag inside the `<head>` element:

```
<meta name="viewport" content="width=device-width, initial-scale=1">
```

2. Containers

Bootstrap 5 also requires a containing element to wrap site contents.

There are two container classes to choose from:

1. The `.container` class provides a responsive fixed width container
2. The `.container-fluid` class provides a full width container, spanning the entire width of the viewport



Container Example

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bootstrap.mi
n.css" rel="stylesheet">

  <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/js/bootstrap.bund
le.min.js"></script>
</head>
<body>

<div class="container">
  <h1>My First Bootstrap Page</h1>
  <p>This part is inside a .container class.</p>
  <p>The .container class provides a responsive fixed width container.</p>
</div>
</body>
</html>
```

Container Fluid Example

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link
href="https://cdVMS4-10999n.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bo
otstrap.min.css" rel="stylesheet">
```

```

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>

<div class="container-fluid">
  <h1>My First Bootstrap Page</h1>
  <p>This part is inside a .container-fluid class.</p>
  <p>The .container-fluid class provides a full width container,
spanning the entire width of the viewport.</p>
</div>
</body>
</html>

```

Responsive Containers

You can also use the `.container-sm|md|lg|xl` classes to determine when the container should be responsive.

The `max-width` of the container will change on different screen sizes/viewports:

Class	Extra small <576px	Small ≥576px	Medium ≥768px	Large ≥992px	Extra large ≥1200px	XXL ≥1400px
<code>.container-sm</code>	100%	540px	720px	960px	1140px	1320px
<code>.container-md</code>	100%	100%	720px	960px	1140px	1320px
<code>.container-lg</code>	100%	100%	100%	960px	1140px	1320px
<code>.container-xl</code>	100%	100%	100%	100%	1140px	1320px
<code>.container-xxl</code>	100%	100%	100%	100%	100%	1320px

.

```

<div class="container-sm">.container-sm</div>
<div class="container-md">.container-md</div>

<div class="container-lg">.container-lg</div>
<div class="container-xl">.container-xl</div>
<div class="container-xxl">.container-xxl</div>

```

<*****>

3. Grids

Bootstrap's grid system is built with flexbox and allows up to 12 columns across the page.

If you do not want to use all 12 columns individually, you can group the columns together to create wider

columns:

span 1	span 1	span 1	span 1	span 1	span 1	span 1	span 1	span 1	span 1	span 1	span 1
span 4				span 4				span 4			
span 4				span 8							
span 6						span 6					
span 12											

.

The grid system is responsive, and the columns will re-arrange automatically depending on the screen size.

Make sure that the sum adds up to 12 or fewer (it is not required that you use all 12 available columns).

Grid Classes

The Bootstrap 5 grid system has six classes:

- `.col-` (extra small devices - screen width less than 576px)
- `.col-sm-` (small devices - screen width equal to or greater than 576px)
- `.col-md-` (medium devices - screen width equal to or greater than 768px)
- `.col-lg-` (large devices - screen width equal to or greater than 992px)
- `.col-xl-` (xlarge devices - screen width equal to or greater than 1200px)
- `.col-xxl-` (xxlarge devices - screen width equal to or greater than 1400px)

The classes above can be combined to create more dynamic and flexible layouts.

Tip: Each class scales up, so if you want to set the same widths for `sm` and `md`, you only need to specify `sm`.

Basic Structure of a Bootstrap 5 Grid

```
<!-- Control the column width, and how they should appear on different devices -->
```



```

<div class="row">
  <div class="col-*-*"></div>
  <div class="col-*-*"></div>
</div>
<div class="row">
  <div class="col-*-*"></div>
  <div class="col-*-*"></div>
  <div class="col-*-*"></div>
</div>

<!-- Or let Bootstrap automatically handle the layout -->
<div class="row">
  <div class="col"></div>
  <div class="col"></div>
  <div class="col"></div>
</div>

```

First example: create a row (`<div class="row">`). Then, add the desired number of columns (tags with appropriate `.col-*-*` classes). The first star (*) represents the responsiveness: sm, md, lg, xl or xxl, while the second star represents a number, which should add up to 12 for each row.

Second example: instead of adding a number to each `col`, let bootstrap handle the layout, to create equal width columns: two `"col"` elements = 50% width to each col, while three cols = 33.33% width to each col. Four cols = 25% width, etc. You can also use `.col-sm|md|lg|xl|xxl` to make the columns responsive.


Below we have collected some examples of basic Bootstrap 5 grid layouts.

Three Equal Columns

```

<div class="row">
  <div class="col">.col</div>
  <div class="col">.col</div>
  <div class="col">.col</div>
</div>

```



Two Unequal Responsive Columns

```

<div class="row">
  <div class="col-sm-4">.col-sm-4</div>
  <div class="col-sm-8">.col-sm-8</div>
</div>

```

<*****>

4. Typography

Bootstrap 5 Default Settings

Bootstrap 5 uses a default `font-size` of 1rem (16px by default), and its `line-height` is 1.5.

In addition, all `<p>` elements have `margin-top: 0` and `margin-bottom: 1rem` (16px by default).

<h1> - <h6>

Bootstrap 5 styles HTML headings (`<h1>` to `<h6>`) with a bolder font-weight and a responsive font-size.

h1 Bootstrap heading

h2 Bootstrap heading

h3 Bootstrap heading

h4 Bootstrap heading

h5 Bootstrap heading

h6 Bootstrap heading

Example

```
<p class="h1">h1 Bootstrap heading</p>
<p class="h2">h2 Bootstrap heading</p>
<p class="h3">h3 Bootstrap heading</p>
<p class="h4">h4 Bootstrap heading</p>
<p class="h5">h5 Bootstrap heading</p>
<p class="h6">h6 Bootstrap heading</p>
```

Display Headings

Display headings are used to stand out more than normal headings (larger font-size and lighter font-weight), and there are six classes to choose from: `.display-1` to `.display-6`:

<small>

In Bootstrap 5 the HTML `<small>` element (and the `.small` class) is used to create a smaller, secondary text in any heading:

h1 heading secondary text

h2 heading secondary text

h3 heading secondary text

h4 heading secondary text

h5 heading secondary text

h6 heading secondary text

<mark>

Bootstrap 5 will style `<mark>` and `.mark` with a yellow background color and some padding:

Use the mark element to highlight text.

<abbr>

Bootstrap 5 will style the HTML `<abbr>` element with a dotted border bottom and a cursor with question mark on hover:

The WHO was founded in1948.

<*****>

5. Colors

Text Colors

The classes for text colors are: `.text-muted`, `.text-primary`, `.text-success`, `.text-info`, `.text-warning`, `.text-danger`, `.text-secondary`, `.text-white`, `.text-dark`, `.text-body` (default body color/often black) and `.text-light`:

This text is muted.

This text is important.

This text indicates success.

This text represents some information.

This text represents a warning.

This text represents danger.

Secondary text.

Dark grey text.

Body text.

Light grey text.

Background Colors


The classes for background colors are: `.bg-primary`, `.bg-success`, `.bg-info`, `.bg-warning`, `.bg-danger`, `.bg-secondary`, `.bg-dark` and `.bg-light`.

Example



The `.bg-color` classes above does not work well with text, or atleast then you have to specify a proper `.text-color` class to get the right text color for each background.

However, you can use the `.text-bg-color` classes and Bootstrap will automatically handle the appropriate text color for each background color:

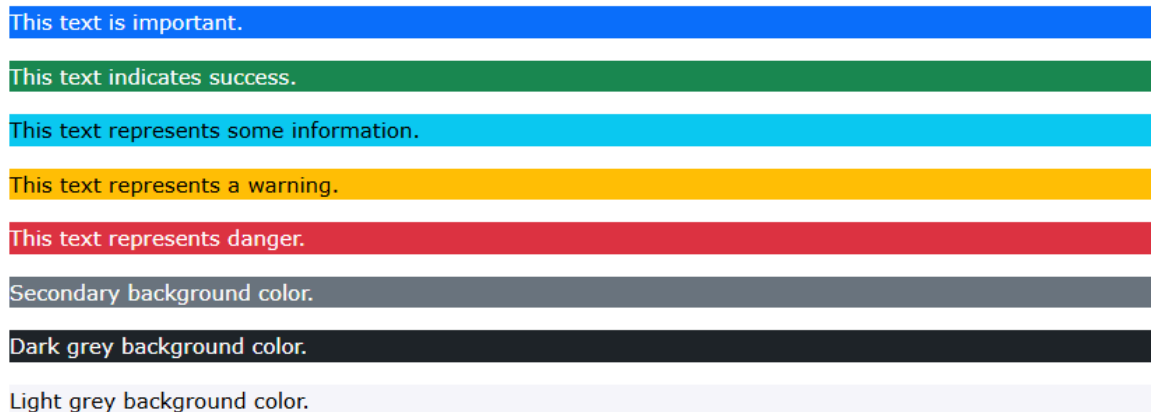

<*****>

6. Tables

Basic Table

A basic Bootstrap 5 table has a light padding and horizontal dividers.

The `.table` class adds basic styling to a table:

```
<div class="container mt-3">
  <h2>Basic Table</h2>
  <p>The .table class adds basic styling (light padding and horizontal
dividers) to a table:</p>
  <table class="table">
    <thead>
      <tr>
        <th>Firstname</th>

        <th>Lastname</th>
        <th>Email</th>
      </tr>
    </thead>
    <tbody>
      <tr>
        <td>John</td>
        <td>Doe</td>
        <td>john@example.com</td>
      </tr>
      <tr>
        <td>Mary</td>
        <td>Moe</td>
        <td>mary@example.com</td>
      </tr>
      <tr>
        <td>July</td>
        <td>Dooley</td>
        <td>july@example.com</td>
      </tr>
    </tbody>
  </table>
</div>
```

Example

Firstname	Lastname	Email
John	Doe	john@example.com
Mary	Moe	mary@example.com
July	Dooley	july@example.com

Bordered Table

The `.table-bordered` class adds borders on all sides of the table and cells:

```
<div class="container mt-3">
  <h2>Bordered Table</h2>
  <p>The .table-bordered class adds borders on all sides of the table and
the    cells:</p>
  <table class="table table-bordered">
    <thead>
      <tr>
        <th>Firstname</th>
        <th>Lastname</th>
        <th>Email</th>

      </tr>
    </thead>
    <tbody>
      <tr>
        <td>John</td>
        <td>Doe</td>
        <td>john@example.com</td>
      </tr>
      <tr>
        <td>Mary</td>
        <td>Moe</td>
        <td>mary@example.com</td>
      </tr>
      <tr>
        <td>July</td>
        <td>Dooley</td>
        <td>july@example.com</td>
      </tr>
    </tbody>
  </table>
</div>
```

Hover Rows

The `.table-hover` class adds a hover effect (grey background color) on table rows:

```
<div class="container mt-3">
  <h2>Hover Rows</h2>
  <p>The .table-hover class enables a hover state (grey background on mouse
over) on table rows:</p>
  <table class="table table-hover">
    <thead>
      <tr>
        <th>Firstname</th>
```



```

    <th>Lastname</th>
  <th>Email</th>
  </tr>
</thead>

<tbody>
  <tr>
    <td>John</td>
    <td>Doe</td>
    <td>john@example.com</td>
  </tr>
  <tr>
    <td>Mary</td>
    <td>Moe</td>
    <td>mary@example.com</td>
  </tr>

  <tr>
    <td>July</td>
    <td>Dooley</td>
    <td>july@example.com</td>
  </tr>
</tbody>
</table>
</div>

```

Firstname	Lastname	Email
John	Doe	john@example.com
Mary	Moe	mary@example.com
July	Dooley	july@example.com

Responsive Tables

Example

```

<div class="table-responsive">
  <table class="table">
    ...
  </table>
</div>

```


Class	Screen width
<code>.table-responsive-sm</code>	< 576px
<code>.table-responsive-md</code>	< 768px
<code>.table-responsive-lg</code>	< 992px
<code>.table-responsive-xl</code>	< 1200px
<code>.table-responsive-xxl</code>	< 1400px

<*****>

7. Images

Image Shapes


Rounded Corners:



Circle:



Thumbnail:



Rounded Corners

The `.rounded` class adds rounded corners to an image:

Example

```

```



Circle

The `.rounded-circle` class shapes the image to a circle:

```

```




Centered Image

Center an image by adding the utility classes `.mx-auto` (margin:auto) and `.d-block` (display:block) to the image:

```

```

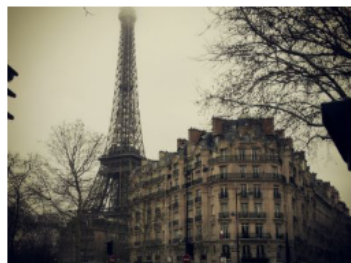

Aligning Images

Float an image to the left with the `.float-start` class or to the right with `.float-end`:



Responsive Images

Images come in all sizes. So do screens. Responsive images automatically adjust to fit the size of the screen.

Create responsive images by adding an `.img-fluid` class to the `<img>` tag. The image will then scale nicely to the parent element.

The `.img-fluid` class applies `max-width: 100%;` and `height: auto;` to the image:

Example

```

```

```
<*****>
```

8. Alerts

Bootstrap 5 provides an easy way to create predefined alert messages:

Alerts are created with the `.alert` class, followed by one of the contextual classes `.alert-success`, `.alert-info`, `.alert-warning`, `.alert-danger`, `.alert-primary`, `.alert-secondary`, `.alert-light` or `.alert-dark`:

Success! This alert box could indicate a successful or positive action.

Info! This alert box could indicate a neutral informative change or action.

Warning! This alert box could indicate a warning that might need attention.

```
<div class="alert alert-success">
  <strong>Success!</strong> Indicates a successful or positive action.
</div>
```

Alert Links

Info! You should [read this message](#).

Add the `.alert-link` class to any links inside the alert box to create "matching colored links":

```
<div class="alert alert-success">
  <strong>Success!</strong> You should <a href="#" class="alert-link">read
this message</a>.
</div>
```

```
<*****>
```

9. Buttons

Button Styles

Basic Primary Secondary Success Info Warning Danger Dark Light [Link](#)

```
<button type="button" class="btn">Basic</button>
<button type="button" class="btn btn-primary">Primary</button>
<button type="button" class="btn btn-secondary">Secondary</button>
<button type="button" class="btn btn-success">Success</button>
<button type="button" class="btn btn-info">Info</button>
<button type="button" class="btn btn-warning">Warning</button>
<button type="button" class="btn btn-danger">Danger</button>
<button type="button" class="btn btn-dark">Dark</button>
<button type="button" class="btn btn-light">Light</button>
<button type="button" class="btn btn-link">Link</button>
```

The button classes can be used on `<a>`, `<button>`, or `<input>` elements:

```
<a href="#" class="btn btn-success">Link Button</a>
<button type="button" class="btn btn-success">Button</button>
<input type="button" class="btn btn-success" value="Input Button">

<input type="submit" class="btn btn-success" value="Submit Button">
<input type="reset" class="btn btn-success" value="Reset Button">
```

Button Outline

Primary Secondary Success Info Warning Danger Dark Light

```
<button type="button" class="btn btn-outline-primary">Primary</button>
<button type="button" class="btn btn-outline-secondary">Secondary</button>
<button type="button" class="btn btn-outline-success">Success</button>
<button type="button" class="btn btn-outline-info">Info</button>
<button type="button" class="btn btn-outline-warning">Warning</button>
<button type="button" class="btn btn-outline-danger">Danger</button>
<button type="button" class="btn btn-outline-dark">Dark</button>
<button type="button" class="btn btn-outline-light text-dark">Light</button>
```

Button Sizes

Use the `.btn-lg` class for large buttons or `.btn-sm` class for small buttons:


```
<button type="button" class="btn btn-primary btn-lg">Large</button>
<button type="button" class="btn btn-primary">Default</button>
<button type="button" class="btn btn-primary btn-sm">Small</button>
```

Active/Disabled Buttons



```
<button type="button" class="btn btn-primary active">Active Primary</button>
<button type="button" class="btn btn-primary disabled">Disabled
Primary</button>
```

Spinner Buttons



```
<button class="btn btn-primary">
  <span class="spinner-border spinner-border-sm"></span>
</button>
```

```
<button class="btn btn-primary">
  <span class="spinner-border spinner-border-sm"></span>
  Loading..
</button>
```

```
<button class="btn btn-primary" disabled>
  <span class="spinner-border spinner-border-sm"></span>
  Loading..
</button>
```


```
<button class="btn btn-primary" disabled>
  <span class="spinner-grow spinner-grow-sm"></span>
  Loading..
</button>
```

<*****>

10. Buttons Group


Button Groups

Bootstrap 5 allows you to group a series of buttons together (on a single line) in a button group:



```
<div class="btn-group">
  <button type="button" class="btn btn-primary">Apple</button>
  <button type="button" class="btn btn-primary">Samsung</button>
  <button type="button" class="btn btn-primary">Sony</button>
</div>
```

Vertical Button Groups



```
<div class="btn-group-vertical">
  <button type="button" class="btn btn-primary">Apple</button>
  <button type="button" class="btn btn-primary">Samsung</button>
  <button type="button" class="btn btn-primary">Sony</button>
</div>
```

Button Groups Side by Side




```

<div class="btn-group">
  <button type="button" class="btn btn-primary">Apple</button>
  <button type="button" class="btn btn-primary">Samsung</button>
  <button type="button" class="btn btn-primary">Sony</button>
</div>

<div class="btn-group">
  <button type="button" class="btn btn-primary">BMW</button>
  <button type="button" class="btn btn-primary">Mercedes</button>
  <button type="button" class="btn btn-primary">Volvo</button>
</div>

```

<*****>

11. Badges

Badges are used to add additional information to any content:

```

<h1>Example heading <span class="badge bg-secondary">New</span></h1>
<h2>Example heading <span class="badge bg-secondary">New</span></h2>
<h3>Example heading <span class="badge bg-secondary">New</span></h3>
<h4>Example heading <span class="badge bg-secondary">New</span></h4>
<h5>Example heading <span class="badge bg-secondary">New</span></h5>
<h6>Example heading <span class="badge bg-secondary">New</span></h6>

```

Example heading **New**

Example heading **New**

Example heading **New**

Example heading **New**

Example heading **New**

Contextual Badges


Use any of the contextual classes (`.bg-*`) to change the color of a badge:



```
<span class="badge bg-primary">Primary</span>
<span class="badge bg-secondary">Secondary</span>
<span class="badge bg-success">Success</span>
<span class="badge bg-danger">Danger</span>
<span class="badge bg-warning">Warning</span>
<span class="badge bg-info">Info</span>
<span class="badge bg-light">Light</span>
<span class="badge bg-dark">Dark</span>
```

Pill Badges

Use the `.rounded-pill` class to make the badges more round:



```
<span class="badge rounded-pill bg-primary">Primary</span>
<span class="badge rounded-pill bg-secondary">Secondary</span>
<span class="badge rounded-pill bg-success">Success</span>
<span class="badge rounded-pill bg-danger">Danger</span>
<span class="badge rounded-pill bg-warning">Warning</span>
<span class="badge rounded-pill bg-info">Info</span>
<span class="badge rounded-pill bg-light">Light</span>
<span class="badge rounded-pill bg-dark">Dark</span>
```

<*****>

12. Progress Bar

Basic Progress Bar

A progress bar can be used to show how far a user is in a process.




To create a default progress bar, add a `.progress` class to a container element and add the `.progress-bar` class to its child element. Use the CSS `width` property to set the width of the progress bar:

```
<div class="progress">
  <div class="progress-bar" style="width:70%"></div>
</div>
```

Progress Bar Height

The height of the progress bar is `1rem` (usually `16px`) by default. Use the CSS `height` property to change it:

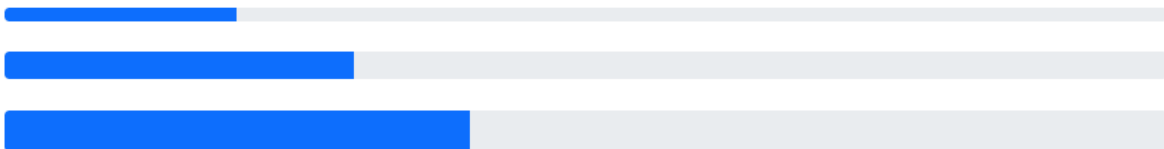

```
<div class="progress" style="height:20px">
  <div class="progress-bar" style="width:40%;"></div>
</div>
```

Progress Bar Labels

Add text inside the progress bar to show the visible percentage:



```
<div class="progress">
  <div class="progress-bar" style="width:70%">70%</div>
</div>
```

Colored Progress Bars

```
<div class="progress">
  <div class="progress-bar" style="width:10%"></div>
</div>
```

```

<!-- Green -->

<div class="progress">
  <div class="progress-bar bg-success" style="width:20%"></div>
</div>

<!-- Turquoise -->
<div class="progress">
  <div class="progress-bar bg-info" style="width:30%"></div>
</div>

<!-- Orange -->
<div class="progress">
  <div class="progress-bar bg-warning" style="width:40%"></div>
</div>


<!-- Red -->
<div class="progress">
  <div class="progress-bar bg-danger" style="width:50%"></div>
</div>

<!-- White -->
<div class="progress border">
  <div class="progress-bar bg-white" style="width:60%"></div>
</div>

```

Striped Progress Bars

Use the `.progress-bar-striped` class to add stripes to the progress bars:

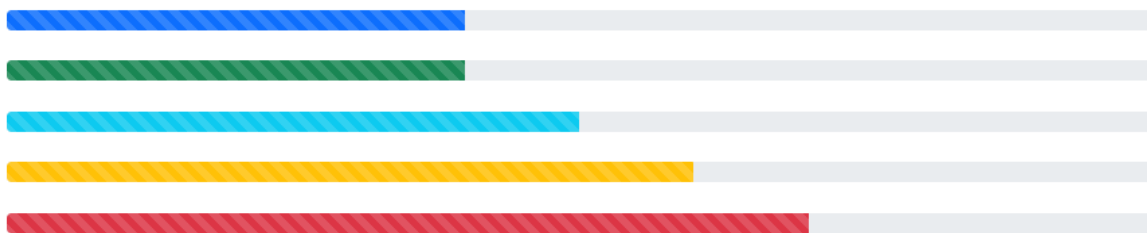

```

<div class="progress">
  <div class="progress-bar progress-bar-striped" style="width:40%"></div>
</div>

```

Multiple Progress Bars



```

<div class="progress">
  <div class="progress-bar bg-success" style="width:40%">
    Free Space
  </div>
  <div class="progress-bar bg-warning" style="width:10%">
    Warning
  </div>
  <div class="progress-bar bg-danger" style="width:20%">
    Danger
  </div>
</div>

```

<*****>

13. Spinners

To create a spinner/loader, use the `.spinner-border` class:



```

<div class="spinner-border"></div>

```

Colored Spinners

Use any text color utilities to add a color to the spinner:



```


<div class="spinner-border text-muted"></div>
<div class="spinner-border text-primary"></div>
<div class="spinner-border text-success"></div>
<div class="spinner-border text-info"></div>
<div class="spinner-border text-warning"></div>
<div class="spinner-border text-danger"></div>
<div class="spinner-border text-secondary"></div>

```

```
<div class="spinner-border text-dark"></div>
<div class="spinner-border text-light"></div>
```

Spinner Buttons

You can also add spinners to a button, with or without text:



```
<button class="btn btn-primary">
  <span class="spinner-border spinner-border-sm"></span>
</button>
```

```
<button class="btn btn-primary">
  <span class="spinner-border spinner-border-sm"></span>
  Loading..
</button>
```

```
<button class="btn btn-primary disabled">
  <span class="spinner-border spinner-border-sm"></span>
  Loading..
</button>
```

```
<button class="btn btn-primary disabled">
  <span class="spinner-grow spinner-grow-sm"></span>
  Loading..
</button>
```

<*****>

14. Pagination

Basic Pagination

If you have a web site with lots of pages, you may wish to add some sort of pagination to each page.

To create a basic pagination, add the `.pagination` class to an `<ul>` element. Then add the `.page-item` to each `<li>` element and a `.page-link` class to each link inside `<li>`:

```

<ul class="pagination">
  <li class="page-item"><a class="page-link" href="#">Previous</a></li>
  <li class="page-item"><a class="page-link" href="#">1</a></li>
  <li class="page-item"><a class="page-link" href="#">2</a></li>
  <li class="page-item"><a class="page-link" href="#">3</a></li>
  <li class="page-item"><a class="page-link" href="#">Next</a></li>
</ul>

```

Active State

The `.active` class is used to "highlight" the current page:



```



<ul class="pagination">
  <li class="page-item"><a class="page-link" href="#">Previous</a></li>
  <li class="page-item"><a class="page-link" href="#">1</a></li>
  <li class="page-item active"><a class="page-link" href="#">2</a></li>
  <li class="page-item"><a class="page-link" href="#">3</a></li>
  <li class="page-item"><a class="page-link" href="#">Next</a></li>
</ul>

```

Pagination Sizing

Pagination blocks can also be sized to a larger or a smaller size:

Add class `.pagination-lg` for larger blocks or `.pagination-sm` for smaller blocks:



```

<ul class="pagination pagination-lg">
  <li class="page-item"><a class="page-link" href="#">Previous</a></li>
  <li class="page-item"><a class="page-link" href="#">1</a></li>
  <li class="page-item"><a class="page-link" href="#">2</a></li>
  <li class="page-item"><a class="page-link" href="#">3</a></li>
  <li class="page-item"><a class="page-link" href="#">Next</a></li>
</ul>

```

```

<ul class="pagination pagination-sm">
  <li class="page-item"><a class="page-link" href="#">Previous</a></li>

```

```
<li class="page-item"><a class="page-link" href="#">1</a></li>
<li class="page-item"><a class="page-link" href="#">2</a></li>
<li class="page-item"><a class="page-link" href="#">3</a></li>
<li class="page-item"><a class="page-link" href="#">Next</a></li>
</ul>

<*****>
```

15. List Groups

Basic List Groups

The most basic list group is an unordered list with list items:

To create a basic list group, use an `<ul>` element with class `.list-group`, and `<li>` elements with class `.list-group-item`:

First item
Second item
Third item

```
<ul class="list-group">
  <li class="list-group-item">First item</li>
  <li class="list-group-item">Second item</li>

  <li class="list-group-item">Third item</li>
</ul>
```

Active State

Use the `.active` class to highlight the current item:

Active item
Second item
Third item

```
<ul class="list-group">
  <li class="list-group-item active">Active item</li>
  <li class="list-group-item">Second item</li>
  <li class="list-group-item">Third item</li>
</ul>
```


Horizontal List Groups

If you want the list items to display horizontally instead of vertically (side by side instead of on top of each other), add the `.list-group-horizontal` class to `.list-group`:

First item	Second item	Third item	Fourth item
------------	-------------	------------	-------------

```
<ul class="list-group list-group-horizontal">
  <li class="list-group-item">First item</li>
  <li class="list-group-item">Second item</li>
  <li class="list-group-item">Third item</li>
  <li class="list-group-item">Fourth item</li>
</ul>
```

Flush / Remove Borders

Use the `.list-group-flush` class to remove some borders and rounded corners:

First item
Second item
Third item
Fourth item

```
<ul class="list-group list-group-flush">
  <li class="list-group-item">First item</li>
  <li class="list-group-item">Second item</li>
  <li class="list-group-item">Third item</li>
  <li class="list-group-item">Fourth item</li>
</ul>
```

<*****>

16. Cards

Cards

A card in Bootstrap 5 is a bordered box with some padding around its content. It includes options for headers, footers, content, colors, etc.



Basic Card

A basic card is created with the `.card` class, and content inside the card has a `.card-body` class:

Basic card

```
<div class="card">
  <div class="card-body">Basic card</div>
</div>
```

Header and Footer

The `.card-header` class adds a heading to the card and the `.card-footer` class adds a footer to the card:

Header

Content

Footer

```
<div class="card">
  <div class="card-header">Header</div>
  <div class="card-body">Content</div>
  <div class="card-footer">Footer</div>
</div>
```

Titles, text, and links

Card title


Some example text. Some example text.

[Card link](#) [Another link](#)

Use `.card-title` to add card titles to any heading element. The `.card-text` class is used to remove bottom margins for a `<p>` element if it is the last child (or the only one) inside `.card-body`. The `.card-link` class adds a blue color to any link, and a hover effect.

```
<div class="card">
  <div class="card-body">
    <h4 class="card-title">Card title</h4>
    <p class="card-text">Some example text. Some example text.</p>
    <a href="#" class="card-link">Card link</a>
    <a href="#" class="card-link">Another link</a>
  </div>
</div>
```

Card Images

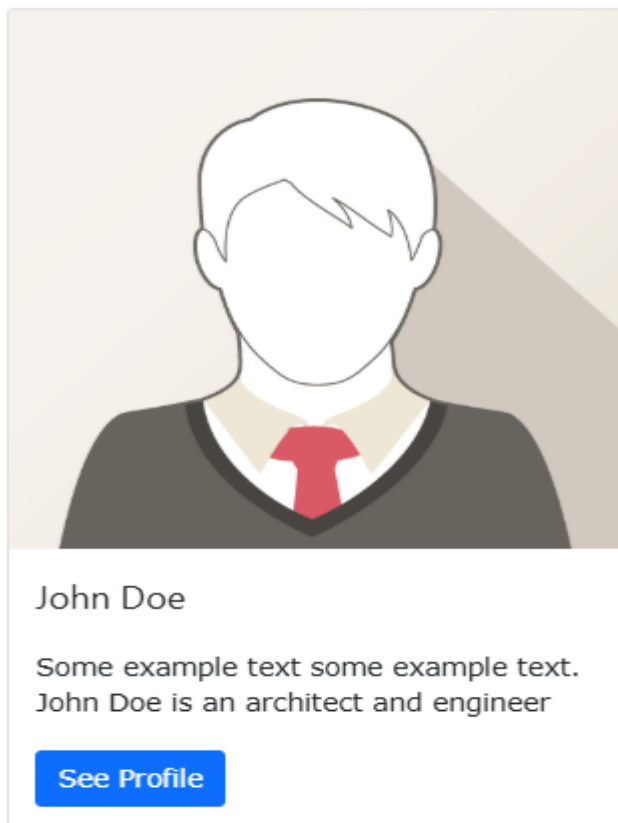

Add `.card-img-top` or `.card-img-bottom` to an `<img>` to place the image at the top or at the bottom inside the card. Note that we have added the image outside of the `.card-body` to span the entire width:


```
<div class="card" style="width:400px">
  
  <div class="card-body">
    <h4 class="card-title">John Doe</h4>
```

```

    <p class="card-text">Some example text.</p>
    <a href="#" class="btn btn-primary">See Profile</a>
  </div>
</div>

```

Card Image Overlays

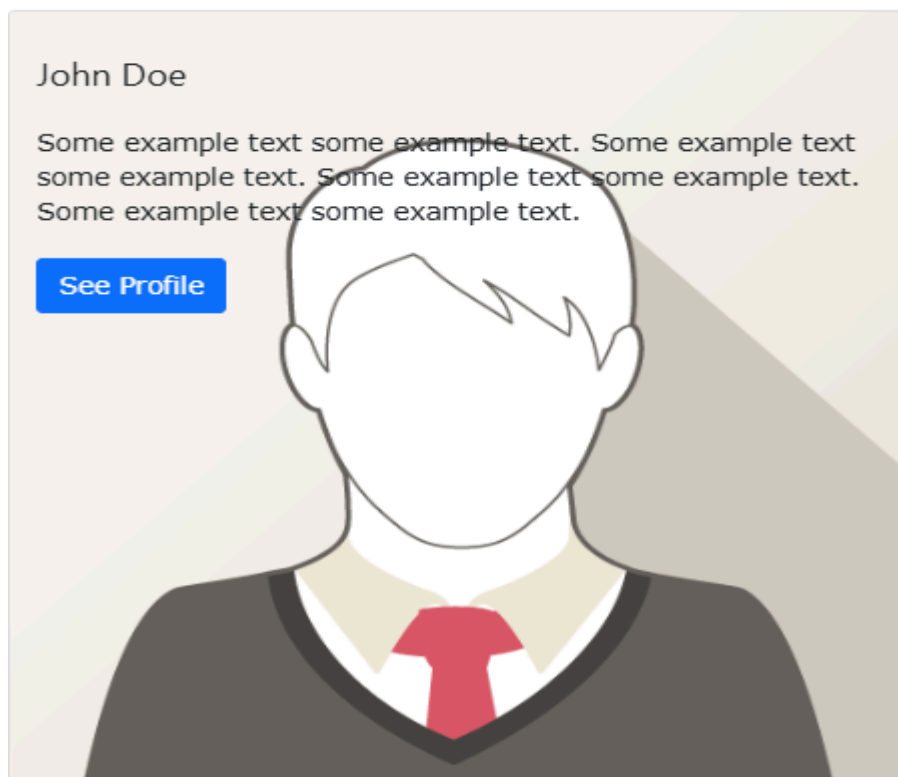

Turn an image into a card background and use `.card-img-overlay` to add text on top of the image:

```

<div class="card" style="width:500px">
  
  <div class="card-img-overlay">

```

```

    <h4 class="card-title">John Doe</h4>
    <p class="card-text">Some example text.</p>
    <a href="#" class="btn btn-primary">See Profile</a>
  </div>
</div>

```

<*****>

17. Dropdowns

Basic Dropdown

A dropdown menu is a toggleable menu that allows the user to choose one

value from a predefined list:

Dropdown button ▾

```

<div class="dropdown">
  <button type="button" class="btn btn-primary dropdown-toggle"
  data-bs-toggle="dropdown">
    Dropdown button
  </button>
  <ul class="dropdown-menu">
    <li><a class="dropdown-item" href="#">Link 1</a></li>
    <li><a class="dropdown-item" href="#">Link 2</a></li>
    <li><a class="dropdown-item" href="#">Link 3</a></li>
  </ul>
</div>

```

Example Explained

The `.dropdown` class indicates a dropdown menu.

To open the dropdown menu, use a button or a link with a class of `.dropdown-toggle` and the `data-bs-toggle="dropdown"` attribute.

Add the `.dropdown-menu` class to a container element, like `<div>` or `<ul>`, to actually build the dropdown menu. Then add the `.dropdown-item` class to each element (links or buttons) inside the dropdown menu.

Disable and Active items


Highlight a specific dropdown item with the `.active` class (adds a blue background color).

To disable an item in the dropdown menu, use the `.disabled` class (gets a light-grey text color and a "no-parking-sign" icon on hover):

9


```
<li><a class="dropdown-item" href="#">Normal</a></li>
<li><a class="dropdown-item active" href="#">Active</a></li>
<li><a class="dropdown-item disabled" href="#">Disabled</a></li>
```

Grouped Buttons with a Dropdown



```
<div class="btn-group">
  <button type="button" class="btn btn-primary">Apple</button>
  <button type="button" class="btn btn-primary">Samsung</button>
  <div class="btn-group">
    <button type="button" class="btn btn-primary dropdown-toggle"
      data-bs-toggle="dropdown">Sony</button>
    <ul class="dropdown-menu">
      <li><a class="dropdown-item" href="#">Tablet</a></li>
      <li><a class="dropdown-item" href="#">Smartphone</a></li>
    </ul>
  </div>
</div>
```

Vertical Button Group w/ Dropdown



```
<div class="btn-group-vertical">
  <button type="button" class="btn btn-primary">Apple</button>
  <button type="button" class="btn btn-primary">Samsung</button>
  <div class="btn-group">
    <button type="button" class="btn btn-primary dropdown-toggle"
      data-bs-toggle="dropdown">Sony</button>
    <ul class="dropdown-menu">
      <li><a class="dropdown-item" href="#">Tablet</a></li>
      <li><a class="dropdown-item" href="#">Smartphone</a></li>
    </ul>
  </div>
</div>
```

```
</ul>
</div>
</div>
<*****>
```

18. Collapse

Basic Collapsible

Click Me

Collapsibles are useful when you want to hide and show large amount of content:

Click Me

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.

```
<button data-bs-toggle="collapse"
data-bs-target="#demo">Collapsible</button>
```

```
<div id="demo" class="collapse">
Lorem ipsum dolor text....
</div>
```

Example Explained

The `.collapse` class indicates a collapsible element (a `<div>` in our example); this is the content that will be shown or hidden with a click of a button.

To control (show/hide) the collapsible content, add the `data-bs-toggle="collapse"` attribute to an `<a>` or a `<button>` element. Then add the `data-bs-target="#id"` attribute to connect the button with the collapsible content (`<div id="demo">`).

Note: For `<a>` elements, you can use the `href` attribute instead of the `data-bs-target` attribute:

```
<a href="#demo" data-bs-toggle="collapse">Collapsible</a>
<div id="demo" class="collapse">
Lorem ipsum dolor text....
</div>
```

Accordion

The following example shows a simple accordion by extending the card component.

Note: Use the `data-bs-parent` attribute to make sure that all collapsible elements under the specified parent will be closed when one of the collapsible item is shown.

Collapsible Group Item #1
Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.
Collapsible Group Item #2
Collapsible Group Item #3

```
<div id="accordion">
  <div class="card">
    <div class="card-header">

      <a class="btn" data-bs-toggle="collapse" href="#collapseOne">
        Collapsible Group Item #1
      </a>
    </div>

    <div id="collapseOne" class="collapse show" data-bs-parent="#accordion">

      <div class="card-body">
        Lorem ipsum..
      </div>
    </div>
  </div>

  <div class="card">
    <div class="card-header">
      <a class="collapsed btn" data-bs-toggle="collapse"
href="#collapseTwo">
Collapsible Group Item #2
      </a>
    </div>
    <div id="collapseTwo" class="collapse" data-bs-parent="#accordion">
      <div class="card-body">
        Lorem ipsum..
      </div>
    </div>
  </div>

  <div class="card">
    <div class="card-header">
      <a class="collapsed btn" data-bs-toggle="collapse"
```



```
href="#collapseThree">
  Collapsible Group Item #3
</a>
</div>
```

```
<div id="collapseThree" class="collapse" data-bs-parent="#accordion">
  <div class="card-body">
    Lorem ipsum..
  </div>
</div>
</div>
</div>
```

<*****>

19. Navs

Nav Menus

If you want to create a simple horizontal menu, add the `.nav` class to a `<ul>` element, followed by `.nav-item` for each `<li>` and add the `.nav-link` class to their links:

Link Link Link Disabled

```
<ul class="nav">
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link disabled" href="#">Disabled</a>
  </li>
</ul>
```

Vertical Nav

[Link](#)

[Link](#)

[Link](#)

[Disabled](#)

Add the `.flex-column` class to create a vertical nav:

```
<ul class="nav flex-column">
```

```
<*****>
```

20. Tabs

[Active](#) [Link](#) [Link](#) [Disabled](#)

*Turn the nav menu into navigation tabs with the `.nav-tabs` class. Add the `.active` class to the active/current link. If you want the tabs to be toggleable, see the last example on this page.

```
<ul class="nav nav-tabs">
  <li class="nav-item">
    <a class="nav-link active" href="#">Active</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link disabled" href="#">Disabled</a>
  </li>
</ul>
```

Pills


Turn the nav menu into navigation pills with the `.nav-pills` class. If you want the pills to be toggleable, see the last example on this page.



```
<ul class="nav nav-pills">
  <li class="nav-item">
    <a class="nav-link active" href="#">Active</a>

</li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link disabled" href="#">Disabled</a>
  </li>
</ul>
```

Toggleable / Dynamic Tabs

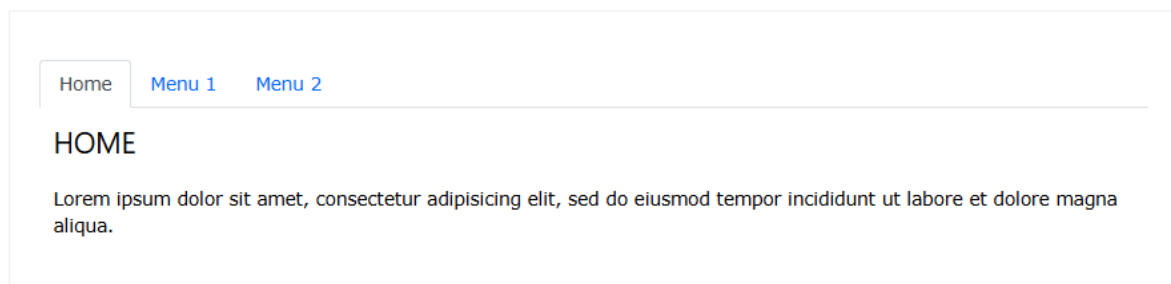

To make the tabs toggleable, add the `data-toggle="tab"` attribute to each link. Then add a `.tab-pane` class with a unique ID for every tab and wrap them inside a `<div>` element with class `.tab-content`.

If you want the tabs to fade in and out when clicking on them, add the `.fade` class to `.tab-pane`:

```
<ul class="nav nav-tabs">
  <li class="nav-item">
    <a class="nav-link active" data-bs-toggle="tab" href="#home">Home</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" data-bs-toggle="tab" href="#menu1">Menu 1</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" data-bs-toggle="tab" href="#menu2">Menu 2</a>
  </li>
</ul>
```

```
</ul>
```

```
<!-- Tab panes -->
```

```
<div class="tab-content">
```

```
  <div class="tab-pane container active" id="home">...</div>
```

```
  <div class="tab-pane container fade" id="menu1">...</div>
```

```
  <div class="tab-pane container fade" id="menu2">...</div>
```

```
</div>
```

```
<*****>
```

21. Navbars

Basic Navbar

With Bootstrap, a navigation bar can extend or collapse, depending on the screen size.

A standard navigation bar is created with the `.navbar` class, followed by a responsive collapsing class: `.navbar-expand-xxl|xl|lg|md|sm` (stacks the navbar vertically on xlarge, extra large, large, medium or small screens). To add links inside the navbar, use either an `<ul>` element (or a `<div>`) with `class="navbar-nav"`. Then add `<li>` elements with a `.nav-item` class followed by an `<a>` element with a `.nav-link` class:

```
Link 1 Link 2 Link 3
```

```
<nav class="navbar navbar-expand-sm bg-light">
```

```
  <div class="container-fluid">
```

```
    <!-- Links -->
```

```
    <ul class="navbar-nav">
```

```
      <li class="nav-item">
```

```
        <a class="nav-link" href="#">Link 1</a>
```

```
      </li>
```

```
      <li class="nav-item">
```

```
        <a class="nav-link" href="#">Link 2</a>
```

```
      </li>
```

```
      <li class="nav-item">
```

```
        <a class="nav-link" href="#">Link 3</a>
```

```
    </ul>
```

```
  </div>
```


```
</div>
```

```
</nav>
```

Brand / Logo

The `.navbar-brand` class is used to highlight the brand/logo/project name of your page:

When using the `.navbar-brand` class with images, Bootstrap 5 will automatically style the image to fit the navbar vertically.



```
<nav class="navbar navbar-expand-sm bg-dark navbar-dark">
  <div class="container-fluid">
    <a class="navbar-brand" href="#">
      
    </a>
  </div>
</nav>
```

Navbar With Dropdown



```
<li class="nav-item dropdown">
  <a class="nav-link dropdown-toggle" href="#" role="button"
data-bs-toggle="dropdown">Dropdown</a>
  <ul class="dropdown-menu">
    <li><a class="dropdown-item" href="#">Link</a></li>
    <li><a class="dropdown-item" href="#">Another link</a></li>
    <li><a class="dropdown-item" href="#">A third link</a></li>
  </ul>
</li>
```

Navbar Forms and Buttons



```
<nav class="navbar navbar-expand-sm navbar-dark bg-dark">
  <div class="container-fluid">
    <a class="navbar-brand" href="javascript:void(0)">Logo</a>
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse"
data-bs-target="#mynavbar">
```

```

        <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="mynavbar">
        <ul class="navbar-nav me-auto">
            <li class="nav-item">
                <a class="nav-link" href="javascript:void(0)">Link</a>
            </li>
            <li class="nav-item">
                <a class="nav-link" href="javascript:void(0)">Link</a>
            </li>
            <li class="nav-item">

                <a class="nav-link" href="javascript:void(0)">Link</a>
            </li>
        </ul>

        <form class="d-flex">
            <input class="form-control me-2" type="text" placeholder="Search">
            <button class="btn btn-primary" type="button">Search</button>
        </form>
    </div>
</div>
</nav>

```

22. Carousel

Carousel / Slideshow

The Carousel is a slideshow for cycling through elements:

How To Create a Carousel

The following example shows how to create a basic carousel with indicators and controls:

```

<div id="demo" class="carousel slide" data-bs-ride="carousel">

    <!-- Indicators/dots -->
    <div class="carousel-indicators">
        <button type="button" data-bs-target="#demo" data-bs-slide-to="0"
class="active"></button>
        <button type="button" data-bs-target="#demo"
data-bs-slide-to="1"></button>
        <button type="button" data-bs-target="#demo"
data-bs-slide-to="2"></button>
    </div>

```

```

</div>

<!-- The slideshow/carousel -->
<div class="carousel-inner">
  <div class="carousel-item active">
    
  </div>
  <div class="carousel-item">
    
  </div>
  <div class="carousel-item">
    
  </div>
</div>
</div>

<!-- Left and right controls/icons -->

<button class="carousel-control-prev" type="button" data-bs-target="#demo"
data-bs-slide="prev">
  <span class="carousel-control-prev-icon"></span>
</button>
<button class="carousel-control-next" type="button" data-bs-target="#demo"
data-bs-slide="next">
  <span class="carousel-control-next-icon"></span>
</button>
</div>

```

Example explained

Class

Description

`.carousel`

Creates a carousel

`.carousel-indicators`

Adds indicators for the carousel. These are the little dots at the bottom of each slide (which indicates how many slides there are in the carousel, and which slide the user are currently viewing)

`.carousel-inner`

Adds slides to the carousel

`.carousel-item`

Specifies the content of each slide

`.carousel-control-prev`

Adds a left (previous) button to the carousel, which allows the user to go back between the slides

`.carousel-control-next`

Adds a right (next) button to the carousel, which allows the user to go forward between the slides

`.carousel-control-prev-icon`


Used together with `.carousel-control-prev` to create a "previous" button

`.carousel-control-next-icon`

Used together with `.carousel-control-next` to create a "next" button

`.slide`

Adds a CSS transition and animation effect when sliding from one item to the next. Remove this class if you do not want this effect

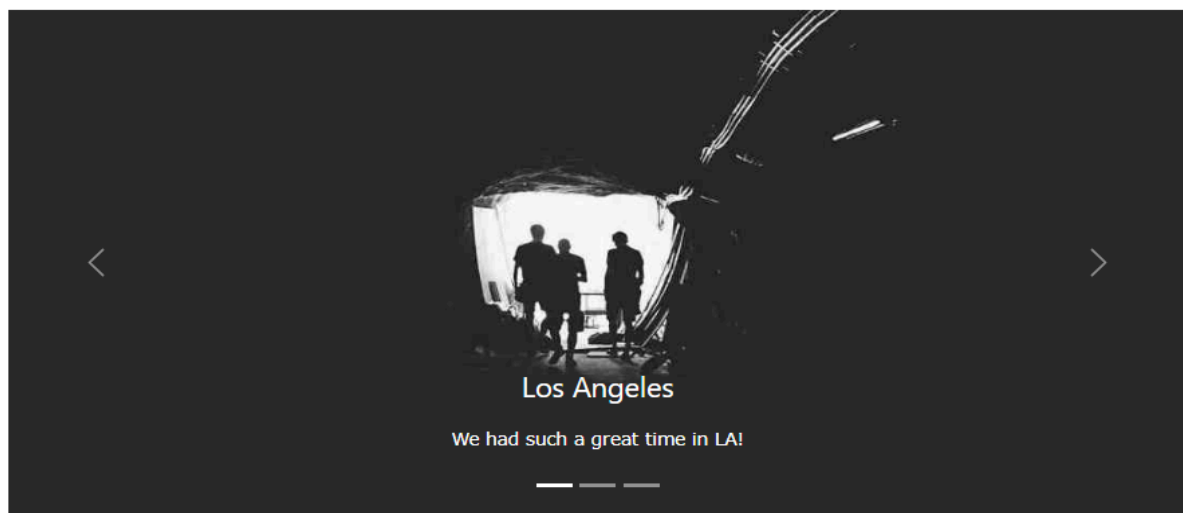


```
<div class="carousel-item">
  
  <div class="carousel-caption">
    <h3>Los Angeles</h3>
    <p>We had such a great time in LA!</p>
  </div>
</div>
```

```
<*****>
```

23. Modal

The Modal component is a dialog box/popup window that is displayed on top of the current page:

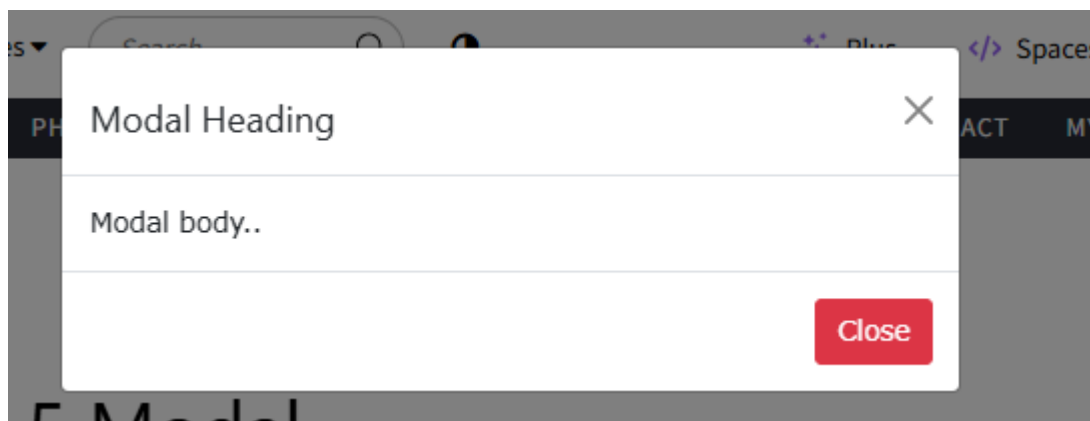

```
<button type="button" class="btn btn-primary" data-bs-toggle="modal"
data-bs-target="#myModal">
  Open modal
</button>
```

```

<!-- The Modal -->
<div class="modal" id="myModal">
  <div class="modal-dialog">
    <div class="modal-content">

      <!-- Modal Header -->
      <div class="modal-header">
        <h4 class="modal-title">Modal Heading</h4>
        <button type="button" class="btn btn-close"
data-bs-dismiss="modal"></button>

    </div>
    <!-- Modal body -->
    <div class="modal-body">
      Modal body..
    </div>

    <!-- Modal footer -->
    <div class="modal-footer">
      <button type="button" class="btn btn-danger"
data-bs-dismiss="modal">Close</button>
    </div>
  </div>
</div>

```

Modal Size

Change the size of the modal by adding the `.modal-sm` class for small modals (max-width 300px), `.modal-lg` class for large modals (max-width 800px), or `.modal-xl` for extra large modals (max-width 1140px). Default is 500px max-width.

Add the size class to the `<div>` element with class `.modal-dialog`:

Small Modal

```
<div class="modal-dialog modal-sm">
```

Large Modal

```
<div class="modal-dialog modal-lg">
```

Extra Large Modal

```
<div class="modal-dialog modal-xl">
```

Responsive Fullscreen Modals

Class

Description

`.modal-fullscreen-sm-down`

Fullscreen below 576px

`.modal-fullscreen-md-down`

Fullscreen below 768px

`.modal-fullscreen-lg-down`

Fullscreen below 992px

`.modal-fullscreen-xl-down`

Fullscreen below 1200px

`.modal-fullscreen-xxl-down`

Fullscreen below 1400px

<*****>

24. Tooltip

Tooltips

The Tooltip component is small pop-up box that appears when the user moves the mouse pointer over an element:

The Toast component is s

Hooray!

Hover over me!

How To Create a Tooltip

To create a tooltip, add the `data-bs-toggle="tooltip"` attribute to an element.

Use the `title` attribute to specify the text that should be displayed inside the tooltip:

```
<button type="button" class="btn btn-primary" data-bs-toggle="tooltip"
title="Hooray!">Hover over me!</button>
```

Positioning Tooltips

By default, the tooltip will appear on top of the element.

Use the `data-bs-placement` attribute to set the position of the tooltip on top, bottom, left or the right side of the element:

```
<a href="#" data-bs-toggle="tooltip" data-bs-placement="top"
title="Hooray!">Hover</a>
```

```
<a href="#" data-bs-toggle="tooltip" data-bs-placement="bottom"
title="Hooray!">Hover</a>
```


```
<a href="#" data-bs-toggle="tooltip" data-bs-placement="left"
title="Hooray!">Hover</a>
```

```
<a href="#" data-bs-toggle="tooltip" data-bs-placement="right"
title="Hooray!">Hover</a>
```

<*****>

25. Toasts

The toast component is like an alert box that is only shown for a couple of seconds when something happens (i.e. when the user clicks on a button, submits a form, etc.).

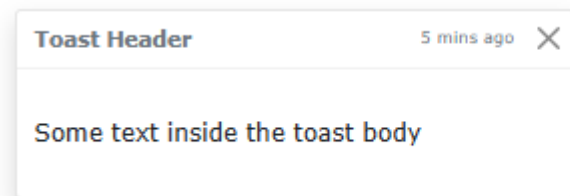

```
<div class="toast show">
  <div class="toast-header">
    Toast Header
    <button type="button" class="btn-close"
data-bs-dismiss="toast"></button>
  </div>
  <div class="toast-body">
    Some text inside the toast body
  </div>
</div>
```

<*****>


26. Utilities

Utilities / Helper Classes

Bootstrap 5 has a lot of utility/helper classes to quickly style elements without using any CSS code.

Borders

Use the `border` classes to add or remove borders from an element:

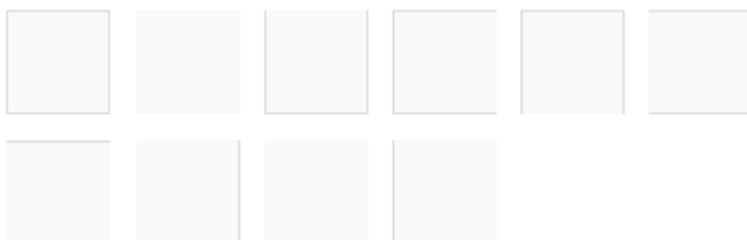

```
<span class="border"></span>
<span class="border border-0"></span>
```

```
<span class="border border-top-0"></span>
<span class="border border-end-0"></span>
<span class="border border-bottom-0"></span>
<span class="border border-start-0"></span>
<br>
<span class="border-top"></span>
<span class="border-end"></span>
<span class="border-bottom"></span>
<span class="border-start"></span>
```

Border Width

Use `.border-1` to `.border-5` to change the width of the border:



```
<span class="border border-1"></span>
<span class="border border-2"></span>
<span class="border border-3"></span>

<span class="border border-4"></span>
<span class="border border-5"></span>
```

Border Color



```
<span class="border border-primary"></span>
<span class="border border-secondary"></span>
<span class="border border-success"></span>
<span class="border border-danger"></span>
<span class="border border-warning"></span>
<span class="border border-info"></span>
<span class="border border-light"></span>
<span class="border border-dark"></span>
<span class="border border-white"></span>
```

Border Radius

```
<span class="rounded"></span>
<span class="rounded-top"></span>
<span class="rounded-end"></span>
```

```

<span class="rounded-bottom"></span>
<span class="rounded-start"></span>
<span class="rounded-circle"></span>
<span class="rounded-pill" style="width:130px"></span>
<span class="rounded-0"></span>
<span class="rounded-1"></span>
<span class="rounded-2"></span>
<span class="rounded-3"></span>
<span class="rounded-4"></span>
<span class="rounded-5"></span>

```

Float and Clearfix

Float an element to the right with the `.float-end` class or to the left with `.float-start`, and clear floats with the `.clearfix` class:

Float left

Float right

```

<div class="clearfix">
  <span class="float-start">Float left</span>
  <span class="float-end">Float right</span>
</div>

```

Center Align

Centered

```

<div class="mx-auto bg-warning" style="width:150px">Centered</div>

```

Width

Set the width of an element with the `w-*` classes (`.w-25`, `.w-50`, `.w-75`, `.w-100`, `.w-auto`, and `.mw-100`):

Width 25%

Width 50%

Width 75%

Width 100%

Auto Width

Max Width 100%


```

<div class="w-25 bg-warning">Width 25%</div>
<div class="w-50 bg-warning">Width 50%</div>
<div class="w-75 bg-warning">Width 75%</div>
<div class="w-100 bg-warning">Width 100%</div>
<div class="w-auto bg-warning">Auto Width</div>
<div class="mw-100 bg-warning">Max Width 100%</div>

```

Height

Set the height of an element with the `h-*` classes (`.h-25`, `.h-50`, `.h-75`, `.h-100`, `.h-auto`, and `.mh-100`):

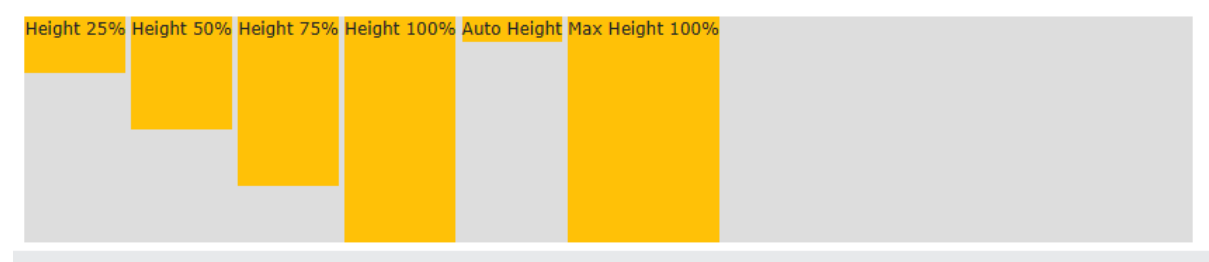

```
<div style="height:200px;background-color:#ddd">
  <div class="h-25 bg-warning">Height 25%</div>
  <div class="h-50 bg-warning">Height 50%</div>
  <div class="h-75 bg-warning">Height 75%</div>
  <div class="h-100 bg-warning">Height 100%</div>
  <div class="h-auto bg-warning">Auto Height</div>
  <div class="mh-100 bg-warning" style="height:500px">Max Height 100%</div>
</div>
```

Spacing

Bootstrap 5 has a wide range of responsive margin and padding utility classes. They work for all breakpoints:

`xs` (`<=576px`), `sm` (`>=576px`), `md` (`>=768px`), `lg` (`>=992px`), `xl` (`>=1200px`) or `xxl` (`>=1400px`):

The classes are used in the format: `{property}{sides}-{size}` for `xs` and `{property}{sides}-{breakpoint}-{size}` for `sm`, `md`, `lg`, `xl` and `xxl`.

Where *property* is one of:

- `m` - sets margin
- `p` - sets padding

Where *sides* is one of:

- `t` - sets margin-top or padding-top
- `b` - sets margin-bottom or padding-bottom
- `s` - sets margin-left or padding-left
- `e` - sets margin-right or padding-right
- `x` - sets both padding-left and padding-right or margin-left and margin-right
- `y` - sets both padding-top and padding-bottom or margin-top

and `margin-bottom`

- `blank` - sets a `margin` or `padding` on all 4 sides of the element

Where *size* is one of:

- `0` - sets `margin` or `padding` to `0`
- `1` - sets `margin` or `padding` to `.25rem`
- `2` - sets `margin` or `padding` to `.5rem`
- `3` - sets `margin` or `padding` to `1rem`
- `4` - sets `margin` or `padding` to `1.5rem`
- `5` - sets `margin` or `padding` to `3rem`
- `auto` - sets `margin` to `auto`

I only have a top padding (1.5rem)


I have a padding on all sides (3rem)

I have a margin on all sides (3rem) and a bottom padding (3rem)

```
<div class="pt-4 bg-warning">I only have a top padding (1.5rem)</div>
<div class="p-5 bg-success">I have a padding on all sides (3rem)</div>
<div class="m-5 pb-5 bg-info">I have a margin on all sides (3rem) and a
bottom padding (3rem)</div>
```

Shadows

Use the `shadow-` classes to add shadows to an element:

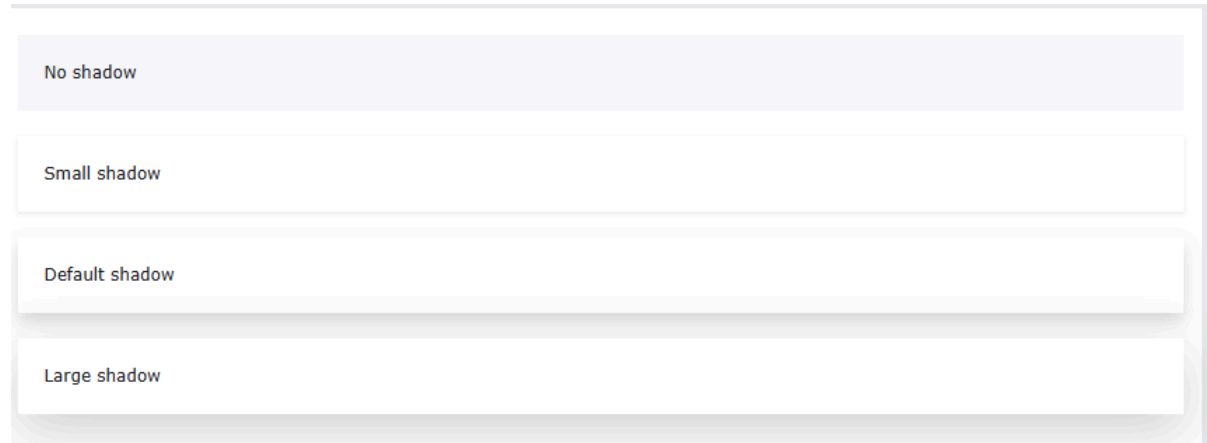

```
<div class="shadow-none p-4 mb-4 bg-light">No shadow</div>  
<div class="shadow-sm p-4 mb-4 bg-white">Small shadow</div>  
<div class="shadow p-4 mb-4 bg-white">Default shadow</div>  
<div class="shadow-lg p-4 mb-4 bg-white">Large shadow</div>
```

Colors

As described in the [Colors](#) chapter, here is a list of all text and background color classes:

The classes for text colors are: `.text-muted`, `.text-primary`, `.text-success`, `.text-info`, `.text-warning`, `.text-danger`, `.text-secondary`, `.text-white`, `.text-dark`, `.text-body` (default body color/often black) and `.text-light`:

This text is muted.

This text is important.

This text indicates success.

This text represents some information.

This text represents a warning.

This text represents danger.

Secondary text.

Dark grey text.

Body text.


Flex

Flexbox

The biggest difference between Bootstrap 3 and Bootstrap 4 & 5 is that Bootstrap 5 now uses flexbox, instead of floats, to handle the layout.

The Flexible Box Layout Module, makes it easier to design flexible responsive layout structure without using float or positioning. If you are new to flex, you can read about it in our [CSS Flexbox Tutorial](#).

To create a flexbox container and to transform direct children into flex items, use the `d-flex` class:

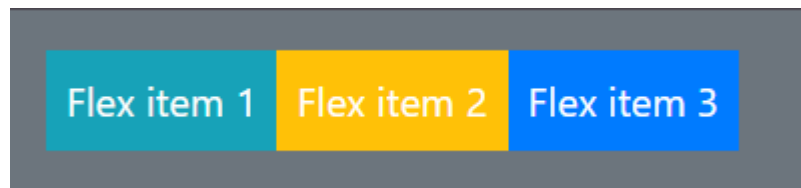

```
<div class="d-flex p-3 bg-secondary text-white">
  <div class="p-2 bg-info">Flex item 1</div>
  <div class="p-2 bg-warning">Flex item 2</div>
  <div class="p-2 bg-primary">Flex item 3</div>
</div>
```

Vertical Direction

Use `.flex-column` to display the flex items vertically (on top of each other), or `.flex-column-reverse` to reverse the vertical direction:




```
<div class="d-flex flex-column">
  <div class="p-2 bg-info">Flex item 1</div>
  <div class="p-2 bg-warning">Flex item 2</div>
  <div class="p-2 bg-primary">Flex item 3</div>
</div>
```

```
<div class="d-flex flex-column-reverse">
  <div class="p-2 bg-info">Flex item 1</div>
  <div class="p-2 bg-warning">Flex item 2</div>
  <div class="p-2 bg-primary">Flex item 3</div>
```

</div>

Justify Content

Use the `.justify-content-*` classes to change the alignment of flex items. Valid classes are `start` (default), `end`, `center`, `between` or `around`:

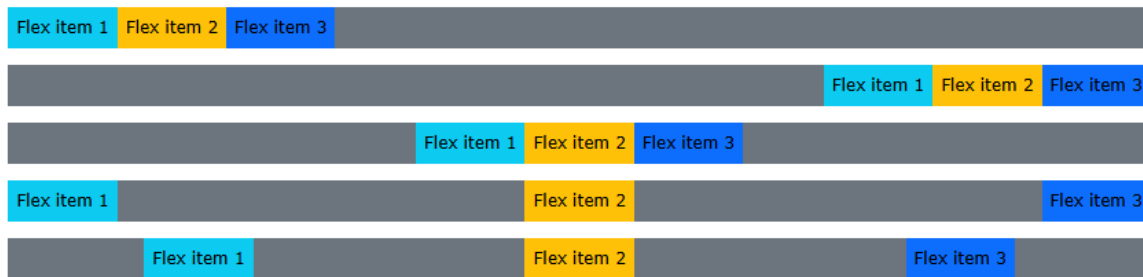

```
<div class="d-flex justify-content-start">...</div>
<div class="d-flex justify-content-end">...</div>
<div class="d-flex justify-content-center">...</div>
<div class="d-flex justify-content-between">...</div>
<div class="d-flex justify-content-around">...</div>
```


Fill / Equal Widths



```
<div class="d-flex">
  <div class="p-2 bg-info flex-fill">Flex item 1</div>
  <div class="p-2 bg-warning flex-fill">Flex item 2</div>
  <div class="p-2 bg-primary flex-fill">Flex item 3</div>
</div>
```

Grow

Use `.flex-grow-1` on a flex item to take up the rest of the space. In the example below, the first two flex items take up their necessary space, while the last item takes up the rest of the available space:

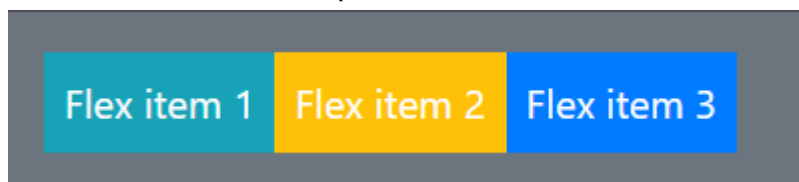

Flex item 1 Flex item 2 Flex item 3

```
<div class="d-flex">
  <div class="p-2 bg-info">Flex item 1</div>
  <div class="p-2 bg-warning">Flex item 2</div>
  <div class="p-2 bg-primary flex-grow-1">Flex item 3</div>
</div>
```

Align Items

Control the vertical alignment of single rows of flex items with the `.align-items-*` classes. Valid classes are `.align-items-start`, `.align-items-end`, `.align-items-center`, `.align-items-baseline`, and `.align-items-stretch` (default).

`align-items-start`

`align-items-end`

`align-items-center`

`align-items-baseline`

`align-items-stretch`

```
<div class="d-flex align-items-start">..</div>
```

```
<div class="d-flex align-items-end">..</div>
```

```
<div class="d-flex align-items-center">..</div>
```

```
<div class="d-flex align-items-baseline">..</div>
```

```
<div class="d-flex align-items-stretch">..</div>
```

Responsive Flex Classes

All flex classes come with additional responsive classes, which makes it easy to set a specific flex class on a specific screen size.

Fill / Equal Width

`.flex-*-fill` Force flex items into equal on different screens

Grow

`.flex-*-grow-0` Don't make the items grow on different screens

`.flex-*-grow-1` Make items grow on different screens

Shrink

`.flex-*-shrink-0` Don't make the items shrink on different screens

`.flex-*-shrink-1` Make items shrink on different screens

Order

`.order-*-0-12` change the order from 0 to 5 on small screens

Wrap

`.flex-*-nowrap` Don't wrap items on different screens

`flex-*-wrap` Wrap items on different screens

`.flex-*-wrap-reverse` Reverse the wrapping if items on different screens

Fill / Equal Width	
<code>.flex-*-fill</code>	Force flex items into equal widths on different screens
Grow	
<code>.flex-*-grow-0</code>	Don't make the items grow on different screens
<code>.flex-*-grow-1</code>	Make items grow on different screens
Shrink	
<code>.flex-*-shrink-0</code>	Don't make the items shrink on diferent screens
<code>.flex-*-shrink-1</code>	Make items shrink on different screens
Order	
<code>.order-*-0-12</code>	Change the order from 0 to 5 on small screens
Wrap	
<code>.flex-*-nowrap</code>	Don't wrap items on different screens
<code>.flex-*-wrap</code>	Wrap items on different screens
<code>.flex-*-wrap-reverse</code>	Reverse the wrapping of items on different screens

The `*` symbol can be replaced with `sm`, `md`, `lg`, `xl` or `xxl`, which represents small, medium, large, xlarge and xxlarge screens.

Align Self	
<code>.align-self-*-start</code>	Align a flex item from the start on different screens
<code>.align-self-*-end</code>	Align a flex item at the end on different screens
<code>.align-self-*-center</code>	Align a flex item in the center on different screens
<code>.align-self-*-baseline</code>	Align a flex item on the baseline on different screens
<code>.align-self-*-stretch</code>	Stretch a flex item on different screens

Align Content	
<code>.align-content-*-start</code>	Align gathered items from the start on different screens
<code>.align-content-*-end</code>	Align gathered items at the end on different screens
<code>.align-content-*-center</code>	Align gathered items in the center on different screens
<code>.align-content-*-around</code>	Align gathered items "around" on different screens
<code>.align-content-*-stretch</code>	Stretch gathered items on different screens
Align Items	
<code>.align-items-*-start</code>	Align single rows of items from the start on different screens
<code>.align-items-*-end</code>	Align single rows of items at the end on different screens
<code>.align-items-*-center</code>	Align single rows of items in the center on different screens
<code>.align-items-*-baseline</code>	Align single rows of items on the baseline on different screens
<code>.align-items-*-stretch</code>	Stretch single rows of items on different screens

Align Self

<code>.align-self-*-start</code>	Align a flex item from the start on different screens
<code>.align-self-*-end</code>	Align a flex item from the end on different screens
<code>.align-self-*-centre</code>	Align a flex item from the start on different screens
<code>.align-self-*-baseline</code>	Align a flex item from the baseline on different screens
<code>.align-self-*-stretch</code>	Stretch a flex item on difference screens

Align Content

<code>.align-content-*-start</code>	Align gathers items from the start on different screens
<code>.align-self-*-end</code>	Align gathers items from the end on difference screens
<code>.align-content-*-centre</code>	Align gathers items from the centre on different screens
<code>.align-content-baseline</code>	Align single rows of items on baseline different screens
<code>.align-content-*-stretch</code>	Stretch gathers items on difference screens

Align Items

<code>.align-self-*-start</code>	Align single rows of items from the start on different screens
<code>.align-self-*-end</code>	Align single rows of items from the end on difference screen
<code>.align-self-*-centre</code>	Align single rows of items from the centre on different screens
<code>.align-self-*-centre</code>	Align single rows of items the centre on different screens
<code>.align-self-*-baseline</code>	Stretch single rows of items on different screens

<*****>