Laxmi Charitable Trust's
Sheth L.U.J College of Arts & Sir M.V. College of Science and Commerce Department of Information Technology (B.Sc.I.T Semester V)
Enterprise Java

Practical – VI

Roll No. : T045	Name: Omkar Thukarul
Class : TYIT	Date/Time of Submission : 19/08/2026


AIM:Implement the following Intermediate JSP Applications.

a. Develop a JSP application to demonstrate the use of JSP Directives and Implicit Objects.

CODE:

```
<%@ page language="java" contentType="text/html; charset=UTF-8" %>
<%@ page import="java.util.Date" %>
<html>
  <head>
    <title>JSP Directives and Implicit Objects</title>
  </head>
  <body>
    <h2>JSP Directives and Implicit Objects</h2>
    <h3>JSP Directives</h3>
    <p>Language: Java</p>
    <p>Content Type: <%= response.getContentType() %></p>
    <p>Current Date: <%= new Date() %></p>
    <h3>Implicit Objects</h3>
    <p>1. Request Method: <%= request.getMethod() %></p>
    <p>2. Response Content Type: <%= response.getContentType() %></p>
    <p>3. Session ID: <%= session.getId() %></p>
    <p>4. Application Server: <%= application.getServerInfo() %></p>
    <p>5. Page Name: <%= page.getClass().getName() %></p>
    <p>6. PageContext: <%= pageContext.getClass().getName() %></p>
    <p>7. Request Parameter: <%= request.getParameter("name") %></p>
    <p>8. Config Servlet Name: <%= config.getServletName() %></p>
    <p>9. Exception Object: Exception object is available only in error pages.</p>
  </body>
</html>
```

OUTPUT:

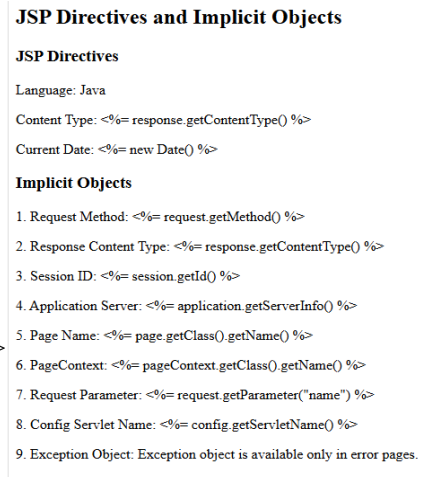

b. Develop a JSP application to demonstrate Form Processing and Input Validation.

CODE:

Admission.jsp

```
<%@page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
  <title>Chaat & Dessert Order</title>
</head>

<body>
  <h2>Chaat & Dessert Order Form</h2>
  <form action="process.jsp" method="post">
    Customer Name:
```

OUTPUT:



Omkar45

```
        <input type="text" name="customerName">
        <br><br>
        Mobile Number:
        <input type="text" name="contact">
        <br><br>
        Select Item:
        <select name="dish">
            <option value="">-- Select Item --</option>
            <option value="Pani Puri">Pani Puri</option>
            <option value="Sev Puri">Sev Puri</option>
            <option value="Dahi Puri">Dahi Puri</option>
            <option value="Samosa Chaat">Samosa Chaat</option>
            <option value="Papdi Chaat">Papdi Chaat</option>
            <option value="Bhel Puri">Bhel Puri</option>
            <option value="Choco Lava Cake">Choco Lava Cake</option>
        </select>
        <br><br>
        Preference:
        <input type="radio" name="tastePref" value="Sweet"> Sweet
        <input type="radio" name="tastePref" value="Medium"> Medium
        <input type="radio" name="tastePref" value="Spicy"> Spicy
        <br><br>
        Add-ons:
        <input type="checkbox" name="addons" value="Extra Sev"> Extra Sev
        <input type="checkbox" name="addons" value="Sweet Chutney"> Sweet
Chutney
        <input type="checkbox" name="addons" value="Vanilla Ice Cream"> Vanilla Ice
Cream
        <input type="checkbox" name="addons" value="Choco Fudge"> Choco Fudge
        <br><br>
        Delivery Address:
        <textarea name="address" rows="3" cols="25"></textarea>
        <br><br>
        <input type="submit" value="Submit Order">
    </form>
</body>
</html>
```

Order Status

Order Placed Successfully!

Name: omkar

Mobile: 90348608

Item: Dahi Puri

Preference: Spicy

Add-ons: Extra Sev Sweet Chutney Vanilla Ice Cream Choco Fudge

Address: andheri

Process.jsp

```
<%@page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
    <title>Order Status</title>
</head>
<body>
    <h2>Order Status</h2>
    <%
        String customerName = request.getParameter("customerName");
        String contact = request.getParameter("contact");
        String dish = request.getParameter("dish");
        String tastePref = request.getParameter("tastePref");
        String address = request.getParameter("address");
        String[] addons = request.getParameterValues("addons");
```

```
        boolean valid = true;
        if (customerName == null || customerName.trim().equals("")) {
            out.println("Customer name is required.<br>");
            valid = false;
        }
        if (contact == null || contact.trim().equals("")) {
            out.println("Contact number is required.<br>");
            valid = false;
        }
        if (dish == null || dish.equals("")) {
            out.println("Please select an item.<br>");
            valid = false;
        }
        if (tastePref == null) {
            out.println("Please select a taste preference.<br>");
            valid = false;
        }
        if (addons == null) {
            out.println("Please select at least one add-on.<br>");
            valid = false;
        }
        if (address == null || address.trim().equals("")) {
            out.println("Delivery address is required.<br>");
            valid = false;
        }
        if (valid) {
    %>
        <h3>Order Placed Successfully!</h3>
        Name: <%= customerName %><br><br>
        Mobile: <%= contact %><br><br>
        Item: <%= dish %><br><br>
        Preference: <%= tastePref %><br><br>
        Add-ons:
        <%
            for (String addon : addons) {
                out.println(addon + " ");
            }
        %><br><br>
        Address: <%= address %><br><br>
    <%  }
    %>
    <br>
    <a href="admission.jsp">Back to Form</a>
</body>
</html>
```

c. Develop a JSP application to display data from a MySQL Database using JDBC.

CODE: **OUTPUT:**

displayFoodMenu.jsp

```
<%@ page language="java" contentType="text/html; charset=UTF-8" pageEncoding="UTF-8" %>
<%@ page import="java.sql.*" %>
<!DOCTYPE html>
<html>
<head>
    <title>Global Bites - Food Menu</title>
```

Omkar45

```
<style>
  body {
    font-family: -apple-system, BlinkMacSystemFont, "Segoe UI", Roboto, sans-serif;
    background-color: #fff7ed;
    color: #431407;
    padding: 30px;
    margin: 0;
  }
  .container {
    max-width: 800px;
    margin: 0 auto;
    background: #ffffff;
    border-radius: 12px;
    box-shadow: 0 4px 15px rgba(0,0,0,0.06);
    overflow: hidden;
    border: 1px solid #fed7aa;
  }
  .header {
    background: #ea580c;
    color: #ffffff;
    padding: 20px 24px;
    font-size: 22px;
    font-weight: 700;
  }
  table {
    width: 100%;
    border-collapse: collapse;
    text-align: left;
  }
  th {
    background-color: #ffedd5;
    color: #9a3412;
    padding: 12px 18px;
    font-size: 13px;
    text-transform: uppercase;
    letter-spacing: 0.5px;
  }
  td {
    padding: 12px 18px;
    border-bottom: 1px solid #fed7aa;
    font-size: 14px;
  } tr:last-child td {
    border-bottom: none;
  }tr:hover {
    background-color: #fffaf5;
  }
  .tag {
    display: inline-block;
    padding: 3px 8px;
    border-radius: 6px;
    font-size: 12px;
    font-weight: 600;
    background-color: #ffedd5;
    color: #c2410c;
  }
  .price {
    font-weight: 700;
    color: #c2410c;}
  .rating {
    font-weight: 700;
    color: #d97706;}
</style>
```

Global Bites — Cafe & Kitchen Menu

ID	ITEM NAME	CUISINE / CATEGORY	PRICE	RATING
1	Butter Chicken & Naan	Indian	₹340.00	★ 4.9
9	Gulab Jamun with Rabdi	Sweet Dish	₹150.00	★ 4.9
10	Matcha Cheesecake	Sweet Dish	₹280.00	★ 4.8
3	Tonkotsu Pork Ramen	Japanese	₹420.00	★ 4.8
8	Woodfired Pepperoni Pizza	Pizza	₹450.00	★ 4.7
2	Paneer Tikka Masala	Indian	₹290.00	★ 4.7
4	Salmon Nigiri Sushi	Japanese	₹480.00	★ 4.6
7	Truffle Cheese Burger	Burger	₹260.00	★ 4.6
5	Kung Pao Chicken	Chinese	₹310.00	★ 4.5
6	Schezwan Veg Noodles	Chinese	₹220.00	★ 4.4

```
mysql> CREATE DATABASE IF NOT EXISTS food_hub_db;
Query OK, 1 row affected (0.00 sec)

mysql> USE food_hub_db;
Database changed
mysql>
mysql> DROP TABLE IF EXISTS food_menu;
Query OK, 0 rows affected, 1 warning (0.02 sec)

mysql> CREATE TABLE food_menu (
    ->     item_id INT PRIMARY KEY AUTO_INCREMENT,
    ->     item_name VARCHAR(50) NOT NULL,
    ->     cuisine VARCHAR(30) NOT NULL,
    ->     price DECIMAL(6,2) NOT NULL,
    ->     rating DECIMAL(2,1) NOT NULL
    -> );
Query OK, 0 rows affected (0.02 sec)

mysql>
mysql> INSERT INTO food_menu (item_name, cuisine, price, rating) VALUES
    -> ('Butter Chicken & Naan', 'Indian', 340.00, 4.9),
    -> ('Paneer Tikka Masala', 'Indian', 290.00, 4.7),
    -> ('Tonkotsu Pork Ramen', 'Japanese', 420.00, 4.8),
    -> ('Salmon Nigiri Sushi', 'Japanese', 480.00, 4.6),
    -> ('Kung Pao Chicken', 'Chinese', 310.00, 4.5),
    -> ('Schezwan Veg Noodles', 'Chinese', 220.00, 4.4),
    -> ('Truffle Cheese Burger', 'Burger', 260.00, 4.6),
    -> ('Woodfired Pepperoni Pizza', 'Pizza', 450.00, 4.7),
    -> ('Gulab Jamun with Rabdi', 'Sweet Dish', 150.00, 4.9),
    -> ('Matcha Cheesecake', 'Sweet Dish', 280.00, 4.8);
Query OK, 10 rows affected (0.00 sec)
Records: 10  Duplicates: 0  Warnings: 0
```

```
Omkar45
</head>
<body>
<div class="container">
  <div class="header">🍜 Global Bites — Cafe & Kitchen Menu</div>
  <table>
    <thead>
      <tr>
        <th>ID</th>
        <th>Item Name</th>
        <th>Cuisine / Category</th>
        <th>Price</th>
        <th>Rating</th>
      </tr>
    </thead>
    <tbody><%
      String dbUrl = "jdbc:mysql://localhost:3306/food_hub_db";
      String dbUser = "root";
      String dbPassword = ""; // Add your MySQL root password here if set
      Connection conn = null;
      Statement stmt = null;
      ResultSet rs = null;
      try {
        Class.forName("com.mysql.jdbc.Driver");
        conn = DriverManager.getConnection(dbUrl, dbUser, dbPassword);
        stmt = conn.createStatement();
        rs = stmt.executeQuery("SELECT * FROM food_menu ORDER BY rating DESC");
        while (rs.next()) {   %>
      <tr>
        <td><%= rs.getInt("item_id") %></td>
        <td><strong><%= rs.getString("item_name") %></strong></td>
        <td><span class="tag"><%= rs.getString("cuisine") %></span></td>
        <td class="price">₹<%= String.format("%.2f", rs.getDouble("price")) %></td>
        <td class="rating">★ <%= rs.getDouble("rating") %></td>
      </tr>
    <%  }
      } catch (Exception e) {
        out.println("<tr><td colspan='5' style='color:red;'>Error: " + e.getMessage() + "</td></tr>");
      } finally {
        if (rs != null) rs.close();
        if (stmt != null) stmt.close();
        if (conn != null) conn.close();
      }       %>
    </tbody>
  </table>
</div>
</body>
</html>
```