
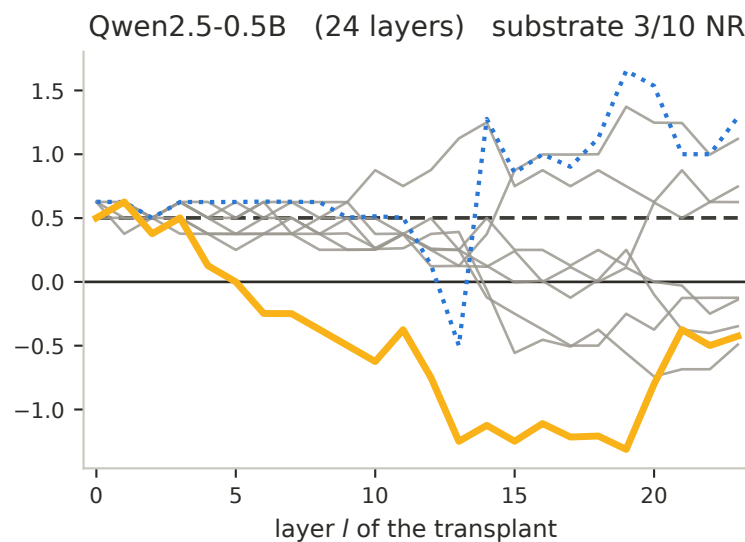
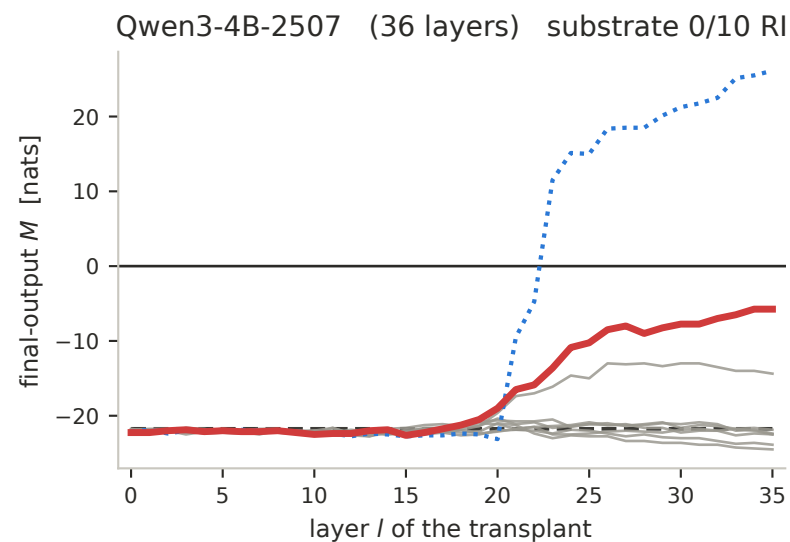
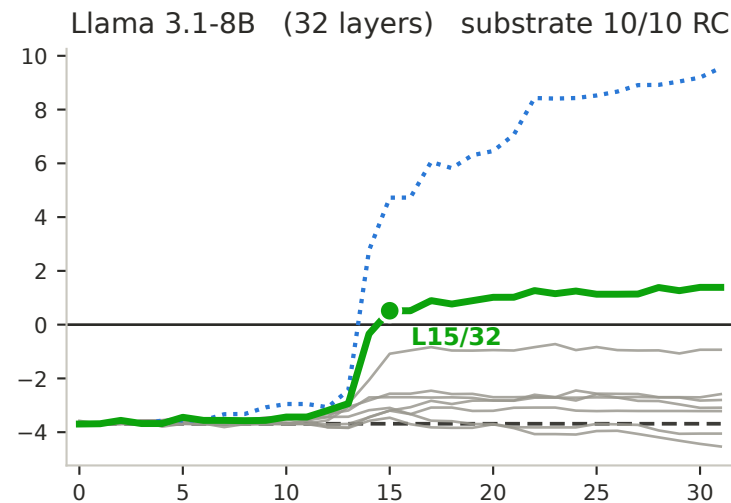


Every condition patched into the baseline run, one panel per model.
 The donor residual replaces the baseline's after layer l ; M is then read at the model's output.

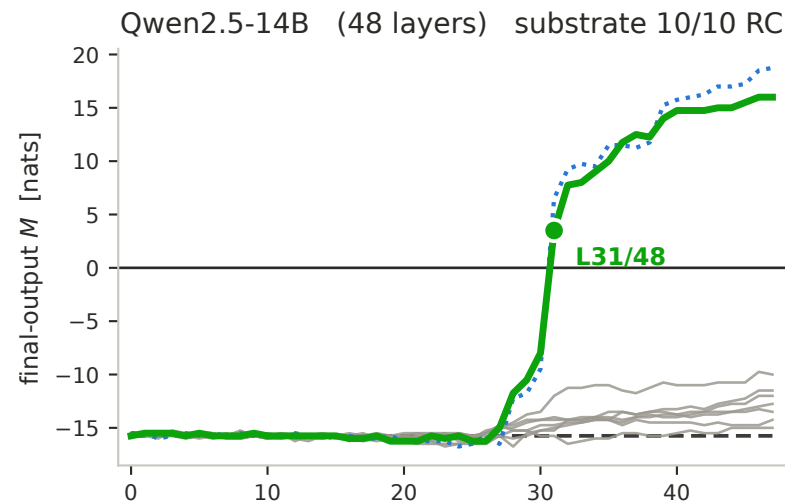

— SUBSTRATE — reproducibly correct (10/10)
 — SUBSTRATE — non-reproducible
 ····· control (prompt states the answer)
 - - - baseline, patched with its own residual
— seven conventional conditions
— SUBSTRATE — reproducibly incorrect (0/10)