
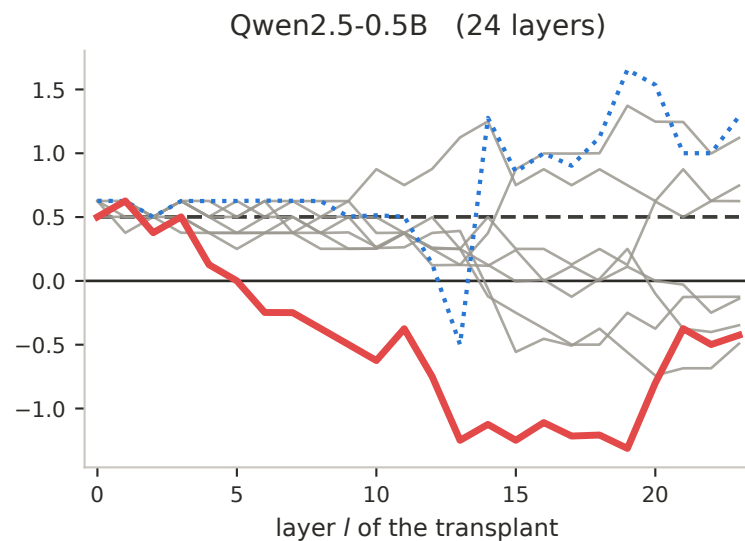
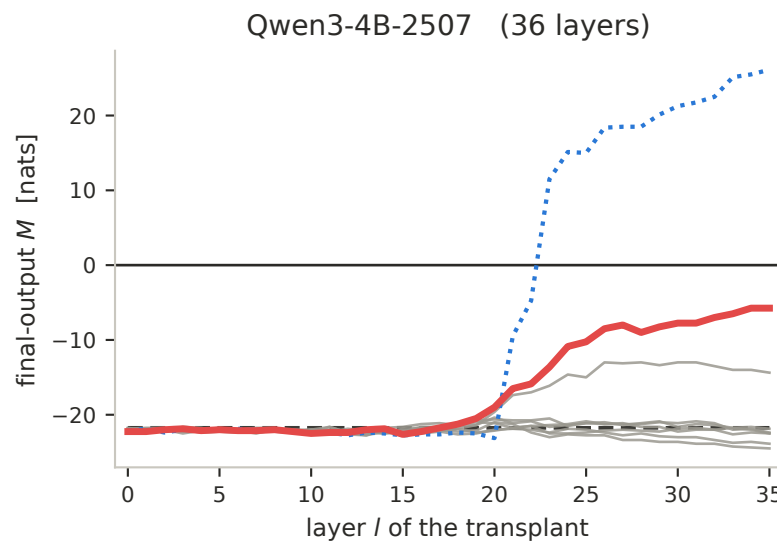
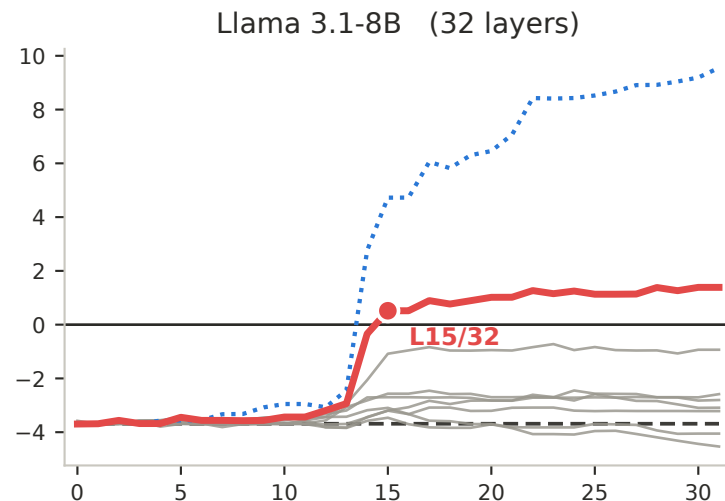


Every condition patched into the baseline run, one panel per model.
 The donor residual replaces the baseline's after layer l ; M is then read at the model's output.

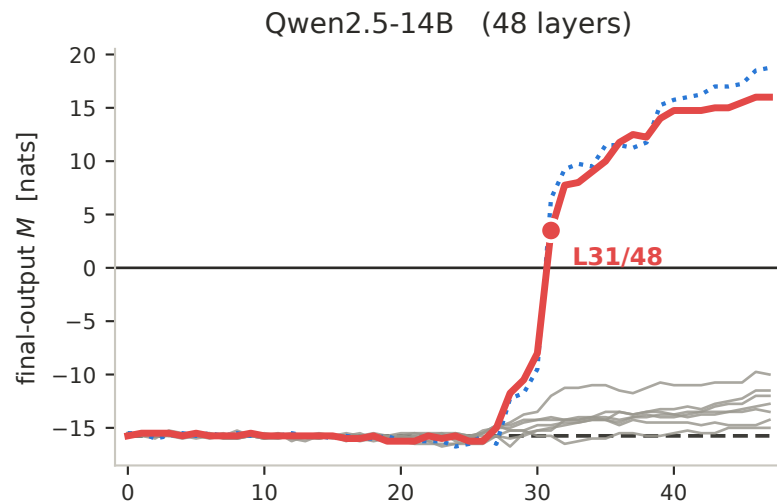

— SUBSTRATE — seven conventional conditions control (prompt states the answer) - - - baseline, patched with its own residual