


Patching every condition into the baseline run. Each point is one full forward pass:
the donor residual replaces the baseline's at layer l , and M is read at the model's output.

Llama-3.1-8B-Instruct: baseline prompt, donor residual patched at layer l



Qwen3-8B: baseline prompt, donor residual patched at layer l

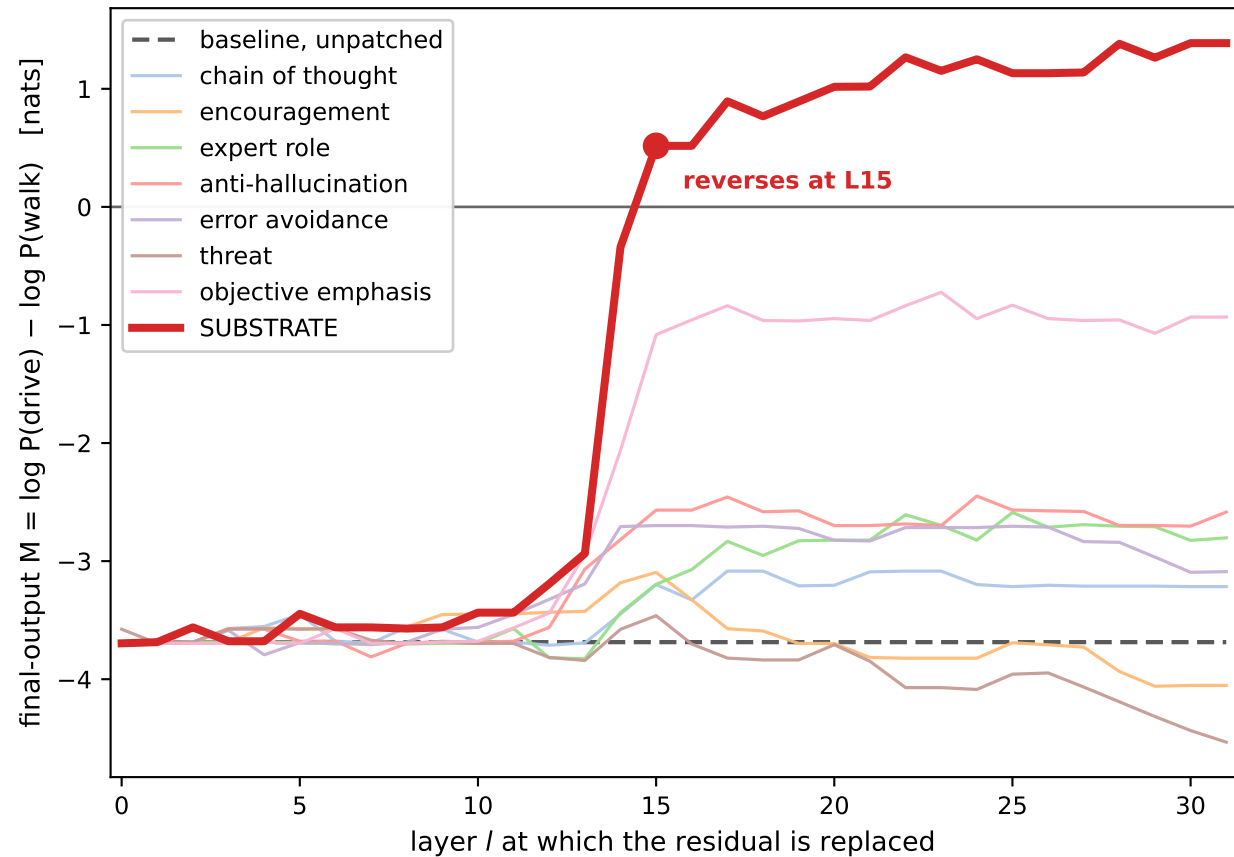